

Page 1 of 40 Permit No. WA0032077

Issuance Date:

September 30, 2015

Effective Date:

December 1, 2015 Expiration Date: November 30, 2020

# **National Pollutant Discharge Elimination System** Waste Discharge Permit No. WA0032077

State of Washington DEPARTMENT OF ECOLOGY Northwest Regional Office 3190 160th Avenue SE Bellevue, WA 98008-5452

In compliance with the provisions of The State of Washington Water Pollution Control Law Chapter 90.48 Revised Code of Washington and The Federal Water Pollution Control Act (The Clean Water Act) Title 33 United States Code, Section 1342 et seq.

# **Kingston Wastewater Treatment Plant Kitsap County Department of Public Works**

614 Division Street MS - 27 Port Orchard, WA 98366

is authorized to discharge in accordance with the Special and General Conditions that follow.

Plant Location:

23055 South Kingston Road NE

Kingston, WA 98346

Receiving Water:

Appletree Cove, Puget Sound

Treatment Type:

Oxidation Ditch (Activated Sludge System)

Kevin C. Fitzpatrick

Water Quality Section Manager Northwest Regional Office

Washington State Department of Ecology

# **Table of Contents**

Tab	le of Co	ntents	2
Sum	mary of	Permit Report Submittals	4
Spec	ial Con	ditionsditions	5
<b>S1.</b>	Discha	arge limits	5
	S1.A.	Effluent limits	5
	S1.B.	Mixing zone authorization	6
<b>S2.</b>	Monit	oring requirements	7
	S2.A.	Monitoring schedule	
	S2.B.	Sampling and analytical procedures	8
	S2.C.	Flow measurement, field measurement, and continuous monitoring devices	8
	S2.D.	Laboratory accreditation	
	S2.E.	Request for reduction in monitoring	9
S3.	Repor	ting and recording requirements	9
	S3.A.	Discharge monitoring reports	10
	S3.B.	Permit submittals and schedules	12
	S3.C.	Records retention	12
	S3.D.	Recording of results	12
	S3.E.	Additional monitoring by the Permittee	12
	S3.F.	Reporting permit violations	13
	S3.G.	Other reporting	
	S3.H.	Maintaining a copy of this permit	14
<b>S4.</b>	Facilit	y loading	15
	S4.A.	Design criteria	
	S4.B.	Plans for maintaining adequate capacity	15
	S4.C.	Duty to mitigate	
	S4.D.	Notification of new or altered sources	
	S4.E.	Infiltration and inflow evaluation	16
S5.	Opera	tion and maintenance	16
	S5.A.	Certified operator	17
	S5.B.	Operation and maintenance program	17
	S5.C.	Short-term reduction	17
	S5.D.	Electrical power failure	17
	S5.E.	Prevent connection of inflow	18
	S5.F.	Bypass procedures	
	S5.G.	Operations and maintenance (O&M) manual	20
<b>S6.</b>	Pretre	atment	21
	S6.A.	General requirements	
	S6.B.	Duty to enforce discharge prohibitions	
	S6.C.	Wastewater discharge permit required	22
	S6.D.	Identification and reporting of existing, new, and proposed industrial users	22
	S6.E.	Industrial user survey	23

<b>S7.</b>	Solid wastes	23
	S7.A. Solid waste handling	
	S7.B. Leachate	23
<b>S8.</b>	Sediment monitoring	
	S8.A. Sediment sampling and analysis plan	
	S8.B. Sediment data report	
<b>S9.</b>	Outfall evaluation	24
S10.	Application for permit renewal or modification for facility changes	24
Gene	eral Conditions	25
<b>G1.</b>	Signatory requirements	25
<b>G2.</b>	Right of inspection and entry	26
<b>G3.</b>	Permit actions	26
<b>G4.</b>	Reporting planned changes	27
<b>G5.</b>	Plan review required	28
<b>G6.</b>	Compliance with other laws and statutes	28
<b>G7.</b>	Transfer of this permit	28
<b>G8.</b>	Reduced production for compliance	29
<b>G9.</b>	Removed substances	29
G10.	Duty to provide information	29
G11.	Other requirements of 40 CFR	29
G12.	Additional monitoring	29
G13.	Payment of fees	29
G14.	Penalties for violating permit conditions	29
G15.	Upset	30
G16.	Property rights	30
G17.	Duty to comply	30
G18.	Toxic pollutants	30
G19.	Penalties for tampering	30
G20.	Compliance schedules	31
G21.	Service agreement review	31
Appe	endix A	32

# **Summary of Permit Report Submittals**

Refer to the Special and General Conditions of this permit for additional submittal requirements.

Permit Section	Submittal	Frequency	First Submittal Date
S3.A	Discharge Monitoring Report (DMR)	Monthly	January 15, 2016
S3.A	Discharge Monitoring Report (DMR)	Quarterly	April 15, 2016
S3.A	Discharge Monitoring Report (DMR)	Yearly	January 15, 2017
S3.F	Reporting Permit Violations	As necessary	
S4.B	Plans for Maintaining Adequate Capacity	As necessary	
S4.D	Notification of New or Altered Sources	As necessary	
S4.E	Infiltration and Inflow Evaluation	1/permit cycle	January 31, 2017
S5.F	Bypass Notification	As necessary	
S5.G	Operations and Maintenance Manual Update or Review Confirmation Letter	1/permit cycle	June 30, 2016
S6.E	Annual List of Industrial User Survey	1/permit cycle	May 31, 2020
S8.A	Sediment Baseline Sampling and Analysis Plan	1/permit cycle	May 31, 2018
S8.B	Sediment Data Report	1/permit cycle	March 31, 2020
S9	Outfall Evaluation	1/permit cycle	May 31, 2020
S10	Application for Permit Renewal	1/permit cycle	May 31, 2020
G1	Notice of Change in Authorization	As necessary	
G4	Reporting Planned Changes	As necessary	
G5	Engineering Report for Construction or Modification Activities	As necessary	
G7	Notice of Permit Transfer	As necessary	
G10	Duty to Provide Information	As necessary	
G20	Compliance Schedules	As necessary	
G21	Contract Submittal	As necessary	

# **Special Conditions**

# S1. Discharge limits

## S1.A. Effluent limits

All discharges and activities authorized by this permit must comply with the terms and conditions of this permit. The discharge of any of the following pollutants more frequently than, or at a level in excess of, that identified and authorized by this permit violates the terms and conditions of this permit.


Beginning on the effective date of this permit, the Permittee may discharge treated domestic wastewater to Appletree Cove at the permitted location subject to compliance with the following limits:

Effluent Limits: Outfall 001 Latitude: 47.788889 Longitude: 122.486389								
	Parameter Average Monthly <sup>a</sup> Average Weekly <sup>b</sup>							
Carbonaceous Biochemical Oxygen Demand (5-day) (CBOD <sub>5</sub> )		25 milligrams/liter (mg/L) 61 pounds/day (lbs/day) 85% removal of influent CBOD <sub>5</sub>	40 mg/L 98 lbs/day					
Total Suspended Solids (TSS)		30 mg/L 73 lbs/day 85% removal of influent TSS	45 mg/L 110 lbs/day					
	Parameter	Minimum	Maximum					
pH c		6.0 standard units	9.0 standard units					
	Parameter	Monthly Geometric Mean	Weekly Geometric Mean					
Fecal Co	coliform Bacteria d	200/100 milliliter (mL)	400/100 mL					
mor disc	Average monthly effluent limit means the highest allowable average of daily discharges over a calendar month. To calculate the discharge value to compare to the limit, you add the value of each daily discharge measured during a calendar month and divide this sum by the total number of daily discharges measured. See footnote d for fecal coliform calculations.							
Average weekly discharge limit means the highest allowable average of daily discharges over a calendar week, calculated as the sum of all daily discharges measured during a calendar week divided by the number of daily discharges measured during that week. See footnote d for fecal coliform calculations.								
c Indi	Indicates the range of permitted values. Do not average pH values.							
04-1		calculate the monthly and the weekly for Treatment Plant Operators availa 10020.pdf						

### S1.B. Mixing zone authorization

### Mixing zone for Outfall 001

The following paragraphs define the maximum boundaries of the mixing zones. Figure 1 illustrates the approximate relationship and sizes of the chronic and acute mixing zones around the diffuser:

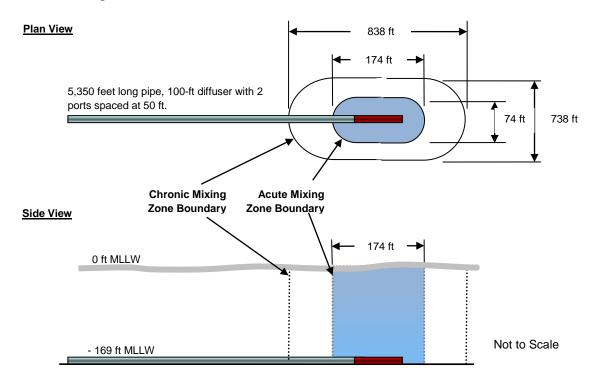

#### **Chronic mixing zone**

The allowable chronic mixing zone is 838 feet (255 meters) by 738 feet (225 meters). The mixing zone extends from the bottom to the top of the water column. The concentration of pollutants at the edge of the chronic zone must meet chronic aquatic life criteria and human health criteria.

#### **Acute mixing zone**

The allowable acute mixing zone is 174 feet (53 meters) by 74 ft (22.5 meters). The mixing zone extends from the bottom to the top of the water column. The concentration of pollutants at the edge of the acute zone must meet acute aquatic life criteria.

Available Dilution (dilution factor)						
Acute Aquatic Life Criteria 290						
Chronic Aquatic Life Criteria	1391					
Human Health Criteria - Carcinogen	1391					
Human Health Criteria - Non-carcinogen	1391					

# S2. Monitoring requirements

# S2.A. Monitoring schedule

The Permittee must monitor in accordance with the following schedule and the requirements specified in Appendix A.

Parameter	Units & Speciation	Minimum Sampling Frequency	Sample Type							
(1) Wastewater influent										
		m the collection system into								
		he treatment plant excluding	g any side-stream							
returns from inside the plant.										
CBOD <sub>5</sub>	mg/L	2/week	24-hr composite b							
CBOD <sub>5</sub>	lbs/day	2/week	Calculated <sup>c</sup>							
TSS	mg/L	2/week	24-hr composite							
TSS	lbs/day	2/week	Calculated							
BOD <sub>5</sub>	mg/L	2/month	24-hr composite							
BOD <sub>5</sub>	lbs/day	2/month	Calculated							
(2) Final wastewater ef	•									
· ,		g the last treatment process	or operation.							
		contact chamber or other of								
		BOD₅ analysis before or afte								
		nated and reseed the samp								
is used for disinfection.		-								
Flow	MGD	Continuous <sup>a</sup>	Metered/recorded							
CBOD <sub>5</sub>	mg/L	2/week	24-hr composite							
CBOD <sub>5</sub>	lbs/day	2/week	Calculated							
CBOD <sub>5</sub>	% removal <sup>d</sup>	1/month	Calculated							
TSS	mg/L	2/week	24-hr composite							
TSS	lbs/day	2/week	Calculated							
TSS	% removal	1/month	Calculated							
Fecal Coliform e	# /100 mL	2/week	Grab <sup>f</sup>							
pH <sup>g</sup>	Standard Units	Daily	Grab							
<u> </u>			Glub							
• •	ation - final wastewater		04 ha							
Total Ammonia	mg/L as N	Quarterly h	24-hr composite							
Nitrate + Nitrite Nitrogen	mg/L as N	Quarterly	24-hr composite							
Total Kjeldahl Nitrogen (TKN)	mg/L as N	Quarterly	24-hr composite							
Total Phosphorus	mg/L as P	Quarterly	24-hr composite							
Soluble Reactive	mg/L as P	Quarterly	24-hr composite							
Phosphorus		_	·							
(4) Permit renewal app	lication requirements - fir	nal wastewater effluent								
Dissolved Oxygen	mg/L	Once per year	Grab							
Oil and Grease	mg/L	Once per year	Grab							
Total Dissolved Solids	mg/L	Once per year	Grab							
Total Hardness	mg/L	Once per year	Grab							
Temperature	Degrees centigrade (°C)	1/month (Summer	Measurement							
	= 59.555 5511191445 ( 6)	months only) i								

	Parameter	Units & Speciation	Minimum Sampling Frequency	Sample Type						
Fo	Footnotes for monitoring table									
а	Continuous means uninterrupted except for brief lengths of time for calibration, power failure, or unanticipated equipment repair or maintenance. The time interval for the associated data logger must be no greater than 30 minutes.									
b		eans a series of individual analyzed as one sample.	samples collected over a 24	1-hour period into a						
С			respective sample, using the version Factor (8.34) = lbs/c							
d	% removal = Influent concentration (mg/L) - Effluent concentration (mg/L) x 100 Influent concentration (mg/L)  Calculate the percent (%) removal of CBOD <sub>5</sub> and TSS using the above equation.									
е	Report a numerical value for fecal coliforms following the procedures in Ecology's <i>Information Manual for Wastewater Treatment Plant Operators</i> , Publication Number 04-10-020 available at: <a href="http://www.ecy.wa.gov/programs/wq/permits/guidance.html">http://www.ecy.wa.gov/programs/wq/permits/guidance.html</a> . Do not report a result as too numerous to count (TNTC).									
f	Grab means an indivi	dual sample collected over	r a fifteen (15) minute, or les	ss, period.						
g	Report the daily pH a	nd the minimum and maxir	num for the monitoring perio	od.						
h	Quarterly sampling periods are January through March, April through June, July through September, and October through December. The Permittee must begin quarterly monitoring for the quarter beginning on 1/1/2016_and submit results by 4/15/2016.									
i			oer. Temperature grab samp perature, which usually occu							

#### S2.B. Sampling and analytical procedures

Samples and measurements taken to meet the requirements of this permit must represent the volume and nature of the monitored parameters. The Permittee must conduct representative sampling of any unusual discharge or discharge condition, including bypasses, upsets, and maintenance-related conditions that may affect effluent quality.

Sampling and analytical methods used to meet the monitoring requirements specified in this permit must conform to the latest revision of the *Guidelines Establishing Test Procedures for the Analysis of Pollutants* contained in 40 CFR Part 136 (or as applicable in 40 CFR subchapters N [Parts 400–471] or O [Parts 501-503]) unless otherwise specified in this permit. Ecology may only specify alternative methods for parameters without permit limits and for those parameters without an EPA approved test method in 40 CFR Part 136.

#### S2.C. Flow measurement, field measurement, and continuous monitoring devices

The Permittee must:

1. Select and use appropriate flow measurement, field measurement, and continuous monitoring devices and methods consistent with accepted scientific practices.

- 2. Install, calibrate, and maintain these devices to ensure the accuracy of the measurements is consistent with the accepted industry standard, the manufacturer's recommendation, and approved O&M manual procedures for the device and the wastestream.
- 3. Calibrate continuous monitoring instruments weekly unless it can demonstrate a longer period is sufficient based on monitoring records. The Permittee:
  - a. May calibrate apparatus for continuous monitoring of dissolved oxygen by air calibration.
  - b. Must calibrate continuous pH measurement instruments using a grab sample analyzed in the lab with a pH meter calibrated with standard buffers and analyzed within 15 minutes of sampling.
- 4. Use field measurement devices as directed by the manufacturer and do not use reagents beyond their expiration dates.
- 5. Establish a calibration frequency for each device or instrument in the O&M manual that conforms to the frequency recommended by the manufacturer.
- 6. Calibrate flow-monitoring devices at a minimum frequency of at least one calibration per year.
- 7. Maintain calibration records for at least three years.

### S2.D. Laboratory accreditation

The Permittee must ensure that all monitoring data required by Ecology for permit specified parameters is prepared by a laboratory registered or accredited under the provisions of chapter 173-50 WAC, *Accreditation of Environmental Laboratories*. Flow, temperature, settleable solids, conductivity, pH, and internal process control parameters are exempt from this requirement. The Permittee must obtain accreditation for conductivity and pH if it must receive accreditation or registration for other parameters.

#### S2.E. Request for reduction in monitoring

The Permittee may request a reduction of the sampling frequency after twelve (12) months of monitoring. Ecology will review each request and at its discretion grant the request when it reissues the permit or by a permit modification.

The Permittee must:

- 1. Provide a written request.
- 2. Clearly state the parameters for which it is requesting reduced monitoring.
- 3. Clearly state the justification for the reduction.

#### S3. Reporting and recording requirements

The Permittee must monitor and report in accordance with the following conditions. Falsification of information submitted to Ecology is a violation of the terms and conditions of this permit.

### S3.A. Discharge monitoring reports

The first monitoring period begins on the effective date of the permit (unless otherwise specified). The Permittee must:

- 1. Submit monitoring results for parameters shown in S2.A (1), (2), and (3) each month.
- 2. Summarize, report, and submit monitoring data obtained during each monitoring period on the electronic discharge monitoring report (DMR) form provided by Ecology within the Water Quality Permitting Portal. Include data for each of the parameters tabulated in Special Condition S2 and as required by the form. Report a value for each day sampling occurred (unless specifically exempted in the permit) and for the summary values (when applicable) included on the electronic form.
- 3. Enter the "No Discharge" reporting code for an entire DMR, for a specific monitoring point, or for a specific parameter as appropriate, if the Permittee did not discharge wastewater or a specific pollutant during a given monitoring period.
- 4. Report single analytical values below detection as "less than the detection level (DL)" by entering < followed by the numeric value of the detection level (e.g. < 2.0) on the DMR. If the method used did not meet the minimum DL and quantitation level (QL) identified in the permit, report the actual QL and DL in the comments or in the location provided.
- 5. Not report zero for bacteria monitoring. Report as required by the laboratory method.
- 6. Calculate and report an arithmetic average value for each day for bacteria if multiple samples were taken in one day.
- 7. Calculate the geometric mean values for bacteria (unless otherwise specified in the permit) using:
  - a. The reported numeric value for all bacteria samples measured above the detection value except when it took multiple samples in one day. If the Permittee takes multiple samples in one day it must use the arithmetic average for the day in the geometric mean calculation.
  - b. The detection value for those samples measured below detection.
- 8. Report the test method used for analysis in the comments if the laboratory used an alternative method not specified in the permit and as allowed in Appendix A.
- 9. Calculate average values and calculated total values (unless otherwise specified in the permit) using:
  - a. The reported numeric value for all parameters measured between the agency-required detection value and the agency-required quantitation value.

- b. One-half the detection value (for values reported below detection) if the lab detected the parameter in another sample from the same monitoring point for the reporting period.
- c. Zero (for values reported below detection) if the lab did not detect the parameter in another sample for the reporting period.
- 10. Report single-sample grouped parameters (for example: priority pollutants, PAHs, pulp and paper chlorophenolics, TTOs) on the WQWebDMR form and include: sample date, concentration detected, detection limit (DL) (as necessary), and laboratory quantitation level (QL) (as necessary). The Permittee must also submit an electronic PDF copy of the laboratory report using WQWebDMR.

If the Permittee has obtained a waiver from electronic reporting or if submitting prior to the compliance date, the Permittee must submit a paper copy of the laboratory report providing the following information: date sampled, sample location, date of analysis, parameter name, CAS number, analytical method/number, detection limit (DL), laboratory quantitation level (QL), reporting units, and concentration detected.

The contract laboratory reports must also include information on the chain of custody, QA/QC results, and documentation of accreditation for the parameter.

- 11. Ensure that DMRs are electronically submitted no later than the dates specified below, unless otherwise specified in this permit.
  - If the Permittee has obtained a waiver, it must ensure that paper forms are postmarked or received by Ecology no later than the dates specified below, unless otherwise specified in this permit.
- 12. Submit DMRs for parameters with the monitoring frequencies specified in S2 (monthly, quarterly, or annual) at the reporting schedule identified below. The Permittee must:
  - a. Submit **monthly** DMRs by the 15<sup>th</sup> day of the following month. The first submittal is January 15, 2016.
  - b. Submit **quarterly DMRs** (for nutrient sampling required in S2A(3)) by the 15<sup>th</sup> day of the month following the monitoring period. Quarterly sampling periods are January through March, April through June, July through September, and October through December. The Permittee must submit the first quarterly DMR on April 15, 2016 for the quarter beginning on January 01, 2015.
  - c. Submit **annual DMRs**, unless otherwise specified in the permit, by January 15 for the previous calendar year. The annual sampling period is the calendar year. The Permittee must submit the first annual DMR on January 15, 2017.

d. Submit permit renewal application monitoring data required in Special Condition S2.A(4)) annually in WQWebDMR by January 15<sup>th</sup> of the year following the monitoring period.

#### S3.B. Permit submittals and schedules

The Permittee must use the Water Quality Permitting Portal – Permit Submittals application (unless otherwise specified in the permit) to submit all other written permit-required reports by the date specified in the permit.

When another permit condition requires submittal of a paper (hard-copy) report, the Permittee must ensure that it is postmarked or received by Ecology no later than the dates specified by this permit. Send these paper reports to Ecology at:

Water Quality Permit Coordinator Department of Ecology Northwest Regional Office 3190 160<sup>th</sup> Avenue SE Bellevue, WA 98008-5452

#### S3.C. Records retention

The Permittee must retain records of all monitoring information for a minimum of three (3) years. Such information must include all calibration and maintenance records and all original recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit. The Permittee must extend this period of retention during the course of any unresolved litigation regarding the discharge of pollutants by the Permittee or when requested by Ecology.

# S3.D. Recording of results

For each measurement or sample taken, the Permittee must record the following information:

- 1. The date, exact place, method, and time of sampling or measurement.
- 2. The individual who performed the sampling or measurement.
- 3. The dates the analyses were performed.
- 4. The individual who performed the analyses.
- 5. The analytical techniques or methods used.
- 6. The results of all analyses.

#### S3.E. Additional monitoring by the Permittee

If the Permittee monitors any pollutant more frequently than required by Special Condition S2 of this permit, then the Permittee must include the results of such monitoring in the calculation and reporting of the data submitted in the Permittee's DMR unless otherwise specified by Special Condition S2.

### S3.F. Reporting permit violations

The Permittee must take the following actions when it violates or is unable to comply with any permit condition:

- 1. Immediately take action to stop, contain, and cleanup unauthorized discharges or otherwise stop the noncompliance and correct the problem.
- 2. If applicable, immediately repeat sampling and analysis. Submit the results of any repeat sampling to Ecology within thirty (30) days of sampling.

#### a. Immediate reporting

The Permittee must **immediately** report to Ecology and the Department of Health, Shellfish Program, and the Kitsap County Health District (at the numbers listed below), all:

- Failures of the disinfection system.
- Collection system overflows.
- Plant bypasses discharging to marine surface waters.
- Any other failures of the sewage system (pipe breaks, etc.)

Northwest Regional Office 425-649-7000

Department of Health, 360-236-3330 (business hours) Shellfish Program 360-789-8962 (after business hours)

Kitsap County Health District 360-337-5235 (call 24/7, press 0 for operator)

#### b. Twenty-four-hour reporting

The Permittee must report the following occurrences of noncompliance by telephone, to Ecology at the telephone number listed above, within 24 hours from the time the Permittee becomes aware of any of the following circumstances:

- 1. Any noncompliance that may endanger health or the environment, unless previously reported under immediate reporting requirements.
- 2. Any unanticipated bypass that causes an exceedance of an effluent limit in the permit (See Part S5.F, "Bypass Procedures").
- 3. Any upset that causes an exceedance of an effluent limit in the permit (See G.15, "Upset").
- 4. Any violation of a maximum daily or instantaneous maximum discharge limit for any of the pollutants in Section S1.A of this permit.
- 5. Any overflow prior to the treatment works, whether or not such overflow endangers health or the environment or exceeds any effluent limit in the permit.

#### c. Report within five days

The Permittee must also submit a written report within five days of the time that the Permittee becomes aware of any reportable event under subparts a or b, above. The report must contain:

- 1. A description of the noncompliance and its cause.
- 2. The period of noncompliance, including exact dates and times.
- 3. The estimated time the Permittee expects the noncompliance to continue if not yet corrected.
- 4. Steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance.
- 5. If the noncompliance involves an overflow prior to the treatment works, an estimate of the quantity (in gallons) of untreated overflow.

### d. Waiver of written reports

Ecology may waive the written report required in subpart c, above, on a case-by-case basis upon request if the Permittee has submitted a timely oral report.

### e. All other permit violation reporting

The Permittee must report all permit violations, which do not require immediate or within 24 hours reporting, when it submits monitoring reports for S3.A ("Reporting"). The reports must contain the information listed in subpart c, above. Compliance with these requirements does not relieve the Permittee from responsibility to maintain continuous compliance with the terms and conditions of this permit or the resulting liability for failure to comply.

#### S3.G. Other reporting

### a. Spills of oil or hazardous materials

The Permittee must report a spill of oil or hazardous materials in accordance with the requirements of RCW 90.56.280 and chapter 173-303-145. You can obtain further instructions at the following website: <a href="http://www.ecy.wa.gov/programs/spills/other/reportaspill.htm">http://www.ecy.wa.gov/programs/spills/other/reportaspill.htm</a>.

#### b. Failure to submit relevant or correct facts

Where the Permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application, or in any report to Ecology, it must submit such facts or information promptly.

#### S3.H. Maintaining a copy of this permit

The Permittee must keep a copy of this permit at the facility and make it available upon request to Ecology inspectors.

# S4. Facility loading

#### S4.A. Design criteria

The flows or waste loads for the permitted facility must not exceed the following design criteria:

Maximum Month Design Flow (MMDF) 0.292 MGD BOD<sub>5</sub> Influent Loading for Maximum Month 585 lb/day TSS Influent Loading for Maximum Month 585 lb/day

#### S4.B. Plans for maintaining adequate capacity

#### a. Conditions triggering plan submittal

The Permittee must submit a plan and a schedule for continuing to maintain capacity to Ecology when:

- 1. The actual flow or waste load reaches 85 percent of any one of the design criteria in S4.A for three consecutive months.
- 2. The projected plant flow or loading would reach design capacity within five years.

#### b. Plan and schedule content

The plan and schedule must identify the actions necessary to maintain adequate capacity for the expected population growth and to meet the limits and requirements of the permit. The Permittee must consider the following topics and actions in its plan.

- 1. Analysis of the present design and proposed process modifications
- 2. Reduction or elimination of excessive infiltration and inflow of uncontaminated ground and surface water into the sewer system
- 3. Limits on future sewer extensions or connections or additional waste loads
- 4. Modification or expansion of facilities
- 5. Reduction of industrial or commercial flows or waste loads

Engineering documents associated with the plan must meet the requirements of WAC 173-240-060, "Engineering Report," and be approved by Ecology prior to any construction.

#### S4.C. Duty to mitigate

The Permittee must take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit that has a reasonable likelihood of adversely affecting human health or the environment.

### S4.D. Notification of new or altered sources

- 1. The Permittee must submit written notice to Ecology whenever any new discharge or a substantial change in volume or character of an existing discharge into the wastewater treatment plant is proposed which:
  - a. Would interfere with the operation of, or exceed the design capacity of, any portion of the wastewater treatment plant.
  - b. Is not part of an approved general sewer plan or approved plans and specifications.
  - c. Is subject to pretreatment standards under 40 CFR Part 403 and Section 307(b) of the Clean Water Act.
- 2. This notice must include an evaluation of the wastewater treatment plant's ability to adequately transport and treat the added flow and/or waste load, the quality and volume of effluent to be discharged to the treatment plant, and the anticipated impact on the Permittee's effluent [40 CFR 122.42(b)].

# S4.E. Infiltration and inflow evaluation

- The Permittee must conduct an infiltration and inflow evaluation. Refer to the U.S. EPA publication, I/I Analysis and Project Certification, available as Publication No. 97-03 at: <a href="http://www.ecy.wa.gov/programs/wg/permits/guidance.html">http://www.ecy.wa.gov/programs/wg/permits/guidance.html</a>
- 2. The Permittee may use monitoring records to assess measurable infiltration and inflow.
- 3. The Permittee must prepare a report summarizing any measurable infiltration and inflow along with the following:
  - a. Summary of the I/I analyses and routine inspections conducted in the last five years.
  - b. A list of collection system repairs completed in the last five years.
  - c. Identification of collection system areas where leaks are known or suspected.
  - d. A schedule for conducting collection system inspections to locate leaks not already identified.
  - e. A tentative schedule for future collection system repairs.
- 4. The Permittee must submit a report summarizing the results of the evaluation and any recommendations for corrective actions by January 31, 2017.

# S5. Operation and maintenance

The Permittee must at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances), which are installed to achieve compliance with the terms and conditions of this permit. Proper operation and maintenance also includes keeping a daily operation logbook (paper or electronic), adequate laboratory controls, and appropriate quality assurance procedures.

This provision of the permit requires the Permittee to operate backup or auxiliary facilities or similar systems only when the operation is necessary to achieve compliance with the conditions of this permit.

#### S5.A. Certified operator

This permitted facility must be operated by an operator certified by the state of Washington for at least a Class II plant. This operator must be in responsible charge of the day-to-day operation of the wastewater treatment plant. An operator certified for at least a Class I plant must be in charge during all regularly scheduled shifts.

# S5.B. Operation and maintenance program

The Permittee must:

- 1. Institute an adequate operation and maintenance program for the entire sewage system.
- 2. Keep maintenance records on all major electrical and mechanical components of the treatment plant, as well as the sewage system and pumping stations. Such records must clearly specify the frequency and type of maintenance recommended by the manufacturer and must show the frequency and type of maintenance performed.
- 3. Make maintenance records available for inspection at all times.

#### S5.C. Short-term reduction

The Permittee must schedule any facility maintenance, which might require interruption of wastewater treatment and degrade effluent quality, during non-critical water quality periods and carry this maintenance out according to the approved O&M manual or as otherwise approved by Ecology.

If a Permittee contemplates a reduction in the level of treatment that would cause a violation of permit discharge limits on a short-term basis for any reason, and such reduction cannot be avoided, the Permittee must:

- 1. Give written notification to Ecology, if possible, thirty (30) days prior to such activities.
- 2. Detail the reasons for, length of time of, and the potential effects of the reduced level of treatment.

This notification does not relieve the Permittee of its obligations under this permit.

# S5.D. Electrical power failure

The Permittee must ensure that adequate safeguards prevent the discharge of untreated wastes or wastes not treated in accordance with the requirements of this permit during electrical power failure at the treatment plant and/or sewage lift stations. Adequate safeguards include, but are not limited to, alternate power sources, standby generator(s), or retention of inadequately treated wastes.

The Permittee must maintain Reliability Class II (EPA 430-99-74-001) at the wastewater treatment plant. Reliability Class II requires a backup power source sufficient to operate all vital components and critical lighting and ventilation during peak wastewater flow conditions. Vital components used to support the secondary processes (i.e., mechanical aerators or aeration basin air compressors) need not be operable to full levels of treatment, but must be sufficient to maintain the biota.

### S5.E. Prevent connection of inflow

The Permittee must strictly enforce its sewer ordinances and not allow the connection of inflow (roof drains, foundation drains, etc.) to the sanitary sewer system.

### S5.F. Bypass procedures

This permit prohibits a bypass, which is the intentional diversion of waste streams from any portion of a treatment facility. Ecology may take enforcement action against a Permittee for a bypass unless one of the following circumstances (1, 2, or 3) applies.

1. Bypass for essential maintenance without the potential to cause violation of permit limits or conditions.

This permit authorizes a bypass if it allows for essential maintenance and does not have the potential to cause violations of limits or other conditions of this permit, or adversely impact public health as determined by Ecology prior to the bypass. The Permittee must submit prior notice, if possible, at least ten (10) days before the date of the bypass.

2. Bypass which is unavoidable, unanticipated, and results in noncompliance of this permit.

This permit authorizes such a bypass only if:

- a. Bypass is unavoidable to prevent loss of life, personal injury, or severe property damage. "Severe property damage" means substantial physical damage to property, damage to the treatment facilities which would cause them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass.
- b. No feasible alternatives to the bypass exist, such as:
  - The use of auxiliary treatment facilities.
  - Retention of untreated wastes.
  - Maintenance during normal periods of equipment downtime, but not if the Permittee should have installed adequate backup equipment in the exercise of reasonable engineering judgment to prevent a bypass.
  - Transport of untreated wastes to another treatment facility.
- c. Ecology is properly notified of the bypass as required in Special Condition S3.F of this permit.

- 3. If bypass is anticipated and has the potential to result in noncompliance of this permit.
  - a. The Permittee must notify Ecology at least thirty (30) days before the planned date of bypass. The notice must contain:
    - A description of the bypass and its cause.
    - An analysis of all known alternatives which would eliminate, reduce, or mitigate the need for bypassing.
    - A cost-effectiveness analysis of alternatives including comparative resource damage assessment.
    - The minimum and maximum duration of bypass under each alternative.
    - A recommendation as to the preferred alternative for conducting the bypass.
    - The projected date of bypass initiation.
    - A statement of compliance with SEPA.
    - A request for modification of water quality standards as provided for in WAC 173-201A-410, if an exceedance of any water quality standard is anticipated.
    - Details of the steps taken or planned to reduce, eliminate, and prevent reoccurrence of the bypass.
  - b. For probable construction bypasses, the Permittee must notify Ecology of the need to bypass as early in the planning process as possible. The Permittee must consider the analysis required above during the project planning and design process. The project-specific engineering report or facilities plan as well as the plans and specifications must include details of probable construction bypasses to the extent practical. In cases where the Permittee determines the probable need to bypass early, the Permittee must continue to analyze conditions up to and including the construction period in an effort to minimize or eliminate the bypass.
  - c. Ecology will consider the following prior to issuing an administrative order for this type of bypass:
    - If the bypass is necessary to perform construction or maintenance-related activities essential to meet the requirements of this permit.
    - If feasible alternatives to bypass exist, such as the use of auxiliary treatment facilities, retention of untreated wastes, stopping production, maintenance during normal periods of equipment down time, or transport of untreated wastes to another treatment facility.
    - If the Permittee planned and scheduled the bypass to minimize adverse effects on the public and the environment.

After consideration of the above and the adverse effects of the proposed bypass and any other relevant factors, Ecology will approve or deny the request. Ecology

will give the public an opportunity to comment on bypass incidents of significant duration, to the extent feasible. Ecology will approve a request to bypass by issuing an administrative order under RCW 90.48.120.

#### S5.G. Operations and maintenance (O&M) manual

#### a. O&M manual submittal and requirements

The Permittee must:

- 1. Update the Operations and Maintenance (O&M) Manual to meet the requirements of 173-240-080 WAC and submit it to Ecology for approval by June 30, 2016.
- 2. When treatment processes or equipment have significant changes or upgrades the Permittee must update the O&M Manual to meet the requirements of 173-240-080 WAC and submit it to Ecology for approval. The Permittee must submit a paper copy and an electronic copy (preferably as a PDF).
- 3. Keep the approved O&M Manual at the permitted facility.
- 4. Follow the instructions and procedures of this manual.

#### b. O&M manual components

In addition to the requirements of WAC 173-240-080(1) through (5), the O&M Manual must be consistent with the guidance in Table G1-3 in the *Criteria for Sewage Works Design* (Orange Book), 2008. The O&M Manual must include:

- 1. Emergency procedures for cleanup in the event of wastewater system upset or failure.
- 2. A review of system components which if failed could pollute surface water or could impact human health. Provide a procedure for a routine schedule of checking the function of these components.
- 3. Wastewater system maintenance procedures that contribute to the generation of process wastewater.
- 4. Reporting protocols for submitting reports to Ecology to comply with the reporting requirements in the discharge permit.
- 5. Any directions to maintenance staff when cleaning or maintaining other equipment or performing other tasks which are necessary to protect the operation of the wastewater system (for example, defining maximum allowable discharge rate for draining a tank, blocking all floor drains before beginning the overhaul of a stationary engine).
- 6. The treatment plant process control monitoring schedule.
- 7. Minimum staffing adequate to operate and maintain the treatment processes and carry out compliance monitoring required by the permit.

#### S6. Pretreatment

#### S6.A. General requirements

The Permittee must work with Ecology to ensure that all commercial and industrial users of the publicly owned treatment works (POTW) comply with the pretreatment regulations in 40 CFR Part 403 and any additional regulations that the Environmental Protection Agency (U.S. EPA) may promulgate under Section 307(b) (pretreatment) and 308 (reporting) of the Federal Clean Water Act.

#### S6.B. Duty to enforce discharge prohibitions

- 1. Under federal regulations (40 CFR 403.5(a) and (b)), the Permittee must not authorize or knowingly allow the discharge of any pollutants into its POTW which may be reasonably expected to cause pass through or interference, or which otherwise violate general or specific discharge prohibitions contained in 40 CFR Part 403.5 or WAC 173-216-060.
- 2. The Permittee must not authorize or knowingly allow the introduction of any of the following into their treatment works:
  - a. Pollutants which create a fire or explosion hazard in the POTW (including, but not limited to waste streams with a closed cup flashpoint of less than 140 degrees Fahrenheit or 60 degrees Centigrade using the test methods specified in 40 CFR 261.21).
  - b. Pollutants which will cause corrosive structural damage to the POTW, but in no case discharges with pH lower than 5.0, or greater than 11.0 standard units, unless the works are specifically designed to accommodate such discharges.
  - c. Solid or viscous pollutants in amounts that could cause obstruction to the flow in sewers or otherwise interfere with the operation of the POTW.
  - d. Any pollutant, including oxygen-demanding pollutants, (BOD<sub>5</sub>, etc.) released in a discharge at a flow rate and/or pollutant concentration which will cause interference with the POTW.
  - e. Petroleum oil, non-biodegradable cutting oil, or products of mineral origin in amounts that will cause interference or pass through.
  - f. Pollutants which result in the presence of toxic gases, vapors, or fumes within the POTW in a quantity which may cause acute worker health and safety problems.
  - g. Heat in amounts that will inhibit biological activity in the POTW resulting in interference but in no case heat in such quantities such that the temperature at the POTW headworks exceeds 40 degrees Centigrade (104 degrees Fahrenheit) unless Ecology, upon request of the Permittee, approves, in writing, alternate temperature limits.
  - h. Any trucked or hauled pollutants, except at discharge points designated by the Permittee.

- i. Wastewaters prohibited to be discharged to the POTW by the Dangerous Waste Regulations (chapter 173-303 WAC), unless authorized under the Domestic Sewage Exclusion (WAC 173-303-071).
- 3. The Permittee must also not allow the following discharges to the POTW unless approved in writing by Ecology:
  - a. Noncontact cooling water in significant volumes.
  - b. Stormwater and other direct inflow sources.
  - c. Wastewaters significantly affecting system hydraulic loading, which do not require treatment, or would not be afforded a significant degree of treatment by the system.
- 4. The Permittee must notify Ecology if any industrial user violates the prohibitions listed in this section (S6.B), and initiate enforcement action to promptly curtail any such discharge.

#### S6.C. Wastewater discharge permit required

#### The Permittee must:

- Establish a process for authorizing non-domestic wastewater discharges that
  ensures all SIUs in all tributary areas meet the applicable state waste discharge
  permit (SWDP) requirements in accordance with chapter 90.48 RCW and
  chapter 173-216 WAC.
- 2. Immediately notify Ecology of any proposed discharge of wastewater from a source, which may be a significant industrial user (SIU) [see fact sheet definitions or refer to 40 CFR 403.3(v)(i)(ii)].
- 3. Require all SIUs to obtain a SWDP from Ecology prior to accepting their non-domestic wastewater, or require proof that Ecology has determined they do not require a permit.
- 4. Require the documentation as described in S6.C.3 at the earliest practicable date as a condition of continuing to accept non-domestic wastewater discharges from a previously undiscovered, currently discharging and unpermitted SIU.
- 5. Require sources of non-domestic wastewater, which do not qualify as SIUs but merit a degree of oversight, to apply for a SWDP and provide it a copy of the application and any Ecology responses.
- 6. Keep all records documenting that its users have met the requirements of S6.C.

# S6.D. Identification and reporting of existing, new, and proposed industrial users

1. The Permittee must take continuous, routine measures to identify all existing, new, and proposed SIUs and potential significant industrial users (PSIUs) discharging or proposing to discharge to the Permittee's sewer system (see *Appendix C* of the fact sheet for definitions).

Page 23 of 40 Permit No. WA0032077

- 2. Within 30 days of becoming aware of an unpermitted existing, new, or proposed industrial user who may be a significant industrial user (SIU), the Permittee must notify such user by registered mail that, if classified as an SIU, they must apply to Ecology and obtain a State Waste Discharge Permit. The Permittee must send a copy of this notification letter to Ecology within this same 30-day period.
- 3. The Permittee must also notify all Potential SIUs (PSIUs), as they are identified, that if their classification should change to an SIU, they must apply to Ecology for a State Waste Discharge Permit within 30 days of such change.

#### S6.E. Industrial user survey

The Permittee must complete an industrial user survey listing all SIUs and potential significant industrial users (PSIUs) discharging to the POTW. The Permittee must submit the survey to Ecology by May 31, 2020. At a minimum, the Permittee must develop the list of SIUs and PSIUs by means of a telephone book search, a water utility billing records search, and a physical reconnaissance of the service area.

Information on PSIUs must include, at a minimum, the business name, telephone number, address, description of the industrial process(s), and the known wastewater volumes and characteristics. The list must include SIUs and PSIUs located in all areas that contribute flow to the facility covered under this permit, including users connected to collection systems owned and operated by sewer districts or municipalities that have treatment service agreements with the Permittee.

#### S7. Solid wastes

#### S7.A. Solid waste handling

The Permittee must handle and dispose of all solid waste material in such a manner as to prevent its entry into state ground or surface water.

#### S7.B. Leachate

The Permittee must not allow leachate from its solid waste material to enter state waters without providing all known, available, and reasonable methods of treatment, nor allow such leachate to cause violations of the State Surface Water Quality Standards, Chapter 173-201A WAC, or the State Ground Water Quality Standards, Chapter 173-200 WAC. The Permittee must apply for a permit or permit modification as may be required for such discharges to state ground or surface waters.

#### S8. Sediment monitoring

## S8.A. Sediment sampling and analysis plan

The Permittee must submit to Ecology for review and approval a Sediment Sampling and Analysis Plan for sediment monitoring no later than May 31, 2018. The Permittee must submit two paper copies and an electronic copy (PDF format). The purpose of the plan is twofold: a) to characterize sediment quality in the vicinity of the Permittee's previous Kingston outfall for closure purposes, and b) to

ensure that sediment quality in the vicinity of the existing outfall meets the Sediment Management Standards (SMS). The Permittee must follow the guidance provided in the Sediment Source Control Standards User Manual, Appendix B: Sediment Sampling and Analysis Plan (SAPA) (Ecology, 2008). The most current information to SAPA is provided in the draft Sediment Cleanup User's Manual (SCUM II) (https://fortress.wa.gov/ecy/publications/SummaryPages/1209057.html).

#### S8.B. Sediment data report

Following Ecology approval of the Sediment Sampling and Analysis Plan for the old and existing outfall locations, the Permittee must collect and analyze sediments between August 15<sup>th</sup> to September 30<sup>th</sup> of 2019. The Permittee must submit to Ecology a Sediment Data Report containing the results of the sediment sampling and analysis no later than March 31, 2020. The Sediment Data Report must conform to the approved Sediment Sampling and Analysis Plan. The Permittee must submit two paper copies and an electronic copy (PDF format).

In addition to a Sediment Data Report, the sediment chemical and/or biological data must be submitted to Ecology's EIM database (http://www.ecy.wa.gov/eim/). Ecology's MyEIM tools must be used to confirm the accuracy of the submitted data (http://www.ecy.wa.gov/eim/MyEIM.htm).

#### S9. Outfall evaluation

The Permittee must inspect the submerged portion of the outfall line and diffuser to document its integrity and continued function. If conditions allow for a photographic verification, the Permittee must include such verification in the report. The Permittee must submit the inspection report to Ecology through the Water Quality Permitting Portal – Permit Submittals application by May 31, 2020. The Permittee must submit hard copies of any video files to Ecology as required by Permit Condition S3.B. The Portal does not support submittal of video files.

The inspection must at minimum:

- Assess the physical condition of the outfall pipe, diffuser, and associated couplings.
- Determine the extent of sediment accumulation in the vicinity of the diffuser.
- Ensure diffuser ports are free of obstructions and are allowing uniform flow.
- Confirm physical location (latitude/longitude) and depth (at MLLW) of the diffuser section of the outfall.

#### S10. Application for permit renewal or modification for facility changes

The Permittee must submit an application for renewal of this permit by May 31, 2020. The Permittee must submit a paper copy and an electronic copy (preferably as a PDF).

The Permittee must also submit a new application or addendum at least one hundred eighty (180) days prior to commencement of discharges, resulting from the activities listed below, which may result in permit violations. These activities include any facility expansions, production increases, or other planned changes, such as process modifications, in the permitted facility.

#### **General Conditions**

# G1. Signatory requirements

- 1. All applications, reports, or information submitted to Ecology must be signed and certified.
  - a. In the case of corporations, by a responsible corporate officer. For the purpose of this section, a responsible corporate officer means:
    - A president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision making functions for the corporation, or
    - The manager of one or more manufacturing, production, or operating facilities, provided, the manager is authorized to make management decisions which govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long-term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.
  - b. In the case of a partnership, by a general partner.
  - c. In the case of sole proprietorship, by the proprietor.
  - d. In the case of a municipal, state, or other public facility, by either a principal executive officer or ranking elected official.

Applications for permits for domestic wastewater facilities that are either owned or operated by, or under contract to, a public entity shall be submitted by the public entity.

- 2. All reports required by this permit and other information requested by Ecology must be signed by a person described above or by a duly authorized representative of that person. A person is a duly authorized representative only if:
  - a. The authorization is made in writing by a person described above and submitted to Ecology.
  - b. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility, such as the position of plant manager, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters. (A duly authorized representative may thus be either a named individual or any individual occupying a named position.)
- 3. Changes to authorization. If an authorization under paragraph G1.2, above, is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph G1.2, above, must be submitted to Ecology prior to or together with any reports, information, or applications to be signed by an authorized representative.

4. Certification. Any person signing a document under this section must make the following certification:

"I certify under penalty of law, that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system or those persons directly responsible for gathering information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

# G2. Right of inspection and entry

The Permittee must allow an authorized representative of Ecology, upon the presentation of credentials and such other documents as may be required by law:

- 1. To enter upon the premises where a discharge is located or where any records must be kept under the terms and conditions of this permit.
- 2. To have access to and copy, at reasonable times and at reasonable cost, any records required to be kept under the terms and conditions of this permit.
- 3. To inspect, at reasonable times, any facilities, equipment (including monitoring and control equipment), practices, methods, or operations regulated or required under this permit.
- 4. To sample or monitor, at reasonable times, any substances or parameters at any location for purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act.

#### G3. Permit actions

This permit may be modified, revoked and reissued, or terminated either at the request of any interested person (including the Permittee) or upon Ecology's initiative. However, the permit may only be modified, revoked and reissued, or terminated for the reasons specified in 40 CFR 122.62, 40 CFR 122.64 or WAC 173-220-150 according to the procedures of 40 CFR 124.5.

- 1. The following are causes for terminating this permit during its term, or for denying a permit renewal application:
  - a. Violation of any permit term or condition.
  - b. Obtaining a permit by misrepresentation or failure to disclose all relevant facts.
  - c. A material change in quantity or type of waste disposal.
  - d. A determination that the permitted activity endangers human health or the environment, or contributes to water quality standards violations and can only be regulated to acceptable levels by permit modification or termination.

- e. A change in any condition that requires either a temporary or permanent reduction, or elimination of any discharge or sludge use or disposal practice controlled by the permit.
- f. Nonpayment of fees assessed pursuant to RCW 90.48.465.
- g. Failure or refusal of the Permittee to allow entry as required in RCW 90.48.090.
- 2. The following are causes for modification but not revocation and reissuance except when the Permittee requests or agrees:
  - a. A material change in the condition of the waters of the state.
  - b. New information not available at the time of permit issuance that would have justified the application of different permit conditions.
  - c. Material and substantial alterations or additions to the permitted facility or activities which occurred after this permit issuance.
  - d. Promulgation of new or amended standards or regulations having a direct bearing upon permit conditions, or requiring permit revision.
  - e. The Permittee has requested a modification based on other rationale meeting the criteria of 40 CFR Part 122.62.
  - f. Ecology has determined that good cause exists for modification of a compliance schedule, and the modification will not violate statutory deadlines.
  - g. Incorporation of an approved local pretreatment program into a municipality's permit.
- 3. The following are causes for modification or alternatively revocation and reissuance:
  - a. When cause exists for termination for reasons listed in 1.a through 1.g of this section, and Ecology determines that modification or revocation and reissuance is appropriate.
  - b. When Ecology has received notification of a proposed transfer of the permit. A permit may also be modified to reflect a transfer after the effective date of an automatic transfer (General Condition G7) but will not be revoked and reissued after the effective date of the transfer except upon the request of the new Permittee.

### G4. Reporting planned changes

The Permittee must, as soon as possible, but no later than one hundred eighty (180) days prior to the proposed changes, give notice to Ecology of planned physical alterations or additions to the permitted facility, production increases, or process modification which will result in:

- 1. The permitted facility being determined to be a new source pursuant to 40 CFR 122.29(b).
- 2. A significant change in the nature or an increase in quantity of pollutants discharged.

3. A significant change in the Permittee's sludge use or disposal practices. Following such notice, and the submittal of a new application or supplement to the existing application, along with required engineering plans and reports, this permit may be modified, or revoked and reissued pursuant to 40 CFR 122.62(a) to specify and limit any pollutants not previously limited. Until such modification is effective, any new or increased discharge in excess of permit limits or not specifically authorized by this permit constitutes a violation.

# G5. Plan review required

Prior to constructing or modifying any wastewater control facilities, an engineering report and detailed plans and specifications must be submitted to Ecology for approval in accordance with chapter 173-240 WAC. Engineering reports, plans, and specifications must be submitted at least one hundred eighty (180) days prior to the planned start of construction unless a shorter time is approved by Ecology. Facilities must be constructed and operated in accordance with the approved plans.

### G6. Compliance with other laws and statutes

Nothing in this permit excuses the Permittee from compliance with any applicable federal, state, or local statutes, ordinances, or regulations.

# G7. Transfer of this permit

In the event of any change in control or ownership of facilities from which the authorized discharge emanate, the Permittee must notify the succeeding owner or controller of the existence of this permit by letter, a copy of which must be forwarded to Ecology.

# 1. Transfers by Modification

Except as provided in paragraph (2) below, this permit may be transferred by the Permittee to a new owner or operator only if this permit has been modified or revoked and reissued under 40 CFR 122.62(b)(2), or a minor modification made under 40 CFR 122.63(d), to identify the new Permittee and incorporate such other requirements as may be necessary under the Clean Water Act.

#### 2. Automatic Transfers

This permit may be automatically transferred to a new Permittee if:

- a. The Permittee notifies Ecology at least thirty (30) days in advance of the proposed transfer date.
- b. The notice includes a written agreement between the existing and new Permittees containing a specific date transfer of permit responsibility, coverage, and liability between them.
- c. Ecology does not notify the existing Permittee and the proposed new Permittee of its intent to modify or revoke and reissue this permit. A modification under this subparagraph may also be minor modification under 40 CFR 122.63. If this notice is not received, the transfer is effective on the date specified in the written agreement.

## G8. Reduced production for compliance

The Permittee, in order to maintain compliance with its permit, must control production and/or all discharges upon reduction, loss, failure, or bypass of the treatment facility until the facility is restored or an alternative method of treatment is provided. This requirement applies in the situation where, among other things, the primary source of power of the treatment facility is reduced, lost, or fails.

#### G9. Removed substances

Collected screenings, grit, solids, sludges, filter backwash, or other pollutants removed in the course of treatment or control of wastewaters must not be resuspended or reintroduced to the final effluent stream for discharge to state waters.

### G10. Duty to provide information

The Permittee must submit to Ecology, within a reasonable time, all information which Ecology may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The Permittee must also submit to Ecology upon request, copies of records required to be kept by this permit.

## G11. Other requirements of 40 CFR

All other requirements of 40 CFR 122.41 and 122.42 are incorporated in this permit by reference.

# G12. Additional monitoring

Ecology may establish specific monitoring requirements in addition to those contained in this permit by administrative order or permit modification.

### G13. Payment of fees

The Permittee must submit payment of fees associated with this permit as assessed by Ecology.

# G14. Penalties for violating permit conditions

Any person who is found guilty of willfully violating the terms and conditions of this permit is deemed guilty of a crime, and upon conviction thereof shall be punished by a fine of up to ten thousand dollars (\$10,000) and costs of prosecution, or by imprisonment in the discretion of the court. Each day upon which a willful violation occurs may be deemed a separate and additional violation.

Any person who violates the terms and conditions of a waste discharge permit may incur, in addition to any other penalty as provided by law, a civil penalty in the amount of up to ten thousand dollars (\$10,000) for every such violation. Each and every such violation is a separate and distinct offense, and in case of a continuing violation, every day's continuance is deemed to be a separate and distinct violation.

### G15. Upset

Definition – "Upset" means an exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limits because of factors beyond the reasonable control of the Permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.

An upset constitutes an affirmative defense to an action brought for noncompliance with such technology-based permit effluent limits if the requirements of the following paragraph are met.

A Permittee who wishes to establish the affirmative defense of upset must demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:

- 1. An upset occurred and that the Permittee can identify the cause(s) of the upset.
- 2. The permitted facility was being properly operated at the time of the upset.
- 3. The Permittee submitted notice of the upset as required in Special Condition S3.F.
- 4. The Permittee complied with any remedial measures required under S3.F of this permit.

In any enforcement action the Permittee seeking to establish the occurrence of an upset has the burden of proof.

# G16. Property rights

This permit does not convey any property rights of any sort, or any exclusive privilege.

# G17. Duty to comply

The Permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.

#### G18. Toxic pollutants

The Permittee must comply with effluent standards or prohibitions established under Section 307(a) of the Clean Water Act for toxic pollutants within the time provided in the regulations that establish those standards or prohibitions, even if this permit has not yet been modified to incorporate the requirement.

# G19. Penalties for tampering

The Clean Water Act provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under this permit shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than two (2) years per violation, or by both. If a conviction of a person is for a violation committed after a first conviction of such person under this condition, punishment shall be a fine of not more than \$20,000 per day of violation, or by imprisonment of not more than four (4) years, or by both.

# **G20.** Compliance schedules

Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit must be submitted no later than fourteen (14) days following each schedule date.

## **G21.** Service agreement review

The Permittee must submit to Ecology any proposed service agreements and proposed revisions or updates to existing agreements for the operation of any wastewater treatment facility covered by this permit. The review is to ensure consistency with chapters 90.46 and 90.48 RCW as required by RCW 70.150.040(9). In the event that Ecology does not comment within a thirty-day (30) period, the Permittee may assume consistency and proceed with the service agreement or the revised/updated service agreement.

Page 32 of 40 Permit No. WA0032077

#### Appendix A

### LIST OF POLLUTANTS WITH ANALYTICAL METHODS, DETECTION LIMITS AND QUANTITATION LEVELS

The Permittee must use the specified analytical methods, detection limits (DLs) and quantitation levels (QLs) in the following table for permit and application required monitoring unless:

- Another permit condition specifies other methods, detection levels, or quantitation levels.
- The method used produces measurable results in the sample and EPA has listed it as an EPA-approved method in 40 CFR Part 136.

If the Permittee uses an alternative method, not specified in the permit and as allowed above, it must report the test method, DL, and QL on the discharge monitoring report or in the required report.

If the Permittee is unable to obtain the required DL and QL in its effluent due to matrix effects, the Permittee must submit a matrix-specific detection limit (MDL) and a quantitation limit (QL) to Ecology with appropriate laboratory documentation.

When the permit requires the Permittee to measure the base neutral compounds in the list of priority pollutants, it must measure all of the base neutral pollutants listed in the table below. The list includes EPA required base neutral priority pollutants and several additional polynuclear aromatic hydrocarbons (PAHs). The Water Quality Program added several PAHs to the list of base neutrals below from Ecology's Persistent Bioaccumulative Toxics (PBT) List. It only added those PBT parameters of interest to Appendix A that did not increase the overall cost of analysis unreasonably.

Ecology added this appendix to the permit in order to reduce the number of analytical "non-detects" in permit-required monitoring and to measure effluent concentrations near or below criteria values where possible at a reasonable cost.

The lists below include conventional pollutants (as defined in CWA section 502(6) and 40 CFR Part 122.), toxic or priority pollutants as defined in CWA section 307(a)(1) and listed in 40 CFR Part 122 Appendix D, 40 CFR Part 401.15 and 40 CFR Part 423 Appendix A), and nonconventionals. 40 CFR Part 122 Appendix D (Table V) also identifies toxic pollutants and hazardous substances which are required to be reported by dischargers if expected to be present. This permit Appendix A list does not include those parameters. The list also includes pulp and paper pollutants identified in 40 CFR Part 430 and the dioxin and furan congeners identified using EPA Method 1613.

CONVENTIONAL POLLUTANTS						
Pollutant	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless  specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified		
Biochemical Oxygen Demand		SM5210-B		2 mg/L		
Biochemical Oxygen Demand, Soluble		SM5210-B <sup>3</sup>		2 mg/L		
Fecal Coliform		SM 9221E,9222	N/A	Specified in method - sample aliquot dependent		
Oil and Grease (HEM) (Hexane Extractable Material)		1664 A or B	1,400	5,000		
pH		SM4500-H+B	N/A	N/A		
Total Suspended Solids		SM2540-D		5 mg/L		

NONCONVENTIONAL POLLUTANTS							
Pollutant & CAS No. (if available)	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> μg/L unless specified	Level (QL) <sup>2</sup> µg/L unless specified			
Alkalinity, Total		SM2320-B		5 mg/L as CaCO3			
Aluminum, Total	7429-90-5	200.8	2.0	10			
Ammonia, Total (as N)		SM4500-NH3-B and C/D/E/G/H		20			
Barium Total	7440-39-3	200.8	0.5	2.0			
BTEX (benzene +toluene + ethylbenzene + m,o,p xylenes)		EPA SW 846 8021/8260	1	2			
Boron, Total	7440-42-8	200.8	2.0	10.0			
Chemical Oxygen Demand		SM5220-D		10 mg/L			
Chloride		SM4500-CI B/C/D/E and SM4110 B		Sample and limit dependent			
Chlorine, Total Residual		SM4500 CI G		50.0			
Cobalt, Total	7440-48-4	200.8	0.05	0.25			
Color		SM2120 B/C/E		10 color units			
Dissolved oxygen		SM4500-OC/OG		0.2 mg/L			
Flow		Calibrated device					
Fluoride	16984-48-8	SM4500-F E	25	100			
Hardness, Total		SM2340B		200 as CaCO3			
Iron, Total	7439-89-6	200.7	12.5	50			
Magnesium, Total	7439-95-4	200.7	10	50			
Manganese, Total	7439-96-5	200.8	0.1	0.5			
Molybdenum, Total	7439-98-7	200.8	0.1	0.5			
Nitrate + Nitrite Nitrogen (as N)		SM4500-NO3- E/F/H		100			
Nitrogen, Total Kjeldahl (as N)		SM4500-N <sub>org</sub> B/C and SM4500NH₃- B/C/D/EF/G/H		300			
NWTPH Dx <sup>4</sup>		Ecology NWTPH Dx	250	250			
NWTPH Gx <sup>5</sup>		Ecology NWTPH Gx	250	250			
Phosphorus, Total (as P)		SM 4500 PB followed by SM4500-PE/PF	3	10			
Salinity		SM2520-B		3 practical salinity units or scale (PSU or PSS)			

NONCONVENTIONAL POLLUTANTS							
Pollutant & CAS No. (if available)	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified			
Settleable Solids		SM2540 -F		Sample and limit dependent			
Soluble Reactive Phosphorus (as P)		SM4500-P E/F/G	3	10			
Sulfate (as mg/L SO <sub>4</sub> )		SM4110-B		0.2 mg/L			
Sulfide (as mg/L S)		SM4500-S <sup>2</sup> F/D/E/G		0.2 mg/L			
Sulfite (as mg/L SO <sub>3</sub> )		SM4500-SO3B		2 mg/L			
Temperature (max. 7-day avg.)		Analog recorder or Use micro-recording devices known as thermistors		0.2° C			
Tin, Total	7440-31-5	200.8	0.3	1.5			
Titanium, Total	7440-32-6	200.8	0.5	2.5			
Total Coliform		SM 9221B, 9222B, 9223B	N/A	Specified in method - sample aliquot dependent			
Total Organic Carbon		SM5310-B/C/D		1 mg/L			
Total dissolved solids		SM2540 C		20 mg/L			

PRIORITY POLLUTANTS	PP#	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless  specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified				
<b>METALS, CYANIDE &amp; TOTAL PH</b>	METALS, CYANIDE & TOTAL PHENOLS								
Antimony, Total	114	7440-36-0	200.8	0.3	1.0				
Arsenic, Total	115	7440-38-2	200.8	0.1	0.5				
Beryllium, Total	117	7440-41-7	200.8	0.1	0.5				
Cadmium, Total	118	7440-43-9	200.8	0.05	0.25				
Chromium (hex) dissolved	119	18540-29-9	SM3500-Cr C	0.3	1.2				
Chromium, Total	119	7440-47-3	200.8	0.2	1.0				
Copper, Total	120	7440-50-8	200.8	0.4	2.0				
Lead, Total	122	7439-92-1	200.8	0.1	0.5				
Mercury, Total	123	7439-97-6	1631E	0.0002	0.0005				
Nickel, Total	124	7440-02-0	200.8	0.1	0.5				
Selenium, Total	125	7782-49-2	200.8	1.0	1.0				
Silver, Total	126	7440-22-4	200.8	0.04	0.2				
Thallium, Total	127	7440-28-0	200.8	0.09	0.36				
Zinc, Total	128	7440-66-6	200.8	0.5	2.5				
Cyanide, Total	121	57-12-5	335.4	5	10				
Cyanide, Weak Acid Dissociable	121		SM4500-CN I	5	10				
Cyanide, Free Amenable to Chlorination (Available Cyanide)	121		SM4500-CN G	5	10				
Phenols, Total	65		EPA 420.1		50				

PRIORITY POLLUTANTS	PP#	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless  specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified
ACID COMPOUNDS					
2-Chlorophenol	24	95-57-8	625	1.0	2.0
2,4-Dichlorophenol	31	120-83-2	625	0.5	1.0
2,4-Dimethylphenol	34	105-67-9	625	0.5	1.0
4,6-dinitro-o-cresol (2-methyl-4,6,-dinitrophenol)	60	534-52-1	625/1625B	1.0	2.0
2,4 dinitrophenol	59	51-28-5	625	1.0	2.0
2-Nitrophenol	57	88-75-5	625	0.5	1.0
4-Nitrophenol	58	100-02-7	625	0.5	1.0
Parachlorometa cresol (4-chloro-3-methylphenol)	22	59-50-7	625	1.0	2.0
Pentachlorophenol	64	87-86-5	625	0.5	1.0
Phenol	65	108-95-2	625	2.0	4.0
2,4,6-Trichlorophenol	21	88-06-2	625	2.0	4.0

PRIORITY POLLUTANTS	PP#	CAS Number (if available)	Recommended Analytical	Detection (DL) <sup>1</sup> µg/L unless	Quantitation Level (QL) <sup>2</sup> μg/L unless
VOLATILE COMPOUNDS			Protocol	specified	specified
Acrolein	2	107-02-8	624	5	10
Acrylonitrile	3	107-02-8	624	1.0	2.0
Benzene	4	71-43-2	624	1.0	2.0
Bromoform	47	71-43-2 75-25-2	624	1.0	2.0
	6	75-25-2 56-23-5	624/601 or	1.0	2.0
Carbon tetrachloride			SM6230B	-	
Chlorobenzene	7	108-90-7	624	1.0	2.0
Chloroethane	16	75-00-3	624/601	1.0	2.0
2-Chloroethylvinyl Ether	19	110-75-8	624	1.0	2.0
Chloroform	23	67-66-3	624 or SM6210B	1.0	2.0
Dibromochloromethane (chlordibromomethane)	51	124-48-1	624	1.0	2.0
1,2-Dichlorobenzene	25	95-50-1	624	1.9	7.6
1,3-Dichlorobenzene	26	541-73-1	624	1.9	7.6
1,4-Dichlorobenzene	27	106-46-7	624	4.4	17.6
Dichlorobromomethane	48	75-27-4	624	1.0	2.0
1,1-Dichloroethane	13	75-34-3	624	1.0	2.0
1,2-Dichloroethane	10	107-06-2	624	1.0	2.0
1,1-Dichloroethylene	29	75-35-4	624	1.0	2.0
1,2-Dichloropropane	32	78-87-5	624	1.0	2.0
1,3-dichloropropene (mixed isomers) (1,2-dichloropropylene) <sup>6</sup>	33	542-75-6	624	1.0	2.0
Ethylbenzene	38	100-41-4	624	1.0	2.0
Methyl bromide (Bromomethane)	46	74-83-9	624/601	5.0	10.0
Methyl chloride (Chloromethane)	45	74-87-3	624	1.0	2.0
Methylene chloride	44	75-09-2	624	5.0	10.0
1,1,2,2-Tetrachloroethane	15	79-34-5	624	1.9	2.0
Tetrachloroethylene	85	127-18-4	624	1.0	2.0
Toluene	86	108-88-3	624	1.0	2.0
1,2-Trans-Dichloroethylene (Ethylene dichloride)	30	156-60-5	624	1.0	2.0
1,1,1-Trichloroethane	11	71-55-6	624	1.0	2.0
1,1,2-Trichloroethane	14	79-00-5	624	1.0	2.0
Trichloroethylene	87	79-01-6	624	1.0	2.0
Vinyl chloride	88	75-01-4	624/SM6200B	1.0	2.0

PRIORITY POLLUTANTS	PP#	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless  specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified
BASE/NEUTRAL COMPOUNDS (d	ompou	nds in bold are	e Ecology PBTs)		
Acenaphthene	1	83-32-9	625	0.2	0.4
Acenaphthylene	77	208-96-8	625	0.3	0.6
Anthracene	78	120-12-7	625	0.3	0.6
Benzidine	5	92-87-5	625	12	24
Benzyl butyl phthalate	67	85-68-7	625	0.3	0.6
Benzo(a)anthracene	72	56-55-3	625	0.3	0.6
Benzo(b)fluoranthene	74	205-99-2	610/625	0.8	1.6
(3,4-benzofluoranthene) 7					
Benzo(j)fluoranthene <sup>7</sup>		205-82-3	625	0.5	1.0

PRIORITY POLLUTANTS	PP#	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless  specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified
BASE/NEUTRAL COMPOUNDS (d	ompou	nds in bold are	e Ecology PBTs)		
Benzo(k)fluoranthene (11,12-benzofluoranthene) <sup>7</sup>	75	207-08-9	610/625	0.8	1.6
Benzo(r,s,t)pentaphene		189-55-9	625	0.5	1.0
Benzo(a)pyrene	73	50-32-8	610/625	0.5	1.0
Benzo(ghi)Perylene	79	191-24-2	610/625	0.5	1.0
Bis(2-chloroethoxy)methane	43	111-91-1	625	5.3	21.2
Bis(2-chloroethyl)ether	18	111-44-4	611/625	0.3	1.0
Bis(2-chloroisopropyl)ether	42	39638-32-9	625	0.3	0.6
Bis(2-ethylhexyl)phthalate	66	117-81-7	625	0.1	0.5
4-Bromophenyl phenyl ether	41	101-55-3	625	0.2	0.4
2-Chloronaphthalene	20	91-58-7	625	0.3	0.6
4-Chlorophenyl phenyl ether	40	7005-72-3	625	0.3	0.5
Chrysene	76	218-01-9	610/625	0.3	0.6
Dibenzo (a,h)acridine		226-36-8	610M/625M	2.5	10.0
Dibenzo (a,j)acridine		224-42-0	610M/625M	2.5	10.0
Dibenzo(a-h)anthracene (1,2,5,6-dibenzanthracene)	82	53-70-3	625	0.8	1.6
Dibenzo(a,e)pyrene		192-65-4	610M/625M	2.5	10.0
Dibenzo(a,h)pyrene		189-64-0	625M	2.5	10.0
3,3-Dichlorobenzidine	28	91-94-1	605/625	0.5	1.0
Diethyl phthalate	70	84-66-2	625	1.9	7.6
Dimethyl phthalate	71	131-11-3	625	1.6	6.4
Di-n-butyl phthalate	68	84-74-2	625	0.5	1.0
2,4-dinitrotoluene	35	121-14-2	609/625	0.2	0.4
2,6-dinitrotoluene	36	606-20-2	609/625	0.2	0.4
Di-n-octyl phthalate	69	117-84-0	625	0.3	0.6
1,2-Diphenylhydrazine (as Azobenzene)	37	122-66-7	1625B	5.0	20
Fluoranthene	39	206-44-0	625	0.3	0.6
Fluorene	80	86-73-7	625	0.3	0.6
Hexachlorobenzene	9	118-74-1	612/625	0.3	0.6
Hexachlorobutadiene	52	87-68-3	625	0.5	1.0
Hexachlorocyclopentadiene	53	77-47-4	1625B/625	0.5	1.0
Hexachloroethane	12	67-72-1	625	0.5	1.0
Indeno(1,2,3-cd)Pyrene	83	193-39-5	610/625	0.5	1.0
Isophorone	54	78-59-1	625	0.5	1.0
3-Methyl cholanthrene		56-49-5	625	2.0	8.0
Naphthalene	55	91-20-3	625	0.3	0.6
Nitrobenzene	56	98-95-3	625	0.5	1.0
N-Nitrosodimethylamine	61	62-75-9	607/625	2.0	4.0
N-Nitrosodi-n-propylamine	63	621-64-7	607/625	0.5	1.0
N-Nitrosodiphenylamine	62	86-30-6	625	0.5	1.0
Perylene		198-55-0	625	1.9	7.6
Phenanthrene	81	85-01-8	625	0.3	0.6
Pyrene	84	129-00-0	625	0.3	0.6
1,2,4-Trichlorobenzene	8	120-82-1	625	0.3	0.6

PRIORITY POLLUTANT	PP#	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless  specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified
DIOXIN					
2,3,7,8-Tetra-Chlorodibenzo-P- Dioxin (2,3,7,8 TCDD)	129	1746-01-6	1613B	1.3 pg/L	5 pg/L
PRIORITY POLLUTANTS	PP#	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless  specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified
PESTICIDES/PCBs					
Aldrin	89	309-00-2	608	0.025	0.05
alpha-BHC	102	319-84-6	608	0.025	0.05
beta-BHC	103	319-85-7	608	0.025	0.05
gamma-BHC (Lindane)	104	58-89-9	608	0.025	0.05
delta-BHC	105	319-86-8	608	0.025	0.05
Chlordane <sup>8</sup>	91	57-74-9	608	0.025	0.05
4,4'-DDT	92	50-29-3	608	0.025	0.05
4,4'-DDE	93	72-55-9	608	0.025	0.05
4,4' DDD	94	72-54-8	608	0.025	0.05
Dieldrin	90	60-57-1	608	0.025	0.05
alpha-Endosulfan	95	959-98-8	608	0.025	0.05
beta-Endosulfan	96	33213-65-9	608	0.025	0.05
Endosulfan Sulfate	97	1031-07-8	608	0.025	0.05
Endrin	98	72-20-8	608	0.025	0.05
Endrin Aldehyde	99	7421-93-4	608	0.025	0.05
Heptachlor	100	76-44-8	608	0.025	0.05
Heptachlor Epoxide	101	1024-57-3	608	0.025	0.05
PCB-1242 <sup>9</sup>	106	53469-21-9	608	0.25	0.5
PCB-1254	107	11097-69-1	608	0.25	0.5
PCB-1221	108	11104-28-2	608	0.25	0.5
PCB-1232	109	11141-16-5	608	0.25	0.5
PCB-1248	110	12672-29-6	608	0.25	0.5
PCB-1260	111	11096-82-5	608	0.13	0.5
PCB-1016 <sup>9</sup>	112	12674-11-2	608	0.13	0.5
Toxaphene	113	8001-35-2	608	0.24	0.5

PULP & PAPER POLLUTANTS (40CFR Part 430)						
Pollutant	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified		
Adsorbable Organic Halides (AOX)		EPA 1650		20		
2,3,7,8- Tetrachlorodibenzo- <i>p</i> -dioxin (TCDD) (this is also priority pollutant and is listed above)	1746-01-6	EPA 1613	1.3 pg/L	5 pg/L		
2,3,7,8- Tetrachlorodibenzofuran (TCDF)	51207-31-9	EPA 1613	1.3 pg/L	5 pg/L		
Trichlorosyringol		EPA 1653		2.5		
3,4,5-Trichlorocatechol		EPA 1653		5.0		
3,4,6-Trichlorocatechol		EPA 1653		5.0		
3,4,5-Trichloroguaiacol		EPA 1653		2.5		
3,4,6-Trichloroguaiacol		EPA 1653		2.5		
4,5,6-Trichloroguaiacol		EPA 1653		2.5		
2,4,5-Trichlorophenol		EPA 1653		2.5		
2,4,6-Trichlorophenol		EPA 1653		2.5		

PULP & PAPER POLLUTANTS (40CFR Part 430)						
Pollutant	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified		
Tetrachlorocatechol		EPA 1653		5.0		
Tetrachloroguaiacol		EPA 1653		5.0		
2,3,4,6-Tetrachlorophenol		EPA 1653		2.5		
Pentachlorphenol (this is also priority pollutant and is listed above)		EPA 1653		5.0		

NONCONVEN	TIONALS – DIO	XIN & FURAN COI	NGENERS	
Pollutant	CAS Number (if available)	Recommended Analytical Protocol	Detection (DL) <sup>1</sup> µg/L unless specified	Quantitation Level (QL) <sup>2</sup> µg/L unless specified
2,3,7,8- Tetrachlorodibenzo- <i>p</i> -dioxin (TCDD) (this is a priority pollutant and is also listed above)	1746-01-6	EPA 1613	1.3 pg/L	5 pg/L
Total TCDD	41903-57-5			
2,3,7,8- Tetrachlorodibenzofuran (TCDF)	51207-31-9		1.3 pg/L	5 pg/L
Total-TCDF	55722-27-5			
1,2,3,7,8- Pentachlorodibenzo- <i>p</i> -dioxin (PeCDD)	40321-76-4			
Total-PeCDD	36088-22-9			
1,2,3,7,8- Pentachlorodibenzofuran (PeCDF)	57117-41-6			
2,3,4,7,8-PeCDF	57117-31-4			
Total-PeCDF	30402-15-4			
1,2,3,4,7,8- Hexachlorodibenzo- <i>p</i> -dioxin (HxCDD)	39227-28-6			
1,2,3,6,7,8-HxCDD	57653-85-7			
1,2,3,7,8,9-HxCDD	19408-74-3			
Total-HxCDD	34465-46-8			
1,2,3,4,7,8- Hexachlorodibenzofuran (HxCDF)	70648-26-9			
1,2,3,6,7,8-HxCDF	57117-44-9			
1,2,3,7,8,9-HxCDF	72918-21-9			
2,3,4,6,7,8-HxCDF	60851-34-5			
Total-HxCDF	55684-94-1			
1,2,3,4,6,7,8- Heptachlorodibenzo- <i>p</i> -dioxin (HpCDD)	35822-46-9			
Total-HpCDD	37871-00-4			
1,2,3,4,6,7,8- Heptachlorodibenzofuran (HpCDF)	67562-39-4			
1,2,3,4,7,8,9-HpCDF	55673-89-7			
Total-HpCDF	38998-75-3			
Octachlorodibenzo-p-dioxin (OCDD)	3268-87-9			
Octachlorodibenzofuran (OCDF)	39001-02-0			

- 1. <u>Detection level (DL)</u> or detection limit means the minimum concentration of an analyte (substance) that can be measured and reported with a 99% confidence that the analyte concentration is greater than zero as determined by the procedure given in 40 CFR part 136, Appendix B.
- 2. Quantitation Level (QL) also known as Minimum Level of Quantitation (ML) The lowest level at which the entire analytical system must give a recognizable signal and acceptable calibration point for the analyte. It is equivalent

Page 40 of 40 Permit No. WA0032077

to the concentration of the lowest calibration standard, assuming that the lab has used all method-specified sample weights, volumes, and cleanup procedures. The QL is calculated by multiplying the MDL by 3.18 and rounding the result to the number nearest to (1, 2, or 5) x 10<sup>n</sup>, where n is an integer. (64 FR 30417). ALSO GIVEN AS:

The smallest detectable concentration of analyte greater than the Detection Limit (DL) where the accuracy (precision & bias) achieves the objectives of the intended purpose. (Report of the Federal Advisory Committee on Detection and Quantitation Approaches and Uses in Clean Water Act Programs Submitted to the US Environmental Protection Agency, December 2007).

- 3. <u>Soluble Biochemical Oxygen Demand</u> method note: First, filter the sample through a Millipore Nylon filter (or equivalent) pore size of 0.45-0.50 um (prep all filters by filtering 250 ml of laboratory grade deionized water through the filter and discard). Then, analyze sample as per method 5210-B.
- 4. NWTPH Dx Northwest Total Petroleum Hydrocarbons Diesel Extended Range see http://www.ecv.wa.gov/biblio/97602.html
- 5. <u>NWTPH Gx</u> Northwest Total Petroleum Hydrocarbons Gasoline Extended Range see http://www.ecy.wa.gov/biblio/97602.html
- 6. <u>1, 3-dichloroproylene (mixed isomers)</u> You may report this parameter as two separate parameters: cis-1, 3-dichloropropene (10061-01-5) and trans-1, 3-dichloropropene (10061-02-6).
- 7. <u>Total Benzofluoranthenes</u> Because Benzo(b)fluoranthene, Benzo(j)fluoranthene and Benzo(k)fluoranthene co-elute you may report these three isomers as total benzofluoranthenes.
- 8. <u>Chlordane</u> You may report alpha-chlordane (5103-71-9) and gamma-chlordane (5103-74-2) in place of chlordane (57-74-9). If you report alpha and gamma-chlordane, the DL/PQLs that apply are 0.025/0.050.
- 9. PCB 1016 & PCB 1242 You may report these two PCB compounds as one parameter called PCB 1016/1242.

## FACT SHEET FOR NPDES PERMIT WA-003207-7 KINGSTON WASTEWATER TREATMENT PLANT

November 9, 2010

#### **PURPOSE** of this Fact Sheet

This fact sheet explains and documents the decisions the Department of Ecology (Ecology) made in drafting the proposed National Pollutant Discharge Elimination System (NPDES) permit for Kitsap County's Kingston wastewater treatment plant (WWTP).

This fact sheet complies with Section 173-220-060 of the Washington Administrative Code (WAC), which requires Ecology to prepare a draft permit *and accompanying fact sheet* for public evaluation before issuing an NPDES permit.

Ecology makes the draft permit and fact sheet available for public review and comment at least thirty (30) days before issuing the final permit. Copies of the fact sheet and draft permit for Kingston WWTP's NPDES permit number WA-003207-7 were available for public review and comment from October 1, 2010, until October 31, 2010. For more details on preparing and filing comments about these documents, please see *Appendix A—Public Involvement Information*.

Kitsap County staff reviewed the draft permit and fact sheet for factual accuracy. Ecology corrected any errors or omissions regarding the facility's location, history, discharges, or receiving water.

After the public comment period closes, Ecology will summarize substantive comments and provide responses to them. Ecology will include the summary and responses to comments in this fact sheet as *Appendix F—Response to Comments*, and publish it when issuing the final NPDES permit. Ecology will not revise the rest of the fact sheet, but the full document will become part of the legal history contained in the facility's permit file.

Mike Dawda prepared the permit and this fact sheet.

#### **SUMMARY**

Kitsap County (County) operates an oxidation ditch (extended aeration) type activated sludge wastewater treatment plant (WWTP) that discharges to Appletree Cove, Puget Sound. Ecology issued the existing permit for this facility on May 2, 2005.

The proposed permit contains the same effluent limits for Carbonaceous Biochemical Oxygen Demand (CBOD<sub>5</sub>), Total Suspended Solids, Fecal Coliform Bacteria, and pH as the existing permit.

### TABLE OF CONTENTS

I.	INT	RODUCTION	4
II.	BAC	KGROUND INFORMATION	5
		TABLE 1. GENERAL FACILITY INFORMATION	5
	A.	Facility Description	
		History	
		Description of the Wastewater Collection System	
		Treatment Processes	
		Discharge Outfall	6
		Solid Wastes	
	B.	Permit Status	6
	C.	Summary of Compliance With the Existing Permit	6
	D.	Wastewater Characterization	
		TABLE 2. EFFLUENT CHARACTERIZATION	7
	E.	Description of the Receiving Water	8
	F.	SEPA Compliance	
III.	PR∩	POSED PERMIT LIMITS	8
111.	A.	Design Criteria	
	71.	Table 3. Design Criteria for Kingston WWTP	9
	В.	Technology-Based Effluent Limits	
	Ъ.	TABLE 4. TECYHNOLOGY-BASED LIMITS	
	C.	Surface Water Quality-Based Effluent Limits	
	C.	Numerical Criteria for the Protection of Aquatic Life and Recreation	
		Numerical Criteria for the Protection of Human Health	
		Narrative Criteria	
		Antidegradation.	
		Mixing Zones	
	D.	Designated Uses and Surface Water Quality Criteria	
		TABLE 5. AQUATIC LIFE USES AND ASSOCIATED CRITERIA	
		Table 6. Recreational Uses.	
	E.	Evaluation of Surface Water Quality-Based Effluent Limits for Numeric	
		Criteria	17
		TABLE 7. DILUTION FACTORS (DF)	
	F.	Whole Effluent Toxicity	
	G.	Human Health	
	H.	Sediment Quality	21
	I.	Ground Water Quality Limits	
	J.	Comparison of Proposed Effluent Limits With the Existing Effluent Limits	
		TABLE 8. COMPARISON OF EXISTING AND PROPOSED EFFLUENT LIMITS	
IV.	MOI	NITORING REQUIREMENTS	22
1 7 .	A.	Lab Accreditation	

V.	OTH	ER PERMIT CONDITIONS	23
	A.	Reporting and Record Keeping	
	B.	Prevention of Facility Overloading	
	C.	Operation and Maintenance (O&M)	
	D.	Pretreatment	
	E.	General Conditions	23
VI.	PERM	MIT ISSUANCE PROCEDURES	23
	A.	Permit Modifications	
	B.	Proposed Permit Issuance	24
VII.	REFE	ERENCES FOR TEXT AND APPENDICES	24
APPE	ENDIX	A—PUBLIC INVOLVEMENT INFORMATION	25
APPE	ENDIX	B—GLOSSARY	26
APPE	ENDIX	C—TREATMENT PLANT LAYOUT AND OUTFALL LOCATION	30
APPE	ENDIX	D—EVALUATION OF WET TESTING REQUIREMENTS	32
APPE	ENDIX	E—TECHNICAL CALCULATIONS	35
APPE	ENDIX	F—RESPONSE TO COMMENTS	37

#### I. INTRODUCTION

The Federal Clean Water Act (FCWA, 1972, and later amendments in 1977, 1981, and 1987) established water quality goals for the navigable (surface) waters of the United States. One mechanism for achieving the goals of the Clean Water Act is the National Pollutant Discharge Elimination System (NPDES), administered by the federal Environmental Protection Agency (EPA). The EPA authorized the state of Washington to manage the NPDES permit program in our state. Our state legislature accepted the delegation and assigned the power and duty for conducting NPDES permitting and enforcement to Ecology. The legislature defined Ecology's authority and obligations for the wastewater discharge permit program in 90.48 RCW (Revised Code of Washington).

The following regulations apply to municipal NPDES permits:

- Procedures Ecology follows for issuing NPDES permits (Chapter 173-220 WAC)
- Technical criteria for discharges from municipal wastewater treatment facilities (Chapter 173-221 WAC)
- Water quality criteria for surface waters (Chapter 173-201A WAC) and for ground waters (chapter 173-200 WAC)
- Sediment management standards (Chapter 173-204 WAC)
- Submission of Plans and Reports for Construction of Wastewater Facilities (Chapter 173-240 WAC)

These rules require any treatment facility operator to obtain an NPDES permit before discharging wastewater to state waters. They also help define the basis for limits on each discharge and for requirements imposed by the permit.

Under the NPDES permit program and in response to a complete and accepted permit application, Ecology must prepare a draft permit and accompanying fact sheet, and make them available for public review before final issuance. Ecology must also publish an announcement (public notice) telling people where they can read the draft permit, and where to send their comments, during a period of thirty days (WAC 173-220-050). (See *Appendix A—Public Involvement Information* for more detail about the public notice and comment procedures.) After the public comment period ends, Ecology may make changes to the draft NPDES permit. Ecology will summarize the responses to comments and any changes to the permit in *Appendix E*.

#### II. BACKGROUND INFORMATION

#### **Table 1. General Facility Information**

Applicant	Kitsap County Public Works
Facility Name and Address	Kingston Wastewater Treatment Plant (WWTP) 23055 South Kingston Road NE Kingston, WA 98346
Type of Treatment	Extended Aeration – Secondary Treatment System
Discharge Location	Appletree Cove, Puget Sound Latitude: 47.788889 Longitude: 122.486389

#### A. Facility Description

#### **History**

Kitsap County (the County) owned and operated an activated sludge wastewater treatment plant constructed in 1974, in downtown Kingston. The County built a new extended aeration WWTP at this new site on South Kingston Road, in 2005. The County constructed a pump station at the old WWTP site and a force main to transfer incoming wastewater from the old plant to the new plant. In addition, the County constructed a new discharge outfall into the deep waters of Appletree Cove, Puget Sound. The County began operating the new plant in May 2005.

### **Description of the Wastewater Collection System**

The wastewater collection system consists of 6-inch through 12-inch diameter sewers. Approximately 95 percent of the existing collection system was constructed in 1974. The County constructed the original collection system primarily of asbestos-cement pipe, and short lengths of 10-inch and 12-inch diameter cast iron pipe. The remaining 5 percent of the collection system, built between 1978 and 1984, was constructed using 6-inch and 8-inch diameter PVC pipe. There are six lift stations in the collection system, including the new pump station constructed at the old WWTP site.

#### **Treatment Processes**

The treatment process at the plant includes preliminary treatment through a rotary screen and an aerated grit chamber, influent flow measurement with a Parshall flume, biological treatment in two oxidation ditches followed by solids settling in two secondary clarifiers, disinfection with an ultraviolet (UV) light disinfection system, and effluent flow measurement with a Parshall flume. Solids removed from the secondary clarifiers are thickened by a gravity belt thickener, and then transported to the County's Central Kitsap WWTP for further treatment and utilization.

Diagram showing the treatment plant layout is included in Appendix C.

#### **Discharge Outfall**

The County discharges the secondary treated and disinfected effluent from the Kingston WWTP to Appletree Cove, Puget Sound, via an 18-inch diameter concrete-coated steel pipe that is lined with polyurethane. The outfall pipe extends 5350 feet into Appletree Cove to a depth of 169 feet below mean lower low water (MLLW). A diffuser at the end of the outfall pipe consists of two 3-inch diameter ports at 50-foot spacing.

Diagram showing the outfall location is included in Appendix C.

#### **Solid Wastes**

The treatment facilities remove solids during the treatment of the wastewater at the headworks (grit and screenings), in addition to incidental solids (rags, scum, and other debris) removed as part of the routine maintenance of the equipment. Grit, rags, scum, and screenings are drained and disposed of as solid waste at the local landfill. Solids removed from the secondary clarifiers are thickened by a gravity belt thickener, and then transported to the County's Central Kitsap WWTP for further treatment and utilization.

#### **B.** Permit Status

Ecology issued the existing permit for this facility on May 2, 2005, with the expiration date of May 2, 2010. The County submitted an application for permit renewal on October 28, 2009. Ecology accepted it as complete on November 2, 2009. Ecology extended the existing permit on April 30, 2010. The County is operating the Kingston WWTP under the terms and conditions of this extended permit.

#### C. Summary of Compliance With the Existing Permit

Ecology staff last conducted a non-sampling compliance inspection of the plant on June 4, 2009. The plant effluent looked very clear at the time of this inspection.

The County has complied with the effluent limits and permit conditions throughout the duration of the existing permit. Ecology assessed compliance based on its review of the facility's discharge monitoring reports (DMRs) and on inspections conducted by Ecology.

The County received Ecology's OUTSTANDING TREATMENT PLANT AWARDS for outstanding performance at Kingston WWTP during 2006, 2007, 2008, and 2009.

#### D. Wastewater Characterization

The concentration of pollutants in the discharge was reported in the NPDES application and in discharge monitoring reports. The WWTP staff analyzes effluent for metals once a month. The tabulated data below represents the quality of the effluent discharged from the plant. Metals data in the table are from 2009 only.

**Table 2. Effluent Characterization** 

Parameter	Average Concentration	Maximum Concentration	Number of Samples
CBOD <sub>5</sub> (mg/L)	3.6	17.7	314
TSS (mg/L)	7.3	32.5	316
Fecal Coliform Bacteria (CFU/100 mL)	2 (GM)*	46,000*	315
Ammonia (NH3-N) (mg/L)	0.6	7.6	72
Dissolved Oxygen (mg/L)	5.8	10.6	1096
Total Nitrogen (TKN) (mg/L)	2.3	13.0	36
Nitrate + Nitrite (as N) (mg/L)	11.1	25.7	26
Oil and Grease (mg/L)	3.6	3.6	3
Phosphorus (Total) (mg/L)	3.8	6.6	36
Parameter	Average Concentration (2009)	Maximum Concentration (2009)	Number of Samples (2009)
Antimony (ug/L)	< 22.20	< 19.20	12
Arsenic (ug/L)	< 12.70	< 12.70	12
Berillium (ug/L)	< 0.22	< 0.22	12
Cadmium (ug/L)	< 2.20	< 2.20	12
Chromium (ug/L)	< 2.03	< 2.03	12
Copper (ug/L)	< 13.30	< 13.30	12
Lead (ug/L)	< 6.61	< 6.61	12
Mercury (ug/L)	< 0.30	< 0.50	12
Molybdenum (ug/L)	< 5.64	< 5.64	12
Nickel (ug/L)	< 5.00	< 5.00	12
Selenium (ug/L)	< 17.40	< 14.70	12
Silver (ug/L)	< 2.36	< 2.36	12
Thallium (ug/L)	< 11.00	< 11.00	12
Zinc (ug/L)	57.20	75.10	12
Parameter	Average Value	Maximum Value	Number of samples
Temperature (°C – Winter)	12°C	17°C	544
Temperature (°C – Summer)	18°C	23°C	552

\*Note: The geometric mean (GM) of 315 samples used for this calculation is 2 CFU/100 mL. The County measured a high fecal coliform (FC) count of 46,000 CFU/100 mL on Thursday, July 24, 2008. This was the result of loss of disinfection (for about 45 minutes) at the plant. Earlier during this week, on Monday (7/21/08) and Tuesday (7/22/08), and the following Monday (7/28/2008), the FC count measured was <1 CFU/100 mL (non-detect). The next two highest values measured were 173 CFU/100 mL and 140 CFU/100 mL. Most of the rest of 315 samples show FC count of <2 CFU/100 mL. The effluent FC concentration at this plant is generally <1 CFU/100 mL (non-detect).

#### E. <u>Description of the Receiving Water</u>

Kingston WWTP discharges to Appletree Cove, Puget Sound. No ambient background data is available in Puget Sound at this discharge location.

#### F. SEPA Compliance

Regulation exempts reissuance or modification of any wastewater discharge permit from the SEPA process as long as the permit contains conditions that are no less stringent than state rules and regulations. The exemption applies only to existing discharges, not to new discharges.

#### III. PROPOSED PERMIT LIMITS

Federal and state regulations require that effluent limits in an NPDES permit must be either technology- or water quality-based.

- Technology-based limits are based upon the treatment methods available to treat specific pollutants. Technology-based limits are set by the EPA and published as a regulation, or Ecology develops the limit on a case-by-case basis (40 CFR 125.3, and chapter 173-220 WAC).
- Water quality-based limits are calculated so that the effluent will comply with the Surface Water Quality Standards (Chapter 173-201A WAC), Ground Water Standards (Chapter 173-200 WAC), Sediment Quality Standards (Chapter 173-204 WAC) or the National Toxics Rule (40 CFR 131.36).
- Ecology must apply the most stringent of these limits to each parameter of concern. These limits are described below.

The limits in this permit reflect information received in the application and from supporting reports (engineering, hydrogeology, etc.). Ecology evaluated the permit application and determined the limits needed to comply with the rules adopted by the state of Washington. Ecology does not develop effluent limits for all reported pollutants. Some pollutants are not treatable at the concentrations reported, are not controllable at the source, are not listed in regulation, and do not have a reasonable potential to cause a water quality violation.

Nor does Ecology usually develop limits for pollutants that were not reported in the permit application but that may be present in the discharge. The permit does not authorize discharge of the non-reported pollutants. If significant changes occur in any constituent of the effluent discharge, the permittee is required to notify Ecology (40 CFR 122.42(a)). The Permittee may be in violation of the permit until Ecology modifies the permit to reflect additional discharge of pollutants.

#### A. Design Criteria

Under WAC 173-220-150 (1)(g), flows and waste loadings must not exceed approved design criteria. Ecology-approved design criteria for this facility's treatment plant were obtained from *Kingston Wastewater Facilities Plan*, CH2M Hill, December 1999.

Table 3. Design Criteria for Kingston WWTP

Parameter	Design Criteria
Average flow for the maximum month	0.292 MGD
BOD <sub>5</sub> influent loading for the maximum month	585 lbs/day
TSS influent loading for the maximum month	585 lbs/day

#### B. Technology-Based Effluent Limits

Federal and state regulations define technology-based effluent limits for municipal wastewater treatment plants. These effluent limits are given in 40 CFR Part 133 (federal) and in Chapter 173-221 WAC (state). These regulations are performance standards that constitute all known, available, and reasonable methods of prevention, control, and treatment (AKART) for municipal wastewater.

Chapter 173-221 WAC lists the following technology-based limits for pH, fecal coliform, BOD<sub>5</sub>, and TSS:

**Table 4. Technology-based Limits** 

Parameter	Limit			
рН	The pH must measure within the range of 6.0 to 9.0 standard units.			
Fecal Coliform Bacteria	Monthly Geometric Mean = 200 organisms/100 mL Weekly Geometric Mean = 400 organisms/100 mL			
CBOD <sub>5</sub> (concentration)	Average Monthly Limit is the most stringent of the following:  - 25 mg/L  - may not exceed fifteen percent (15%) of the average influent concentration  Average Weekly Limit = 40 mg/L			
TSS (concentration)	Average Monthly Limit is the most stringent of the following:  - 30 mg/L  - may not exceed fifteen percent (15%) of the average influent concentration  Average Weekly Limit = 45 mg/L			

**Note:** The Permittee has requested continuation of the CBOD $_5$  limits instead of the standard BOD $_5$  limits. This request is granted as allowed by the state and federal regulations. The average monthly and weekly limits for CBOD $_5$  are 5 mg/l lower than the standard BOD $_5$  limits.

The following technology-based mass limits are based on WAC 173-220-130(3)(b) and 173-221-030(11)(b).

Monthly average effluent mass limits for  $CBOD_5 = 0.292$  MGD (maximum monthly design flow) x 25 mg/L (concentration limit) x 8.34 (conversion factor) = 61 lbs/day.

Weekly average effluent mass limits for  $CBOD_5 = 0.292 \text{ MGD}$  (maximum monthly design flow) x 40 mg/L (concentration limit) x 8.34 (conversion factor) = 98 lbs/day.

Monthly average effluent mass limits for TSS = 0.292 MGD (maximum monthly design flow) x 30 mg/L (concentration limit) x 8.34 (conversion factor) = 73 lbs/day.

Weekly average effluent mass limits for TSS = 0.292 MGD (maximum monthly design flow) x 45 mg/L (concentration limit) x 8.34 (conversion factor) = 110 lbs/day.

#### C. Surface Water Quality-Based Effluent Limits

The Washington State Surface Water Quality Standards (Chapter 173-201A WAC) are designed to protect existing water quality and preserve the beneficial uses of Washington's surface waters. Waste discharge permits must include conditions that ensure the discharge will meet the surface water quality standards (WAC 173-201A-510). Water quality-based effluent limits may be based on an individual waste load allocation or on a waste load allocation developed during a basin wide total maximum daily load study (TMDL).

#### Numerical Criteria for the Protection of Aquatic Life and Recreation

Numerical water quality criteria are listed in the water quality standards for surface waters (Chapter 173-201A WAC). They specify the maximum levels of pollutants allowed in receiving water to protect aquatic life and recreation in and on the water. Ecology uses numerical criteria along with chemical and physical data for the wastewater and receiving water to derive the effluent limits in the discharge permit. When surface water quality-based limits are more stringent or potentially more stringent than technology-based limits, the discharge must meet the water quality-based limits.

#### Numerical Criteria for the Protection of Human Health

The U.S. EPA has published 91 numeric water quality criteria for the protection of human health that are applicable to dischargers in Washington State (EPA 1992). These criteria are designed to protect humans from exposure to pollutants linked to cancer and other disease, based on consuming fish and shellfish and drinking contaminated surface waters. The water quality standards also include radionuclide criteria to protect humans from the effects of radioactive substances.

#### **Narrative Criteria**

Narrative water quality criteria [e.g., WAC 173-201A-240(1), 2006] limit the toxic, radioactive, or other deleterious material concentrations that the facility may discharge to levels below those which have the potential to:

- Adversely affect designated water uses.
- Cause acute or chronic toxicity to biota.
- Impair aesthetic values.
- Adversely affect human health.

Narrative criteria protect the specific designated uses of all fresh waters (WAC 173-201A-200, 2006) and of all marine waters (WAC 173-201A-210, 2006) in the state of Washington.

#### **Antidegradation**

The purpose of Washington's Antidegradation Policy (WAC 173-201A-300-330, 2006) is to:

- Restore and maintain the highest possible quality of the surface waters of Washington.
- Describe situations under which water quality may be lowered from its current condition.
- Apply to human activities that are likely to have an impact on the water quality of surface water.
- Ensure that all human activities likely to contribute to a lowering of water quality, at a minimum, apply all known, available, and reasonable methods of prevention, control, and treatment (AKART).
- Apply three tiers of protection (described below) for surface waters of the state.

Tier I ensures existing and designated uses are maintained and protected and applies to all waters and all sources of pollutions. Tier II ensures that waters of a higher quality than the criteria assigned are not degraded unless such lowering of water quality is necessary and in the overriding public interest. Tier II applies only to a specific list of polluting activities. Tier III prevents the degradation of waters formally listed as "outstanding resource waters," and applies to all sources of pollution.

This facility must meet Tier I requirements.

• Dischargers must maintain and protect existing and designated uses. Ecology must not allow any degradation that will interfere with, or become injurious to, existing or designated uses, except as provided for in Chapter 173-201A WAC.

Ecology's analysis described in this section of the fact sheet demonstrates that the existing and designated uses of the receiving water will be protected under the conditions of the proposed permit.

#### **Mixing Zones**

A mixing zone is the defined area in the receiving water surrounding the discharge port(s), where wastewater mixes with receiving water. Within mixing zones the pollutant concentrations may exceed water quality numeric standards, so long as the discharge does not interfere with designated uses of the receiving water body (for example, recreation, water supply, and aquatic life and wildlife habitat, etc.) The pollutant concentrations outside of the mixing zones must meet water quality numeric standards.

State and federal rules allow mixing zones because the concentrations and effects of most pollutants diminish rapidly after discharge, due to dilution. Ecology defines mixing zone sizes to limit the amount of time any exposure to the end-of-pipe discharge could harm water quality, plants, or fish.

The state's water quality standards allow Ecology to authorize mixing zones for the facility's permitted wastewater discharges only if those discharges already receive all known, available, and reasonable methods of prevention, control, and treatment (AKART). Mixing zones typically require compliance with water quality criteria within a specified distance from the point of discharge. Ecology uses modeling to estimate the amount of mixing within the mixing zone. Through modeling Ecology determines the potential for violating the water quality standards at the edge of the mixing zone and derives any necessary effluent limits. Steady-state models are the most frequently used tools for conducting mixing zone analyses. Ecology chooses values for each effluent and for receiving water variables that correspond to the time period when the most critical condition is likely to occur (see Ecology's *Permit Writer's Manual*). Each critical condition parameter, by itself, has a low probability of occurrence and the resulting dilution factor is conservative. The term "reasonable worst-case" applies to these values.

The mixing zone analysis produces a numerical value called a dilution factor (DF). A dilution factor represents the amount of mixing of effluent and receiving water that occurs at the boundary of the mixing zone. For example, a dilution factor of 10 means the effluent is 10% and the receiving water is 90% of the total volume of water at the boundary of the mixing zone. Ecology uses dilution factors with the water quality criteria to calculate reasonable potentials and effluent limits. Water quality standards include both aquatic life-based criteria and human health-based criteria. The former are applied at both the acute and chronic mixing zone boundaries; the latter are applied only at the chronic boundary. The concentration of pollutants at the boundaries of any of these mixing zones may not exceed the numerical criteria for that zone.

Each aquatic life **acute** criterion is based on the assumption that organisms are not exposed to that concentration for more than one hour and more often than one exposure in three years. Each aquatic life **chronic** criterion is based on the assumption that organisms are not exposed to that concentration for more than four consecutive days and more often than once in three years.

The two types of human health-based water quality criteria distinguish between those pollutants linked to non-cancer effects (non-carcinogenic) and those linked to cancer effects (carcinogenic). The human health-based water quality criteria incorporate several exposure and risk assumptions. These assumptions include:

- A 70-year lifetime of daily exposures.
- An ingestion rate for fish or shellfish measured in kg/day.
- An ingestion rate of two liters/day for drinking water
- A one-in-one-million cancer risk for carcinogenic chemicals.

This permit authorizes a small acute mixing zone, surrounded by a chronic mixing zone around the point of discharge (WAC 173-201A-400). The water quality standards impose certain conditions before allowing the discharger a mixing zone:

#### 1. Ecology must specify both the allowed size and location in a permit.

The proposed permit specifies the size and location of the allowed mixing zone.

# 2. The facility must fully apply "all known, available, and reasonable methods of prevention, control and treatment" (AKART) to its discharge.

Ecology has determined that the treatment provided at Kingston WWTP meets the requirements of AKART (see "Technology-based Limits").

#### 3. Ecology must consider critical discharge conditions.

Surface water quality-based limits are derived for the waterbody's critical condition (the receiving water and waste discharge condition with the highest potential for adverse impact on the aquatic biota, human health, and existing or designated waterbody uses). The critical discharge condition is often pollutant-specific or waterbody-specific.

Critical discharge conditions are those conditions that result in reduced dilution or increased effect of the pollutant. Factors affecting dilution include the depth of water, the density stratification in the water column, the currents, and the rate of discharge. Density stratification is determined by the salinity and temperature of the receiving water. Temperatures are warmer in the surface waters in summer. Therefore, density stratification is generally greatest during the summer months. Density stratification affects how far up in the water column a freshwater plume may rise. The rate of mixing is greatest when an effluent is rising. The effluent stops rising when the mixed effluent is the same density as the surrounding water. After the effluent stops rising, the rate of mixing is much more gradual. Water depth can affect dilution when a plume might rise to the surface when there is little or no stratification. Ecology's *Permit Writer's Manual* describes additional guidance on criteria/design conditions for determining dilution factors. The manual can be obtained from Ecology's website at: <a href="http://www.ecy.wa.gov/biblio/92109.html">http://www.ecy.wa.gov/biblio/92109.html</a>.

#### 4. Supporting information must clearly indicate the mixing zone would not:

- Have a reasonable potential to cause the loss of sensitive or important habitat.
- Substantially interfere with the existing or characteristic uses.
- Result in damage to the ecosystem.
- Adversely affect public health.

Ecology established Washington State water quality criteria for toxic chemicals using EPA criteria. EPA developed the criteria using toxicity tests with numerous organisms and set the criteria to generally protect the species tested and to fully protect all commercially and recreationally important species.

EPA sets acute criteria for toxic chemicals assuming organisms are exposed to the pollutant at the criteria concentration for one hour. They set chronic standards assuming organisms are exposed to the pollutant at the criteria concentration for four days.

Dilution modeling under critical conditions generally shows that both acute and chronic criteria concentrations are reached within minutes of being discharged.

The discharge plume does not impact drifting and non-strong swimming organisms because they cannot stay in the plume close to the outfall long enough to be affected. Strong swimming fish could maintain a position within the plume, but they can also avoid the discharge by swimming away. Mixing zones generally do not affect benthic organisms (bottom dwellers) because the buoyant plume rises in the water column. Ecology has additionally determined that the effluent will not exceed 33 degrees C for more than two seconds after discharge; and that the temperature of the water will not create lethal conditions or blockages to fish migration.

Ecology evaluates the cumulative toxicity of an effluent by testing the discharge with whole effluent toxicity (WET) testing.

Ecology reviewed the above information, the specific information on the characteristics of the discharge, the receiving water characteristics and the discharge location. Based on this review, Ecology concluded that the discharge does not have a reasonable potential to cause the loss of sensitive or important habitat, substantially interfere with existing or characteristics uses, result in damage to the ecosystem, or adversely affect public health if the permit limits are met.

# 5. The discharge/receiving water mixture must not exceed water quality criteria outside the boundary of a mixing zone.

The effluent data (see Table 2 of this fact sheet) show that ammonia is present in very low concentrations considering high dilution factors achieved in the receiving water. In addition, only zinc was found above the method detection limit, but below the water quality criteria. Based on this, Ecology determined that there is no reasonable potential for the effluent to violate water quality criteria outside the boundary of the mixing zone.

# 6. The size of the mixing zone and the concentrations of the pollutants must be minimized.

At any given time, the effluent plume uses only a portion of the acute and chronic mixing zone, which minimizes the volume of water involved in mixing. Because tidal currents change direction, the plume orientation within the mixing zone changes. The plume rises through the water column as it mixes; therefore much of the receiving water volume at lower depths in the mixing zone is not mixed with discharge. Similarly, because the discharge may stop rising at some depth due to density stratification, waters above that depth will not mix with the discharge. Ecology determined it is impractical to specify in the permit the actual, much more limited volume in which the dilution occurs as the plume rises and moves with the current.

Ecology minimizes the size of mixing zones by requiring dischargers to install diffusers when they are appropriate to the discharge and the specific receiving waterbody. When a diffuser is installed, the discharge is more completely mixed with the receiving water in a shorter time. Ecology also minimizes the size of the mixing zone (in the form of the dilution factor) using design criteria with a low probability of occurrence.

Because of the above reasons, Ecology has effectively minimized the size of the mixing zone authorized in the proposed permit.

#### 7. Maximum size of mixing zone.

The authorized mixing zone does not exceed the maximum size restriction.

#### 8. Acute Mixing Zone.

• The discharge/receiving water mixture must comply with acute criteria as near to the point of discharge as practicably attainable.

Ecology determined the acute criteria will be met at 10% of the distance of the chronic mixing zone.

• The pollutant concentration, duration, and frequency of exposure to the discharge will not create a barrier to migration or translocation of indigenous organisms to a degree that has the potential to cause damage to the ecosystem.

As described above, the toxicity of any pollutant depends upon the exposure, the pollutant concentration, and the time the organism is exposed to that concentration. Authorizing a limited acute mixing zone for this discharge assures that it will not create a barrier to migration. The effluent from this discharge will rise as it enters the receiving water, assuring that the rising effluent will not cause translocation of indigenous organisms near the point of discharge (below the rising effluent).

#### • Comply with size restrictions.

The mixing zone authorized for this discharge complies with the size restrictions published in chapter 173-201A WAC.

#### 9. Overlap of Mixing Zones.

This mixing zone does not overlap another mixing zone.

#### D. <u>Designated Uses and Surface Water Quality Criteria</u>

Applicable designated uses and surface water quality criteria are defined in Chapter 173-201A WAC. In addition, the U.S. EPA set human health criteria for toxic pollutants (EPA 1992). Criteria applicable to this facility's discharge are summarized below in Table 5.

- Aquatic life uses are designated using the following general categories. All indigenous fish and non-fish aquatic species must be protected in waters of the state.
  - (a) **Extraordinary quality** salmonid and other fish migration, rearing, and spawning; clam, oyster, and mussel rearing and spawning; crustaceans and other shellfish (crabs, shrimp, crayfish, scallops, etc.) rearing and spawning.
  - (b) **Excellent quality** salmonid and other fish migration, rearing, and spawning; clam, oyster, and mussel rearing and spawning; crustaceans and other shellfish (crabs, shrimp, crayfish, scallops, etc.) rearing and spawning.
  - (c) **Good quality** salmonid migration and rearing; other fish migration, rearing, and spawning; clam, oyster, and mussel rearing and spawning; crustaceans and other shellfish (crabs, shrimp, crayfish, scallops, etc.) rearing and spawning.
  - (d) Fair quality salmonid and other fish migration.

The receiving water, Puget Sound, in the vicinity of this facility's discharge is designated as Extraordinary Quality. Aquatic Life Uses for this receiving water are identified below.

Table 5. Aquatic Life Uses and Associated Criteria

Extraordinary quality					
Temperature Criteria – Highest 1D MAX	13°C (55.4°F)				
Dissolved Oxygen Criteria – Lowest 1-Day Minimum	7.0 mg/L				
Turbidity Criteria	• 5 NTU over background when the background is 50 NTU or less; or				
	• A 10 percent increase in turbidity when the background turbidity is more than 50 NTU.				
pH Criteria	pH must be within the range of 7.0 to 8.5 with a human-caused variation within the above range of less than 0.2 units.				

- To protect **shellfish harvesting**, fecal coliform organism levels must not exceed a geometric mean value of 14 colonies/100 mL, and not have more than 10 percent of all samples (or any single sample when less than ten sample points exist) obtained for calculating the geometric mean value exceeding 43 colonies/100 mL.
- The **recreational uses** are primary contact recreation and secondary contact recreation.

The recreational uses for this receiving water are identified below in Table 6.

Table 6. Recreational Uses

<b>Recreational Use</b>	Criteria
Primary Contact	Fecal coliform organism levels must not exceed a geometric mean value
Recreation	of 14 colonies/100 mL, with not more than 10 percent of all samples (or
	any single sample when less than ten sample points exist) obtained for
	calculating the geometric mean value exceeding 43 colonies /100 mL.

• The **miscellaneous marine water uses** are wildlife habitat, harvesting, commerce and navigation, boating, and aesthetics.

#### E. Evaluation of Surface Water Quality-Based Effluent Limits for Numeric Criteria

Pollutants in an effluent may affect the aquatic environment near the point of discharge (near-field) or at a considerable distance from the point of discharge (far-field). Toxic pollutants, for example, are near-field pollutants—their adverse effects diminish rapidly with mixing in the receiving water. Conversely, a pollutant such as biological oxygen demand (BOD) is a far-field pollutant whose adverse effect occurs away from the discharge even after dilution has occurred. Thus, the method of calculating surface water quality-based effluent limits varies with the point at which the pollutant has its maximum effect.

With technology-based controls (AKART), predicted pollutant concentrations in the discharge exceed water quality criteria. Ecology therefore authorizes a mixing zone in accordance with the geometric configuration, flow restriction, and other restrictions imposed on mixing zones by chapter 173-201A WAC.

The outfall diffuser for the Kingston WWTP has two 3-inch diameter ports at 50-foot spacing.

#### **Chronic Mixing Zone**

WAC 173-201A-400(7)(b)(i) specifies that mixing zones must not extend in any horizontal direction from the discharge ports for a distance greater than 200 feet plus the depth of water over the discharge ports as measured during mean lower low water (MLLW). Given a MLLW water depth of 169 feet for the Permittee's outfall, the horizontal distance therefore is 369 feet. The mixing zone is a circle with radius of 369 feet measured from the center of each discharge port. The mixing zone extends from the seabed to the top of the water surface.

#### **Acute Mixing Zone**

WAC 173-201A-400(8)(b) specifies that in estuarine waters a zone where acute criteria may be exceeded must not extend beyond 10% of the distance established for the maximum or chronic zone as measured independently from the discharge ports. The acute mixing zone is a circle with radius of 37 feet measured from the center of each discharge port. The mixing zone extends from the seabed to the top of the water surface.

The dilution factors of effluent to receiving water that occur within these zones have been determined at the critical condition by using near-field and far-field dilution modeling. The modeling provides dilution predictions under critical (worst case) receiving water conditions and for the range of receiving water conditions expected at the discharge site. The dilution

modeling and results are discussed in the "Kingston Replacement Outfall Engineering Report," CH2M Hill, January 2000. The design criteria specified in the proposed permit for the new facility are for the year 2012 conditions - diffuser with two 3-inch diameter ports at 50-foot spacing, and a maximum month flow of 0.292 MGD. Model-predicted dilutions for the 2012 discharge conditions, which are used in this permit, are shown in the following table:

**Table 7. Dilution Factors (DF)** 

Criteria	Acute	Chronic	
Aquatic Life	290	1391	
Human Health, Non-carcinogen		1391	

It should be noted that dilution modeling was based on the assumption of the outfall depth of 153 feet below MLLW. However, the actual outfall depth is 169 feet below MLLW. Therefore, Ecology expects that the actual dilutions are higher than those stated in the above table.

Ecology determined the impacts of dissolved oxygen deficiency, temperature, pH, fecal coliform, ammonia, and metals as described below, using the dilution factors in the above table. The derivation of surface water quality-based limits also takes into account the variability of pollutant concentrations in both the effluent and the receiving water.

**CBOD**<sub>5</sub>—This discharge with technology-based limitations results in a small amount of CBOD loading relative to the large amount of dilution (1,390:1) occurring in the receiving water at critical conditions. Technology-based limits will ensure that dissolved oxygen criteria are met in the receiving water.

**Temperature**—The state temperature standards (WAC 173-201A-200-210 and 600-612) include multiple elements:

- Annual summer maximum threshold criteria (June 15 to September 15)
- Supplemental spawning and rearing season criteria (September 15 to June 15)
- Incremental warming restrictions
- Protections against acute effects

Ecology evaluates each criterion independently to determine reasonable potential and derive permit limits.

Annual summer maximum and supplementary spawning/rearing criteria

Each water body has an annual maximum temperature criterion [WAC 173-201A-200(1)(c), 210(1)(c), and Table 602]. These threshold criteria (e.g., 12, 16, 17.5, 20°C) protect specific categories of aquatic life by controlling the effect of human actions on summer temperatures.

Some waters have an additional threshold criterion to protect the spawning and incubation of salmonids (9°C for char and 13°C for salmon and trout) [WAC 173-201A-602, Table 602]. These criteria apply during specific date-windows.

The threshold criteria apply at the edge of the chronic mixing zone. Criteria for marine waters are expressed as the highest 1-Day annual maximum temperature (1-DMax).

#### • Incremental warming criteria

The water quality standards limit the amount of warming human sources can cause under specific situations [WAC 173-201A-200(1)(c)(i)-(ii), 210(1)(c)(i)-(ii)]. The incremental warming criteria apply at the edge of the chronic mixing zone.

At locations and times when background temperatures are cooler than the assigned threshold criterion, point sources are permitted to warm the water by only a defined increment. These increments are permitted only to the extent doing so does not cause temperatures to exceed either the annual maximum or supplemental spawning criteria.

At locations and times when a threshold criterion is being exceeded due to <u>natural</u> <u>conditions</u>, all human sources, considered cumulatively, must not warm the water more than 0.3°C above the naturally warm condition.

When Ecology has not yet completed a TMDL, our policy allows each point source to warm water at the edge of the chronic mixing zone by 0.3°C. This is true regardless of the background temperature and even if doing so would cause the temperature at the edge of a standard mixing zone to exceed the numeric threshold criteria. Allowing a 0.3°C warming for each point source is reasonable and protective where the dilution factor is based on 25% or less of the critical flow. This is because the fully mixed effect on temperature will only be a fraction of the 0.3°C cumulative allowance (0.075°C or less) for all human sources combined.

#### • Temperature Acute Effects

**Instantaneous lethality to passing fish:** The upper 99<sup>th</sup> percentile daily maximum effluent temperature must not exceed 33°C; unless a dilution analysis indicates ambient temperatures will not exceed 33°C 2-seconds after discharge.

**General lethality and migration blockage:** Measurable (0.3°C) increases in temperature at the edge of a chronic mixing zone are not allowed when the receiving water temperature exceeds either a 1DMax of 23°C or a 7DADMax of 22°C.

**Lethality to incubating fish:** Human actions must not cause a measurable (0.3°C) warming above 17.5°C at locations where eggs are incubating.

**Temperature Analysis for this Discharge**—Ecology does not have background temperature data for the receiving water in the vicinity of the outfall. Ecology measures water quality parameters, including temperature, at several monitoring stations in Puget Sound. For background, temperature measurements at three locations in Puget Sound were used for this analysis. Daily maximum temperatures measured at these stations are:

- (1) 14.71°C in July 2004 at Station PSB 003 (Puget Sound Main Basin–West Point),
- (2) 14.77°C in August 1995 at Station PMA 001 (Port Madison), and
- (3) 16°C in September 2005 at Station POD 006 (Port Orchard/Liberty Bay).

The data indicate that these areas of Puget Sound naturally have higher temperatures than the criteria, in the summer months.

The WWTP staff at Kingston monitor effluent temperature almost daily. The operators took a total of 552 effluent temperature measurements during the summer months in the past five years. The maximum effluent temperature measured during the summer was 23°C.

Using the dilution factor of 1391and maximum daily temperature of  $16^{\circ}$ C for the receiving water and  $23^{\circ}$ C for the effluent, the predicted maximum daily temperature inside the dilution zone is  $((1390x16)+(1x23))/1391=16.005^{\circ}$ C. Thus, under the worst case scenario, the effluent discharge from this facility results in warming of the ambient temperature by  $0.005^{\circ}$ C, which is less than the allowable warming temperature of  $0.3^{\circ}$ C.

Since there is no potential for the effluent to violate the water quality standards for temperature in the receiving water, no limits are placed in the permit for effluent temperature. Based on the available data, no potential exist for the effluent to violate the water quality standards for temperature in the receiving water. Therefore, the permit does not require effluent temperature monitoring.

The daily maximum effluent temperature (23°C) prior to discharge is less than 33°C. Therefore, there is no instantaneous lethality for passing fish.

**pH**—Compliance with the technology-based limits of 6.0 to 9.0 will assure compliance with the water quality standards of surface waters because of the high buffering capacity of marine water.

**Fecal Coliform**—Ecology modeled the numbers of fecal coliform by simple mixing analysis using the technology-based limit of 400 organisms per 100 ml and a dilution factor of 1391.

Under critical conditions, modeling predicts no violation of the water quality criterion for fecal coliform. Therefore, the proposed permit includes the technology-based effluent limit for fecal coliform bacteria.

**Toxic Pollutants**—Federal regulations (40 CFR 122.44) require Ecology to place limits in NPDES permits on toxic chemicals in an effluent whenever there is a reasonable potential for those chemicals to exceed the surface water quality criteria. Ecology does not exempt facilities with technology-based effluent limits from meeting the surface water quality standards.

The toxic pollutants present in the discharge include ammonia and zinc. Ecology conducted a reasonable potential analysis (See Appendix E) for these parameters to determine whether it would require effluent limits in this permit. Ecology determined that these toxic chemicals (ammonia and zinc) present in Kingston WWTP effluent have no reasonable potential to exceed the water quality criteria at the critical condition using procedures given in EPA, 1991.

#### F. Whole Effluent Toxicity

The water quality standards for surface waters forbid discharge of effluent that causes toxic effects in the receiving waters. Many toxic pollutants cannot be measured by commonly available detection methods. However, laboratory tests can measure toxicity directly by exposing living organisms to the wastewater and measuring their responses. These tests measure the aggregate toxicity of the whole effluent, so this approach is called whole effluent toxicity (WET) testing. Some WET tests measure acute toxicity and other WET tests measure chronic toxicity.

Using the screening criteria in Chapter 173-205-040 WAC (see Appendix D), Ecology determined that toxic effects caused by unidentified pollutants in the effluent are unlikely. Therefore, this permit does not require WET testing. Ecology may require WET testing in the future if it receives information indicating that toxicity may be present in this effluent.

#### G. Human Health

Washington's water quality standards include 91 numeric human health-based criteria that Ecology must consider when writing NPDES permits. These criteria were established in 1992 by the U.S. EPA in its National Toxics Rule (40 CFR 131.36). The National Toxics Rule allows states to use mixing zones to evaluate whether discharges comply with human health criteria.

Ecology determined that the applicant's discharge is unlikely to contain chemicals regulated to protect human health based on the existing effluent data (see Table 2 of this fact sheet) or knowledge of discharges to the Permittee's sewer system. Ecology will reevaluate this discharge for impacts to human health at the next permit reissuance.

#### H. Sediment Quality

The aquatic sediment standards (Chapter 173-204 WAC) protect aquatic biota and human health. Under these standards Ecology may require a facility to evaluate the potential for its discharge to cause a violation of sediment standards (WAC 173-204-400). You can obtain additional information about sediments at the Aquatic Lands Cleanup Unit website. <a href="http://www.ecy.wa.gov/programs/tcp/smu/sediment.html">http://www.ecy.wa.gov/programs/tcp/smu/sediment.html</a>

Through a review of the effluent characteristics, Ecology determined that this discharge has no reasonable potential to violate the sediment management standards.

#### I. Ground Water Quality Limits

The ground water quality standards (Chapter 173-200 WAC) protect beneficial uses of ground water. Permits issued by Ecology must not allow violations of those standards (WAC 173-200-100).

Kingston WWTP does not discharge wastewater to the ground. No permit limits are required to protect ground water.

#### J. Comparison of Proposed Effluent Limits With the Existing Effluent Limits

Since there has been no change in the WWTP process and design criteria, the proposed effluent limits are identical to the existing limits as shown in the table below:

Table 8. Comparison of Existing and Proposed Effluent Limits

	Basis of Limit	<b>Existing Effluent Limits</b>		<b>Proposed Effluent Limits</b>	
Parameter		Average Monthly	Average Weekly	Average Monthly	Average Weekly
Carbonaceous Biochemical Oxygen Demand (5-day) (mg/L)	Technology	25	40	25	40
Total Suspended Solids (mg/L)	Technology	30	45	30	45
Fecal Coliform Bacteria (#/100 mL)	Technology	200	400	200	400
pH (Standard Units)	Technology	6.0 to 9.0		6.0 to 9.0	

#### MONITORING REQUIREMENTS

Ecology requires monitoring, recording, and reporting (WAC 173-220-210 and 40 CFR 122.41) to verify that the treatment process is functioning correctly and that the discharge complies with the permit's effluent limits.

The monitoring schedule is detailed in the proposed permit under Condition S2. Specified monitoring frequencies take into account the quantity and variability of the discharge, the treatment method, past compliance, significance of pollutants, and cost of monitoring. The required monitoring frequency is consistent with agency guidance given in the current version of Ecology's *Permit Writer's Manual* (Publication Number 92-09) for activated sludge plants with less than 2 million gallons per day (MGD) average design flow and for plants with oxidation ditches.

Monitoring of stabilized sludge (biosolids) quantity and quality is necessary to determine the appropriate uses of the sludge. Biosolids monitoring is required by the current state and local solid waste management program and also by EPA under 40 CFR 503.

#### A. Lab Accreditation

Ecology requires that facilities must use a laboratory registered or accredited under the provisions of Chapter 173-50 WAC, *Accreditation of Environmental Laboratories*, to prepare all monitoring data (with the exception of certain parameters). The laboratory analyses for parameters required in this permit are conducted at the Permittee's Central Kitsap (CK) WWTP. The laboratory at the CK WWTP is accredited for all of the parameters to be monitored at the Kingston WWTP.

#### OTHER PERMIT CONDITIONS

### A. Reporting and Record Keeping

Ecology based permit condition S3 on our authority to specify any appropriate reporting and record keeping requirements to prevent and control waste discharges (WAC 173-220-210).

#### B. Prevention of Facility Overloading

Overloading of the treatment plant is a violation of the terms and conditions of the permit. To prevent this from occurring, RCW 90.48.110 and WAC 173-220-150 require Kitsap County to take the actions detailed in proposed permit requirement S4 to plan expansions or modifications before existing capacity is reached and to report and correct conditions that could result in new or increased discharges of pollutants.

#### C. Operation and Maintenance (O&M)

The proposed permit contains Condition S5 as authorized under RCW 90.48.110, WAC 173-220-150, WAC 173-230, and WAC 173-240-080. Ecology included it to ensure proper operation and regular maintenance of equipment, and to ensure that the Permittee takes adequate safeguards so that it uses constructed facilities to their optimum potential in terms of pollutant capture and treatment.

#### D. Pretreatment

Primary sources of wastewater tributary to the facility are domestic sewage from residential and light commercial activities in the sewer service area. Since the pretreatment program has not been delegated to the Permittee, the pretreatment Condition S8 in the permit is a standard condition derived from the Federal Regulation 40 CFR 403.5.

#### E. General Conditions

Ecology bases the standardized General Conditions on state and federal law and regulations. They are included in all individual municipal NPDES permits issued by Ecology.

#### PERMIT ISSUANCE PROCEDURES

#### A. Permit Modifications

Ecology may modify this permit to impose numerical limits, if necessary, to comply with water quality standards for surface waters, with sediment quality standards, or with water quality standards for ground waters, based on new information from sources such as inspections, effluent monitoring, outfall studies, and effluent mixing studies.

Ecology may also modify this permit to comply with new or amended state or federal regulations.

#### **B.** Proposed Permit Issuance

This proposed permit meets all statutory requirements for Ecology to authorize a wastewater discharge. The permit includes limits and conditions to protect human health and aquatic life, and the beneficial uses of waters of the state of Washington. Ecology proposes to issue this permit for a term of five years.

#### REFERENCES FOR TEXT AND APPENDICES

Environmental Protection Agency (EPA)

1991. Technical Support Document for Water Quality-based Toxics Control. EPA/505/2-90-001.

Washington State Department of Ecology

2006. *Permit Writer's Manual*. Publication Number 92-109 (http://www.ecy.wa.gov/biblio/92109.html)

Laws and Regulations (http://www.ecy.wa.gov/laws-rules/index.html)

Kitsap County Department of Public works

December 1999. Final Kingston Wastewater Facilities Plan, CH2M Hill

January 2000. Kingston Replacement Outfall Engineering Report, CH2M Hill

February 2000. Project Manual for Construction of Kingston Wastewater Treatment Plant and Pump Station Number 71, CH2M Hill

#### APPENDIX A—PUBLIC INVOLVEMENT INFORMATION

Ecology proposes to reissue the permit to Kitsap County. The permit includes wastewater discharge limits and other conditions. This fact sheet describes the facility and Ecology's reasons for requiring permit conditions.

Ecology placed a Public Notice of Application on November 14 and 21, 2009, in the *Kitsap Sun* to inform the public about the submitted application and to invite comment on the reissuance of this permit.

Ecology placed a Public Notice of Draft on October 1, 2010, in the *Kitsap Sun* to inform the public and to invite comment on the proposed draft National Pollutant Discharge Elimination System permit and fact sheet.

#### The notice -

- Told where copies of the draft permit and fact sheet were available for public evaluation (a local public library, the closest regional or field office, posted on our website).
- Offered to provide the documents in an alternate format to accommodate special needs.
- Asked people to tell us how well the proposed permit would protect the receiving water.
- Invited people to suggest fairer conditions, limits, and requirements for the permit.
- Invited comments on Ecology's determination of compliance with antidegradation rules.
- Urged people to submit their comments, in writing, before the end of the comment period.
- Told how to request a public hearing about the proposed NPDES permit.
- Explained the next step(s) in the permitting process.

Ecology has published a document entitled *Frequently Asked Questions about Effective Public Commenting* which is available on our website at <a href="http://www.ecy.wa.gov/biblio/0307023.html">http://www.ecy.wa.gov/biblio/0307023.html</a>.

You may obtain further information from Ecology by telephone 425-649-7201 or by writing to the address listed below.

Ms. Tricia Miller Water Quality Program Department of Ecology 3190 160<sup>th</sup> Avenue SE Bellevue, WA 98008-5452

The primary author of this permit and fact sheet is Mike Dawda.

#### APPENDIX B—GLOSSARY


- **1-DMax** or **1-day maximum** temperature—The highest water temperature reached on any given day. This measure can be obtained using calibrated maximum/minimum thermometers or continuous monitoring probes having sampling intervals of thirty minutes or less.
- **7-DADMax** or **7-day average of the daily maximum temperatures**—The arithmetic average of seven consecutive measures of daily maximum temperatures. The 7-DADMax for any individual day is calculated by averaging that day's daily maximum temperature with the daily maximum temperatures of the three days prior and the three days after that date.
- **Acute Toxicity**—The lethal effect of a compound on an organism that occurs in a short period of time, usually 48 to 96 hours.
- **AKART**—The acronym for "all known, available, and reasonable methods of prevention, control and treatment." AKART is a technology-based approach to limiting pollutants from wastewater discharges which requires an engineering judgment and an economic judgment. AKART must be applied to all wastes and contaminants prior to entry into waters of the state in accordance with RCW 90.48.010 and 520, WAC 173-200-030(2)(c)(ii), and WAC 173-216-110(1)(a).
- **Ambient Water Quality**—The existing environmental condition of the water in a receiving water body.
- **Ammonia**—Ammonia is produced by the breakdown of nitrogenous materials in wastewater. Ammonia is toxic to aquatic organisms, exerts an oxygen demand, and contributes to eutrophication. It also increases the amount of chlorine needed to disinfect wastewater.
- **Annual Average Design Flow (AADF)**—The average of the daily flow volumes anticipated to occur over a calendar year.
- **Average Monthly Discharge Limit**—The average of the measured values obtained over a calendar month's time.
- **Best Management Practices (BMPs)**—Schedules of activities, prohibitions of practices, maintenance procedures, and other physical, structural and/or managerial practices to prevent or reduce the pollution of waters of the state. BMPs include treatment systems, operating procedures, and practices to control plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage. BMPs may be further categorized as operational, source control, erosion and sediment control, and treatment BMPs.
- BOD<sub>5</sub>—Determining the Biochemical Oxygen Demand of an effluent is an indirect way of measuring the quantity of organic material present in an effluent that is utilized by bacteria. The BOD<sub>5</sub> is used in modeling to measure the reduction of dissolved oxygen in receiving waters after effluent is discharged. Stress caused by reduced dissolved oxygen levels makes organisms less competitive and less able to sustain their species in the aquatic environment. Although BOD is not a specific compound, it is defined as a conventional pollutant under the federal Clean Water Act.
- **Bypass**—The intentional diversion of waste streams from any portion of a treatment facility.
- **Chlorine**—Chlorine is used to disinfect wastewaters of pathogens harmful to human health. It is also extremely toxic to aquatic life.

- **Chronic Toxicity**—The effect of a compound on an organism over a relatively long time, often 1/10 of an organism's lifespan or more. Chronic toxicity can measure survival, reproduction or growth rates, or other parameters to measure the toxic effects of a compound or combination of compounds.
- **Clean Water Act (CWA)**—The Federal Water Pollution Control Act enacted by Public Law 92-500, as amended by Public Laws 95-217, 95-576, 96-483, 97-117; USC 1251 et seq.
- **Compliance Inspection Without Sampling**—A site visit for the purpose of determining the compliance of a facility with the terms and conditions of its permit or with applicable statutes and regulations.
- Compliance Inspection With Sampling—A site visit for the purpose of determining the compliance of a facility with the terms and conditions of its permit or with applicable statutes and regulations. In addition, it includes as a minimum, sampling and analysis for all parameters with limits in the permit to ascertain compliance with those limits; and, for municipal facilities, sampling of influent to ascertain compliance with the 85 percent removal requirement. Ecology may conduct additional sampling.
- Composite Sample—A mixture of grab samples collected at the same sampling point at different times, formed either by continuous sampling or by mixing discrete samples. May be "time-composite" (collected at constant time intervals) or "flow-proportional" (collected either as a constant sample volume at time intervals proportional to stream flow, or collected by increasing the volume of each aliquot as the flow increased while maintaining a constant time interval between the aliquots).
- **Construction Activity**—Clearing, grading, excavation, and any other activity which disturbs the surface of the land. Such activities may include road building; construction of residential houses, office buildings, or industrial buildings; and demolition activity.
- **Continuous Monitoring**—Uninterrupted, unless otherwise noted in the permit.
- **Critical Condition**—The time during which the combination of receiving water and waste discharge conditions have the highest potential for causing toxicity in the receiving water environment. This situation usually occurs when the flow within a water body is low, thus, its ability to dilute effluent is reduced.
- **Dilution Factor (DF)**—A measure of the amount of mixing of effluent and receiving water that occurs at the boundary of the mixing zone. Expressed as the inverse of the percent effluent fraction, for example, a dilution factor of 10 means the effluent comprises 10% by volume and the receiving water 90%.
- **Engineering Report**—A document which thoroughly examines the engineering and administrative aspects of a particular domestic or industrial wastewater facility. The report must contain the appropriate information required in WAC 173-240-060 or 173-240-130.
- **Fecal Coliform Bacteria**—Fecal coliform bacteria are used as indicators of pathogenic bacteria in the effluent that are harmful to humans. Pathogenic bacteria in wastewater discharges are controlled by disinfecting the wastewater. The presence of high numbers of fecal coliform bacteria in a water body can indicate the recent release of untreated wastewater and/or the presence of animal feces.

- **Grab Sample**—A single sample or measurement taken at a specific time or over as short a period of time as is feasible.
- **Industrial Wastewater**—Water or liquid-carried waste from industrial or commercial processes, as distinct from domestic wastewater. These wastes may result from any process or activity of industry, manufacture, trade or business; from the development of any natural resource; or from animal operations such as feed lots, poultry houses, or dairies. The term includes contaminated storm water and, also, leachate from solid waste facilities.
- **Major Facility**—A facility discharging to surface water with an EPA rating score of > 80 points based on such factors as flow volume, toxic pollutant potential, and public health impact.
- **Maximum Daily Discharge Limit**—The highest allowable daily discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling. The daily discharge is calculated as the average measurement of the pollutant over the day.
- **Maximum Day Design Flow (MDDF)**—The largest volume of flow anticipated to occur during a one-day period, expressed as a daily average.
- **Maximum Month Design Flow (MMDF)**—The largest volume of flow anticipated to occur during a continuous 30-day period, expressed as a daily average.
- **Maximum Week Design Flow (MWDF)** The largest volume of flow anticipated to occur during a continuous 7-day period, expressed as a daily average.
- **Method Detection Level (MDL)**—The minimum concentration of a substance that can be measured and reported with 99 percent confidence that the pollutant concentration is above zero and is determined from analysis of a sample in a given matrix containing the pollutant.
- **Minor Facility**—A facility discharging to surface water with an EPA rating score of < 80 points based on such factors as flow volume, toxic pollutant potential, and public health impact.
- **Mixing Zone**—An area that surrounds an effluent discharge within which water quality criteria may be exceeded. The area of the authorized mixing zone is specified in a facility's permit and follows procedures outlined in state regulations (Chapter 173-201A WAC).
- **National Pollutant Discharge Elimination System (NPDES)**—The NPDES (Section 402 of the Clean Water Act) is the federal wastewater permitting system for discharges to navigable waters of the United States. Many states, including the state of Washington, have been delegated the authority to issue these permits. NPDES permits issued by Washington State permit writers are joint NPDES/State permits issued under both state and federal laws.
- **pH**—The pH of a liquid measures its acidity or alkalinity. It is the negative logarithm of the hydrogen ion concentration. A pH of 7 is defined as neutral, and large variations above or below this value are considered harmful to most aquatic life.
- **Peak Hour Design Flow (PHDF)**—The largest volume of flow anticipated to occur during a one-hour period, expressed as a daily or hourly average.
- **Peak Instantaneous Design Flow (PIDF)**—The maximum anticipated instantaneous flow.

- **Quantitation Level (QL)**—The smallest detectable concentration of analyte greater than the Method Detection Limit (MDL) where the accuracy (precision &bias) achieves the objectives of the intended purpose.
- **Reasonable Potential**—A reasonable potential to cause a water quality violation, or loss of sensitive and/or important habitat.
- **Responsible Corporate Officer**—A president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy- or decision-making functions for the corporation, or the manager of one or more manufacturing, production, or operating facilities employing more than 250 persons or have gross annual sales or expenditures exceeding \$25 million (in second quarter 1980 dollars), if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures (40 CFR 122.22).
- **Technology-based Effluent Limit**—A permit limit that is based on the ability of a treatment method to reduce the pollutant.
- **Total Suspended Solids (TSS)**—Total suspended solids is the particulate material in an effluent. Large quantities of TSS discharged to receiving waters may result in solids accumulation. Apart from any toxic effects attributable to substances leached out by water, suspended solids may kill fish, shellfish, and other aquatic organisms by causing abrasive injuries and by clogging the gills and respiratory passages of various aquatic fauna. Indirectly, suspended solids can screen out light and can promote and maintain the development of noxious conditions through oxygen depletion.
- **Solid Waste**—All putrescible and non-putrescible solid and semisolid wastes including, but not limited to, garbage, rubbish, ashes, industrial wastes, swill, sewage sludge, demolition and construction wastes, abandoned vehicles or parts thereof, contaminated soils and contaminated dredged material, and recyclable materials.
- **State Waters**—Lakes, rivers, ponds, streams, inland waters, underground waters, salt waters, and all other surface waters and watercourses within the jurisdiction of the state of Washington.
- **Stormwater**—That portion of precipitation that does not naturally percolate into the ground or evaporate, but flows via overland flow, interflow, pipes, and other features of a storm water drainage system into a defined surface water body, or a constructed infiltration facility.
- **Upset**—An exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limits because of factors beyond the reasonable control of the Permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, lack of preventative maintenance, or careless or improper operation.
- **Water Quality-based Effluent Limit**—A limit on the concentration of an effluent parameter that is intended to prevent the concentration of that parameter from exceeding its water quality criterion after it is discharged into receiving waters.

# APPENDIX C—TREATMENT PLANT LAYOUT AND OUTFALL LOCATION TREATMENT PLANT LAYOUT

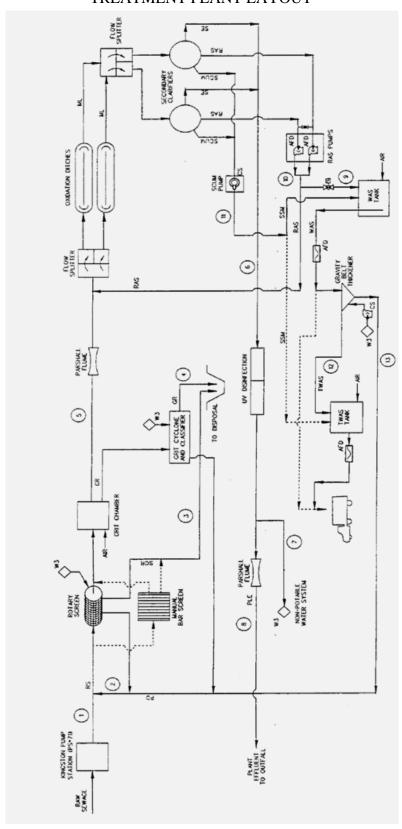

#### **OUTFALL LOCATION**



### APPENDIX D—EVALUATION OF WET TESTING REQUIREMENTS

### DISCHARGE RANKING SYSTEM FOR WET TESTS

### A. Toxicity Likelihood:

- 1. <u>5 points</u> Uses, stores, produces as a product or waste, or transfers hazardous substances listed in 40 CFR 302.4 with a statutory code of 1 or 2 with adequate Best Management Practices (adequate secondary containment, good housekeeping, good employee training, thorough self-inspection, sufficient emergency planning, and spill control equipment, etc.) **0 point**
- 2. 20 points Uses, stores, produces as a product or waste, or transfers hazardous substances listed in 40 CFR 302.4 with a statutory code of 1 or 2 with inadequate Best Management Practices (no or undersized secondary containment, poor housekeeping, little employee training, poor self inspection, little emergency planning, insufficient spill control equipment, history of spills which have reached receiving water, etc.) 0 point
- 3. <u>15 points</u> Discharges in the effluent any toxic pollutant listed in Appendix D of 40 CFR Part 122 for which there are no water quality criteria for aquatic life protection listed in 40 CFR 131.36 (b)(1) or WAC 173-201A-040(3) **0 point**
- 4. <u>15 points</u> Discharger belongs in an industry category identified in 40 CFR Part 122, Appendix A **0 point**
- 5. <u>15 points</u> Discharger is a municipal facility which receives a discharge from any industry category identified in Appendix C of 40 CFR Part 403, unless the municipality has an adequate pretreatment program which establishes and enforces local limits **0 point**
- 6. 10 points Any facility with toxicity detected during past acute toxicity testing based on less than 80% survival in 100% effluent **0 point**
- 7. <u>15 points</u> Any facility with known or suspected receiving water impacts **0 point**

### **Sum of Scores in Part A:**

0 point

5 points

### B. Potential for Impact:

1. Average Annual Discharge Flow Volume:

a.	<u>5 points</u>	Flow < 0.5 mgd
b.	10 points	Flow 0.5 mgd to 12.5 mgd
c.	15 points	Flow 12.5 mgd to 25 mgd
d.	20 points	Flow 25 mgd to 37.5 mgd
e.	25 points	Flow 37.5 mgd to 50 mgd
f.	30 points	Flow > 50 mgd

2. Chronic Critical Effluent Concentration at Edge of Mixing Zone:

a.	1 point	CCEC < 0.1% effluent = $(1/1390)*100 = 0.07%$	1 point
b.	5 points	CCEC = 0.1% effluent to 2% effluent	
c.	10 points	CCEC = 2% effluent to 4% effluent	
d.	15 points	CCEC = 4% effluent to 6% effluent	
e.	20 points	CCEC = 6% effluent to 8% effluent	
f.	25 points	CCEC = 8% effluent to 10% effluent	
g.	30 points	CCEC > 10% effluent	

## **Sum of Scores in Part B:**

6 points

C. Multiply the sum of scores from Part A by the sum of scores in Part B to rank the discharge:

Score in Part C: <u>0 point</u>

### D. <u>Discharge Ranks\*</u>:

Rank 1 - greater than 2500 points

Rank 2 - 1500 points to 2500 points

Rank 3 - 750 points to 1500 points

Rank 4 - 100 points to 750 points

Rank 5 - less than 100 points

### **TESTING FREQUENCY**

	EFFLUENT			
DISCHARGE	CHARACTERIZATION			
RANK	Acute Toxicity	Chronic Toxicity		
	6/year,	6/year,		
RANK 1	1 fish	1 fish		
	1 invert.	1 invert.		
		1 algal*		
	6/year,	4/year,		
RANK 2	1 fish	1 fish		
	1 invert.	1 invert.		
		1 algal*		
	4/year,	4/year,		
RANK 3	1 fish	1 fish		
	1 invert.	1 invert.		
	4/year,	2/year,		
RANK 4	1 fish	1 fish		
	1 invert.	1 invert.		
	2/year,	2/year,		
RANK 5	1 fish	1 fish		
	1 invert.	1 invert.		

<sup>\*</sup> Optional at permit manager's discretion

<sup>\*</sup> Borderline values go to any adjacent group at the discretion of the permit manager.

### APPENDIX E—TECHNICAL CALCULATIONS

Several of the Excel® spreadsheet tools used to evaluate a discharger's ability to meet Washington State water quality standards can be found on Ecology's homepage at <a href="http://www.ecy.wa.gov/programs/eap/pwspread/pwspread.html">http://www.ecy.wa.gov/programs/eap/pwspread/pwspread.html</a>.

## Calculations to Determine Surface Water Quality Standards for Ammonia

r
3
,
40.0
16.0
8.1
0.1
28.96
1.0
0.594
9.314
3.027%
0.233
0.035
7.70
1.16
6.33
0.95

## Reasonable Potential Calculation for Water Quality Criteria

0.946 0.946 90.00 81.00 0.24 0.05 NO 1.00 0.779 75.1 0.60 0.55 12 1.00 290 1391 Out of 12 samples, highest effluent				s 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Variati (CV CO6)		Ph Ph 0.959	CALCULAT Effluerit percertile value 1.00	NO N		Max conce at edge Acute Mixing Zone ug/L 24.83	cer Quality chronic Chronic ug/L 950.00			Metal Criteria as decimal Chronic	Metal Criteria Translator as decimal Acute	
	State Water Quality   Max concentration   Standard   at edge of   Standard   at edge of   Standard   at edge of   Conc.   Chievia   Chi	zinc concentartion was 75.1															
100 000 000 000 000 000 000 000 000 000	CALCLLATIONS  State Water Quality Max concentration  Standard at edge of  Standard at edge of  Metal Metal Concentration  Criteria C	001			3		2	3	≧	3	T2.V	70.10	20,00		) E	5 5 5	
	CALCULATIONS  Standard at edge of  Netal Metal Concentration Chierie Chionic decimal as decimal dissolved) Acute Chronic LIMIT percentile total Chronic Light Ug/L ug/L ug/L ug/L ug/L ug/L ug/L ug/L u																
	Starte Water Quality   Max concentration   Standard   at edge of   Standard   at edge of   Chronic   Chronic   Chronic   LiMT   Chronic   Chronic   Limt   Chronic   Chronic   Limt   Chronic   Chronic   Limt   Chronic   Limt   Chronic   Chronic   Chronic   Limt   Chronic   Chronic   Limt   Chronic	ammonia concentartion was 7.															
ammonia concentration was 7.6 mg/L	CALCULATIONS Standard at edge of  Metal Metal Concentration Criteria Officeria ion (metals as decimal as ac decimal as ac decimal as ac decimal as ac decimal as d	0.95 290 1391			9.0		0.959	1.00	2	5.18	24.83	920.00	6330.00				<u>ş</u>
6330.00 950.00 24.83 5.18 NO 1.00 0.959 7600.0 0.65 72 0.95 230 1391	State Water Quality Max concentration Standard at edge of  Standard at edge of  Standard at edge of  Anthent Metal Metal Concentrate Criteria Criteria ion (metals as Tanslator as Tanslator as Tanslator as decimal as decima	CUMIMIENIS			3		Ξ			ng/L	η'nΓ	ng/L	ηĥη	η/ĥ		Acute	1
6330.00 950.00 24.83 5.18 NO 1.00 0.959 7600.0 0.60 0.55 72 0.95 290 1391	State Water Quality Max concentration Standard at edge of  Metal Concentrat  Criteria ion (meas) Translator as decimal dissolved Acute Chronic Zone REOU? Multiplier  Acute Chronic Zone REOU? Multiplier  REOUR Multiplier  REOUR Multiplier  REOUR Multiplier			_	5		ą			100	2	//	<u> </u>		-incari	Volled	
Acute         Chronic         ug/L         ug/L         ug/L         ug/L         ug/L         ug/L         og/L         s         n           6530.00         24.83         5.18         NO         1,00         0.959         7600.0         0.60         0.55         72         0.95         230         1391	Standard at edge of  Metal Concentration  Metal Concentration  Ambient Ambient Concentration  Mixing Mixing LIMIT percentile total Coeff # of	s Multiplier Factor Factor	sample	.5	Variati	recoverable		valne	REQ'D?	Zone	Zone	Chronic	Acute		as decimal	decimal	
decimal         as decimal         dissolved)         Acute         Chronic         Zone         Zone         REQUD? value         recoverable)         Variation         samples         Multiplier         Factor         Factor           Acute         Chronic         ug/L         ug/L         ug/L         ug/L         ug/L         ug/L         0.07         s         n         s         n           Acute         Chronic         ug/L         ug/L         ug/L         ug/L         ug/L         ug/L         ug/L         s         n	State Water Quality Max concentration Standard at edge of  Ambient Ambient Ambient Metal Concentrat measured		<b>Jo</b> #			(metals as total		Effluent percentile		Chronic Mixing	Acute Mixing			ion (metals	Oriteria Translator	Criteria Translator as	
Cutteria         Chiteria         Chiteria         Chiteria         Chronic as decimal         Churic as decimal         Chronic as d	State Water Quality Max concentration Standard at edge of Ambient					measured								Concentrat		Metal	
Metal Metal Concentrat  Citleria Citleria in measured  Citleria Citleria in measured  Citleria Citleria in measured  Translator as Translator as Translator as Acute Citroric Zone REQ1D; Value  Acute Citroric ug/L ug/L ug/L ug/L ug/L ug/L ug/L ug/L	CALCULATIONS					conc.								Ambient			
Metal         Metal         Concentrat         Chronic decimal         Ch						Max effluen											
Artbient			_	-						OI	at edge	loard	Star				
Metal Metal Concentration of the concording as decimal as decimal of the concording of the condition of the	CALCUATIONS									intration	Max conce	er Quality	State Wal				
Stard Mater Quality   Max concentration   Standard   at edge of   Standard   at edge of   Ambient   Ambient   Ambient   Ambient   Ambient   Acute   Chronic   Chronic   Standard   Acute   Chronic   Chronic   as decimal   dissolved   Acute   Chronic   Light   Ligh	CALCULATIONS																
State Water Quality   Max concentration   State Water Quality   Max concentration   State Water Quality   Max concentration   Standard   at edge off   Standard   at edge off   Standard   at edge off   Acute   Chronic   Correction   Acute   Chronic   Correction   Correction   Correction   Correction   Acute   Chronic   Correction	CALCULATIONS																
Netal Metal Concentration Standard at edge of  Netal Metal Concentration Geoimal as decimal as d							8	CALCULAT									

## APPENDIX F—RESPONSE TO COMMENTS

Ecology did not receive any public comments on the draft permit.





### KINGSTON WASTEWATER TREATMENT PLANT

INDUSTRIAL USER SURVEY

FOR THE

DEPARTMENT OF ECOLOGY



Prepared by:

Kitsap County Public Works – Sewer Utility 12351 Brownsville Hwy NE Poulsbo, WA 98370





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

### Table of Contents:

Section 1 – Kitsap County Code Chapter 13.12 Prohibited Discharges

Section 2 – Information Used for Master List Kitsap County's Description of Source Information

Section 3 – Copy of Customer Letter and Questionnaire Letter and Blank Survey Form for Potential User

Section 4 – List of Surveyed Industries

Section 5 - List of Eliminated Industries

Section 6 – Copies of Signed Surveys



### **SECTION 1**

KINGSTON INDUSTRIAL USER SURVEY

Kitsap County Code

Chapter 13.12







614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

#### Sections:

			_			
13.	17	.010	) [	)etii	niti	ons.

- 13.12.015 Relationship to comprehensive plan and Growth Management Act.
- 13.12.020 Connection with public sewer required.
- 13.12.025 Waivers.
- 13.12.030 Connection or repair by director.
- 13.12.040 Permit required prior to connection.
- 13.12.050 Building sewer contractor's license.
- 13.12.060 Location of building sewer connection.
- 13.12.070 Protection of excavations.
- 13.12.080 Building sewer for each building.
- 13.12.090 Sewer service Where not required.
- 13.12.110 Building sewer specifications.
- 13.12.120 Building sewer excavation and trenches.
- 13.12.130 Inspection of building sewers.
- 13.12.140 Standards.
- 13.12.150 Disconnection proscribed.
- 13.12.160 Prohibited discharges.
- 13.12.170 Disposal of prohibited wastes.
- 13.12.180 Inspections to ascertain character of sewage.
- 13.12.190 Discharge from mobile tanks.
- 13.12.200 Liability to county.
- 13.12.210 Charges for sewer service.
- 13.12.220 Liens.





- 13.12.230 Industrial cost recovery.
- 13.12.240 Violations Penalty.
- 13.12.250 Nuisance declared.
- 13.12.260 Grease interceptors.
- 13.12.270 Administration.

#### 13.12.010 Definitions.

Unless the context indicates otherwise, the terms used in this chapter shall be as set forth in this section:

- (1) "ASTM" means the American Society for Testing Materials.
- (2) "Board" means the Kitsap County board of county commissioners.
- (3) "Biosolids" means primarily organic solid product produced by wastewater treatment processes that can be beneficially recycled.
- (4) "B.O.D." is the abbreviation for biochemical oxygen demand, the quantity of oxygen utilized in the biochemical oxidation of organic matter in five days at twenty degrees Celsius under standard laboratory procedure expressed in milligrams per liter.
- (5) "Building" means any structure the use of which requires location or attachment to something on the ground and which is used for human occupancy, employment or recreation.
- (6) "Building drain" means the lowest part of a building's drainage system where it connects to the building sewer.
- (7) "Building sewer" means the piping of a drainage system which extends from the building drain to the side sewer.
- (8) "Building sewer contractor" means a person who constructs, installs, repairs, excavates or connects building sewers, and who is licensed as such by Kitsap County.
- (9) "County" means all portions of Kitsap County exclusive of areas within the boundaries of municipalities which are empowered to provide sewerage service but including those areas of municipalities which are served by sewerage systems which are owned, operated or maintained by Kitsap County.
- (10) "Director" means the director of Kitsap County department of public works or a duly authorized representative.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

- (11) "Equivalent residential unit" means a sewage service unit which is substantially equivalent to a single-family residence in sewage output and function.
- (12) "Garbage" means putrescrible material resulting from the preparation and consumption of food except body waste, swill and animal carcasses.
- (13) "Parts per million" is equivalent to milligrams per liter.
- (14) "Person" means any individual, firm, company, corporation, partnership, association, society or group.
- (15) "pH" means the negative logarithm of the concentration of hydrogen ions (H+) in a solution measured in standard units; pH is the intensity factor of acidity.
- (16) "Properly shredded garbage" means garbage which has been shredded so that all particles may be carried freely under the sewage flow conditions normally prevailing and which has no particle greater than one-quarter inch in any dimension.
- (17) "Public sewer" means a sewer owned by a governmental body or public utility and/or which is operated and maintained by the county.
- (18) "Sanitary sewer" means a sewer that carries sewage.
- (19) "Sewage" means the liquid and liquid-carried wastes from residences, commercial buildings, industrial plants and institutions together with minor quantities of ground, storm and surface waters that are not intentionally admitted.
- (20) "Sewage treatment facilities" means structures, equipment and processes used to collect, carry and treat sewage.
- (21) "Side sewer" means piping from a public sewer to the property line of the parcel served and to which a building sewer is connected.
- (22) "Suspended solids" means particles that float on or are suspended in sewage and which may be substantially removed by filtering; measured in milligrams per liter.

(Ord. 55-I (1996) § 1 (part), 1996: Ord. 55 (1974) § 1, 1974)

13.12.015 Relationship to comprehensive plan and Growth Management Act.

Provisions set forth in this chapter are to be consistent with and implement the Kitsap County Comprehensive Plan in accordance with Chapter <u>36.70A</u> RCW.

(Ord. 494 (2012) § 4, 2012: Ord. 493 (2012) § 4, 2012)

13.12.020 Connection with public sewer required.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

A proposal to develop, redevelop, or substantially remodel a structure that increases the volume or strength of sewage above the permitted design capacity of the on-site sewage system located within an Urban Growth Area (UGA) which is or will be situated within two hundred feet of an existing public sewer main that has adequate capacity to serve shall connect. A structure served by a septic system located within a UGA which has been determined by the Health District to be failing and in need of repair and is located within two hundred feet of a public sewer main that has adequate capacity to serve shall be required to connect. The two-hundred-foot distance shall be measured along the usual or most feasible route to access. Connection may be authorized outside of a UGA if consistent with RCW 36.70A.110(4).

Such connection shall be made entirely at the expense of the owner. Prior to such connection, the owner shall connect every toilet, sink, stationary washstand, washing machine, dishwasher, shower, bathtub or other device producing sewage located on the premises so that the sewage thereby produced will be transported to the building drain. In the case of buildings under construction, any use or occupancy of such buildings is unlawful until such connection has been made.

(Ord. 494 (2012) § 5, 2012: Ord. 493 (2012) § 4, 2012; Ord. 55-B (1978) § 1, 1978; Ord. 55 (1974) § 2, 1974)

#### 13.12.025 Waivers.

- (1) With the exception of the requirement in Section <u>13.12.020</u> regarding the connection of existing septic systems to public sewer, the director may waive the requirements in this chapter upon making findings that the following criteria are met:
- (a) The waiver is based on unusual and site-specific conditions that are not created by the property owner; and
- (b) The requirements of this chapter impose a severe and unexpected economic hardship on the applicant. Sewer connection fees and rates shall not be considered in the determination of a severe and unexpected economic hardship; and
- (c) The grant of a waiver will not increase the risk to the public health and welfare, nor be injurious to other properties in the vicinity, to properties downstream or to the quality of the waters of the state; and
- (d) The grant of a waiver will in no way prevent or deter the extension of public sewers at any future date; and
- (e) The grant of a waiver will meet the objectives of safety, function, appearance, environmental protection and maintainability based on sound engineering judgment.

In granting a waiver, the director has the authority to impose conditions, including but not limited to requiring a no-protest agreement for future connection to public sewer.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

(2) With respect to the requirement in Section <u>13.12.020</u> regarding the connection of existing septic systems to public sewers, the board of county commissioners may consider, upon appeal by the owner of the property subject to the requirement, a waiver of the requirement, if the board finds that the conditions set forth in RCW <u>36.01.330</u>, as it now exists or is hereafter amended, are met.

(Ord. 534 (2016) § 7(4) (App. D), 2016: Ord. 494 (2012) § 6, 2012: Ord. 493 (2012) § 4, 2012; Res. 132-1984, 1984)

#### 13.12.030 Connection or repair by director.

- (a) Any repairs to a building sewer deemed necessary by the director shall be made by a licensed sewer contractor or the owner of the real property on which the building sewer is situated within thirty days after the director mails notice by certified mail to the owner specifying the repairs required; provided, the director may provide less than thirty days if he believes an emergency exists.
- (b) In the event that a connection is not made within the time and manner specified in Section 13.12.020 or in the event that repairs are not made as specified in subsection (a) of this section, the director may forthwith cause the same to be made. The director shall thereupon charge the owner for such expenditures and shall thereafter certify such expenditures, if not paid, to the Kitsap County treasurer. Such expenditures shall constitute a lien upon the premises and bear interest at eight percent per year.

(Ord. 55-A (1975) § 1 (part), 1975; Ord. 55 (1974) § 3, 1974)

#### 13.12.040 Permit required prior to connection.

- (a) It is unlawful for any person other than a licensed building sewer contractor or the owner of the real property on which the building sewer is situated to construct, uncover, repair, replace, alter, disturb any building sewer or to make any connection with or opening into any public sewer or side sewer. It is unlawful for any person to construct a building sewer without first having obtained a building sewer permit from the director as provided in this section. It is unlawful for any person to make any connection with or opening into any public sewer or side sewer without first having caused an inspection to be made and approval received as provided in Section 13.12.130.
- (b) The application for a building sewer permit shall be made to the director and shall contain the following:
- (1) Contractor's name and mailing address;
- (2) Owner's name and mailing address;
- (3) Street address and legal description of the property;
- (4) Contractor's registration number;





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

- (5) Use or proposed use of the building;
- (6) Number of residential, commercial or industrial units;
- (7) A diagram showing the real property involved, the location or proposed location of the building, and the location of the building drain, building sewer and, if known, the nearest sewer stub;
- (8) Type and size of materials used or to be used;
- (9) Other information considered necessary by the director.
- (c) The director shall review each application and shall issue a building sewer permit if the applicant and application meet the requirements of this chapter and if all fees have been properly paid.
- (d) A building sewer permit shall become null and void if the construction of the building sewer authorized thereby is not commenced within sixty days from the issuance of such permit or if the work authorized thereby is suspended or abandoned for a period of one hundred twenty days.
- (e) Upon application for a building sewer permit, the applicant shall pay a fee to the director in the amount of fifty dollars for each building to be connected to a public sewer and an additional twenty dollars for each additional connection where the building is to have more than one connection to the public sewer.
- (f) A building sewer permit shall be displayed in a conspicuous place at or near the work allowed thereby during the performance of the work and until the completion thereof and inspection and approval by the director.

(Ord. 55-C (1978) § 1, 1978; Ord. 55-A (1975) § 1 (part), 1975; Ord. 55 (1974) § 4, 1974)

#### 13.12.050 Building sewer contractor's license.

- (a) It is unlawful to engage in the activities of a building sewer contractor in the county without a current building sewer contractor's license.
- (b) An applicant for a building sewer contractor's license must possess a current certificate of registration issued by the Washington State Department of Labor and Industries pursuant to RCW Chapter <u>18.27</u>.
- (c) An application for a building sewer contractor's license shall be made to the director on forms provided by the director. The application must be accompanied by a fee of twenty-five dollars to defray in part the costs of examining the applicant. This fee is not refundable.
- (d) The director shall examine each applicant both orally and in writing to determine if the applicant possesses adequate knowledge of this chapter and adequate knowledge and skill to properly construct, install, repair, excavate and connect building sewers, to the end that the public health, safety, morals





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

and welfare will not suffer from improperly constructed, installed, repaired, excavated or connected building sewers.

- (e) Upon successful completion of the examination, the director shall issue the applicant a building sewer contractor's license. The fee for such license shall be fifty dollars for each fiscal year which shall expire on June thirtieth. A license may be renewed without examination provided renewal is made by the first day of the succeeding fiscal year.
- (f) The director or any person may file a verified petition with the board requesting that a building sewer contractor's license be granted or revoked. A copy of such petition shall be served by the director or other person upon the person who seeks a building sewer contractor's license or upon the person whose license is sought to be revoked. The board shall thereafter set a time for a public hearing giving due notice of such to the interested parties. The board may grant a building sewer contractor's license if the petitioner demonstrates that the person seeking the license meets the requirements of this section. The board may revoke a building sewer contractor's license if the petitioner demonstrates that the licensed building sewer contractor has performed in an incompetent or negligent manner or that he has misrepresented facts in an application for a building sewer contractor's license or permit as required by Section 13.12.040.

(Ord. 55 (1974) § 5, 1974)

#### 13.12.060 Location of building sewer connection.

The connection of a building sewer to a public sewer shall be made at the point and in the manner specified by the director.

(Ord. 55 (1974) § 6, 1974)

#### 13.12.070 Protection of excavations.

It is unlawful for any person to fail to protect any excavation in a public right-of-way or in lands adjacent thereto. Such protection may include fencing, covering or lighting. The protection of the public from the danger of such excavation shall be the duty of the person making or causing the excavation. The person making or causing the excavation shall be responsible for insuring adherence to all applicable safety and health standards required by the Occupational Safety and Health Act (OSHA) and the Washington Industrial Safety and Health Act (WISHA).

(Ord. 55-I (1996) § 1 (part), 1996: Ord. 55-A (1975) § 1 (part), 1975; Ord. 55 (1974) § 7, 1974)

#### 13.12.080 Building sewer for each building.

A building sewer shall serve only one building unless, prior to construction of the building sewer, written approval is obtained from the director allowing a building sewer to serve more than one building.

(Ord. 55 (1974) § 8, 1974)





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

### 13.12.090 Sewer service - Where not required.

- (a) Where the owner of a building is not required to connect to a public sewer pursuant to Section 13.12.020, the lawful mandate of a utility local improvement district, the lawful mandate of the Kitsap County planning commission, or any other lawful order or mandate, the owner may elect to connect to a public sewer upon agreement with board. Such agreement shall be known as a "sewer assessment agreement."
- (b) The board shall not enter into a sewer assessment agreement unless the sewer treatment facilities can adequately provide the additional sewer service.
- (c) A sewer assessment agreement shall provide:
- (1) That the owner have full authority to bind the property on which the building is located with the terms and covenants contained in the contract;
- (2) That the owner shall abide by the laws and regulations of the county appertaining to sewers and that the owner shall duly and regularly pay for sewer service as shall from time to time be fixed by the board;
- (3) That the property on which the building is situated shall be subject to liens, penalties and interest for nonpayment of sewer service charges;
- (4) That the building on which the property is situated shall be provided with sewer service;
- (5) Other terms agreeable to the owner and the board.
- (d) Subsequent to the execution of a sewer assessment agreement, it shall be filed with the Kitsap County auditor.

(Ord. 55-I (1996) § 1 (part), 1996: Ord. 55 (1974) § 9, 1974)

#### 13.12.110 Building sewer specifications.

- (a) A building sewer shall be constructed of one or more of the following materials:
- (1) Ductile iron pipe (ANSI specification A 21.51 or AWWA specification C151);
- (2) Polyvinyl chloride gravity sewer pipe and fittings (ASTM specification D-3033 (Type PSP), D-3034 (Type PSM);
- (3) Other material authorized by the director.
- (b) It is unlawful to lay or cause to be laid a building sewer or nonmetallic material in a trench which carries water intended for consumption within the building unless the bottom of the water pipe is at all





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

points at least twelve inches above the top of the building sewer and the water pipe rests on a solid shelf at one side of the common trench.

- (c) It is unlawful to lay or cause to be laid a building sewer composed of a material other than ductile iron pipe in filled or unstable ground, provided, the director may approve the use of some other material if laid on a granular or concrete bed as approved by the director.
- (d) Building sewers shall have clean-outs of the same diameter as the pipe they serve (except that manholes may be utilized as clean-outs), located as follows:
- (1) Where the building sewer connects to the building drain;
- (2) At all bends of forty-five degrees or greater;
- (3) At intervals of no greater than one hundred feet;
- (4) An upright tee where the building sewer connects to the side sewer; the upright portion of the tee must be plugged in a manner approved by the director.
- (e) The inside diameter of a building sewer must, at a minimum, be as follows for the following applications:
- (1) Equivalent residential unit, four inches;
- (2) Two or more equivalent residential units up to ten such units, six inches;
- (3) Other applications, as approved by the director.
- (f) No building sewer shall be laid under or within two feet of any building unless it is composed of ductile iron pipe.
- (g) The minimum cover for a building sewer is eighteen inches unless it is composed of cast iron soil pipe.
- (h) Whenever topographically possible, building sewers shall have a grade of not less than two percent nor more than one hundred percent. Where the grade is less than two percent, a check valve shall be installed, at the discretion of the director, to prevent backflooding into the building. Where the grade is greater than one hundred percent, the director may require manholes or other devices at the lower end of the building sewer in order to reduce the velocity of the sewage.
- (i) Whenever possible, a building sewer shall be installed at a uniform grade and without curves. Where curves are necessary (excluding manufacturer's allowable joint deflection), curved pipe or fittings shall be used.
- (j) Joints and connections shall be gastight and watertight. Pipe joints shall have flexible sealing gaskets conforming to ASTM Specification D-1869.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

- (k) Building sewers composed of the material permitted by subdivision (6) of subsection (a) of this section shall have flexible couplings at no greater than sixty-foot intervals.
- (1) Cement mortar joints are prohibited except for repairs or connections to existing building sewers utilizing such joints.
- (m) Ball and spigot pipes shall be laid with spigot end toward the side sewer.

(Ord. 55-I (1996) § 1 (part), 1996; Ord. 55 (1974) § 11, 1974)

#### 13.12.120 Building sewer excavation and trenches.

- (a) Building sewers shall be laid in open trenches unless otherwise approved by the director.
- (b) Pipe must be carefully bedded by forming the trench bottom to meet the contour of the bottom one-quarter of the pipe or by overexcavating and bedding with tamped and compacted granular material.
- (c) Rocks larger than one inch in diameter shall not be left in the trench bottom nor shall they be placed closer than six inches from the pipe when backfilling.
- (d) Trench must be free of water when pipe is laid.
- (e) Backfill shall be placed by hand and be tamped and compacted by hand to six inches above the top of the pipe.

(Ord. 55 (1974) § 12, 1974)

#### 13.12.130 Inspection of building sewers.

No building sewer shall be connected to a public sewer nor shall any trench in which a building sewer lies be filled unless and until the building sewer passes an inspection by the director, except as provided by subsection (4) of this section. The contractor or owner shall give the director forty-eight hours' notice prior to the time when the inspection is desired. At such inspection, the director shall determine that the building sewer meets the requirements of Sections <u>13.12.080</u>, <u>13.12.110</u> and <u>13.12.120</u>. In addition thereto, the director shall ascertain that the building sewer passes one of the following tests. Such tests are to be conducted by and at the expense of the contractor or owner. The type of test utilized is within the discretion of the director. Such tests are to be conducted as follows:

(1) Water Exfiltration Test. Prior to test, the contractor or owner may fill the building sewer with clear water to permit normal absorption into pipe walls; however, if the building sewer is so filled, the test must be completed within twenty-four hours after filling. The contractor or owner shall fill the building sewer with clear water. Exfiltration shall be no more than five-tenths gallon per hour per inch of inside pipe diameter per one hundred feet of pipe with a minimum test pressure of six feet of water column above the crown at the upper end of the pipe or above the active groundwater, whichever is higher.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

- (2) Air Exfiltration Test. The contractor or owner shall pressurize the building sewer with air to three pounds per square inch. Exfiltration shall be measured by the use of a rotometer. Exfiltration shall not exceed 0.003 cubic feet of air per minute per square foot of internal pipe surface or, alternatively, two cubic feet of air per minute when subjected to a constant pressure of three pounds per square inch. The rate of loss is to be determined when the system reaches equilibrium. For each foot of water table elevation above the invert of the pipe, the allowable loss shall be reduced six percent.
- (3) Water Infiltration Test. When the natural groundwater table is above the crown of the higher end of the building sewer, infiltration shall not exceed four-tenths gallon per hour per inch of internal pipe diameter per one hundred feet of pipe.
- (4) Internal Television Inspection. This inspection technique shall be utilized if and only if the trench in which the building sewer lies has been backfilled. The director shall then visually inspect the interior of the building sewer via television to determine if the building sewer is of the proper materials and constructed as herein provided. In addition to the television inspection the director may require an additional test as set forth in subsections (1), (2) or (3) of this section.

(Ord. 55-I (1996) § 1 (part), 1996; Ord. 55-A (1975) § 1 (part), 1975: Ord. 55 (1974) § 13, 1974)

#### 13.12.140 Standards.

When not inconsistent or in conflict with the provisions of this chapter, the director shall utilize the standards specified in the Kitsap County public works, Standards for Sanitary Sewer Extensions, as now or hereafter amended, for all sanitary sewer design, materials, construction and inspection practices.

(Ord. 55-I (1996) § 1 (part), 1996: Ord. 55 (1974) § 14, 1974)

#### 13.12.150 Disconnection proscribed.

It is unlawful to disconnect a building from a building sewer or to disconnect a building sewer from a public sewer without first having obtained a capping permit from the director. In the event that disconnection is allowed, the building sewer or public sewer shall be sealed and capped by the person causing the disconnection at the points and in the manner designated by the director.

(Ord. 55 (1974) § 15, 1974)

#### 13.12.160 Prohibited discharges.

Except as provided in Section <u>13.12.170</u>, no discharger shall discharge or cause to be discharged into a public sewer, place or cause to be placed where they are likely to run, leak or escape into a public sewer, any of the following:

(1) Any solid or viscous substances which may obstruct or interfere with the capacity or operation of the sewer such as but not limited to ashes, cinders, sand, earth, rubbish, mud, straw, shavings, metal, glass, rags, feathers, tar, plastic or wood;





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

- (2) Any liquids, solids, or gases, which because of their nature or quantity are, or may be, sufficient, either alone or by interaction with other substances, to cause fire or explosion or be injurious in any other way to the wastewater collection and treatment system. At no time shall two successive readings on an explosion hazard meter, at the point of discharge into the system (or at any point in the system), be more than five percent nor any single reading over ten percent of the lower explosive limit (LEL) of the meter. Prohibited materials include but are not limited to: gasoline, kerosene, naphtha, benzene, toluene, xylene, ethers, alcohols, ketones, aldehydes, peroxides, chlorates, perchlorates, bromates, carbides, hydrides and sulfides, and any other substances that the county, the state, the EPA, or the fire department has notified the user is a fire hazard or a hazard to the system;
- (3) Any matter having a temperature greater than forty degrees Celsius, or will inhibit biological activity at the wastewater treatment plant;
- (4) Sewage containing suspended solids in excess of three hundred fifty milligrams per liter;
- (5) Wastewater containing fats, oils or grease in excess of one hundred parts per million (mg/L);
- (6) Wastewater with B.O.D. greater than three hundred milligrams per liter;
- (7) Wastewater with pH lower than 6.0 or higher that 9.0, or having any corrosive property capable of causing damage to structures, equipment or personnel;
- (8) Garbage that has not been properly shredded;
- (9) Wastewater containing toxic substances in sufficient quantity to injure or interfere with any wastewater treatment process, constitute a hazard to humans or the environment, create any hazard in the receiving waters of a wastewater treatment plant, or exceed the limitation set forth in the pretreatment standards;
- (10) Any noxious or malodorous matter capable of creating a public nuisance or hazard to life, or sufficient to prevent entry into the sewers for their maintenance and repair;
- (11) Any unpolluted water including but not limited to; waters from irrigation, water main flushing, cooling processes, industrial processes creating no substantial water contamination, storm drains, surface runoff, roof runoff, subsurface drainage, swimming pools, ponds or reservoirs;
- (12) Any matter which is radioactive to any degree above that which normally prevails in the county;
- (13) Any substance that may cause the wastewater treatment plant's effluent or treatment residues, biosolids or scums to be unsuitable for reclamation and reuse or to interfere with the reclamation process. (In no case shall a substance discharged to the wastewater treatment plant cause the treatment plant to be in noncompliance with biosolid use or disposal criteria, guidelines, or regulations developed under Sections 405 and 503 of the Clean Water Act, any criteria, guidelines or regulations affecting biosolids use or disposal developed pursuant to the Solid Waste Disposal Act, the Clean Air Act,





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

the Toxic Substance Control Act, or state standards applicable to the biosolids management method being used.);

- (14) Any substance that will cause the wastewater treatment plant to violate its NPDES and/or other disposal system permits;
- (15) Any slugload, which shall mean any pollutant, including oxygen-demanding pollutants (B.O.D., etc.), released in a single extraordinary discharge episode of such volume or strength as to cause interference to the treatment plant. In no case shall a slugload contain concentrations or qualities of pollutants that exceed for any period longer than fifteen minutes more than five times the average twenty-four-hour concentration, quantities or flow during normal operation;
- (16) Wastewater containing substances not amenable to treatment or reduction by the sewage treatment process employed, or are amenable to treatment only to such a degree that the sewage treatment plant effluent cannot meet the requirements of other agencies having jurisdiction over discharge to the receiving waters;
- (17) National Categorical Pretreatment Standards. National categorical pretreatment standards, as promulgated by the EPA pursuant to the Clean Water Act and as adopted, shall be enforceable by this chapter and shall be met by all dischargers of the regulated industrial categories;
- (18) State Requirements. State requirements and limitations on dischargers to the wastewater system shall be met by all dischargers which are subject to standards in any instance in which they are more stringent than federal requirements and limitations or those in this or any other applicable ordinance;
- (19) Any discharge that exceeds the following daily maximum pollutant limits:

Arsenic 0.15 mg/L

Cadmium 0.10 mg/L

Chromium 1.0 mg/L

Copper 0.75 mg/L

Lead 0.25 mg/L

Mercury(1) 0.010 mg/L

Molybdenum 2.0 mg/L





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

Nickel

0.60 mg/L

Selenium

0.80 mg/L

Silver(1)

0.50 mg/L

Zinc

2.0 mg/L

Cyanide

 $0.75 \,\mathrm{mg/L}$ 

Ammonia

50.0 mg/L

Notes: (1) Businesses that follow Best Management Practices (BMPs) for their industry can petition Public Works Wastewater for higher limits. This will be limited to businesses contributing less than 1% of the total flow to the Publicly Owned Treatment Works (POTW).

(Ord. 300 (2003), 2003: Ord. 55-I (1996) § 1 (part), 1996: Ord. 55 (1974) § 16, 1974)

#### 13.12.170 Disposal of prohibited wastes.

Prohibited wastes as defined in Section 13.12.160 shall be disposed of in one of the following ways:

- (1) Pretreatment. A person producing prohibited wastes may treat such wastes prior to their introduction into a public sewer so that any and all characteristics objectionable per Section 13.12.160 are removed. Prior to the utilization of any pretreatment device or process, a person producing the prohibited unlawful wastes must submit the plans and specifications for the pretreatment device or process to the director and the Washington State Department of Ecology requiring written approval of the device or process that will remove the objectionable characteristics. The entire cost of the construction, maintenance and operation of any pretreatment device or process shall be borne by the person producing the prohibited wastes.
- (2) Prohibited Waste Discharge Permit.
- (A) A person producing prohibited wastes may discharge such into a public sewer if a permit to do so is first obtained from the director. The application for such permit shall include the following information: name and address of applicant, location of sewage production, process which produces sewage, volume of anticipated discharge, specific type and degree of prohibited sewage characteristic, other information deemed necessary by the director. The director may approve the application if the sewage treatment plant affected has sufficient capacity to handle the increased treatment load and if the contemplated discharge will not be unnecessarily harmful to the public sewer or unreasonably detrimental to the public health, safety or welfare. A person discharging prohibited waste pursuant to a permit shall pay





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

the county for the increased costs of the treatment thereof in addition to the regular monthly or bimonthly charge.

(B) The charge for treating such wastes pursuant to the permit shall be as follows:

\$0.02 per gallon for

0 - 10,000 gallons

\$0.04 per gallon for

10,001 - 20,000 gallons

\$0.06 per gallon for

20,001 - 30,000 gallons

\$0.08 per gallon for

30,001 - 40,000 gallons

The maximum allowable discharge shall be limited to forty thousand gallons. A fifty-dollar fee will be charged for the permit to defray administrative costs.

The director may revoke a permit upon sixty days' written notice to the person discharging the prohibited waste if it is found that the waste discharged has significantly increased in volume or degree of prohibited sewage characteristic, that the particular variety of prohibited characteristics has changed, or that the sewage treatment plant affected no longer has the capacity to handle the prohibited waste.

(3) Dilution. No discharger shall increase the use of potable or process water in any way for the purpose of diluting a discharge as a partial or complete substitute for adequate treatment to achieve compliance with applicable standards set forth in this chapter. Mass limitations may be imposed on dischargers that are using dilutions to meet applicable pretreatment standards or requirements of this chapter, or in other cases where deemed appropriate by the director.

(Ord. 55-I (1996) § 1 (part), 1996: Ord. 55 (1974) § 17, 1974)

#### 13.12.180 Inspections to ascertain character of sewage.

The director may enter premises served by a public sewer at any and all reasonable times to take sewage samples in order to determine if the sewage is an unlawful waste. Persons pretreating unlawful wastes pursuant to subsection (1) of Section 13.12.170 or permitted to discharge unlawful wastes pursuant to subsection (2) of Section 13.12.170 shall, at the direction of the director, install inspection tees or manholes in the building sewer to facilitate sampling.

(Ord. 55 (1974) § 18, 1974)

#### 13.12.190 Discharge from mobile tanks.

(a) It is unlawful for any person to discharge or cause to be discharged from a mobile tank into a public sewer any sewage which is generated outside Kitsap County.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

- (b) It is unlawful for any person to discharge or cause to be discharged from a mobile tank into a public sewer any sewage which is generated inside Kitsap County from commercial or industrial sources without obtaining prior approval from the director of public works.
- (c) It is unlawful for any person to discharge or cause to be discharged from a mobile tank into a public sewer any sewage except at points and in a manner designated by the director of public works.
- (d) A charge of eight cents per gallon shall be made for the discharge from mobile tanks of sewage from septic tanks, cesspools, chemical toilets or similar apparatus, provided the charges shall be based upon the gallonage capacity of the mobile tank from which the sewage is discharged into the Central Kitsap Wastewater Treatment Plant. A two-cent per gallon fee shall be transferred to the public health pooling fund once each month. The rate for septage shall increase by one cent per year on October 1st of each year through the year 2001.
- (e) Prior to the discharge of any sewage from mobile tanks, a written manifest shall be submitted to the Central Kitsap Wastewater Treatment Plant office at 12350 Highway No. 303 NE, Poulsbo, WA 98370, clearly identifying the source, nature and quantity of sewage to be discharged. The manifest shall be made on forms provided by Kitsap County and all information required shall be complete.
- (f) The charge per gallon referenced in subsection (d) of this section shall be established from time to time by resolution of the board of county commissioners.

(Ord. 55-J (1996) § 1, 1996: Ord. 55-G (1993) § 1, 1993: Ord. 55-F (1989) § 1, 1989: Ord. 55-E (1985), 1985: Ord. 55-D (1984), 1984: Ord. 55-B (1978) § 2, 1978: Ord. 55 (1974) § 20, 1974)

#### 13.12.200 Liability to county.

Any person who violates any provision of this chapter is liable to the county for any expense, loss, damage, cost of inspection or correction incurred by the county as a result of such violation.

(Ord. 55 (1974) § 20, 1974)

#### 13.12.210 Charges for sewer service.

Charges for sewer service for all single-family residences shall be due and payable bimonthly. Charges for all other sewer service shall be due and payable monthly. For all new building construction, charges for sewer service shall commence upon occupancy or sixty days after issuance of a building sewer permit, whichever occurs first.

(Ord. 55-B (1977) § 1, 1977: Ord. 55 (1974) § 21, 1974)

#### 13.12.220 Liens.

Pursuant to RCW  $\underline{36.94.130}$  and RCW  $\underline{36.94.150}$ , the following, when not paid within thirty days of the date due, shall constitute a lien upon the premises served: Sewer service charges, repair costs,





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

connection charges, permit fees, inspection costs, and charges in lieu of assessment. Such liens shall bear interest at eight percent per year. When a charge is not paid when due, a penalty of ten percent shall be added thereto.

(Ord. 55 (1974) § 22, 1974)

#### 13.12.230 Industrial cost recovery.

Any industrial users of a sewer facility constructed with Environmental Protection Agency grant funds awarded after March 1, 1973, shall repay that portion of the grant amount allocable to the treatment of its wastes. The method of repayment and procedures for handling the repayment shall be in accordance with 30 Fed. Reg. 35.905-8, 35.925-12, 35.928 and 35.935-13 (1974).

(Ord. 55 (1974) § 23, 1974)

#### 13.12.240 Violations - Penalty.

- (a) Civil Penalties. Any discharger who violates an order by the county, or who fails to comply with:
- (1) Any provision of this chapter; or
- (2) Any regulation, rule or permit of the county, issued pursuant to this chapter, shall be liable to the county for a civil penalty. The amount of such civil penalties shall not be less than two hundred fifty dollars per violation nor more than one thousand dollars per violation. Each day upon which a violation occurs or continues shall constitute a separate violation. In addition, the county may commence an action to end the discharger's wastewater treatment service.
- (b) Recovery of Cost Incurred by the County. Any discharger violating any of the provisions of this chapter who discharges or causes a discharge producing a deposit or obstruction or causes damage to or impairs the county's wastewater disposal system shall be liable to the county for any expense, loss or damage caused by such violation or discharge. The county shall, by order, bill the discharger for the cost incurred the county for any cleaning, repair, or replacement work caused by the violation or discharge and for any cost incurred by the county in investigating the violation and in enforcing the chapter against the discharger, including reasonable administrative costs, fees for testing, attorney fees, court costs, and all expenses of litigation. Refusal to pay the assessed costs shall constitute a violation of this chapter.
- (c) In addition to or as an alternative to any other penalty provided in this chapter or by law, any violation of this chapter shall constitute a Class I civil infraction. Each violation shall constitute a separate infraction for each and every day or portion thereof during which the violation is committed, continued or permitted. Infractions shall be processed in accordance with the provisions of the civil enforcement ordinance (Chapter 2.116 of this code). The choice of enforcement action taken and the severity of any penalty shall be based upon the nature of the violation and the damage or risk to the public.





(Ord. 55-K (1997) § 1, 1997; Ord. 55-I (1996) § 1 (part), 1996: Ord. 55 (1974) § 24, 1974)

#### 13.12.250 Nuisance declared.

Any building sewer or side sewer hereafter constructed, moved, maintained, used or altered contrary to the provisions of this chapter shall be, and the same is, unlawful and a public nuisance. Compliance with this chapter may be enforced by mandatory injunction brought by the owner or owners of land lying in proximity to that whereon the violation exists or the prosecuting attorney may commence action or actions, proceeding or proceedings for the abatement, removal and enjoinment thereof and may take such other steps to obtain such relief as will abate or remove sewers, structures or uses and restrain and enjoin any person from constructing, maintaining or altering any such sewers contrary to the provisions of this chapter.

(Ord. 55-A (1975) § 2, 1975: Ord. 55 (1974) (part), 1974)

#### 13.12.260 Grease interceptors.

- (a) Any business involved in the process, preparation, sale or packaging of human or animal food shall install an exterior (located outside the building) grease interceptor on a separate building sewer main. This separate building sewer shall be connected directly, and only to the food handling areas of the building, with no sanitary connections permitted upstream of the grease interceptor.
- (b) The grease interceptor shall be adequately designed to provide retention of a minimum of ninety percent of the contaminated oils and greases. Grease interceptors shall be sized using storage capacity factors and loading factors appropriate for the intended use of the facility and anticipated volumes. It shall include baffles that provide sufficient detention time to allow the grease to separate fully.
- (c) Grease interceptors shall be properly operated and cleaned regularly to prevent escape of appreciable quantities of grease. The extracted grease shall not be reintroduced into the sanitary sewer system at another location.

(Ord. 55-I (1996) § 1 (part), 1996)

#### 13.12.270 Administration.

- (a) Wastewater Dischargers. It is unlawful to discharge sewerage, industrial wastes, or other wastes to any sewer outlet within the jurisdiction of the county and/or to the wastewater treatment plant without first having complied with the terms of this chapter, or without having first obtained the county's approval of a compliance schedule submitted by the discharger.
- (b) General Disclosure. All industrial dischargers proposing to connect to or to discharge sewage, industrial wastes, or other wastes to the wastewater treatment plant shall comply with all terms of this chapter within thirty days after the effective date of the ordinance codified in this section.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

- (c) Disclosure Forms. Significant industrial dischargers shall complete and file with the county a data disclosure declaration in the form prescribed by the county, and accompanied by the appropriate fee. Existing significant industrial dischargers shall file a disclosure form within sixty days after notification by the county. Proposed new source dischargers shall file a disclosure form a minimum of ninety days before connecting to the sewer system. The disclosure to be made by the discharger shall be made on written forms provided by the county and shall cover:
- (1) Disclosure of name, address and location of the discharger;
- (2) Disclosure of wastewater constituents and characteristics including but not limited to those mentioned in this chapter, including standards contained in Section <u>13.12.170</u> of this chapter, as appropriate, as determined by bona fide chemical and biological analysis. Sampling and analysis shall be performed according to procedures established by the EPA;
- (3) Disclosure of time and duration of discharges;
- (4) Disclosure of average daily and instantaneous peak wastewater flow rates, in gallons per day, monthly, and seasonal variations, if any. All flows shall be measured unless other verifiable techniques are approved by the county due to cost or nonfeasibility;
- (5) Disclosure of site plans, floor plans, plumbing plans, and details to show all sewers, sewer connections, inspection manholes, sampling chambers, and appurtenances by size and location.
- (d) Operating Upsets. Any discharger that experiences an upset in operations which places the discharger in a temporary state of noncompliance with this chapter shall inform the county immediately upon first awareness of the commencement of the upset. Where such information is given orally, a written follow-up report shall be filed by the discharger with the county within five days. The report shall specify:
- (1) Description of the upset, the cause of it, and the upset's impact on the discharger's compliance status;
- (2) Duration of noncompliance, including exact dates and times of noncompliance; and, if the noncompliance continues, the time by which compliance is reasonably expected to occur;
- (3) All steps taken or to be taken to reduce, eliminate and prevent recurrence of such an upset or other conditions of noncompliance. A documented and verified bona fide operating upset shall be an affirmative defense to any enforcement action brought by the county against the discharger for any noncompliance with the chapter that arises out of violations alleged to have occurred during the period of upset.

(Ord. 55-I (1996) § 1 (part), 1996)



### **SECTION 2**

#### KINGSTON INDUSTRIAL USER SURVEY

Information used for Master List

#### Sources of Information:

As recommended by the "Guidance Manual for Performing an Industrial User Survey", Kitsap County complied a Master List of potential industrial users using billing records and water use. The manual recommended surveying businesses using over 25,000 gallons per day or business contributing a process waste stream of 5% or more of the average dry weather hydraulic or organic capacity of the Kingston Wastewater Treatment Plant. These criteria eliminated every business from our survey pool. Kitsap County decided to set the standard at 10,000 gallons per day or just below 5% capacity, which qualified 4 businesses for the Industrial User Survey.

Along with using water consumption rates, the business accounts were evaluated for potential industrial discharges based on their production. After this assessment, there were no new businesses added to the list of Industrial Users. At the time of this submittal, Kitsap County was still awaiting a Customer Survey from Northwest Laborers.



### **SECTION 3**

KINGSTON INDUSTRIAL USER SURVEY

Copy of Customer Letter and Questionnaire



## Completion of Industrial User Survey Forms

Dear Customer:

Kitsap County Public Works - Sewer Utility is currently collecting information on the wastewater discharged by our customers. This study is called an "Industrial User Survey" and is required by Washington State Department of Ecology. We need to collect information from non-residential customers that meet our water use criteria of over 10,000 gallons per/day and have potential to discharge non-residential waste. We use the information provided to determine if businesses can be eliminated from any future surveys.

After we successfully survey the businesses on our list, we send the results to the Department of Ecology, who uses this information to determine if a business requires a Wastewater Discharge Permit or a pre-treatment program. The primary goal is to identify any discharge that may be a problem to our collection/treatment systems. We must ensure that proper controls are in place to reduce significant or potential sources of pollution as disclosed in the Kitsap County Code 13.12.160 that may ultimately end up in the Puget Sound.

The Department of Ecology is the permit administrator for the Kingston Wastewater Treatment Plant. This permit is a National Pollutant Discharge Elimination System (NPDES) Permit. To comply with our requirement we need to successfully receive a completed survey from every business on our list. This survey should be completed by the authority onsite that can vouch for the discharge of the business. Please complete and return this form by Friday, May 22, 2020.

Thank you for your cooperation as Kitsap County continues to provide safe and clean water resources for its residents. If you have any questions feel free to call (360) 337-7197 or e-mail me at <a href="mailto:csheridan@co.kitsap.wa.us">csheridan@co.kitsap.wa.us</a>.

Thank You,

Chris Sheridan

Sewer Utility Operations Manager

Kitsap County Public Works-Sewer Utility Division





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

#### WASTEWATER DIVISION

### INDUSTRIAL USER SURVEY FOR NON\_RESIDENTIAL ESTABLISHMENTS

INSTRUCTIONS: Please type or print information clearly with a pen. Attach additional sheets as needed. Please complete a survey for each facility that discharges to the Kitsap County Sanitary Sewer. Additional information and copies of this form are available from Matt Pickering, Utility Analyst – Lead.

1.	Company Name:
2.	Mailing Address:
3.	Facility Address:
4.	Telephone Number:
5.	Name and Title of Contact Person:
6.	Please provide a brief narrative of manufacturing, production, or services provided at your facility:
7.	You use approximatelygallons of water per day.
8.	How much of your daily water use goes into the wastewater sewer system?
Э.	Do you discharge any wastewater other than domestic waste (restrooms, showers, etc) ( ) Yes ( ) No
10.	If Yes, what kind of non-domestic waste do you discharge?
11.	Will water be used for product manufacturing, washdown, or floor cleaning in production areas? ( ) Yes ( ) No
	Do you have floor drains in your process / production area? ( ) Yes ( ) No Do you discharge oil, grease, or animal / vegetable fats to the sewer system? ( ) Yes ( ) No





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

Print Name and Title	
12351 Brownsville Hwy NE Poulsbo, WA 98370	
Please return this survey to:	
Wastewater Treatment Plant's Nation	is survey is used to fulfill the requirements of Kitsap County Kingston onal Pollutant Discharge Elimination System (NPDES) Permit through y. The Permit number is WA-0032077.
	on the SQG Program, please call the Solid Waste Division at 360-337-stance with hazardous waste, contact the Kitsap County Health  1.
21. Do you have a plan do p	prevent accidental spills? ( ) Yes    ( ) No
20. Are you aware of Kitsap	o County's Small Generator (SQG) Program? ( ) Yes ( ) No
19. Do you qualify as a Haza	ardous Waste Small Quantity Generator? ( ) Yes ( ) No
18. If Yes, what materials?	
17. Do you store toxic, haza	ardous, or dangerous materials at your facility? ( ) Yes ( ) No
16. How often do you have	it cleaned?
( ) Grease Trap ( )	Oil / Water Separator ( ) Both
15. If Yes, which do you have	ve?
system?()Yes ()N	

I understand by signing this, I hereby certify the above statement is true to the best of my knowledge and ability. I understand this is a legal document and will be used to determine our Industrial User Status with the Department of Ecology.



#### **SECTION 4**

### KINGSTON INDUSTRIAL USER SURVEY

List of Surveyed Industries

NAME	Street	City	Gallons per month
North Kitsap School District	18360 NE Caldart Avenue	Poulsbo	210,000 **
Northwest Laborers	27055 Ohio Ave	Kingston	74,110
Peninsula Health Services	25989 Barber Cut Off Rd NE	Kingston	95,931
Port of Kingston	25864 Washington Blvd NE	Kingston	85,646

<sup>\*\*</sup> North Kitsap School District gallons per month mostly irrigation.



### **SECTION 5**

### KINGSTON INDUSTRIAL USER SURVEY

#### List of Eliminated Industries

Business Name	Telephone number	Address
All about Sewing	360-731-9973	11264 WA-104, #201
Apple Tree Cove Animal Hospital	360-297-2898	11254 WA 154, #261
Arco	360-297-1717	10951 WA-104
Bayside Community Church	360-297-2000	25992 Barber Cut Off Rd NE
Bim Prince Ameriprise Financial Services	360-297-4848	10950 NE State Hwy 104
Bliss Day Spa	360-881-0737	10978 NE State Hwy 104
Borrowed Kitchen Bakery	360-860-2255	10811 NE State Hwy 2014 #101
Clearview Blainds and Shades	360-774-2658	11133 NE Maine St A
Coffee Oasis Kingston Café	360-881-0314	11212 NW State Hwy 104
Country Pet Shoppe	360-297-4165	11132 NE 2nd St
Downpour Brewing	360-881-0452	10991 NE State Hwy 104
d'Vine Wine Bar	360-297-3010	11227 NE State Hwy 104
Eastern Fish	360-297-5551	26076 Iowa Ave NE
Expeditino Press	360-434-2093	10975 WA-104
Filling Station	360-297-7732	11200 WA-104
Firehouse Theater	360-297-4849	11171 NE State Hwy 104
Food Market at Kignston	360-297-3350	10978 WA-104
Galare Thai	360-297-4022	26050 Illinois Avenue NE
Henery Hardware	360-297-3366	10960 WA-104
Hot Dogs at the Cove	??	11252 WA-104
J'aime les crepes Creperie	360-297-5886	11264 WA-104
Joy Luck Restaurant	360-297-3342	10978 NE State Hwy 104
Jumpin Java	??	10943 NE State Hwy 104
Kafe Neo	360-881-0197	11171 NE State Hwy 104
Kingston Dental	360-297-2298	25985 Barber Cutoff Rd NE
Kingston Ale House	360-881-0412	11225 NE Stae Hwy 104
Kingston Auto Shop	360-297-2803	26262 Lindvog Rd NE





# Kitsap County Department of Public Works

614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

Kingston Bookery	360-297-7380	10978 WA-104 Ste 121
Kingston Bookery	300 237 7300	10370 1171 127 010 111
Kingston Cove Yacht Club	360-297-3371	25815 Washington Blvd NE
Kingston Nails and Spa	360-297-5099	25829 Ohio Ave NE
Kingston's Central Valley Child Care	360-297-8020	11026 NE Oregon St
,		25923 Washington Blvd / PO Box
Kingston Chamber of Commerce	360-215-7022	78
Kingston Christian Church	360-297-2551	11255 NE 2nd St
Kingston Co-Op Preschool	360-297-3220	11128 NE Maine St
Kingston High School	360-396-3300	26201 Siyaya Ave NE
Kingston Mini Storage	360-297-3019	11126 NE State Hwy 104
Kitsap Regional Library	360-297-3330	26159 Dulay Rd NE
McDonalds	360-297-4350	10977 State Hwy 104
Mora Iced Creamery	360-215-7022	11250 NE State Hwy 104
Mossback	360-297-2373	26185 Ohio Ave NE
Oregon Street Salon	360-297-1899	11053 Oregon St
Deliable Storage	360-930-6687	10600 WA-104 NE
Reliable Storage	360-396-3800	26331 Barber Cut Off Rd NE
Richard Gordon Elementary	360-638-6105	10801 WA-104
Roots and Razors	360-297-7117	26282 Lindvog Rd NE #130
Roy's Marine Services	300-237-7117	26262 Lindvog Rd NE Ste 130 &
Stanley Steemer	360-626-9012	140
Subway	360-297-4498	10978 WA-104
Sweet Life Cakery	360-881-0215	11201 NW State Hwy 104
Sweet Tansosha Yoga	360-638-6171	26569 Lindvog Rd NE Suite 102
The Cup and Muffin	360-297-3364	10969 NE State Hwy 104
The Grub Hut	360-881-0147	11130 NE State Hwy 104
Thistle Floral and Home	360-638-2849	25960 Central Ave NE
Unity Church	360-297-5100	26011 Ohio Ave NE
USPS	800-275-8777	10990 NE State Hwy 104
Westside Pizza	360-297-6800	25960 Ohio Avenue NE Ste 102
WSDOT Ferries	NA SS ON CONSTRUCTION OF THE ST	
VVODOTTCITICS		

Industries listed above were eliminated after determining their discharge to the Kingston WWTP was considered domestic in quantity and characteristics.



#### **SECTION 6**

KINGSTON INDUSTRIAL USER SURVEY

Copies of Signed Surveys





614 DIVISION STREET (MS 26), PORT ORCHARD. WA 98366 4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

#### WASTEWATER DIVISION

#### INDUSTRIAL USER SURVEY FOR NON\_RESIDENTIAL ESTABLISHMENTS

INSTRUCTIONS: Please type or print information clearly with a pen. Attach additional sheets as needed. Please complete a survey for each facility that discharges to the Kitsap County Sanitary Sewer. Additional information and copies of this form are available from Matt Pickering, Utility Analyst – Lead.

ICII	miorination and copies of this form are available from Matter texering, other, Analysis Lead.
1.	Company Name: North Kitsap School District # 401
2.	Mailing Address: Transportation Sucs. NKSP #F400 26000 Siyaya AVE NE KINGSHOW WAS
3.	Facility Address: 20000 Siyaya AVE NK KINGSTON, WA 98346
4.	Telephone Number: 360-396-3099
5.	Name and Title of Contact Person: John 510ES Interm Dir Tr
6.	Please provide a brief narrative of manufacturing, production, or services provided at your facility: Routine Mantenance and upkeep of Rubic School Bus fleet
7.	You use approximately <5000 gallons of water per day.
8.	How much of your daily water use goes into the wastewater sewer system?
9.	Do you discharge any wastewater other than domestic waste (restrooms, showers, etc) Yes ( ) No
10.	If Yes, what kind of non-domestic waste do you discharge?  SMALL VEhicle Washbay - 1 Bay USECL +O Wash School busses and Fleet vehicles
11.	Will water be used for product manufacturing, washdown, or floor cleaning in production areas? (>) Yes No
12, 13.	Do you have floor drains in your process / production area? ( ) Yes  Do you discharge oil, grease, or animal / vegetable fats to the sewer system? ( ) Yes  No





614 DIVISION STREET (MS 26). PORT ORCHARD, WA 98366 4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

1	4. Do you have a grease trap or oil / water separator on any discharge line to the sewer system? ( ) No
15	5. If Yes, which do you have?
	( ) Grease Trap ( ) Oil / Water Separator Both
16	() Grease Trap () Oil / Water Separator Both  6. How often do you have it cleaned? ANNUAL CONTRACTED 5VC  7. Do you store toxic, hazardous, or dangerous materials at your facility? Wes () No Activation
17	7. Do you store toxic, hazardous, or dangerous materials at your facility? Yes () No
18	3. If Yes, what materials? FUCIS/LUbricounts/Bostkories/Chemical
15	). Do you qualify as a Hazardous Waste Small Quantity Generator ( ) No
20	Are you aware of Kitsap County's Small Generator (SQG) Program? Yes ( ) No
21	. Do you have a plan do prevent accidental spills? Yes ( ) No
	For more information on the SQG Program, please call the Solid Waste Division at 360-337-5777. For technical assistance with hazardous waste, contact the Kitsap County Health District at 360-692-3611.

The information collected during this survey is used to fulfill the requirements of Kitsap County Kingston Wastewater Treatment Plant's National Pollutant Discharge Elimination System (NPDES) Permit through the WA State Department of Ecology. The Permit number is WA-0032077.

Please return this survey to:

12351 Brownsville Hwy NE Poulsbo, WA 98370

Print Name and Title

ature Trabana

Asst. Director Martenance NKSD

Date 22 May 2020

I understand by signing this, I hereby certify the above statement is true to the best of my knowledge and ability. I understand this is a legal document and will be used to determine our industrial User Status with the Department of Ecology.





614 DIVISION STREET (MS-26). PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

#### WASTEWATER DIVISION

### INDUSTRIAL USER SURVEY FOR NON\_RESIDENTIAL ESTABLISHMENTS

INSTRUCTIONS: Please type or print information clearly with a pen. Attach additional sheets as needed. Please complete a survey for each facility that discharges to the Kitsap County Sanitary Sewer. Additional information and copies of this form are available from Matt Pickering, Utility Analyst – Lead.

1.	Company Name: PENINSULA COMMUNITY HEALTH
2.	Mailing Address: P.O. BOX 960 BREMERTON WA 98337
3.	Facility Address: 25989 BARBER CUT-OFF ROAD NE
4.	Telephone Number: 360 616 3140
5.	Name and Title of Contact Person: CHUCK RUSSELL FACILITIES MANAGER
6.	Please provide a brief narrative of manufacturing, production, or services provided at your facility: OUT PATIENT MEDICLE CLINIC
7.	You use approximately 30 gallons of water per day.
8.	How much of your daily water use goes into the wastewater sewer system?All
9.	Do you discharge any wastewater other than domestic waste (restrooms, showers, etc)  ( ) Yes No
10.	If Yes, what kind of non-domestic waste do you discharge?
	Will water be used for product manufacturing, washdown, or floor cleaning in production areas? (A) Yes ( ) No
12. 13.	Do you have floor drains in your process / production area? ( ) Yes No





614 DIVISION STREET (MS-26). PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV.COM

14. Do you have a grease trap or oil / water separator on any discharge line to the sewer system? ( ) Yes () No しい にいっしいい
15. If Yes, which do you have?
() Grease Trap () Oil / Water Separator () Both
16. How often do you have it cleaned?
17. Do you store toxic, hazardous, or dangerous materials at your facility? ( ) Yes No
18. If Yes, what materials?
19. Do you qualify as a Hazardous Waste Small Quantity Generator? 似 Yes () No FIORESCEいて LICHT TUBES
20. Are you aware of Kitsap County's Small Generator (SQG) Program? (Yes ( ) No
21. Do you have a plan do prevent accidental spills? ( ) Yes No
For more information on the SQG Program, please call the Solid Waste Division at 360-337-5777. For technical assistance with hazardous waste, contact the Kitsap County Health District at 360-692-3611.
The information collected during this survey is used to fulfill the requirements of Kitsap County Kingston Wastewater Treatment Plant's National Pollutant Discharge Elimination System (NPDES) Permit through the WA State Department of Ecology. The Permit number is WA-0032077.
Please return this survey to:
12351 Brownsville Hwy NE Poulsbo, WA 98370
Print Name and Title
CHUCK RUSSELL PACILITIES MANAGER
Signature Date 5/14/20

I understand by signing this, I hereby certify the above statement is true to the best of my knowledge and ability. I understand this is a legal document and will be used to determine our Industrial User Status with the Department of Ecology.





614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAPI: 360.337.5777 | KITSAPGOY, COM

#### WASTEWATER DIVISION

#### INDUSTRIAL USER SURVEY FOR NON\_RESIDENTIAL ESTABLISHMENTS

INSTRUCTIONS: Please type or print information clearly with a pen. Attach additional sheets as needed. Please complete a survey for each facility that discharges to the Kitsap County Sanitary Sewer. Additional information and copies of this form are available from Matt Pickering, Utility Analyst – Lead.

1.	Company Name: PORT OF KINGSTON
2.	Mailing Address: <u>POBOX 559</u> KINGSTON, WA 98346
3.	258/24 MACHINETON 3/10
4.	Telephone Number: 360 900 8235 call At
5.	Name and Title of Contact Person: TER FY GRANDT
6.	Please provide a brief narrative of manufacturing, production, or services provided at your facility: FORT DISTRIET, MARTMA, TARK.
7.	You use approximately 460 gallons of water per day.
8.	How much of your daily water use goes into the wastewater sewer system? 250
9.	Do you discharge any wastewater other than domestic waste (restrooms, showers, etc) (x) Yes ( ) No
10.	If Yes, what kind of non-domestic waste do you discharge?  MARSTUE PUMP-OUT System, DISCHARGE VESSE BLACKWATER
11.	Will water be used for product manufacturing, washdown, or floor cleaning in production areas? () Yes PNo
	Do you have floor drains in your process / production area? ( ) Yes ( ) No  Do you discharge oil, grease, or animal / vegetable fats to the sewer system? ( ) Yes ( ) No





# Kitsap County Department of Public Works

614 DIVISION STREET (MS-26), PORT ORCHARD, WA 98366-4699 | KITSAP1: 360.337.5777 | KITSAPGOV, COM

14. Do you have a grease trap or oil / water separator on any discharge line to the sewer system? ( ) Yes No
15. If Yes, which do you have? № 🖟
() Grease Trap () Oil / Water Separator () Both
16. How often do you have it cleaned? N
17. Do you store toxic, hazardous, or dangerous materials at your facility? (🗘) Yes 🥡 ( ) No
18. If Yes, what materials? EPOXY PAINT, Fuel = GASOLITE, DIESEL, ANTO FREEZE,
19. Do you qualify as a Hazardous Waste Small Quantity Generator? (*) Yes (*) No
20. Are you aware of Kitsap County's Small Generator (SQG) Program? Yes ( ) No
21. Do you have a plan do prevent accidental spills? 💢 Yes ( ) No
For more information on the SQG Program, please call the Solid Waste Division at 360-337-5777. For technical assistance with hazardous waste, contact the Kitsap County Health District at 360-692-3611.
The information collected during this survey is used to fulfill the requirements of Kitsap County Kingston Wastewater Treatment Plant's National Pollutant Discharge Elimination System (NPDES) Permit through the WA State Department of Ecology. The Permit number is WA-0032077.
Please return this survey to:
12351 Brownsville Hwy NE Poulsbo, WA 98370
Print Name and Title
TOREY GRANDT / PORT MAINTENACE LEAD.
Signature
,

I understand by signing this, I hereby certify the above statement is true to the best of my knowledge and ability. I understand this is a legal document and will be used to determine our Industrial User Status with the Department of Ecology.





APPENDIX C PUMP STATION CONDITION ASSESSMENT



Condition Rating	Definition		
	Very Good, well maintained, expected to remain reliable for more		
1	than 90% of the expected life.		
	Good, some degradation but performance and reliability are not		
	significantly affected. Performance and reliability expected to		
2	remain satisfactory for 50-90% of the expected life.		
	Fair, performance and reliability are still acceptable, but some		
	rehabilitation or replacement will be needed in the 50% +/- of the		
3	expected life.		
	Poor, performance and/or reliability has significantly decreased,		
	maintenance rehabilitation or replacement needed to restore		
	performance or reliability to acceptable levels. Failure (no longer		
	functions) is likely in 10-50% of the expected life if not rehabilitated		
4	or replaced.		
	Very poor, performance and/or reliability has significantly		
	decreased, and failure is probable within 10% of the expected life if		
5	rehabilitation or replacement is not performed.		

Consequence of Failure Rating	Definition
1	Not Managed. Failure would not affect the pump station operation.
	Not Critical. Could marginally reduce the pump station capacity or
2	performance.
	Important (critical but redundant). The pump station performance
	is significantly impacted without a currently installed redundant
3	component.
	Critical. The pump station performance is significantly impacted
4	upon failure.
	Highly Critical. Failure will cause an immediate loss of hydraulic
5	throughput.



Pun	np Station:	41							
	Basin:	Kingston	ngston						
Asses	ssment By:	Peter Cunni	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley	m Foley						
Da	Date of Visit: 9/14/2020								
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

General Site Conditions/Access			
Access	Unidirectional vehicle access down single-lane driveway		
Parking	Limited parking; Capacity for approx. 2 pickup trucks		
Notes			

Site Security and Safety							
Facility Fe	enced	Yes	No	Privacy Fence	Yes	No	
Fence Ma	iterial/type	e Fence Height					
*Small wooden pickett fence located at the end of access driveway, runs along northern border of							
Notes	pump stat	ion site					

Wet Well			Age	46 years	46 years			
Pump Station Configuration Submersible		Dry Pit		Suction Lift				
Condition (1-5)	3	3		Criticality (1-5)		5		
Wet Well Material	Concrete		Dimensio	Dimensions 8' insi		iameter		
Coating Material	N/A	N/A		Access Hatch Fall Protection		Yes	No	
Hatch Lock	Yes	No	Intrusion	Intrusion Alarm		Yes	No	

Dry Well			Age	46 years	46 years			
Condition (1-5)	3 0		Criticality (1-5)					
Dry Well Material	Steel		Dimension	ıs				
Coating Material	N/A		Access Hatch Fall Protectio		tection	Yes	No	
Hatch Lock	Yes No I		Intrusion Alarm			Yes	No	

HVAC (Dry Well)			Age				
Condition (1-5)	3		Criticality (1-5)	2			
Continuous Supply	Yes	No	Supply Fan	Yes	No		
Exhaust Fan	Yes	No	Heat	Yes	No		
Notes							

Control Bu	ilding	N/A					
Building		Shed	Roof		Age		
Condition	(1-5)			Criticality (1-5)			
Description	n						
Material		•		Dimensions			
Intrusion A	Alarm						
Notes		-					



Pun	np Station:	41							
	Basin:	Kingston	ngston						
Asses	ssment By:	Peter Cunni	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley							
Da	te of Visit:	9/14/2020							
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

HVAC (Control Building)		N/A	Age				
Condition (1-5)			Criticality (1-5)				
Continuous	Supply	Yes	No	Supply Fan	1	Yes	No
Exhaust Fan Yes		Yes	No	Heat		Yes	No
Notes							

Piping, Valves, and G	auges	*Located	in dry well	Age	46			
Vault Condition (1-5)				Vault Criticality (1-5)				
Material	С		Dimensions					
Coating Material		А		Access Hat	tch Fall Pro	tection	Yes	No
Hatch Lock	Yes	No		Intrusion A	Alarm		Yes	No
Isolation Valve Condi	tion (1-5)		3	Isolation Valve Criticality (1-5)			2	
Isolation Valve Type	Gate		Plug					
Piping Condition (1-5	)	3		Piping Criticality (1-5)			4	
Check Valve Conditio	n (1-5)		2	Check Valve Criticality (1-5)				4
Air/Vac Valve Conditi	on (1-5)	N/A		Air/Vac Valve Criticality (1-5)			N/A	
Pressure Gauge Cond	lition (1-5)	N/A		Presssure Gauge Criticality (1-5)			N/A	
Flow Meter Condition	Flow Meter Condition (1-5) N/A			Flow Meter Criticality (1-5)			N/A	
Notes		•		•			•	

Pumps									
Make/Model	Smith Loveless; 4B3 &	Quantity	2	46 years					
Design Point	240 gpm	92	tdh	Capacity Checked		Yes	No		
Condition (1-5)	3		Criticality (	(1-5)	5				
Notes									

Miscellaneous										
Washdown Water	Yes	No	Backflow Assembly Y	Backflow Assembly Yes						
Bypass Piping Condi	tion (1-5)	N/A	Bypass Piping Criticality	y (1-5)						
Bypass Piping Condi	tion (1-5)	N/A	Bypass Piping Criticality	Bypass Piping Criticality (1-5)						
SCADA	Yes	No	•		•					

- Gets power from LS-71
- Odor complaints from low tide
- Dry can, Smith and Loveless
- Telemetry is around 75% reliable
- Old but works, not a lot of issues
- Continuous ventilation



Pump Station:	41
Basin:	Kingston
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert
Access provided by:	Jim Foley
Date of Visit:	9/14/2020

Category	Condition (	CoF	Condition*CoF
Overall	3.2	5.0	11.9
Civil	4.0	2.0	8.0
Structural	3.0	5.0	15.0
Pumping Systems	2.7	5.0	13.3
Motors (greater than 25 hp only)	2.7	3.0	8.0
Piping Systems	3.0	5.0	15.0
Valve Systems or Assemblies	2.0	2.0	4.0
Support Systems	3.5	1.0	3.5
Instrumentation	3.0	5	15.0
Electrical and Power Distribution	5.0	5	25.0
Notes: A lower score indicates better co	ndition or lo	wer critica	lity



Pun	np Station:	42							
	Basin:	Kingston	ngston						
Asses	sment By:	Peter Cunnii	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley							
Da	te of Visit:	9/14/2020							
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

General Si	General Site Conditions/Access					
Access	Easy access from middle school parking lot					
	Space for approx. 3 pickup trucks and 1 commercial vehicle; School parking lot availabilty is high given					
Parking	current conditions					
Notes						

Site Security and Safety						
Facility Fer	nced	Yes	No	Privacy Fence	Yes	No
Fence Material/type Fence Height						
Notes						

Wet Well				Age				
Pump Station Configuration Submersible			Dry Pit Suction Life		t			
Condition (1-5)	3	3 (		Criticality (1-5)		2		
Wet Well Material	Concrete			Dimension	S			
Coating Material	N/A	N/A		Access Hat	ch Fall Prot	ection	Yes	No
Hatch Lock	Yes	No		Intrusion A	larm		Yes	No

Dry Well	N/A		Age			
Condition (1-5)			Criticality (1-5)			
Dry Well Material			Dimensions			
Coating Material			Access Hatch Fall Pro	tection	Yes	No
Hatch Lock	Yes	No	Intrusion Alarm		Yes	No

HVAC (Dry Well)	N/A		Age	Age				
Condition (1-5)			Criticality (1-5)					
Continuous Supply	Yes	No	Supply Fan	Yes	No			
Exhaust Fan	Yes	No	Heat	Yes	No			
Notes			•					

Control Building	N/A			
Building	Shed	Roof		Age
Condition (1-5)		Criticality (1-5)		
Description				
Material	•		Dimension	ns
Intrusion Alarm				
Notes				



Pur	np Station:	42							
	Basin:	Kingston	ngston						
Asse	ssment By:	Peter Cunni	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	rovided by:	Jim Foley							
Da	ate of Visit:	9/14/2020	9/14/2020						
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

HVAC (Control Buildin N/A			Age				
Condition (1-5)			Criticality (1-5)				
Continuous Supply	Yes	No	(	Supply Fan		Yes	No
Exhaust Fan	Exhaust Fan Yes No			Heat		Yes	No
Notes							•

Piping, Valves, and Ga	Piping, Valves, and Gauges							
Vault Condition (1-5)	dition (1-5) 3			Vault Criticality (1-5)		1		
Material	Concrete			Dimension	ıs			81"x105"
Coating Material	N/A			Access Hat	tch Fall Prot	ection	Yes	No
Hatch Lock	Yes	No	No		Alarm		Yes	No
Isolation Valve Condition (1-5) 3			3	Isolation Valve Criticality (1-5)			1	
Isolation Valve Type	Gate		Plug					
Piping Condition (1-5)		4	1	Piping Criticality (1-5)			2	
Check Valve Condition	า (1-5)	3	3	Check Valve Criticality (1-5)				2
Air/Vac Valve Condition	on (1-5)	N/A		Air/Vac Valve Criticality (1-5)				
Pressure Gauge Condition (1-5) N/A			Presssure Gauge Criticality (1-5)					
Flow Meter Condition (1-5) N/A			Flow Meter Criticality (1-5)					
Notes								

Pumps						
Make/Model	odel				Age	
Design Point gpm tdh			Capacity Checked		Yes	No
Condition (1-5) 3 Critica		Criticality (	1-5)		2	
Notes						

Miscellaneous							
Washdown Water	Yes	No	I	Backflow Assembly	Yes	No	
Bypass Piping Condition (1-5)			I	Bypass Piping Criticali	ss Piping Criticality (1-5)		
Bypass Piping Condition (1-5)			I	Bypass Piping Criticali	ty (1-5)		
SCADA	Yes	No	-				

- Corrosion on discharge piping, County not concerned
- No issues
- Has overflow tank



Pump Station:	42
Basin:	Kingston
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert
Access provided by:	Jim Foley
Date of Visit:	9/14/2020

Category	Condition (	CoF	Condition*CoF
Overall	2.9	2.0	10.1
Civil	2.0	2.0	4.0
Structural	3.0	5.0	15.0
Pumping Systems	3.0	3.0	9.0
Motors (greater than 25 hp only)	3.0	3.0	9.0
Piping Systems	4.0	5.0	20.0
Valve Systems or Assemblies	3.0	2.0	6.0
Support Systems	3.0	1.0	3.0
Instrumentation	3.0	5	15.0
Electrical and Power Distribution	2.0	5	10.0
Notes: A lower score indicates better	condition or	lower criti	cality



Pun	np Station:	43							
	Basin:	Kingston	ngston						
Asses	ssment By:	Peter Cunni	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley							
Da	Date of Visit: 9/14/2020								
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

General S	General Site Conditions/Access						
Access	Accessible from entrance to Richardson Elementary School						
	Limited parking; Space for approx. 3 pickup trucks along shoulders/sides of road leading to						
Parking	Richardson Elementary School						
Notes							

Site Security and Safety									
Facility Fer	nced	Yes	No	Privacy Fence	Yes	No			
Fence Mat	erial/type	Chain link		Fence Height	Approx. 6 feet				
Notes									

Wet Well			Age	30 years			
Pump Station Configuration Submersible		Dry Pit		Suction Lift			
Condition (1-5)	3		Criticality (1-5)		2		
Wet Well Material	Concrete		Dimensions		5 ft. inside diameter		
Coating Material	Ероху		Access Hatch Fall Prot		ection	Yes	No
Hatch Lock	Yes	No	Intrusion Alarm			Yes	No

Dry Well	N/A		Age					
Condition (1-5)			Criticality (1-5)					
Dry Well Material			Dimensions					
Coating Material			Access Hatch Fall Pro	tection	Yes	No		
Hatch Lock	Yes	No	Intrusion Alarm		Yes	No		

HVAC (Dry Well)	N/A		Age				
Condition (1-5)			Criticality (1-5)				
Continuous Supply	upply Yes No		Supply Fan	Yes	No		
Exhaust Fan	Yes	No	Heat	Yes	No		
Notes	•						

Control Buildi	ing N/A			
Building	Shed	Roof		Age
Condition (1-5	5)		Criticality (	(1-5)
Description				·
Material	•		Dimension	ns
Intrusion Alar	m			
Notes				



Pun	np Station:	43							
	Basin:	Kingston							
Asses	ssment By:	Peter Cunni	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley							
Da	Date of Visit: 9/14/2020								
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

HVAC (Control Building) N/A		N/A	Age		
Condition (1-5)			Criticality (1-5)		
Continuous Supply	Yes	No	Supply Fan	Yes	No
Exhaust Fan	Yes	No	Heat	Yes	No
Notes				•	

Piping, Valves, and Ga	uges			Age	30 years			
Vault Condition (1-5)		3		Vault Criti	Vault Criticality (1-5) 1			
Material	Concrete		Dimension	Dimensions				
Coating Material	N/A		Access Ha	Access Hatch Fall Protection			No	
Hatch Lock	Yes	No		Intrusion Alarm			Yes	No
Isolation Valve Condition (1-5) 3			1	Isolation Valve Criticality (1-5)			1	
Isolation Valve Type	Gate		Plug					
Piping Condition (1-5)		4	4		Piping Criticality (1-5)			2
Check Valve Condition	า (1-5)	4		Check Valve Criticality (1-5)				2
Air/Vac Valve Condition	on (1-5)	N/A		Air/Vac Valve Criticality (1-5)				
Pressure Gauge Cond	ition (1-5)	N/A		Presssure Gauge Criticality (1-5)				
Flow Meter Condition	(1-5)	N/A	N/A		Flow Meter Criticality (1-5)			
Notes								

Pumps										
Make/Model	Flygt; C3102090	Quantity	2	Age	30 years					
Design Point 400 gpm		32	tdh	Capacity Checked		Yes	No			
Condition (1-5)	1-5) 3 Criticality (1-5)		2							
Notes										

Miscellaneous									
Washdown Water	Yes	No Backflow Assembly Yes			No				
Bypass Piping Condition	on (1-5)		Bypass Piping Criticality (1-5)						
Bypass Piping Condition	on (1-5)		Bypass Piping Criticali	ty (1-5)					
SCADA	Yes	No							

- Old but works
- Serves school only
- Pig launch
- Pig tail
- Might have overflow, possibly overflow tank



Pump Station:	43
Basin:	Kingston
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert
Access provided by:	Jim Foley
Date of Visit:	9/14/2020

Category	Condition	CoF	Condition*CoF
Overall	3.3	2.0	11.3
Civil	4.0	2.0	8.0
Structural	3.0	5.0	15.0
Pumping Systems	3.3	3.0	10.0
Motors (greater than 25 hp only)	3.3	3.0	10.0
Piping Systems	4.0	5.0	20.0
Valve Systems or Assemblies	3.0	2.0	6.0
Support Systems	3.0	1.0	3.0
Instrumentation	4.0	5	20.0
Electrical and Power Distribution	2.0	5	10.0
Notes: A lower score indicates better	condition o	or lower cri	ticality



Pum	np Station:	52							
	Basin:	Kingston							
Asses	ssment By:	Peter Cunnii	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley	m Foley						
Da	te of Visit:	9/14/2020	9/14/2020						
Condition	1	good	5	bad	Criticality	1 not critical	5 critical		

General Si	General Site Conditions/Access							
Access	Easy access from Siyaya Ave NE							
Parking	Room for approx. 4 pickup trucks and 1 commercial vehicle provided by bus barn parking lot							
Notes								

Site Security and Safety									
Facility Fenced	Yes	No	Privacy Fence	Yes	No				
Fence Material/type	Chain link		Fence Height	Approx. 6 feet					
Notes									

Wet Well	Age	22 years	years				
Pump Station Configuration Submersible		Dry Pit	Dry Pit Suction Li		t		
Condition (1-5)	3		Criticality (	Criticality (1-5)		1	
Wet Well Material	Concrete	Concrete		Dimensions 4' in		iameter	
Coating Material	Unknown		Access Hat	Access Hatch Fall Prote		Yes	No
Hatch Lock	Yes	No	Intrusion A	Intrusion Alarm		Yes	No

Dry Well	N/A		Age				
Condition (1-5)			Criticality (1-5)				
Dry Well Material			Dimensions				
Coating Material			Access Hatch Fall Protection	Yes	No		
Hatch Lock	Yes	No	Intrusion Alarm	Yes	No		

HVAC (Dry Well)	N/A		Age			
Condition (1-5)			Criticality (1-5)			
Continuous Supply	Yes	No	Supply Fan	Yes	No	
Exhaust Fan	Yes	No	Heat	Yes	No	
Notes	•	•	•	•	·	

Control Bu	ilding	N/A			
Building		Shed	Roof		Age
Condition (	(1-5)		•	Criticality (	(1-5)
Description	n			•	•
Material		•		Dimension	ns
Intrusion A	larm			•	•
Notes					



Pur	np Station:	52							
	Basin:	Kingston	ngston						
Asse	ssment By:	Peter Cunnii	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley	im Foley						
Da	ate of Visit:	9/14/2020							
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

HVAC (Control Buildin N/A			Age	Age			
Condition (1-5)			Criticality (1-5	Criticality (1-5)			
Continuous Supply	Yes	No	Supply Fan	Yes	No		
Exhaust Fan	Yes	No	Heat	Yes	No		
Notes							

Piping, Valves, and Gauges				Age	22 years			
Vault Condition (1-5)	ndition (1-5) 4		Vault Criticality (1-5) 1		1			
Material	Concrete	Concrete Di		Dimension	S			
Coating Material	N/A			Access Hat	ch Fall Prot	ection	Yes	No
Hatch Lock	Yes	No		Intrusion Alarm			Yes	No
Isolation Valve Condition (1-5) 3			3	Isolation Valve Criticality (1-5)				
Isolation Valve Type	Gate		Plug	g				
Piping Condition (1-5)	-		3	Piping Criticality (1-5)				1
<b>Check Valve Condition</b>	n (1-5)		3	Check Valve Criticality (1-5)				1
Air/Vac Valve Condition	on (1-5)	N/A		Air/Vac Va	lve Criticalit	ty (1-5)	N/A	
Pressure Gauge Condition (1-5) N/A			Presssure Gauge Criticality (1-5)			N/A		
Flow Meter Condition	r Condition (1-5) N/A			Flow Meter Criticality (1-5)			N/A	
Notes								

Pumps							
Make/Model	ABS; Piranha V2			Quantity	2	Age	22 years
Design Point	31 gpm	48	tdh	Capacity Cl	necked	Yes	No
Condition (1-5)	3		Criticality	(1-5)			1
Notes							

Miscellaneous										
Washdown Water	Yes	No	Backflow Assembly Yes No							
Bypass Piping Condition (1-5)  Bypass Piping Criticality (1-5)										
Bypass Piping Condition (1-5)  Bypass Piping Criticality (1-5)										
SCADA	Yes	No								

- If pump is running during outage, when power returns it trips breaker
- 2 Grinder pumps
- Pig tail



Pump Station:	52
Basin:	Kingston
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert
Access provided by:	Jim Foley
Date of Visit:	9/14/2020

Category	Condition	CoF	Condition*CoF
Overall	2.8	2.0	9.8
Civil	2.0	2.0	4.0
Structural	3.5	5.0	17.5
Pumping Systems	3.0	3.0	9.0
Motors (greater than 25 hp only)	3.0	3.0	9.0
Piping Systems	3.0	5.0	15.0
Valve Systems or Assemblies	3.0	2.0	6.0
Support Systems	3.0	1.0	3.0
Instrumentation	3.0	5	15.0
Electrical and Power Distribution	2.0	5	10.0
Notes: A lower score indicates bette	r condition	or lower cr	iticality



Pump Station:	71					
Basin	Kingston					
Assessment By	Peter Cunni	ngham, An	drew Hens	on,Tom Hubert	t	
Access provided by	Jim Foley, C	iff				
Date of Visit	9/14/2020					
Condition 1	good	5	bad	Criticality	1 not critical	5 critical

General S	General Site Conditions/Access								
Access	Access 2-way access; Vehicles can pull through and around the station with no backing required.								
Parking	Parking Abundant parking; Approx. 25 available parking spots surrounding station.								
Notes									

Site Security and Safety									
Facility Fend	Facility Fenced Yes No Privacy Fence Yes No								
Fence Mate	Fence Material/type Chainlink fence w/ bar Fence Height Approx. 6-7 ft.								
Notes									

Wet Well			Age				
Pump Station Configuration Submersible			Dry Pit		Suction Lift		
Condition (1-5)	ondition (1-5) 2		Criticality	Criticality (1-5)			
Wet Well Material	Concrete		Dimension	ıs			
Coating Material	1aterial N/A		Access Hat	Access Hatch Fall Protec		Yes	No
Hatch Lock	Yes	No	Intrusion A	Intrusion Alarm		Yes	No

Dry Well	(Pump Roo	m)	Age				
Condition (1-5)	1		Criticality (	1-5)	5		
Dry Well Material	Concrete		Dimension	S			
Coating Material	N/A		Access Hatch Fall Protec		tection	Yes	No
Hatch Lock	Yes	No	Intrusion Alarm			Yes	No

HVAC (Dry Well)			Age				
Condition	ndition (1-5) 1		Criticality (1-5)		2		
Continuou	s Supply	Yes	No	Supply Fan		Yes	No
Exhaust Fa	Exhaust Fan Yes No		Heat		Yes	No	
Notes	Air intake	Air intake and duct heater located on 1st floor.					

Control Bu	uilding						
Building		Shed	Roof		Age		
Condition	(1-5)	2	2 Criticality (1-5)				
Descriptio	n						
Material	CMU const	truction		Dimensions			
Intrusion Alarm Yes; Controlled via switch (alarm ON/OFF) on station control panel						ontrol panel	
Notes			•		•		



Pun	np Station:	71							
	Basin:	Kingston	ngston						
Asses	ssment By:	Peter Cunni	eter Cunningham, Andrew Henson,Tom Hubert						
Access pr	ovided by:	Jim Foley, C	liff						
Da	Date of Visit: 9/14/2020								
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

HVAC (Control Building)			Age				
Condition (1-5) 1		Criticality (1-5)	2				
Continuous Supply	Yes	No	Supply Fan	Yes	No		
Exhaust Fan	Yes	No	Heat	Yes	No		
Notes	-						

Piping, Valves, and G	auges		Age						
Vault Condition (1-5)		N/A	Vault Critic	cality (1-5)					
Material		N/A	Dimension	Dimensions					
Coating Material		Latex-based paint A		Access Hatch Fall Protection			No		
Hatch Lock	Yes	No	Intrusion Alarm			Yes	No		
Isolation Valve Condition (1-5) 1			Isolation V	Isolation Valve Criticality (1-5)			3		
Isolation Valve Type	Gate	Plug							
Piping Condition (1-5	)	1	Piping Crit	icality (1-5)			5		
Check Valve Conditio	n (1-5)	3	Check Valv	e Criticality	/ (1-5)		5		
Air/Vac Valve Condit	ion (1-5)	N/A	Air/Vac Va	Air/Vac Valve Criticality (1-5)					
Pressure Gauge Condition (1-5)		N/A	Presssure	Presssure Gauge Criticality (1-5)					
Flow Meter Condition	n (1-5)	2	Flow Meter Cri		(1-5)		2		
Notes		•	•			•			

Pumps							
Make/Model		Quantity	2	Age	16 years old		
Design Point	450 gpm	205	tdh	Capacity C	Capacity Checked		No
Condition (1-5)	3		Criticality	(1-5)			5
Notes	•				•		

Miscellaneous						
Washdown Water	Yes	No	Backflow Assembly	Yes	No	*W2 air gap tank located in generator room
<b>Bypass Piping Condi</b>	tion (1-5)	2	Bypass Piping Critica	lity (1-5)		
Bypass Piping Condi	tion (1-5)	2	Bypass Piping Critica	lity (1-5)		
SCADA	Yes	No				

- Rags on floats at inlet
- Pumps get ragged
- Grease mat increased since lockdown
- FM capacity is limited, second pump only adds 20-40 gpm
- Approximately 15 years old
- Feeds LS-41 power
- G&O did study regarding adding VFDs or jockey pumps, but it didn't pencil out to make the upgrades
- Charcoal filter, change every 6 months
- Bioxide is on site
- Wet well in decent shape, no coating



Pump Station:	71
Basin:	Kingston
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert
Access provided by:	Jim Foley, Cliff
Date of Visit:	9/14/2020

Category	Condition	CoF	Condition*CoF
Overall	1.7	5.0	5.8
Civil	1.0	2.0	2.0
Structural	1.7	5.0	8.3
Pumping Systems	2.3	3.0	7.0
Motors (greater than 25 hp only)	2.0	3.0	6.0
Piping Systems	1.5	5.0	7.5
Valve Systems or Assemblies	2.0	2.0	4.0
Support Systems	2.0	1.0	2.0
Instrumentation	2.0	5	10.0
Electrical and Power Distribution	1.0	5	5.0
Notes: A lower score indicates bet	ter conditio	n or lower	criticality



Pum	np Station:	72								
	Basin:	Kingston	ngston							
Asses	sment By:	Peter Cunni	eter Cunningham, Andrew Henson, Tom Hubert							
Access pr	ovided by:	Jim Foley								
Da	te of Visit:	of Visit: 9/14/2020								
Condition	1	good	5	bad	Criticality	1	not critical	5	critical	

General S	General Site Conditions/Access						
Single lane gravel road off of Kingston High School's loop road; Steep driveway may make							
Access	commercial vehicle access difficult						
	Space for approx. 2 work trucks and 1 commercial vehicle; limited turnaround space for larger						
Parking	trucks (3-5 point turn necessary)						
Notes							

Site Security and Safety								
Facility Fenced Yes No Privacy Fence Yes No						No		
Fence Mat	Fence Material/type Fence Height							
Notes	*Chain is strung across gravel driveway entrance							

Wet Well	Age						
Pump Station Configuration Submersible			Dry Pit Suction L			t	
Condition (1-5)	Condition (1-5) 3.5		Criticality (1-5)		2		
Wet Well Material	Conc		Dimension	Dimensions		de diamete	r
Coating Material	pating Material N/A		Access Hatch Fall Pro		tection	Yes	No
Hatch Lock Yes No		Intrusion Alarm			Yes	No	

Dry Well	N/A Age						
Condition (1-5)	-5) Criticality (1-5)						
Dry Well Material			Dimensions				
Coating Material			Access Hat	ch Fall Pro	tection	Yes	No
Hatch Lock	Yes	No	Intrusion A	Marm		Yes	No

HVAC (Dry Well)	N/A		Age	Age				
Condition (1-5)			Criticality (1-5)					
Continuous Supply	Yes	No	Supply Fan	Yes	No			
Exhaust Fan	Yes	No	Heat	Yes	No			
Notes								

Control Bu	ilding	N/A				
Building		Shed		Roof		Age
Condition (	ondition (1-5) Criticality (1-5)		1-5)			
Description	Description					
Material	erial			Dimension	S	
Intrusion A	larm					
Notes		•				



Pun	np Station:	72							
	Basin:	Kingston							
Asse	ssment By:	Peter Cunni	eter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley	m Foley						
Da	ate of Visit:	9/14/2020							
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

HVAC (Control Buildir N/A			Age	Age				
Condition (1-5)		Criticality (	Criticality (1-5)					
Continuous Supply	Yes	No	Supply Fan	Yes	No			
Exhaust Fan	Yes	No	Heat	Yes	No			
Notes								

Piping, Valves, an	Age							
Vault Condition (1	5)	3	Vault Critic	cality (1-5)	1			
Material	Concrete		Dimension	ıs	80"x152"			
Coating Material	N/A		Access Hat	tch Fall Pro	tection	Yes	No	
Hatch Lock	Yes	No	Intrusion A	Alarm		Yes	No	
Isolation Valve Condition (1-5)		3	Isolation V	'alve Critica	lity (1-5)		1	
Isolation Valve Type Gate		Plug						
Piping Condition (	1-5)	4	Piping Criticality (1-5)		2			
Check Valve Cond	ition (1-5)	4	Check Valv	Check Valve Criticality (1-5)			2	
Air/Vac Valve Cor	dition (1-5)	N/A	Air/Vac Va	lve Critical	ity (1-5)	N/A		
Pressure Gauge C	ondition (1-5)	3	Presssure	Gauge Criti	cality (1-5)	1		
Flow Meter Condition (1-5)		N/A	Flow Meter Criticality (1-5) N/A		N/A			
	*Pumps did not run during site visit; should verify pressure gauges are working properly when							

Pumps								
Make/Mor ABS; Piranha 09 Quantity 2 Age								
Design Point gpm tdh			Capacity Checked Yes		No			
Condition (1-5)	3.5	Criticality	(1-5)		2			
Notes								

Miscellaneous									
Washdown Water	Yes	No		Backflow Assembly	Yes	No			
Bypass Piping Condition (1-5)		2		Bypass Piping Critical	ity (1-5)	1			
Bypass Piping Condition (1-5)				Bypass Piping Critical	ity (1-5)				
SCADA	Yes	No							

- No big issues
- Explosion proof float boxes
- Corrosion on piping
- Pig launch
- Small diameter bypass
- Lid is hitting cables when closed



Pump Station:	72
Basin:	Kingston
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert
Access provided by:	Jim Foley
Date of Visit:	9/14/2020

Category	Condition	CoF	Condition*CoF							
Overall	3.5	2.0	12.6							
Civil	3.0	2.0	6.0							
Structural	3.5	5.0	17.5							
Pumping Systems	3.5	3.0	10.5							
Motors (greater than 25 hp only)	3.5	3.0	10.5							
Piping Systems	4.0	5.0	20.0							
Valve Systems or Assemblies	3.0	2.0	6.0							
Support Systems	3.0	1.0	3.0							
Instrumentation	3.0	5	15.0							
Electrical and Power Distribution	5.0	5	25.0							
Notes: A lower score indicates bet	tter conditio	Notes: A lower score indicates better condition or lower criticality								



Pump Station:	73	
Basin	Kingston	
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert	
Access provided by:	Jim Foley	
Date of Visit:	9/14/2020	
Condition 1	good 5 bad Criticality 1 not critical 5 critical	

General S	Site Conditions/Access
	NE Schoolhouse Rd provides easy access; wide driveway into pump station and cul-de-sac make
Access	maneuvering commercial vehicles easy
	Parking available for 1 tanker truck in pump station driveway and approx. 2 pickup trucks in cul-de-
Parking	sac
Notes	

Site Security and Safety										
Facility Fer	Facility Fenced Yes No Privacy Fence Yes No									
Fence Mat	Fence Material/type   Chain link   Fence Height   Approx. 6 feet									
Notes										

Wet Well	Age						
Pump Station Configuration Submersible			Dry Pit		Suction Lift		
Condition (1-5) 1		Criticality (1-5)					
Wet Well Material Concrete		Dimension	S				
Coating Material	nterial Raven lining system		Access Hatch Fall Prot		tection	Yes	No
Hatch Lock	Yes	No	Intrusion Alarm			Yes	No

Dry Well N/A			Age				
Condition (1-5)			Criticality (1-5)				
Dry Well Material	rial		Dimensions				
Coating Material	aterial		Access Hatch Fall Pro	tection	Yes	No	
Hatch Lock	Yes	No	Intrusion Alarm Yes		Yes	No	

HVAC (Dry Well)	N/A		Age				
Condition (1-5)			Criticality (1-5)				
Continuous Supply	Yes	No	Supply Fan	Yes	No		
Exhaust Fan	Yes	No	Heat	Yes	No		
Notes							

Control Building	N/A			
Building	Shed	Roof		Age
Condition (1-5)			Criticality	v (1-5)
Description				·
Material			Dimension	ons
Intrusion Alarm				·
Notes				



Pun	np Station:	73							
	Basin:	Kingston	ngston						
Asses	ssment By:	Peter Cunni	Peter Cunningham, Andrew Henson, Tom Hubert						
Access pr	ovided by:	Jim Foley							
Da	te of Visit:	9/14/2020							
Condition	1	good	5	bad	Criticality	1	not critical	5	critical

HVAC (Control Buildir N/A			Age			
Condition (1-5)			Criticality (1-5)			
Continuous Supply	Yes No		Supply Fan	Yes	No	
Exhaust Fan	Yes	No	Heat	Yes	No	
Notes						

Piping, Val	ves, and G	auges			Age				
Vault Cond	dition (1-5)	1			Vault Criticality (1-5) 2		2		
Material		Concrete [		Dimension	ıs				
Coating Ma	aterial	N/A		Access Hat	tch Fall Pro	tection	Yes	No	
Hatch Lock	<	Yes	No		Intrusion A	Alarm		Yes	No
Isolation Valve Condition (1-5)		1		Isolation Valve Criticality (1-5)			2		
Isolation V	alve Type	Gate		Plug					
Piping Con	dition (1-5)	)	1		Piping Criticality (1-5)				3
Check Valv	e Conditio	n (1-5)	1		Check Valve Criticality (1-5)				3
Air/Vac Va	lve Conditi	on (1-5)	N/A		Air/Vac Va	lve Criticali	ty (1-5)	N/A	
Pressure G	Pressure Gauge Condition (1-5) 5*		5*		Presssure Gauge Criticality (1-5)				2
Flow Meter Condition (1-5) N/A			Flow Meter Criticality (1-5) N/A						
	*Pressure	gauge was c	bserved to	reach full	scale pressi	ıre (60 psig	) upon pun	np discha	irging, may
Notes	need recal	libration/rep	lacement	Notes need recalibration/replacement					

Pumps							
Make/Model	Flygt; NP3153.095-760	/gt; NP3153.095-760 Quantity Age 1 yea					1 year
Design Point	83.8 gpm	83.8 gpm 172 tdh Capacity		Capacity C	hecked	Yes	No
Condition (1-5)	1		Criticality (	1-5)		3	
Notes							

Miscellaneous							
Washdown Water	Yes	No	No				
Bypass Piping Conditi	on (1-5)		<b>Bypass Piping Critical</b>				
Bypass Piping Condition (1-5)		Bypass Piping Criticality (1-5)					
SCADA	Yes	No	•				

- New (2 years old, online for 1 year)
- No issues
- Floats, multitrode
- OneLift
- Constant speed
- Raven 405
- Need sign with station number and phone number
- Passive carbon filter doesn't do much



Pump Station:	73
Basin:	Kingston
Assessment By:	Peter Cunningham, Andrew Henson, Tom Hubert
Access provided by:	Jim Foley
Date of Visit:	9/14/2020

Category	Condition	CoF	Condition*CoF				
Overall	1.8	2.0	5.5				
Civil	2.0	2.0	4.0				
Structural	1.0	5.0	5.0				
Pumping Systems	1.0	3.0	3.0				
Motors (greater than 25 hp only)	1.0	3.0	3.0				
Piping Systems	1.0	5.0	5.0				
Valve Systems or Assemblies	3.0	2.0	6.0				
Support Systems	3.5	1.0	3.5				
Instrumentation	3.0	5	15.0				
Electrical and Power Distribution	1.0	5	5.0				
Notes: A lower score indicates better co	Notes: A lower score indicates better condition or lower criticality						



Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H17-3017-H17-3016	606436	6/11/2019	Roots	80.00	Light	ROOTS AI 164 FT
J17-4036-H17-3085	606417	6/5/2019	Roots	80.00	Light	ROOTS IN MANHOLE H17=3085 DOWNSTREAM SIDE IN THE SAND COLLAR
H16-2014-H16-2013	606483	6/20/2019	Inflow and Infiltration	60.00	Running or Trickling	
M15-1006-M15-1005	607751	10/21/2020	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF M/H M15-1005
L17-1023-L17-1022	607903	1/12/2021	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF L17-1023
L17-1023-L17-1022	607903	1/12/2021	Inflow and Infiltration	60.00	Running or Trickling	
L17-1023-L17-1022	607903	1/12/2021	Cracks or Fractures	40.00	Severe Cracking	
L17-1023-L17-1022	607903	1/12/2021	Break or Failure	0.00	Collapse	
L17-1023-L17-1022	607903	1/12/2021	Lining or Repair Failure	80.00	Minor	
H16-2059-H16-2111	606521	6/27/2019	Roots	50.00	Medium	ROOTS IN THE MANHOLE H16-2111
G16-3015-G16-3014	606236	1/16/2019	Roots	80.00	Light	ROOTS IN THE SAND COLLAR IN MH 3014
G16-3015-G16-3014	606236	1/16/2019	Worn Surface	60.00	Moderate	
B28-4043-B28-4041	607312	7/2/2020	Roots	50.00	Medium	ENTIRE MANHOLE IS COVERED IN ROOTS
H15-2046-H15-2042	606888	12/10/2019	Belly or Sag	80.00	Minor (<10%)	
B28-4039-B28-4038	607335	7/8/2020	Roots	30.00	Heavy	ROOTS IN THE SIDE SERVICE AT 43 AND 84 FEET
H17-3065-H17-3064	606406	6/5/2019	Cracks or Fractures	80.00	Minor Cracking	
L17-1053-L17-1052	606603	7/22/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1053-L17-1052	606603	7/22/2019	Roots	80.00	Light	Wall of L17-1052
L17-1053-L17-1052	606603	7/22/2019	Worn Surface	80.00	Minor	
L17-1053-L17-1052	606603	7/22/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1053-L17-1052	606603	7/22/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
D23-2123-D23-2122	604815	8/23/2017	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2123-D23-2122	604815	8/23/2017	Obstruction or Intrusion	80.00	Minor	
D23-2123-D23-2122	604815	8/23/2017	Cracks or Fractures	80.00	Minor Cracking	
J20-3057-J20-3056	607728	10/19/2020	Roots	80.00	Light	ROOTS IN THE JOINT AT 116.8

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H17-3019-H17-3018	606390	5/30/2019	Roots	50.00	Medium	ROOTS AT 216 AND 375 FT FROM UPPER M/H
H17-3019-H17-3018	606390	5/30/2019	Cracks or Fractures	80.00	Minor Cracking	
G15-3019-G15-3040	606015	1/8/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-4101-G16-4100	606796	10/1/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G16-2002-G16-2001	606553	7/8/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1034-L17-1033	607898	1/12/2021	Inflow and Infiltration	40.00	Gushing or Spurting	
M18-4026-M18-4025	607869	1/4/2021	Roots	30.00	Heavy	HEAVY ROOTS IN MANHOLE M18- 4027
L17-1047-L17-1043	606607	7/22/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1047-L17-1043	606607	7/22/2019	Worn Surface	80.00	Minor	
L17-1047-L17-1043	606607	7/22/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1047-L17-1043	606607	7/22/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J20-3060-J20-3059	607725	10/19/2020	Roots	80.00	Light	ROOTS IN MANHOLE J20-3060
A28-3015-A28-3014	607381	7/16/2020	Roots	30.00	Heavy	ROOTS IN THE UPPER MANHOLE COVERING THE BOTTOM
G16-2030-G16-2029	606306	1/16/2019	Roots	80.00	Light	246" VERY SMALL
G16-4059-G16-4057	606737	9/11/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-2061-H16-2058	606515	6/26/2019	Belly or Sag	40.00	Severe (>30%)	
H15-4034-H15-4003	606120	2/7/2019	Roots	80.00	Light	Roots in the sand collar
J17-2009-J17-2008	607516	8/19/2020	Belly or Sag	80.00	Minor (<10%)	
L17-1049-L17-1047	606606	7/22/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1049-L17-1047	606606	7/22/2019	Worn Surface	80.00	Minor	
L17-1049-L17-1047	606606	7/22/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1049-L17-1047	606606	7/22/2019	Cracks or Fractures	80.00	Minor Cracking	
L17-1049-L17-1047	606606	7/22/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G16-4003-G16-4005	606802	10/2/2019	Belly or Sag	80.00	Minor (<10%)	
H17-3038-H17-3037	606463	6/13/2019	Break or Failure	15.00	Hole Void Visible	
J16-1007-J16-1006	607041	2/10/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-1014-G16-1013	605822	8/29/2018	Belly or Sag	80.00	Minor (<10%)	
G16-1014-G16-1013	605822	8/29/2018	Break or Failure	0.00	Collapse	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-3084-G16-3078	606276	1/16/2019	Roots	30.00	Heavy	ROOTS IN THE MANHOLE EVERYWHERE ALL 3 SAND COLLARS AND STRETCHING DOWN THE PIE
G16-4088-G16-4084	606771	9/17/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
B28-4018-B28-4017	607334	7/8/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
B28-4046-B28-4039	607300	6/24/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
J19-2012-J19-2011	607941	2/2/2021	Belly or Sag	80.00	Minor (<10%)	
M16-1034-M16-1033	605599	7/2/2018	Inflow and Infiltration	60.00	Running or Trickling	
H16-4046-H16-4016	606381	1/16/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
J16-1094-J16-1095	607036	2/10/2020	Belly or Sag	80.00	Minor (<10%)	
L17-1064-L17-1063	607962	2/4/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1050-L17-1049	606605	7/23/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1050-L17-1049	606605	7/23/2019	Worn Surface	80.00	Minor	
L17-1050-L17-1049	606605	7/23/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1050-L17-1049	606605	7/23/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
M18-4009-M18-4008	607845	12/21/2020	Belly or Sag	80.00	Minor (<10%)	
B28-1006-B28-1005	607262	6/1/2020	Inflow and Infiltration	40.00	Gushing or Spurting	
J16-2005-J16-2003	605897	9/25/2018	Belly or Sag	60.00	Moderate (10 to 30%)	
B28-4054-B28-4053	607247	5/28/2020	Roots	50.00	Medium	ROOTS IN MANHOLE B28-4054 ALL OVER AND IN THE SAND COLLAR
L17-1024-L17-1023	607901	1/12/2021	Roots	80.00	Light	ROOTBALL IN THE BOTTOM OF MANHOLE L17-1023
J11-3040-J11-3039	605985	12/20/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3040-J11-3039	605985	12/20/2018	Break or Failure	30.00	Hole Soil Visible	
J11-3040-J11-3039	605985	12/20/2018	Cracks or Fractures	80.00	Minor Cracking	
H16-2053-H16-2052	606505	6/25/2019	Obstruction or Intrusion	0.00	Severe or Impassable	
L18-3051-L18-3050	607783	10/27/2020	Belly or Sag	80.00	Minor (<10%)	
J16-1014-J16-1013	607024	2/6/2020	Belly or Sag	40.00	Severe (>30%)	
J16-1071-J16-1070	607048	2/11/2020	Obstruction or Intrusion	0.00	Severe or Impassable	
G21-2007-G21-2006	605428	6/18/2018	Belly or Sag	80.00	Minor (<10%)	
G16-2024-G16-2020	606293	1/16/2019	Roots	80.00	Light	ROOTS IN THE LOWER MANHOLE IN THE SANDCOLLAR G16-2020

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
L17-1041-L17-1092	607919	1/21/2021	Roots	50.00	Medium	ROOTS IN THE JOINTS AND SAND COLLARS LINE IS ONLY 10 FEET LONG
G16-3036-G16-3035	606180	2/26/2019	Worn Surface	40.00	Severe	
L16-2003-L16-2002	605511	7/2/2018	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
H16-3034-H16-3033	606923	1/3/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
J16-3006-J16-3002	605878	10/19/2018	Belly or Sag	80.00	Minor (<10%)	
A28-2032-A28-2031	607161	3/5/2020	Roots	80.00	Light	ROOTS IN THE MANHOLE A28-2031
L17-1065-L17-1064	607961	2/4/2021	Roots	0.00	Blockage	SIDE SERVICE BLOCKED AT 334.4 FROM THE GROCERY STORE
L17-1065-L17-1064	607961	2/4/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1065-L17-1064	607961	2/4/2021	Obstruction or Intrusion	0.00	Severe or Impassable	
B28-4024-B28-4021	607239	5/21/2020	Belly or Sag	80.00	Minor (<10%)	
L18-4011-L18-4010	606232	4/3/2019	Roots	80.00	Light	First 4 ft the at 230 ft
L18-4011-L18-4010	606232	4/3/2019	Worn Surface	80.00	Minor	
L18-4011-L18-4010	606232	4/3/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L18-4011-L18-4010	606232	4/3/2019	Cracks or Fractures	80.00	Minor Cracking	
L18-4011-L18-4010	606232	4/3/2019	Break or Failure	15.00	Hole Void Visible	
L18-4011-L18-4010	606232	4/3/2019	Lining or Repair Failure	80.00	Minor	
L18-4011-L18-4010	606232	4/3/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J16-1002-J16-1001	607053	2/11/2020	Roots	50.00	Medium	ROOTS IN MANHOLE J16-1001
G16-2047C-G16-2004	606323	1/16/2019	Roots	50.00	Medium	ROOTS AT THE CLEANOUT CONNECTION
D23-2108-D23-2107	606129	2/14/2019	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-3040-H16-3038	606916	1/3/2020	Belly or Sag	80.00	Minor (<10%)	
G16-4084-G16-4083	606774	9/17/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1096-L17-1054	606601	7/22/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1096-L17-1054	606601	7/22/2019	Worn Surface	80.00	Minor	
L17-1096-L17-1054	606601	7/22/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1096-L17-1054	606601	7/22/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J17-2018-J17-2009	607509	8/19/2020	Obstruction or Intrusion	80.00	Minor	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J17-2018-J17-2009	607509	8/19/2020	Belly or Sag	80.00	Minor (<10%)	
J16-1012-J16-1094	607027	2/6/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-3024-G16-3023	606200	2/28/2019	Roots	50.00	Medium	Roots in the side service connection about 97 ft
J19-3110-J19-3109	607995	3/1/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
H16-3009-H15-2004	604860	8/21/2017	Maintenance Condition	70.00	Heavy	
G16-4038-G16-4037	606744	9/11/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-3021C-G16-3020	606382	1/16/2019	Roots	0.00	Blockage	ROOTS IN LATERAL AND MAIN AT 100 FT BLOCKAGE END CLEAOUT IS FULL OF ROOTS ALSO
L17-1027-L17-1026	607912	1/21/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1027-L17-1026	607912	1/21/2021	Obstruction or Intrusion	0.00	Severe or Impassable	
L17-1027-L17-1026	607912	1/21/2021	Break or Failure	15.00	Hole Void Visible	
L17-1027-L17-1026	607912	1/21/2021	Lining or Repair Failure	80.00	Minor	
H16-1054-H16-1017	606363	1/16/2019	Roots	80.00	Light	ROOTS IN THE MANHOLE AND HANGING INTO THE SEWER MAIN
G16-3020-G16-3019	606226	1/16/2019	Roots	30.00	Heavy	ROOTS FROM 65 TO 109 FEET ALMOST BLOCKING NEEDS CUT AND TREATMENT VERY SOON
G16-3020-G16-3019	606226	1/16/2019	Cracks or Fractures	60.00	Moderate Cracking	
L17-1038-L17-1003	606609	7/23/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1038-L17-1003	606609	7/23/2019	Worn Surface	80.00	Minor	
L17-1038-L17-1003	606609	7/23/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1038-L17-1003	606609	7/23/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G16-4077-G16-4076	606672	8/7/2019	Belly or Sag	80.00	Minor (<10%)	
G15-3013-G15-3012	606062	1/24/2019	Roots	30.00	Heavy	Roots in drop m/h G15-3012
G21-2029-G21-2028	605371	5/10/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
L18-3011-L18-3010	607764	10/22/2020	Roots	50.00	Medium	ROOTS IN THE MANHOLE L18-3010
H16-2016-H16-2015	606494	6/24/2019	Break or Failure	15.00	Hole Void Visible	
H16-4050-H16-4049	606217	3/28/2019	Cracks or Fractures	40.00	Severe Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-3010-G16-3073	606279	1/16/2019	Roots	50.00	Medium	ROOTS IN THE SHELF OF MANHOLE G16-3073
H16-4002-H16-4001	606287	1/16/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1003-L17-1002	606610	7/23/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1003-L17-1002	606610	7/23/2019	Worn Surface	80.00	Minor	
L17-1003-L17-1002	606610	7/23/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1003-L17-1002	606610	7/23/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J16-2006-J16-2005	605898	9/25/2018	Belly or Sag	80.00	Minor (<10%)	
H16-2088-H16-2087	607113	2/24/2020	Roots	80.00	Light	ROOTS IN MANHOLE H16-2087
J16-1047-J16-1046	606617	7/29/2019	Roots	80.00	Light	ONE LARGE ROOT AT 22.5 FT
H16-3011-H16-3010	606944	1/7/2020	Obstruction or Intrusion	0.00	Severe or Impassable	
H16-3011-H16-3010	606944	1/7/2020	Belly or Sag	80.00	Minor (<10%)	
H16-3011-H16-3010	606944	1/7/2020	Lining or Repair Failure	60.00	Moderate	
H16-3011-H16-3010	606944	1/7/2020	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
L18-4038-L18-4036	607956	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
H15-2002-H15-2001	607107	2/20/2020	Roots	50.00	Medium	Roots in the manhole needs treatment manhole 2001
A28-3029-A28-3018	607331	7/8/2020	Roots	80.00	Light	71FT FROM TOP MANHOLE
H16-2003-H16-2004	606424	6/10/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-2003-H16-2004	606424	6/10/2019	Cracks or Fractures	80.00	Minor Cracking	
G16-3030-G16-3029	606195	2/28/2019	Roots	80.00	Light	Roots all along the pipe treat whole line
G16-3030-G16-3029	606195	2/28/2019	Cracks or Fractures	80.00	Minor Cracking	
H17-4046-H17-4045	606820	10/9/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-4046-H17-4045	606820	10/9/2019	Obstruction or Intrusion	60.00	Moderate	
H16-1033-H16-1026	606137	2/20/2019	Roots	80.00	Light	
H16-1033-H16-1026	606137	2/20/2019	Cracks or Fractures	80.00	Minor Cracking	
B28-4019-B28-4018	607333	7/8/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
B28-4019-B28-4018	607333	7/8/2020	Obstruction or Intrusion	60.00	Moderate	
B28-4019-B28-4018	607333	7/8/2020	Cracks or Fractures	60.00	Moderate Cracking	
B28-4019-B28-4018	607333	7/8/2020	Lining or Repair Failure	80.00	Minor	
B28-4019-B28-4018	607333	7/8/2020	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
B28-4013-B28-4012	607360	7/15/2020	Lining or Repair Failure	60.00	Moderate	
L17-1069-L17-1068	607773	10/26/2020	Roots	50.00	Medium	ROOTS 5 FT FROM THE TOP OF THE RUN JUST INSIDE THE M/H ROOTS IN THE SIDE SERVICE AT THE LATERAL 88FT
G16-3073-G16-3078	606280	1/16/2019	Roots	50.00	Medium	ROOTS IN MANHOLE G16-3078
L15-2010-L15-2009	607698	10/12/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
G15-3012-G15-3050	606070	1/30/2019	Roots	30.00	Heavy	Roots in both M/Hs upper and lower
H17-3078-H17-3077	606403	6/5/2019	Cracks or Fractures	80.00	Minor Cracking	
G15-2026-G15-2025	606259	4/17/2019	Belly or Sag	80.00	Minor (<10%)	
G15-3010-G15-3009	606073	1/30/2019	Belly or Sag	80.00	Minor (<10%)	
G16-4006-G16-4005	606786	9/30/2019	Belly or Sag	80.00	Minor (<10%)	
G16-4006-G16-4005	606786	9/30/2019	Break or Failure	15.00	Hole Void Visible	
H16-1015-H16-1044	606374	1/16/2019	Roots	80.00	Light	ROOTS IN M/H H16-1044
H15-2023-H15-2032	606964	1/8/2020	Inflow and Infiltration	60.00	Running or Trickling	
H15-2023-H15-2032	606964	1/8/2020	Cracks or Fractures	80.00	Minor Cracking	
L18-4036-L18-4037	607958	2/3/2021	Inflow and Infiltration	60.00	Running or Trickling	
M18-4012-M18-4011	607844	12/21/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-3085-H17-3012	606419	6/6/2019	Roots	80.00	Light	ROOT IN MANHOLE H17-3-85 ON THE SHELF
G16-4074-G16-4075	606725	8/19/2019	Belly or Sag	80.00	Minor (<10%)	
H17-3039-H17-3037	606469	6/13/2019	Cracks or Fractures	60.00	Moderate Cracking	
H17-3039-H17-3037	606469	6/13/2019	Break or Failure	15.00	Hole Void Visible	
J16-4021-J16-4022	607130	2/26/2020	Inflow and Infiltration	80.00	Weeping or Dripping	
J16-4021-J16-4022	607130	2/26/2020	Obstruction or Intrusion	60.00	Moderate	
J16-4021-J16-4022	607130	2/26/2020	Worn Surface	60.00	Moderate	
J16-4021-J16-4022	607130	2/26/2020	Lining or Repair Failure	60.00	Moderate	
H16-1038-H16-1037	606379	1/16/2019	Belly or Sag	80.00	Minor (<10%)	
G16-3075-G16-3074	606272	1/16/2019	Worn Surface	60.00	Moderate	
G16-3075-G16-3074	606272	1/16/2019	Cracks or Fractures	60.00	Moderate Cracking	
G16-3075-G16-3074	606272	1/16/2019	Break or Failure	15.00	Hole Void Visible	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-3013-G16-3012	606237	1/16/2019	Roots	80.00	Light	ROOTS AT 200 FT AND IN LOWER MH 3012
G16-3013-G16-3012	606237	1/16/2019	Worn Surface	60.00	Moderate	
G16-4069-G16-4066	606674	8/7/2019	Belly or Sag	80.00	Minor (<10%)	
L18-3031-L18-3029	607810	12/10/2020	Belly or Sag	80.00	Minor (<10%)	
J11-3061-J11-3060	607467	8/11/2020	Worn Surface	60.00	Moderate	
J11-3061-J11-3060	607467	8/11/2020	Cracks or Fractures	60.00	Moderate Cracking	
J11-3061-J11-3060	607467	8/11/2020	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
A28-3004-A28-3002	607168	3/9/2020	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J16-4012-J16-4011	606625	7/29/2019	Roots	50.00	Medium	ROOTS RIGHT OUTSIDE THE MANHOLE
G15-3003-G15-3002	606056	1/24/2019	Roots	0.00	Blockage	Roots in sand collar
G16-2027-G16-2011	606304	1/16/2019	Roots	50.00	Medium	ROOTS AT 197
H15-2001-LS-34	607108	2/20/2020	Roots	50.00	Medium	Roots in manhole 2001
H17-3040-H17-3039	606468	6/13/2019	Cracks or Fractures	80.00	Minor Cracking	
H16-2073-H16-2115	606500	6/25/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
J16-4033-J16-4032	606970	1/9/2020	Inflow and Infiltration	60.00	Running or Trickling	
G16-3042-G16-3041	606224	1/16/2019	Roots	50.00	Medium	ROOTS IN THE SIDE SERVICE CONNECTION AT 17 FEET FROM UPPER MANHOLE
K18-3108-L18-4036	607957	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
L14-3014-L14-3001	607705	10/13/2020	Roots	50.00	Medium	ROOTS IN MANHOLE L14-3001
J20-3063C-J20-3061	607723	10/19/2020	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
M17-4007-M17-4006	605453	6/26/2018	Belly or Sag	80.00	Minor (<10%)	
J16-4018-J16-4017	606622	7/29/2019	Roots	80.00	Light	ROOTS IN LATERAL AT REPAIR 260.7 FT
J11-4017-J11-4010	606979	1/10/2020	Roots	50.00	Medium	ROOTS AT 159 IN A SIDE SERVICE CONNECTION NOT BLOCKING
J11-4017-J11-4010	606979	1/10/2020	Worn Surface	40.00	Severe	
J11-4017-J11-4010	606979	1/10/2020	Break or Failure	15.00	Hole Void Visible	
J11-4017-J11-4010	606979	1/10/2020	Lining or Repair Failure	40.00	Severe	
G21-2014-G21-2002	605379	5/10/2018	Belly or Sag	80.00	Minor (<10%)	
			<u> </u>		<u> </u>	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
D23-2085-D23-2083	606418	6/6/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
J16-2007-J16-2006	605899	9/25/2018	Belly or Sag	60.00	Moderate (10 to 30%)	
G21-2028-G21-2026	605373	5/10/2018	Belly or Sag	80.00	Minor (<10%)	
G21-2028-G21-2026	605373	5/10/2018	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H16-1030-H16-1029	606136	2/19/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H16-4049-H16-4047	606218	3/28/2019	Roots	50.00	Medium	H16-4047 Roots at section joint/ wall.
H16-2110-H16-2071	606531	6/27/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J11-3049-J11-3108	604831	8/24/2017	Maintenance Condition	90.00	Light	
J11-3049-J11-3108	604831	8/24/2017	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3049-J11-3108	604831	8/24/2017	Worn Surface	80.00	Minor	
J11-3049-J11-3108	604831	8/24/2017	Cracks or Fractures	80.00	Minor Cracking	
J11-3049-J11-3108	604831	8/24/2017	Lining or Repair Failure	80.00	Minor	
H16-3033-H16-3032	606924	1/3/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-3031-H17-3030	606475	6/20/2019	Cracks or Fractures	80.00	Minor Cracking	
H17-3031-H17-3030	606475	6/20/2019	Break or Failure	30.00	Hole Soil Visible	
H16-3078-H16-3063	607005	1/21/2020	Worn Surface	40.00	Severe	
H16-3078-H16-3063	607005	1/21/2020	Cracks or Fractures	40.00	Severe Cracking	
H16-3078-H16-3063	607005	1/21/2020	Break or Failure	0.00	Collapse	
L18-4051-L18-4050	607967	2/5/2021	Inflow and Infiltration	60.00	Running or Trickling	
L18-4051-L18-4050	607967	2/5/2021	Cracks or Fractures	80.00	Minor Cracking	
L14-3005-LS-14	607924	1/27/2021	Lining or Repair Failure	40.00	Severe	
L14-3005-LS-14	607924	1/27/2021	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
J16-1077-J16-1033	606907	12/26/2019	Belly or Sag	80.00	Minor (<10%)	
G16-2021-G16-2020	606297	1/16/2019	Roots	50.00	Medium	ROOTS IN MANHOLE 2021 SAND COLLAR
M16-1033-M16-1032	605598	7/2/2018	Inflow and Infiltration	60.00	Running or Trickling	
G16-1057-G16-1013	606249	4/17/2019	Roots	50.00	Medium	At sand collar of G16-1013. Root cut this date.
H17-1026-H17-1021	607555	8/28/2020	Roots	50.00	Medium	ROOTBALL IN M/H H17-1027
G15-3014-G15-3051	606048	1/23/2019	Inflow and Infiltration	80.00	Weeping or Dripping	
J18-2010-J18-2009	606593	5/13/2019	Roots	50.00	Medium	J18-2009 SAND COLLAR, SHELF & WALL

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
L17-1092-L17-1076	607918	1/21/2021	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF L1'7-1092
J16-1072-J16-1071	607044	2/11/2020	Roots	50.00	Medium	ROOTS AT 136 FT IN A JOINT
M18-4051-M18-4040	607854	12/22/2020	Belly or Sag	80.00	Minor (<10%)	
L18-4023-L18-4022	607768	10/22/2020	Belly or Sag	80.00	Minor (<10%)	
G16-3014-G16-3013	606238	1/16/2019	Roots	80.00	Light	ROOTS IN THE LOWER SAND COLLAR
G16-3014-G16-3013	606238	1/16/2019	Worn Surface	60.00	Moderate	
L14-CAP-L14-3015	607703	10/13/2020	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
J16-1025-J16-1022	607016	1/24/2020	Roots	50.00	Medium	ROOTS IN SAND COLLAR OF M'H J16-1022
H17-1007-H17-1006	607437	7/30/2020	Roots	80.00	Light	ROOTS AT SAND COLLAR @ IN FLOW H17-1007
H16-1062-H16-1033	606134	2/19/2019	Roots	50.00	Medium	Roots at 49 and 73 ft from the upper manhole
H16-1062-H16-1033	606134	2/19/2019	Cracks or Fractures	80.00	Minor Cracking	
G21-2016-G21-2014	605426	5/10/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
G21-2016-G21-2014	605426	5/10/2018	Worn Surface	80.00	Minor	
G21-2016-G21-2014	605426	5/10/2018	Belly or Sag	60.00	Moderate (10 to 30%)	
G21-2016-G21-2014	605426	5/10/2018	Cracks or Fractures	80.00	Minor Cracking	
G16-4106-G16-4105	606675	8/8/2019	Worn Surface	60.00	Moderate	
G16-4106-G16-4105	606675	8/8/2019	Belly or Sag	80.00	Minor (<10%)	
G16-4027-G16-4026	606781	9/30/2019	Break or Failure	15.00	Hole Void Visible	
G16-2007-G16-2006	606318	1/16/2019	Belly or Sag	80.00	Minor (<10%)	
L17-1036-L17-1035	607890	1/11/2021	Break or Failure	30.00	Hole Soil Visible	
H15-4040-H15-4037	606115	2/7/2019	Belly or Sag	80.00	Minor (<10%)	
H16-2048-H16-2047	606543	6/28/2019	Roots	30.00	Heavy	ROOTS IN BOTH SAND COLLARS OF H16-2048
L18-3016-L18-3015	607814	12/10/2020	Roots	50.00	Medium	ROOTS IN THE LATERAL AND ALSO THE JOINT AT 110.2 FT
J11-3108-J11-3048	604832	8/24/2017	Maintenance Condition	90.00	Light	
J11-3108-J11-3048	604832	8/24/2017	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3108-J11-3048	604832	8/24/2017	Worn Surface	80.00	Minor	
J11-3108-J11-3048	604832	8/24/2017	Cracks or Fractures	80.00	Minor Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J20-3061-J20-3060	607724	10/19/2020	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF J20-3060
G16-1050-G16-1046	605800	9/13/2018	Belly or Sag	80.00	Minor (<10%)	
H16-2049-H16-2048	606542	6/28/2019	Roots	30.00	Heavy	ROOTS IN MANHOLE H16-2048 BOTH SAND COLLARS
H16-4012-H16-4011	606855	11/13/2019	Roots	50.00	Medium	ROOTS IN MANHOLE OR POSSIBLY SANDCOLLAR IN MH H16-4011
J19-3112-J19-3111	607993	3/1/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L18-3017-L18-3016	607813	12/10/2020	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF L18-3016
F16-2021-F16-2020	605729	8/21/2018	Obstruction or Intrusion	60.00	Moderate	
F16-2021-F16-2020	605729	8/21/2018	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
L18-4048-L18-4047	607972	2/5/2021	Roots	50.00	Medium	ROOTS IN MANHOLE L18-4047
H15-4041-H15-4040	606114	2/7/2019	Belly or Sag	80.00	Minor (<10%)	
H17-2011-H17-2010	606588	7/10/2019	Obstruction or Intrusion	60.00	Moderate	
G15-3009-G15-3008	606074	1/30/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
B28-1026-B28-1025	607149	3/4/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2091-D23-2090	604828	8/24/2017	Worn Surface	80.00	Minor	
D23-2091-D23-2090	604828	8/24/2017	Belly or Sag	80.00	Minor (<10%)	
D23-2091-D23-2090	604828	8/24/2017	Lining or Repair Failure	80.00	Minor	
H17-4042-LS-35	606836	10/21/2019	Inflow and Infiltration	60.00	Running or Trickling	
H16-2081-H16-2080	606547	6/28/2019	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-2007-H16-2008	606537	6/28/2019	Roots	50.00	Medium	ROOTS AT 106 AND 227 ALSO AT M/H 22008 IN THE CLEAN OUT
H16-2007-H16-2008	606537	6/28/2019	Cracks or Fractures	80.00	Minor Cracking	
H17-1016-H17-1014	607384	7/22/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
B28-4027-B28-4024	607238	5/21/2020	Belly or Sag	80.00	Minor (<10%)	
L18-3010-L18-3009	607763	10/22/2020	Roots	50.00	Medium	ROOTS IN THE MANHOLE L18-3009

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
M15-1001-L15-2007	607693	10/12/2020	Roots	50.00	Medium	ROOTS IN THE JOINTS CONNECTIONS AT 128 AND 153 ALSO ROOTS IN THE LATERS AT 83 AND 36
M15-1001-L15-2007	607693	10/12/2020	Cracks or Fractures	60.00	Moderate Cracking	
M15-1001-L15-2007	607693	10/12/2020	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
H16-2093C-H16-2017	606533	6/27/2019	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-2093C-H16-2017	606533	6/27/2019	Break or Failure	15.00	Hole Void Visible	
M15-1010-M15-1006	607750	10/21/2020	Roots	50.00	Medium	ROOTS IN JOINT AT 143
G16-1034-G16-1033	605806	9/17/2018	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J17-2031-J17-2030	607530	8/24/2020	Break or Failure	30.00	Hole Soil Visible	
B28-4060-B28-4090	607228	5/20/2020	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF B28-4060
B28-4035-B28-4034	607298	6/24/2020	Roots	50.00	Medium	AT 195 FT CARRIES ON FOR 13 FEET
B28-4035-B28-4034	607298	6/24/2020	Cracks or Fractures	60.00	Moderate Cracking	
B28-4035-B28-4034	607298	6/24/2020	Lining or Repair Failure	60.00	Moderate	
G16-4026-G16-4018	606752	9/12/2019	Cracks or Fractures	80.00	Minor Cracking	
G16-4026-G16-4018	606752	9/12/2019	Break or Failure	30.00	Hole Soil Visible	
M17-1015-M17-1014	607824	12/14/2020	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G21-2019-G21-2018	605376	5/10/2018	Inflow and Infiltration	90.00	Stain, Possible I&I	
G21-2019-G21-2018	605376	5/10/2018	Belly or Sag	80.00	Minor (<10%)	
J16-2008-J16-2011	606050	1/24/2019	Roots	50.00	Medium	
L18-4045-L18-4038	607955	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
H16-4004-H16-4003	606216	3/27/2019	Inflow and Infiltration	80.00	Weeping or Dripping	
A28-3041-A28-3040	607315	7/2/2020	Roots	30.00	Heavy	ROOTS IN SIDE SERVICE ABOUT 30 FT FROM THE MAIN. CONTACTED HOME OWNER AT 1183 PENNSYLVANIA AND RECOMMENDED HE GET A PLUMBER CLEAN OUTS ARE NOT EASILY ACCESSED
J19-2083-J19-2082	607945	2/2/2021	Roots	50.00	Medium	
H16-3010-H16-3009	606949	1/8/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H16-3010-H16-3009	606949	1/8/2020	Worn Surface	80.00	Minor	
H16-3010-H16-3009	606949	1/8/2020	Lining or Repair Failure	80.00	Minor	
G21-2033-G21-2007	605427	6/18/2018	Belly or Sag	80.00	Minor (<10%)	
G16-4009-G16-4007	606783	9/30/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
J16-1062-J16-1059	606583	7/9/2019	Roots	80.00	Light	ROOTS IN LATERAL JOINT 52.5FT
J16-1062-J16-1059	606583	7/9/2019	Break or Failure	15.00	Hole Void Visible	
L18-3014-L18-3021	607819	12/14/2020	Roots	80.00	Light	ROOTS IN THE CONNECTION 105'
G16-3076-G16-3075	606271	1/16/2019	Roots	80.00	Light	ROOTS STARTING TO APPEAR IN THE SAND COLLAR G16-3075
K10-1074-K10-1007	605411	6/4/2018	Obstruction or Intrusion	60.00	Moderate	
K10-1074-K10-1007	605411	6/4/2018	Lining or Repair Failure	60.00	Moderate	
K10-1074-K10-1007	605411	6/4/2018	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
L17-1062-L17-1058	607966	2/4/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1062-L17-1058	607966	2/4/2021	Belly or Sag	80.00	Minor (<10%)	
J11-3084-J11-3083	606281	4/22/2019	Worn Surface	60.00	Moderate	
J11-3084-J11-3083	606281	4/22/2019	Cracks or Fractures	60.00	Moderate Cracking	
J11-3084-J11-3083	606281	4/22/2019	Break or Failure	30.00	Hole Soil Visible	
J11-3084-J11-3083	606281	4/22/2019	Lining or Repair Failure	60.00	Moderate	
G21-2026-G21-2018	605374	5/10/2018	Obstruction or Intrusion	0.00	Severe or Impassable	
G21-2026-G21-2018	605374	5/10/2018	Belly or Sag	80.00	Minor (<10%)	
H16-1040-H16-1002	606570	7/8/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-4054-H17-1043	607343	7/9/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
L18-4018-L17-1069	607793	10/30/2020	Roots	30.00	Heavy	HEAVY ROOTS BETWEEN 267 AND 318 WITH ROOTS IN THE DROP
H15-1068C-H15-1042	605851	10/4/2018	Obstruction or Intrusion	80.00	Minor	
H15-1040-H15-1037	605856	10/5/2018	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-3029-G16-3028	606196	2/28/2019	Belly or Sag	40.00	Severe (>30%)	
G21-2021-G21-2020	605431	6/18/2018	Obstruction or Intrusion	60.00	Moderate	
H16-2084-H16-2083	607088	2/18/2020	Roots	80.00	Light	ROOTS AT 48FT FROM THE TOP END MANHOLE
H16-3017-H16-3016	606938	1/6/2020	Belly or Sag	60.00	Moderate (10 to 30%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H16-3017-H16-3016	606938	1/6/2020	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
B28-4020-B28-4011	607294	6/11/2020	Belly or Sag	80.00	Minor (<10%)	
G16-1010-G16-1072	606107	2/6/2019	Roots	80.00	Light	Roots in sand collar G16=1010
H16-1006-H16-1005	606045	1/22/2019	Obstruction or Intrusion	0.00	Severe or Impassable	
D23-2113-D23-2112	604818	8/23/2017	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2113-D23-2112	604818	8/23/2017	Cracks or Fractures	80.00	Minor Cracking	
H16-1036-H16-1035	606138	2/20/2019	Roots	30.00	Heavy	Roots at 9' 182,227,238,294 from upper m/h
H16-1036-H16-1035	606138	2/20/2019	Cracks or Fractures	80.00	Minor Cracking	
H15-4004-H15-4003	606128	2/8/2019	Roots	50.00	Medium	Roots just inside at 7 feet
M18-4036-M18-4035	607872	1/6/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
K10-1023-K10-1020	606201	3/4/2019	Roots	30.00	Heavy	Roots at 10ft,21ft,45ft,48ft,50ft,105ft, 106ft, 130ft, 147ft
K10-1023-K10-1020	606201	3/4/2019	Cracks or Fractures	60.00	Moderate Cracking	
K10-1023-K10-1020	606201	3/4/2019	Break or Failure	15.00	Hole Void Visible	
H17-3003-H17-3002	606471	6/19/2019	Roots	50.00	Medium	ROOTS AT 105FT TO 110 FT
L17-1035-L17-4004	607892	1/11/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
J19-3114-J19-3107	608000	3/2/2021	Obstruction or Intrusion	0.00	Severe or Impassable	
H17-1009-H17-1008	607433	7/30/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1056-L17-1055	606599	7/23/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1056-L17-1055	606599	7/23/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1056-L17-1055	606599	7/23/2019	Worn Surface	80.00	Minor	
L17-1056-L17-1055	606599	7/23/2019	Cracks or Fractures	80.00	Minor Cracking	
L17-1056-L17-1055	606599	7/23/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G16-2029-G16-2011	606305	1/16/2019	Roots	30.00	Heavy	HEAVY ROOTS AT 230.5
H15-4017-H15-4016	604858	9/5/2017	Belly or Sag	80.00	Minor (<10%)	
H16-2020-H16-2018	606480	6/20/2019	Cracks or Fractures	80.00	Minor Cracking	
H16-2020-H16-2018	606480	6/20/2019	Break or Failure	15.00	Hole Void Visible	
H16-2017-H16-2016	606495	6/24/2019	Break or Failure	15.00	Hole Void Visible	
H16-2057-H16-2056	606502	6/25/2019	Roots	80.00	Light	ROOTS IN MANHOLE H16-2056
J19-2082-J19-2041	607944	2/2/2021	Roots	50.00	Medium	ROOTS IN MANHOLE J19-2082

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
M18-4002-M18-4001	607881	1/6/2021	Inflow and Infiltration	40.00	Gushing or Spurting	
G21-2039-G21-2001	605432	6/18/2018	Obstruction or Intrusion	0.00	Severe or Impassable	
L17-1068-L17-1067	607796	11/2/2020	Roots	30.00	Heavy	HEAVY ROOTS FROM 27FT TO 317FT
M15-1011-M15-1010	607748	10/21/2020	Roots	30.00	Heavy	ROOTS IN LATERAL AT 145FT
G16-3037-G16-3034	606192	2/28/2019	Roots	0.00	Blockage	Roots in side service 95 feet from m/h
G21-2024-G21-2023	605404	5/17/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
J19-2079-J19-2012	607939	2/1/2021	Break or Failure	30.00	Hole Soil Visible	
J16-4013-J16-4012	606624	7/29/2019	Roots	50.00	Medium	ROOTS RIGHT OUTSIDE THE MANHOLE
G16-4055-G16-4054	606758	9/16/2019	Roots	50.00	Medium	ROOTS IN THE M/H G16-4053
G16-4055-G16-4054	606758	9/16/2019	Belly or Sag	80.00	Minor (<10%)	
G16-4021-G16-4019	606755	9/12/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4021-G16-4019	606755	9/12/2019	Cracks or Fractures	80.00	Minor Cracking	
L18-4011-L18-4012	606233	4/3/2019	Roots	80.00	Light	ROOTS AT 106 IN THE JOINT
L18-4011-L18-4012	606233	4/3/2019	Belly or Sag	80.00	Minor (<10%)	
G21-2034C-G21-2029	605372	5/10/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
G21-2034C-G21-2029	605372	5/10/2018	Cracks or Fractures	80.00	Minor Cracking	
H16-2008-H16-2009	606486	6/20/2019	Inflow and Infiltration	60.00	Running or Trickling	
H16-2008-H16-2009	606486	6/20/2019	Cracks or Fractures	80.00	Minor Cracking	
G16-2006-G16-2005	606319	1/16/2019	Roots	50.00	Medium	ROOTS IN MANHOLE 2006 ON THE SHELF
J20-3004-J20-3003	607607	9/25/2020	Roots	50.00	Medium	ROOTS IN LATERAL CONNECTIONS AT 14FT, 108FT, 111FT
L16-2027-L16-2026	605524	7/2/2018	Obstruction or Intrusion	80.00	Minor	
G16-4037-G16-4036	606765	9/16/2019	Belly or Sag	80.00	Minor (<10%)	
M18-1006-M18-4057	607738	10/20/2020	Belly or Sag	80.00	Minor (<10%)	
J16-4024-J16-4038	607070	2/18/2020	Worn Surface	80.00	Minor	
J16-4024-J16-4038	607070	2/18/2020	Lining or Repair Failure	80.00	Minor	
G16-4065-G16-4060	606732	9/10/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-3016-G16-3015	606231	1/16/2019	Roots	50.00	Medium	ROOTS IN VARIOUS PLACES WHERE PIPE HAS ERODED
G16-3016-G16-3015	606231	1/16/2019	Inflow and Infiltration	40.00	Gushing or Spurting	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-3016-G16-3015	606231	1/16/2019	Worn Surface	40.00	Severe	
G16-3016-G16-3015	606231	1/16/2019	Cracks or Fractures	60.00	Moderate Cracking	
G16-3016-G16-3015	606231	1/16/2019	Break or Failure	15.00	Hole Void Visible	
G16-3016-G16-3015	606231	1/16/2019	Lining or Repair Failure	40.00	Severe	
H16-2070-H16-2069	606510	6/26/2019	Roots	0.00	Blockage	HEAVY ROOTS IN M/H H16-2070
H16-1002-H16-1019	606380	1/16/2019	Obstruction or Intrusion	0.00	Severe or Impassable	
G16-4029-G16-4028	606750	9/12/2019	Roots	80.00	Light	VERY SMALL BIT OF ROOTS AND THE END OF THE RUN81 FT FROM THE TOP END
G16-4029-G16-4028	606750	9/12/2019	Belly or Sag	80.00	Minor (<10%)	
H16-3064-H16-3063	606992	1/16/2020	Worn Surface	60.00	Moderate	
H16-3064-H16-3063	606992	1/16/2020	Obstruction or Intrusion	60.00	Moderate	
H16-3064-H16-3063	606992	1/16/2020	Cracks or Fractures	60.00	Moderate Cracking	
H16-3064-H16-3063	606992	1/16/2020	Break or Failure	0.00	Collapse	
G16-2023C-G16-2021	606295	1/16/2019	Roots	50.00	Medium	ROOTS IN THE CLEAN OUT 2023C
J17-2035-J17-2032	607480	8/17/2020	Roots	50.00	Medium	
H16-2071-H16-2070	606532	6/27/2019	Roots	30.00	Heavy	ROOTS IN THE MANHOLE H16-2070 HEAVY ROOTS
M15-1003-M15-1002	607754	10/21/2020	Roots	50.00	Medium	ROOTS IN THE SAND COLLAR OF M/HOLE M15-1002
G21-2027-G21-2026	605375	5/10/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3038-J11-3037	606698	8/13/2019	Roots	30.00	Heavy	HEAVY ROOTS THROUGHOUT THE WHOLE MAIN, MOST LATERALS HAVE ROOTS IN THEM ALSO
J11-3038-J11-3037	606698	8/13/2019	Obstruction or Intrusion	60.00	Moderate	
J11-3038-J11-3037	606698	8/13/2019	Belly or Sag	80.00	Minor (<10%)	
J11-3038-J11-3037	606698	8/13/2019	Cracks or Fractures	80.00	Minor Cracking	
J11-3038-J11-3037	606698	8/13/2019	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
M15-1005-M15-1004	607752	10/21/2020	Roots	80.00	Light	ROOTS 1 FOOT FROM THE TOP OF THE PIPE

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
B28-1037-B28-1036	607272	6/2/2020	Roots	50.00	Medium	ROOTS IN MANHOLE B28-1036
J16-4001-LS-11	606637	7/31/2019	Worn Surface	80.00	Minor	
J16-4001-LS-11	606637	7/31/2019	Lining or Repair Failure	80.00	Minor	
H17-2013-H17-2012	606560	7/8/2019	Roots	50.00	Medium	ROOTS IN THE SAND COLLAR H17- 2012
G16-4058-G16-4057	606764	9/16/2019	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
H16-2118C-H16-2117	606876	11/27/2019	Roots	50.00	Medium	ROOTS IN MH G16-2118C
J16-4036-J16-4035	606966	1/9/2020	Inflow and Infiltration	60.00	Running or Trickling	
H17-3033-H17-3032	606474	6/19/2019	Cracks or Fractures	60.00	Moderate Cracking	
H17-3033-H17-3032	606474	6/19/2019	Break or Failure	15.00	Hole Void Visible	
H17-3033-H17-3032	606474	6/19/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H17-2012-H17-2011	606561	7/8/2019	Roots	50.00	Medium	ROOTS IN THE SIDE SERVICE 223FT
G16-3039-G16-3038	606222	1/16/2019	Belly or Sag	80.00	Minor (<10%)	
M18-4021-M18-4014	607864	1/4/2021	Belly or Sag	80.00	Minor (<10%)	
J19-2046-J19-2010	607937	2/1/2021	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF J19-2010
G16-2032-G16-2031	606303	1/16/2019	Roots	50.00	Medium	ROOTS AT 123 AND 136
G21-2009-G21-2008	605415	6/5/2018	Belly or Sag	80.00	Minor (<10%)	
G16-2018-G16-2017	606110	2/6/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L18-4009-L18-4008	604848	8/28/2017	Inflow and Infiltration	90.00	Stain, Possible I&I	
L18-4009-L18-4008	604848	8/28/2017	Belly or Sag	60.00	Moderate (10 to 30%)	
L18-4009-L18-4008	604848	8/28/2017	Cracks or Fractures	40.00	Severe Cracking	
L18-4009-L18-4008	604848	8/28/2017	Lining or Repair Failure	80.00	Minor	
L18-4009-L18-4008	604848	8/28/2017	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H16-3041-H16-3040	606915	1/3/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
J17-4030-J17-4029	607462	8/11/2020	Roots	80.00	Light	NECK, SECTION JOINT AND SAND COLLAR J17-4030.
G21-2023-G21-2020	605430	5/10/2018	Belly or Sag	80.00	Minor (<10%)	
J16-1081-H16-2110	606529	6/27/2019	Belly or Sag	40.00	Severe (>30%)	
G21-2020-G21-2019	605377	5/10/2018	Obstruction or Intrusion	0.00	Severe or Impassable	
G21-2020-G21-2019	605377	5/10/2018	Belly or Sag	80.00	Minor (<10%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G21-2017-G21-2016	605425	5/10/2018	Inflow and Infiltration	90.00	Stain, Possible I&I	
G21-2017-G21-2016	605425	5/10/2018	Obstruction or Intrusion	80.00	Minor	
G21-2017-G21-2016	605425	5/10/2018	Worn Surface	80.00	Minor	
G21-2017-G21-2016	605425	5/10/2018	Belly or Sag	60.00	Moderate (10 to 30%)	
G21-2017-G21-2016	605425	5/10/2018	Cracks or Fractures	80.00	Minor Cracking	
G21-2017-G21-2016	605425	5/10/2018	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G15-3050-G15-3011	606071	1/30/2019	Roots	0.00	Blockage	Roots at 80 ft from the upper m/h
H16-2022-H16-2021	606489	6/24/2019	Obstruction or Intrusion	60.00	Moderate	
H16-2022-H16-2021	606489	6/24/2019	Break or Failure	15.00	Hole Void Visible	
H16-2022-H16-2021	606489	6/24/2019	Cracks or Fractures	80.00	Minor Cracking	
J16-1036-J16-1035	606909	12/26/2019	Lining or Repair Failure	80.00	Minor	
J16-1036-J16-1035	606909	12/26/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L17-1088C-L17-1087	607886	1/8/2021	Roots	50.00	Medium	
L17-1088C-L17-1087	607886	1/8/2021	Inflow and Infiltration	60.00	Running or Trickling	
L17-1088C-L17-1087	607886	1/8/2021	Cracks or Fractures	80.00	Minor Cracking	
L17-1043-L17-1038	606608	7/23/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1043-L17-1038	606608	7/23/2019	Worn Surface	80.00	Minor	
L17-1043-L17-1038	606608	7/23/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1043-L17-1038	606608	7/23/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H15-4037-H15-4036	606116	2/7/2019	Belly or Sag	80.00	Minor (<10%)	
G16-3061-G16-3062	606345	1/16/2019	Obstruction or Intrusion	80.00	Minor	
M15-1007-M15-1006	607749	10/21/2020	Roots	30.00	Heavy	ROOTS AT VARIOUS POINTS TREAT WHOLE LINE
M15-1007-M15-1006	607749	10/21/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
M15-1007-M15-1006	607749	10/21/2020	Cracks or Fractures	80.00	Minor Cracking	
L18-3041-L18-3040	607801	11/2/2020	Roots	80.00	Light	ROOTS AT LATERAL 144.6
B28-4026-B28-4025	607243	5/26/2020	Roots	0.00	Blockage	HEAVY ROOTS IN LATERAL AT 95.5 FEET T3
H21-4005-H21-4004	605395	5/16/2018	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
M15-1033-M15-1012	607746	10/21/2020	Roots	80.00	Light	ROOTS ON THE SHELF OF M/H M15- 1012
J17-4006-J17-4005	607475	8/12/2020	Belly or Sag	60.00	Moderate (10 to 30%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J20-3076-J20-3075	607619	9/29/2020	Roots	50.00	Medium	ROOTS IN THE SAND COLLAR OF J20-3075
G21-2003-G21-2002	605424	6/6/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
G21-2003-G21-2002	605424	6/6/2018	Worn Surface	80.00	Minor	
G16-3070-G16-3062	606325	1/16/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L15-2012-L15-2011	607691	10/9/2020	Roots	50.00	Medium	ROOTS IN THE SANDCOLLAR AND SHELF OF 15-2011
H16-2111-H16-2058	606520	6/27/2019	Roots	50.00	Medium	ROOTS IN MANHOLE H16-2111
G16-4112-G16-4111	606789	9/30/2019	Roots	50.00	Medium	ROOTS AT 220 AND 240 FROM LOWER M/H
G16-4112-G16-4111	606789	9/30/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4112-G16-4111	606789	9/30/2019	Cracks or Fractures	80.00	Minor Cracking	
G16-4112-G16-4111	606789	9/30/2019	Lining or Repair Failure	60.00	Moderate	
G15-2023-G15-2015	606261	4/17/2019	Worn Surface	60.00	Moderate	
G16-4090-G16-4089	606670	8/7/2019	Belly or Sag	80.00	Minor (<10%)	
H15-4007-LS-33	606034	1/16/2019	Roots	0.00	Blockage	Rootball just inside the sand collar down stream
H15-4003-H15-4002	606119	2/7/2019	Roots	80.00	Light	Roots in the sand collar
H16-3063-H16-3062	607006	1/21/2020	Belly or Sag	80.00	Minor (<10%)	
L14-3001-L14-3002	607707	10/13/2020	Roots	50.00	Medium	ROOTS IN MANHOLE L14-3001
J17-4031-J17-4021	607471	8/12/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1026-L17-1022	607902	1/12/2021	Inflow and Infiltration	40.00	Gushing or Spurting	
M17-4008-M17-4007	605452	6/26/2018	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-2092C-H16-2022	606488	6/24/2019	Roots	50.00	Medium	ROOTS AT 92.5 AND 142
H16-2092C-H16-2022	606488	6/24/2019	Cracks or Fractures	60.00	Moderate Cracking	
H16-2092C-H16-2022	606488	6/24/2019	Break or Failure	15.00	Hole Void Visible	
M18-4023-M18-4022	607861	12/23/2020	Belly or Sag	80.00	Minor (<10%)	
L17-1016-L17-1015	607908	1/14/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1016-L17-1015	607908	1/14/2021	Cracks or Fractures	80.00	Minor Cracking	
A28-3036-A28-3035	607309	6/30/2020	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
J16-1004-J16-1001	607051	2/11/2020	Roots	50.00	Medium	ROOTS IN THE SAND COLLAR J16- 1001

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-2033-G16-2032	606301	1/16/2019	Roots	30.00	Heavy	ROOTS IN A LATERAL AT 135 TREAT LINE FROM UPPER MANHOLE AT 115 TO 140
G16-3026-G16-3025	606197	2/28/2019	Roots	0.00	Blockage	Blockage in side service did a dye test and talked to the owner blockage at 200 ft
M15-1002-M15-1001	607755	10/21/2020	Roots	50.00	Medium	ROOTS IN THE DROP
J16-1058-J16-1056	606574	7/8/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
M18-4013-M18-4012	607843	12/21/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
H21-1004-H21-1003	605405	5/17/2018	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-2028-G16-2027	606312	1/16/2019	Roots	30.00	Heavy	ROOTS IN MANHOLE 2028
L17-1042C-L17-1041	607920	1/21/2021	Roots	50.00	Medium	ROOTS IN THE FIRST 50 FEET
L17-1042C-L17-1041	607920	1/21/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1042C-L17-1041	607920	1/21/2021	Cracks or Fractures	80.00	Minor Cracking	
L15-2016-L15-2015	607689	10/9/2020	Roots	50.00	Medium	ROOTS IN THE SHELF OF L15-2015
G16-2031-G16-2029	606300	1/16/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H15-4035-H15-4034	606118	2/7/2019	Roots	80.00	Light	Roots in sand collars
H16-3028-H16-3027	606903	12/11/2019	Belly or Sag	80.00	Minor (<10%)	
L17-1092-L17-1038	606302	4/30/2019	Roots	50.00	Medium	ROOTS IN SEVERAL JOINTS 124 AND 329
L17-1092-L17-1038	606302	4/30/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1086-L17-1017	607889	1/11/2021	Roots	50.00	Medium	ROOTS IN JOINTS AND CRACKS MULTIPLE AREAS 82FT 98 FT AND 103 FT
L17-1086-L17-1017	607889	1/11/2021	Belly or Sag	80.00	Minor (<10%)	
L17-1086-L17-1017	607889	1/11/2021	Cracks or Fractures	80.00	Minor Cracking	
L17-1086-L17-1017	607889	1/11/2021	Lining or Repair Failure	80.00	Minor	
L17-1086-L17-1017	607889	1/11/2021	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
H15-2035-H15-2034	606901	12/11/2019	Belly or Sag	80.00	Minor (<10%)	
H16-2018-H16-2014	606482	6/20/2019	Lining or Repair Failure	60.00	Moderate	
K18-3014-LS-1-N	605948	12/3/2018	Belly or Sag	40.00	Severe (>30%)	
M18-4043-M18-4042	607850	12/22/2020	Belly or Sag	80.00	Minor (<10%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-3043-G16-3042	606223	1/16/2019	Roots	80.00	Light	ROOTS IN THE FIRST 3 FEET OF THE RUN FROM THE TOP MANHOLE
G16-3043-G16-3042	606223	1/16/2019	Cracks or Fractures	80.00	Minor Cracking	
H17-4057-H17-4056	607338	7/9/2020	Belly or Sag	80.00	Minor (<10%)	
G16-2035-G16-2019	606294	1/16/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-4044-H17-4043	606822	10/9/2019	Inflow and Infiltration	80.00	Weeping or Dripping	
J16-4008-J16-4007	606631	7/30/2019	Roots	50.00	Medium	ROOTS AT 237
J16-4008-J16-4007	606631	7/30/2019	Cracks or Fractures	80.00	Minor Cracking	
G16-4057-G16-4055	606759	9/16/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-4057-G16-4055	606759	9/16/2019	Cracks or Fractures	80.00	Minor Cracking	
H17-3036-H17-3034	606478	6/20/2019	Cracks or Fractures	60.00	Moderate Cracking	
H17-3036-H17-3034	606478	6/20/2019	Break or Failure	30.00	Hole Soil Visible	
M15-1004-M15-1003	607753	10/21/2020	Roots	50.00	Medium	ROOTS IN THE JOINT AT 114
G16-4098-G16-4002	606800	10/2/2019	Belly or Sag	80.00	Minor (<10%)	
G16-4012-G16-4011	606784	9/30/2019	Roots	80.00	Light	ROOTS IN MANHOLE G16-4012 COMING IN FROM THE RING AND ALSO IN THE SAND COLLAR
H17-1024-H17-1023	607438	7/30/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1087-L17-1086	607887	1/8/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1087-L17-1086	607887	1/8/2021	Belly or Sag	80.00	Minor (<10%)	
L17-1057-L17-1063	607963	2/4/2021	Roots	80.00	Light	LIGHT ROOTS IN THE TOP OF THE PIPE AT 125 FT
L17-1057-L17-1063	607963	2/4/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1057-L17-1063	607963	2/4/2021	Belly or Sag	80.00	Minor (<10%)	
G16-4089-G16-4088	606671	8/7/2019	Belly or Sag	80.00	Minor (<10%)	
G16-4107-G16-4106	606792	10/1/2019	Obstruction or Intrusion	60.00	Moderate	
J16-1017-J16-1016	607018	1/24/2020	Roots	50.00	Medium	ROOTS IN THE SAND COLLARS
G16-4102-G16-4100	606770	9/16/2019	Obstruction or Intrusion	0.00	Severe or Impassable	
G16-4102-G16-4100	606770	9/16/2019	Belly or Sag	80.00	Minor (<10%)	
G16-4102-G16-4100	606770	9/16/2019	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
J16-1085-J16-1012	607026	2/6/2020	Belly or Sag	40.00	Severe (>30%)	
G15-3015-G15-3016	605996	12/26/2018	Belly or Sag	80.00	Minor (<10%)	
					1	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J17-1015-J17-2048	607528	8/24/2020	Break or Failure	30.00	Hole Soil Visible	
G16-3017-G16-3016	606230	1/16/2019	Inflow and Infiltration	40.00	Gushing or Spurting	
K18-Cap-K18-3055	604836	8/28/2017	Inflow and Infiltration	90.00	Stain, Possible I&I	
G15-3016-G15-3017	605997	11/13/2018	Belly or Sag	80.00	Minor (<10%)	
L17-1089C-L17-1086	607888	1/11/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
K18-3033-L18-4045	607954	2/3/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
H15-4038-H15-4037	606125	2/8/2019	Roots	80.00	Light	Roots in side service connections at 7 feet from upper m/h
G16-4017-G16-4009	606782	9/30/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-1023-H17-1022	607440	7/30/2020	Roots	80.00	Light	ROOTS SAND COLLAR H17-1022
G21-2025-G21-2024	605402	5/17/2018	Inflow and Infiltration	90.00	Stain, Possible I&I	
G21-2025-G21-2024	605402	5/17/2018	Cracks or Fractures	80.00	Minor Cracking	
L17-1017-L17-1016	607907	1/13/2021	Inflow and Infiltration	60.00	Running or Trickling	
J16-4002-J16-4001	606636	7/31/2019	Roots	80.00	Light	ROOTS AT 283 DOWN STREAM
L14-3015-L14-3014	607704	10/13/2020	Roots	50.00	Medium	ROOTS IN THE SAND COLLAR OF MANHOLE L14-3014
L18-4037-L18-4071	607959	2/3/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L18-4037-L18-4071	607959	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
K18-3016-K18-3106	606202	3/4/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-3016-K18-3106	606202	3/4/2019	Lining or Repair Failure	80.00	Minor	
K18-3016-K18-3106	606202	3/4/2019	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
H16-2032-H16-2033	606871	11/19/2019	Belly or Sag	80.00	Minor (<10%)	
L17-1007-L17-1006	607922	1/22/2021	Belly or Sag	80.00	Minor (<10%)	
A28-2014-A28-2013	607193	3/17/2020	Roots	0.00	Blockage	ROOTS IN THE LATERAL WITH A BLOCKAGE AT 149FT. ALSO IN THE MANHOLE A28-2013
G16-3048-G16-3047	606678	8/12/2019	Obstruction or Intrusion	80.00	Minor	
G16-3048-G16-3047	606678	8/12/2019	Cracks or Fractures	80.00	Minor Cracking	
J16-2004-J16-2003	605900	9/25/2018	Belly or Sag	80.00	Minor (<10%)	
H17-1017-H17-1013	607389	7/22/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-4086-G16-4084	606748	9/12/2019	Belly or Sag	80.00	Minor (<10%)	
H16-2094C-H16-2012	606493	6/24/2019	Roots	80.00	Light	ROOTS IN LATERAL CONNECTION
H16-2094C-H16-2012	606493	6/24/2019	Cracks or Fractures	80.00	Minor Cracking	
A28-2026-A28-2010	607148	3/3/2020	Roots	50.00	Medium	ROOTS IN ALMOST EVERY JOINT, AT THE T3 AT 96 FT THERE IS A LARGE ROOT BALL BLOCKING THE CONNECTION
A28-2026-A28-2010	607148	3/3/2020	Cracks or Fractures	80.00	Minor Cracking	
H15-4036-H15-4035	606117	2/7/2019	Roots	80.00	Light	Roots in both sand collars
H16-2009-H16-2010	606485	6/20/2019	Inflow and Infiltration	60.00	Running or Trickling	
H16-2009-H16-2010	606485	6/20/2019	Cracks or Fractures	80.00	Minor Cracking	
H16-2086-H16-2083	607114	2/24/2020	Inflow and Infiltration	80.00	Weeping or Dripping	
H17-1008-H17-1007	607434	7/30/2020	Roots	80.00	Light	ROOTS AT SAND COLLAR IN FLOW H171007
H17-1008-H17-1007	607434	7/30/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-1008-H17-1007	607434	7/30/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-1003-H17-1002	607577	8/31/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-4004-H17-4003	606808	10/3/2019	Roots	50.00	Medium	ROOTS IN M/H H17-4004 AT THE SAND COLLAR
H17-3037-H17-3030	606457	6/13/2019	Obstruction or Intrusion	0.00	Severe or Impassable	
G21-2012-H21-1003	605406	5/17/2018	Inflow and Infiltration	90.00	Stain, Possible I&I	
G21-2012-H21-1003	605406	5/17/2018	Obstruction or Intrusion	80.00	Minor	
G21-2012-H21-1003	605406	5/17/2018	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L15-2008-L15-2009	607695	10/12/2020	Roots	80.00	Light	ROOTS AT THE LATERAL NOT BLOCKING
M18-4027-M18-4026	607870	1/4/2021	Roots	30.00	Heavy	HEAVY ROOTS IN MANHOLE M18- 4027
B28-4022-B28-4021	607241	5/26/2020	Lining or Repair Failure	80.00	Minor	
J16-4022-J16-4023	607131	2/26/2020	Inflow and Infiltration	80.00	Weeping or Dripping	
J16-4022-J16-4023	607131	2/26/2020	Worn Surface	60.00	Moderate	
J16-4022-J16-4023	607131	2/26/2020	Lining or Repair Failure	60.00	Moderate	
L17-1098-L17-1065	607960	2/4/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-3025-H16-3023	606930	1/6/2020	Belly or Sag	60.00	Moderate (10 to 30%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-4031-G16-4029	606749	9/12/2019	Belly or Sag	80.00	Minor (<10%)	
H16-3023-H16-3016	606935	1/6/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
H16-3023-H16-3016	606935	1/6/2020	Belly or Sag	80.00	Minor (<10%)	
J19-3109-J19-3108	607997	3/1/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
H16-2072-H16-2070	606509	6/26/2019	Roots	0.00	Blockage	ROOTS IN H16-2070 BLOCKING ENTANCE AND EXIT
J17-4021-J17-4020	607473	8/12/2020	Inflow and Infiltration	80.00	Weeping or Dripping	
J17-2025-J17-2024	607493	8/17/2020	Roots	80.00	Light	J17-2024 WALL
J16-1009-J16-1007	607040	2/10/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-1013-H17-1012	607390	7/22/2020	Belly or Sag	80.00	Minor (<10%)	
H16-1021-H16-1020	606568	7/8/2019	Belly or Sag	40.00	Severe (>30%)	
H17-2008-H17-2009	606559	7/8/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-2009-LS-37	606563	7/8/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-1018-H17-1017	607386	7/22/2020	Cracks or Fractures	80.00	Minor Cracking	
L17-1055-L17-1096	606600	7/22/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1055-L17-1096	606600	7/22/2019	Worn Surface	80.00	Minor	
L17-1055-L17-1096	606600	7/22/2019	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1055-L17-1096	606600	7/22/2019	Cracks or Fractures	80.00	Minor Cracking	
L17-1055-L17-1096	606600	7/22/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J17-2024-J17-2023	607483	8/17/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1052-L17-1050	606604	7/23/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1052-L17-1050	606604	7/23/2019	Worn Surface	80.00	Minor	
L17-1052-L17-1050	606604	7/23/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1052-L17-1050	606604	7/23/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G21-2015-G21-2014	605495	7/2/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
J16-4007-J16-4027	606653	8/5/2019	Roots	30.00	Heavy	RE TV AFTER ROOT CUT STILL NEEDS MORE CUTTING
G15-2011-G15-2010	606084	2/1/2019	Obstruction or Intrusion	80.00	Minor	
G15-3036-G15-3012	606069	1/30/2019	Roots	0.00	Blockage	Roots in M/H and sand collar
J16-1019-J16-1016	607014	1/24/2020	Roots	50.00	Medium	ROOTS IN THE SAND COLLAR OF M/H J16-1016
H16-2004-H16-2005	606421	6/6/2019	Roots	30.00	Heavy	ROOTS THROUGH OUT THE LINE

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H16-2004-H16-2005	606421	6/6/2019	Belly or Sag	80.00	Minor (<10%)	
M18-4004-M18-4003	607871	1/5/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-3069-G16-3068	606235	1/16/2019	Roots	30.00	Heavy	ROOTS AT EVERY SIDE SERVICE TREAT WHOLE PIPE
G16-3069-G16-3068	606235	1/16/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-3069-G16-3068	606235	1/16/2019	Cracks or Fractures	80.00	Minor Cracking	
G16-3068-G16-3012	606234	1/16/2019	Roots	50.00	Medium	ROOTS IN UPPER AND LOWER MANHOLE
G16-3068-G16-3012	606234	1/16/2019	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4100-G16-4099	606797	10/1/2019	Roots	50.00	Medium	ROOTS IN THE MANHOLE SECTION JOINTS OF G16-4099
H16-2098-H16-2078	607121	2/25/2020	Roots	50.00	Medium	ROOTS IN BOTH MANHOLE H16- 2098 AND 2078
H16-2098-H16-2078	607121	2/25/2020	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-4018C-L17-4004	607893	1/11/2021	Belly or Sag	80.00	Minor (<10%)	
L17-4018C-L17-4004	607893	1/11/2021	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
J16-4027-J16-4006	606654	8/5/2019	Roots	30.00	Heavy	ROOTS 34 FEET FROM THE TOP WILL CUT SIDE SERVICE 8/6/19
H17-2010-LS-37	606562	7/8/2019	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
G15-3008-G15-3007	606256	4/17/2019	Worn Surface	80.00	Minor	
L18-3049-L18-3003	607786	10/27/2020	Belly or Sag	80.00	Minor (<10%)	
J16-4005-J16-4004	606629	7/30/2019	Roots	50.00	Medium	ROOTS AT 35, 273, 275 AND 283 AND 289
J16-4005-J16-4004	606629	7/30/2019	Cracks or Fractures	80.00	Minor Cracking	
J16-4005-J16-4004	606629	7/30/2019	Break or Failure	15.00	Hole Void Visible	
L17-1033-L17-1032	607899	1/12/2021	Roots	80.00	Light	ROOTS JUST INSIDE THE SAND COLLAR OF MANHOLE L17-1032
G15-2020-G15-2019	606257	4/17/2019	Roots	80.00	Light	From top end, 100'
H16-2087-H16-2086	607115	2/24/2020	Inflow and Infiltration	80.00	Weeping or Dripping	
H17-3076-H16-2017	606534	6/27/2019	Inflow and Infiltration	80.00	Weeping or Dripping	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H17-3076-H16-2017	606534	6/27/2019	Break or Failure	15.00	Hole Void Visible	
G16-2034-G16-2009	606309	1/16/2019	Roots	50.00	Medium	ROOTS IN THE MANHOLE SAND COLLAR AT G16-2034
H15-2003-H15-2032	607110	2/21/2020	Inflow and Infiltration	60.00	Running or Trickling	
H16-2012-H16-2011	606491	6/24/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L17-1078-L17-1077	607916	1/21/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1054-L17-1053	606602	7/22/2019	Inflow and Infiltration	60.00	Running or Trickling	
L17-1054-L17-1053	606602	7/22/2019	Worn Surface	80.00	Minor	
L17-1054-L17-1053	606602	7/22/2019	Belly or Sag	40.00	Severe (>30%)	
L17-1054-L17-1053	606602	7/22/2019	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J16-1041-J16-1044	606612	7/29/2019	Roots	30.00	Heavy	ROOTS AT 1 FT 16 FT AND 73 FT
J16-1041-J16-1044	606612	7/29/2019	Cracks or Fractures	80.00	Minor Cracking	
J11-3039-J11-3037	605984	12/20/2018	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3039-J11-3037	605984	12/20/2018	Cracks or Fractures	80.00	Minor Cracking	
J20-3075-J20-3074	607620	9/29/2020	Roots	50.00	Medium	M/H J20-3074 IN THE SAND COLLAR
J16-1073C-J16-1072	607043	2/11/2020	Cracks or Fractures	80.00	Minor Cracking	
H17-1033-H17-1032	607399	7/27/2020	Belly or Sag	80.00	Minor (<10%)	
G15-3011-G15-3010	606072	1/30/2019	Roots	50.00	Medium	Roots the wall at G15-3011
J16-1055-J16-1054	606576	7/8/2019	Belly or Sag	80.00	Minor (<10%)	
L17-1015-L17-1081	607909	1/14/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-1048-H17-1011	607393	7/23/2020	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-1048-H17-1011	607393	7/23/2020	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H17-1012-H17-1011	607392	7/23/2020	Break or Failure	30.00	Hole Soil Visible	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
K18-4053-K18-4007	609006	2/3/2022	Roots	50.00	Medium	ROOTS IN STRUCTURE K18-4007
G21-2027-G21-2026	609874	11/8/2022	Cracks or Fractures	80.00	Minor Cracking	
G21-2027-G21-2026	609874	11/8/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
J20-2002-J20-2001	608801	11/15/2021	Roots	80.00	Light	IN STRUCTURE 2002 AROUND OUTFLOW PIPE
D10-2001-D10-1027	609741	10/4/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1017-L17-1016	607907	1/13/2021	Inflow and Infiltration	60.00	Running or Trickling	
D23-2046-D23-2042	608186	5/3/2021	Cracks or Fractures	80.00	Minor Cracking	
D23-2057-D23-2056	608134	4/12/2021	Belly or Sag	80.00	Minor (<10%)	
L18-4071-L17-1058	609532	7/17/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
D10-2057-D10-2056	609510	7/6/2022	Cracks or Fractures	80.00	Minor Cracking	
G16-4102-G16-4100	610145	1/18/2023	Obstruction or Intrusion	60.00	Moderate	
H15-4010-H15-4009	610595	8/3/2023	Break or Failure	15.00	Hole Void Visible	
L17-1026-L17-1022	607902	1/12/2021	Inflow and Infiltration	40.00	Gushing or Spurting	
D23-3049-D23-3032	608201	5/4/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
M18-4021-M18-4014	607864	1/4/2021	Belly or Sag	80.00	Minor (<10%)	
L17-1015-L17-1081	607909	1/14/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-2026-J11-3032	608321	5/20/2021	Roots	50.00	Medium	ROOTS AT 15, 27, 29, 36, 45, 55
H16-4003-H16-4002	610359	4/4/2023	Belly or Sag	80.00	Minor (<10%)	
H17-3060-H17-3059	611089	12/28/2023	Roots	80.00	Light	H17-3059
J11-3099-J11-3051	608388	6/10/2021	Obstruction or Intrusion	80.00	Minor	
J11-3099-J11-3051	608388	6/10/2021	Cracks or Fractures	80.00	Minor Cracking	
D10-2054-D10-2053	609507	7/6/2022	Roots	80.00	Light	D10-2053
D10-2054-D10-2053	609507	7/6/2022	Inflow and Infiltration	60.00	Running or Trickling	
J11-3106-J11-3072	608426	7/1/2021	Obstruction or Intrusion	80.00	Minor	
J11-3106-J11-3072	608426	7/1/2021	Cracks or Fractures	80.00	Minor Cracking	
G15-3036-G15-3012	610466	5/8/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4015-G16-4013	610128	1/17/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-2047C-G16-2004	610448	5/3/2023	Roots	50.00	Medium	
K18-3017-K18-3016	609323	4/27/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
L19-4009-L19-4008	610228	2/6/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1035-L17-4004	607892	1/11/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
G15-3014-G15-3051	610256	3/8/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J19-3109-J19-3108	607997	3/1/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4058-G16-4057	610146	1/19/2023	Obstruction or Intrusion	80.00	Minor	
G16-4058-G16-4057	610146	1/19/2023	Cracks or Fractures	60.00	Moderate Cracking	
G15-2019-G15-2018	610393	4/12/2023	Inflow and Infiltration	60.00	Running or Trickling	
D10-2053-D10-2052	609501	6/30/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
D10-2053-D10-2052	609501	6/30/2022	Belly or Sag	80.00	Minor (<10%)	
J18-3040-J18-3038	608205	5/5/2021	Roots	50.00	Medium	ROOTS IN STRUCTURE 3038
L17-1010C-L17-1009	608758	10/22/2021	Cracks or Fractures	80.00	Minor Cracking	
D23-2078-D23-2077	608082	3/24/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-3078-J11-3107	608403	6/22/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3078-J11-3107	608403	6/22/2021	Roots	50.00	Medium	VARIOUS JOINTS THROUGHOUT MAINLINE.
J11-3078-J11-3107	608403	6/22/2021	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
J11-3078-J11-3107	608403	6/22/2021	Belly or Sag	80.00	Minor (<10%)	
J11-3056-J11-3055	608457	7/13/2021	Roots	80.00	Light	
J11-3068-J11-3067	608405	6/22/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-3068-J11-3067	608405	6/22/2021	Break or Failure	30.00	Hole Soil Visible	
J11-3068-J11-3067	608405	6/22/2021	Worn Surface	80.00	Minor	
K18-3069-K18-3002	609352	5/4/2022	Obstruction or Intrusion	80.00	Minor	
F16-3018-F16-3041	610038	12/6/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-3057-H17-3056	611072	12/27/2023	Cracks or Fractures	80.00	Minor Cracking	
H17-3057-H17-3056	611072	12/27/2023	Roots	80.00	Light	
H17-3057-H17-3056	611072	12/27/2023	Worn Surface	80.00	Minor	
H16-1062-H16-1033	610457	5/5/2023	Roots	50.00	Medium	ROOTS AT LATERALS
H16-1062-H16-1033	610457	5/5/2023	Cracks or Fractures	80.00	Minor Cracking	
D23-3032-D23-3031	608223	5/6/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
K19-1064-K19-1063	609243	4/13/2022	Roots	50.00	Medium	IN DOWNSTREAM STRUCTURE K19- 1063
G16-3057-LS-31	610559	7/20/2023	Belly or Sag	80.00	Minor (<10%)	
G21-2024-G21-2023	609877	11/8/2022	Cracks or Fractures	80.00	Minor Cracking	
D11-4024-D11-4023	609696	9/12/2022	Belly or Sag	80.00	Minor (<10%)	
D11-4024-D11-4023	609696	9/12/2022	Roots	80.00	Light	D11-4024 ROOTS IN MH

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
E23-1006-E23-1005	608087	3/29/2021	Roots	50.00	Medium	SAND COLLAR AND WALL 0F E23- 1005
K18-2011-K18-2008	609569	7/20/2022	Inflow and Infiltration	60.00	Running or Trickling	
L17-1078-L17-1077	607916	1/21/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-3063-J11-3058	608525	8/3/2021	Roots	80.00	Light	ON ROOTS LIST
D23-1019-D23-1003	608166	4/27/2021	Roots	80.00	Light	
D23-1019-D23-1003	608166	4/27/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-3071-J11-3070	608425	7/1/2021	Roots	80.00	Light	ROOTS AT JOINTS 120'-150', 172'- 190', 201', 218'-222' JOINTS
J11-3071-J11-3070	608425	7/1/2021	Break or Failure	30.00	Hole Soil Visible	
J11-3071-J11-3070	608425	7/1/2021	Worn Surface	80.00	Minor	
H15-4036-H15-4035	610513	6/29/2023	Belly or Sag	80.00	Minor (<10%)	
J11-3050-J11-3048	608485	7/20/2021	Roots	80.00	Light	
D11-4061-D11-4060	609618	8/9/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-1020-D23-1019	608156	4/20/2021	Roots	80.00	Light	
J16-4027-J16-4006	610933	12/1/2023	Cracks or Fractures	60.00	Moderate Cracking	
J16-4027-J16-4006	610933	12/1/2023	Roots	80.00	Light	ROOTS IN LATERAL AND JOINTS
J16-4027-J16-4006	610933	12/1/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
J19-2012-J19-2011	607941	2/2/2021	Belly or Sag	80.00	Minor (<10%)	
H17-3052-H17-3051	611060	12/20/2023	Break or Failure	30.00	Hole Soil Visible	
H16-3110-H16-3109	610777	9/13/2023	Belly or Sag	80.00	Minor (<10%)	
K18-2027-K18-2025	608890	12/23/2021	Inflow and Infiltration	60.00	Running or Trickling	
D23-2018-D23-2017	608127	4/8/2021	Roots	50.00	Medium	ROOTS AT 23FT ,34 FT, 201FT, 220FT, 257FT 264FT
L17-1006-L17-1005	608725	10/18/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L17-1006-L17-1005	608725	10/18/2021	Belly or Sag	80.00	Minor (<10%)	
H16-2004-H16-2005	611006	12/13/2023	Roots	50.00	Medium	ROOTS IN A COUPLE JOINTS AND LATERAL CONNECTIONS
D23-2093-D23-2090	608061	3/18/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-4023-J11-4026	608465	7/19/2021	Belly or Sag	80.00	Minor (<10%)	
K18-2005-K18-2004	609354	5/4/2022	Roots	80.00	Light	K18-2004 ROOTS STARTING TO GROW IN MH

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
F16-3029-F16-3027	610018	12/1/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
K18-3058-K18-3057	608731	10/19/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G15-3013-G15-3012	610258	3/8/2023	Roots	30.00	Heavy	DONWSTEAM MAN STRUCTURE
G21-2012-H21-1003	609880	11/8/2022	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
L17-1059-L17-1058	609433	6/13/2022	Inflow and Infiltration	40.00	Gushing or Spurting	
G16-1017-G16-1016	610435	4/27/2023	Roots	30.00	Heavy	
L18-4037-L18-4071	607959	2/3/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L18-4037-L18-4071	607959	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
H16-2021-H16-2010	611005	12/13/2023	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
H16-2021-H16-2010	611005	12/13/2023	Obstruction or Intrusion	80.00	Minor	
H16-2021-H16-2010	611005	12/13/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
H16-2021-H16-2010	611005	12/13/2023	Cracks or Fractures	40.00	Severe Cracking	
K20-4021-K19-1045	609376	5/24/2022	Roots	80.00	Light	K20-4016 ROOTS AT INFLOW SAND COLLAR
K19-1029-K19-1028	609062	2/15/2022	Roots	80.00	Light	
G16-4016-G16-4015	610117	1/11/2023	Inflow and Infiltration	60.00	Running or Trickling	
G16-4016-G16-4015	610117	1/11/2023	Break or Failure	30.00	Hole Soil Visible	
H17-3021-H17-3018	611067	12/26/2023	Roots	80.00	Light	
J11-3042-J11-3096	608446	7/8/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3042-J11-3096	608446	7/8/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-3042-J11-3096	608446	7/8/2021	Roots	80.00	Light	
J11-3042-J11-3096	608446	7/8/2021	Cracks or Fractures	80.00	Minor Cracking	
J19-2009-J19-2008	609516	7/12/2022	Roots	80.00	Light	J19-2009-J19-2008 IN STRUCTUREREQUIRE ROOTX
J20-2007-J20-2006	608792	11/15/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-3073-J11-3106	608427	7/1/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3073-J11-3106	608427	7/1/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
D10-2047-D10-2043	609505	7/6/2022	Roots	80.00	Light	D10-2047
G16-4112-G16-4111	610152	1/19/2023	Inflow and Infiltration	60.00	Running or Trickling	
G16-4112-G16-4111	610152	1/19/2023	Roots	50.00	Medium	roots sticking through patch
G16-4112-G16-4111	610152	1/19/2023	Lining or Repair Failure	60.00	Moderate	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-4112-G16-4111	610152	1/19/2023	Cracks or Fractures	40.00	Severe Cracking	
M18-4027-M18-4026	607870	1/4/2021	Roots	30.00	Heavy	HEAVY ROOTS IN MANHOLE M18- 4027
K18-2029-K18-2028	608867	12/20/2021	Belly or Sag	80.00	Minor (<10%)	
J19-2080C-J19-2056	608816	11/30/2021	Lining or Repair Failure	80.00	Minor	
K10-1075-K10-1030	608258	5/11/2021	Roots	80.00	Light	
H15-4001-H15-1016	610519	7/6/2023	Roots	30.00	Heavy	HEAVY ROOTS IN UPSTREAM STRUCTURE H15-4001
H15-4001-H15-1016	610519	7/6/2023	Belly or Sag	80.00	Minor (<10%)	
G21-2039-G21-2001	609904	11/14/2022	Obstruction or Intrusion	0.00	Severe or Impassable	
D23-2013-D23-2012	608179	5/3/2021	Roots	80.00	Light	LIGHT ROOTS AT 80' LATRECOMMENDING ROOT TREATMENT
D23-1017-D23-1016	608152	4/15/2021	Roots	50.00	Medium	ROOTS AT 27 FT FROM UPPER M/H
D11-1008-D11-1007	609675	9/1/2022	Roots	80.00	Light	@126" AT LATERAL CONNECTION, RECOMMEND FOAMADDED TO ROOT TREATMENT LIST 9-1-22
K10-1033-K10-1032	608253	5/11/2021	Cracks or Fractures	80.00	Minor Cracking	
D10-1034-D10-1033	609628	8/15/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
D11-4022-D11-4021	609698	9/12/2022	Obstruction or Intrusion	80.00	Minor	
G16-1050-G16-1046	610201	1/27/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
J18-3054-J18-3053	609367	5/23/2022	Roots	30.00	Heavy	J18-3053: ROOTS IN STRUCTURE JOINT
G16-3010-G16-3073	610275	3/13/2023	Roots	50.00	Medium	
D10-2002-D10-2001	609629	8/15/2022	Worn Surface	40.00	Severe	
L17-1087-L17-1086	607887	1/8/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1087-L17-1086	607887	1/8/2021	Belly or Sag	80.00	Minor (<10%)	
G16-4022-G16-4125	610110	1/9/2023	Cracks or Fractures	60.00	Moderate Cracking	
G16-4022-G16-4125	610110	1/9/2023	Inflow and Infiltration	60.00	Running or Trickling	
J11-4021-J11-4022	608467	7/19/2021	Belly or Sag	80.00	Minor (<10%)	
K19-4013-K19-4012	609038	2/9/2022	Roots	50.00	Medium	K19-4013- ROOTS IN SAND COLLAR JOINT
H16-3022-H16-3016	610839	9/28/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H16-1034C-H16-1062	610455	5/5/2023	Roots	0.00	Blockage	
H16-1034C-H16-1062	610455	5/5/2023	Obstruction or Intrusion	0.00	Severe or Impassable	
H16-1034C-H16-1062	610455	5/5/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
K18-4027-K18-4026	609319	4/27/2022	Break or Failure	15.00	Hole Void Visible	
J16-4007-J16-4027	610932	12/1/2023	Cracks or Fractures	80.00	Minor Cracking	
J11-3024-J11-3023	608332	5/26/2021	Roots	50.00	Medium	ROOTS IN LATERAL AT 22.6FT IN THE RIGHT OF WAY
J16-1040-J16-1041	610919	11/29/2023	Roots	80.00	Light	J16-1041 ROOTS IN MANHOLE
G21-2022-G21-2021	609893	11/10/2022	Roots	50.00	Medium	
J18-2080-J18-2087	609251	4/14/2022	Roots	30.00	Heavy	SEVERE ROOTS IN LATERAL AT 26 FEET UPSTREAM
L17-3009-L17-3008	609106	3/2/2022	Belly or Sag	80.00	Minor (<10%)	
L17-3009-L17-3008	609106	3/2/2022	Roots	80.00	Light	IN LATERAL JOINT
K18-3024-K18-3014	609360	5/6/2022	Cracks or Fractures	80.00	Minor Cracking	
K18-3024-K18-3014	609360	5/6/2022	Roots	80.00	Light	K18-3024 ROOTS THROUGH OUT. ROOTS GROWING THROUGH INFLOW SAND COLLAR
K18-4040-K18-4002	608906	1/4/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
H16-1006-H16-1005	610282	3/16/2023	Obstruction or Intrusion	60.00	Moderate	
D23-2019-D23-2018	608126	4/8/2021	Roots	50.00	Medium	ROOTS AT 15 AND 51 FT FROM LOWER M/H
C11-2006-C11-2004	609604	8/2/2022	Belly or Sag	80.00	Minor (<10%)	
K19-1061-K19-1060	609247	4/13/2022	Belly or Sag	80.00	Minor (<10%)	
K18-4074-K18-4073	609351	5/4/2022	Cracks or Fractures	80.00	Minor Cracking	
J16-1017-J16-1016	610629	8/9/2023	Roots	80.00	Light	ROOTS IN DOWN STREAM MANHOLE J16-1016 AROUND THE END OF THE PIPE
J19-2083-J19-2082	607945	2/2/2021	Roots	50.00	Medium	
H17-3022-H17-3021	611068	12/26/2023	Belly or Sag	80.00	Minor (<10%)	
H17-3022-H17-3021	611068	12/26/2023	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
K19-1006-K19-1005	609121	3/9/2022	Roots	50.00	Medium	ROOTS IN UPSTREAM STRUCTURE K19-1006

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G15-3038-G15-3037	610260	3/9/2023	Roots	80.00	Light	G15-3038- ROOTS IN STRUCTURE JOINT
J18-2047-J18-2046	608972	1/28/2022	Roots	80.00	Light	IN UPSTREAM STRUCTURE J18- 2047
D23-2058-D23-2057	608133	4/12/2021	Inflow and Infiltration	60.00	Running or Trickling	
D23-2058-D23-2057	608133	4/12/2021	Roots	80.00	Light	
D23-2058-D23-2057	608133	4/12/2021	Cracks or Fractures	80.00	Minor Cracking	
M18-2014-M18-2013	610236	3/2/2023	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
M18-2014-M18-2013	610236	3/2/2023	Belly or Sag	80.00	Minor (<10%)	
H16-3023-H16-3016	610830	9/27/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-3047C-J11-3045	608439	7/6/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J11-3047C-J11-3045	608439	7/6/2021	Belly or Sag	80.00	Minor (<10%)	
J11-3047C-J11-3045	608439	7/6/2021	Cracks or Fractures	80.00	Minor Cracking	
J19-3003-J19-3002	608551	8/16/2021	Roots	80.00	Light	WALL AND SAND COLLAR J19-3002
K18-4003-K18-3094	609542	7/18/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
M18-4004-M18-4003	607871	1/5/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
G16-3093-G16-3027	610426	4/26/2023	Cracks or Fractures	60.00	Moderate Cracking	
C11-3012-LS-47	609821	10/19/2022	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
C11-3012-LS-47	609821	10/19/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
H15-4008-H15-4007	610594	8/3/2023	Roots	50.00	Medium	H15-4007 ROOTS
C11-2014-C11-2013	609738	10/4/2022	Worn Surface	80.00	Minor	
C11-2014-C11-2013	609738	10/4/2022	Obstruction or Intrusion	80.00	Minor	
C11-2014-C11-2013	609738	10/4/2022	Belly or Sag	80.00	Minor (<10%)	
K10-1006-K10-1005	608340	5/27/2021	Belly or Sag	80.00	Minor (<10%)	
K10-1006-K10-1005	608340	5/27/2021	Inflow and Infiltration	60.00	Running or Trickling	
H16-2008-H16-2009	611010	12/13/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-1022-G16-1021	610489	5/30/2023	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-2016-K18-2015	609342	5/3/2022	Inflow and Infiltration	60.00	Running or Trickling	
K18-3011-K18-3010	609537	7/18/2022	Obstruction or Intrusion	80.00	Minor	
K19-1026-K19-1025	609060	2/15/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
J19-3040-J19-3039	608538	8/10/2021	Break or Failure	15.00	Hole Void Visible	
J19-3040-J19-3039	608538	8/10/2021	Obstruction or Intrusion	60.00	Moderate	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
K18-4059-K18-4058	609300	4/25/2022	Cracks or Fractures	80.00	Minor Cracking	
G18-4001-LS-9	608163	4/22/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
G18-4001-LS-9	608163	4/22/2021	Belly or Sag	80.00	Minor (<10%)	
K18-2037-K18-2036	609341	5/3/2022	Roots	80.00	Light	K18-2036 MINOR ROOT INTRUSION IN STRUCTURE NEAR TOP
H16-2017-H16-2016	611030	12/18/2023	Cracks or Fractures	80.00	Minor Cracking	
H16-2017-H16-2016	611030	12/18/2023	Break or Failure	30.00	Hole Soil Visible	
J11-2022-J11-2040	608533	8/5/2021	Cracks or Fractures	80.00	Minor Cracking	
H15-4011-H15-4010	610596	8/3/2023	Obstruction or Intrusion	0.00	Severe or Impassable	
J11-3062-J11-3103	608420	6/28/2021	Roots	50.00	Medium	ROOT CUT WHOLE LINE
J11-3053-J11-3051	608484	7/20/2021	Belly or Sag	80.00	Minor (<10%)	
J11-3082-J11-3105	608381	6/10/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L17-1100-L17-1079	608759	10/22/2021	Inflow and Infiltration	60.00	Running or Trickling	
K18-4068-K18-4009	609349	5/4/2022	Cracks or Fractures	80.00	Minor Cracking	
D10-1026-D10-1025	609631	8/25/2022	Roots	80.00	Light	IN STRUCTURE D10-1025
H17-3076-H16-2017	611029	12/18/2023	Break or Failure	30.00	Hole Soil Visible	
H17-3076-H16-2017	611029	12/18/2023	Cracks or Fractures	60.00	Moderate Cracking	
H17-3076-H16-2017	611029	12/18/2023	Lining or Repair Failure	80.00	Minor	
K18-4090-K18-4010	608450	7/12/2021	Obstruction or Intrusion	80.00	Minor	
G16-3035-G16-3034	610414	4/21/2023	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L17-1007-L17-1006	607922	1/22/2021	Belly or Sag	80.00	Minor (<10%)	
G16-3026-G16-3025	610418	4/24/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
J19-3051-J19-3050	609003	2/3/2022	Roots	80.00	Light	J19-3051 ROOTS IN STRUCTURE
J19-2046-J19-2010	607937	2/1/2021	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF J19-2010
K18-4041-K18-4082	608904	1/4/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1092-L17-1076	607918	1/21/2021	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF L1'7-1092
D23-1018-D23-1017	608151	4/15/2021	Roots	50.00	Medium	ROOTS IN JOINT 107 FROM LOWER M/H
K18-3033-L18-4045	607954	2/3/2021	Belly or Sag	60.00	Moderate (10 to 30%)	

J20-3027-J20-3024   608840   12/9/2021   Roots   50.00   Medium   ROOTS IN DOWNSTREAM MANHOLE STRUCTURE	
120-2004-J20-2003   608800   11/15/2021   Belly or Sag   80.00   Minor (<10%)   H16-2016-H16-2015   611027   12/14/2023   Cracks or Fractures   80.00   Minor Cracking   H16-2016-H16-2015   611027   12/14/2023   Break or Failure   30.00   Hole Soil Visible   H16-2016-H16-2015   611027   12/14/2023   Break or Failure   30.00   Hole Soil Visible   H16-2089-H16-2088   611023   12/14/2023   Roots   80.00   Light   H16-2088   H16-2088   H16-2088   H16-2088   H16-2089-H16-2088   609739   10/4/2022   Inflow and Infiltration   80.00   Weeping or Dripping   H16-2088   H16-2088   H16-2013-C11-2008   609739   10/4/2022   Cracks or Fractures   80.00   Minor Cracking   H16-2088   H16-2088   H16-2088   H16-2088   H16-2013-C11-2008   H16-2013-C11-200	
H16-2016-H16-2015 611027 12/14/2023 Cracks or Fractures 80.00 Minor Cracking H16-2016-H16-2015 611027 12/14/2023 Break or Failure 30.00 Hole Soil Visible  D23-2107-D23-2156 608031 3/10/2021 Inflow and Infiltration 60.00 Running or Trickling H16-2089-H16-2088 611023 12/14/2023 Roots 80.00 Light H16-2088 C11-2013-C11-2008 609739 10/4/2022 Inflow and Infiltration 80.00 Weeping or Dripping C11-2013-C11-2008 609739 10/4/2022 Cracks or Fractures 80.00 Minor Cracking K19-4008-K19-4007 609043 2/10/2022 Inflow and Infiltration 60.00 Running or Trickling L18-4008-L18-4007 609293 4/22/2022 Cracks or Fractures 80.00 Minor Cracking D23-2054-D23-2053 608139 4/12/2021 Obstruction or Intrusion 60.00 Moderate D23-2054-D23-2053 608139 4/12/2021 Roots 30.00 Heavy CANNOT PROCEDE THROUGI ROOTS J11-2028-J11-2027 608460 7/14/2021 Belly or Sag 80.00 Minor (<10%) K19-1056-K19-1055 608959 1/24/2022 Inflow and Infiltration 60.00 Running or Trickling J11-3084-J11-3083 608377 6/9/2021 Cracks or Fractures 80.00 Minor Cracking J11-3094-J11-3014 608399 6/22/2021 Roots 80.00 Minor (<10th Minor Cracking 80.00 Minor Cracking 90.00 Minor Cr	
H16-2016-H16-2015 611027 12/14/2023 Break or Failure 30.00 Hole Soil Visible D23-2107-D23-2156 608031 3/10/2021 Inflow and Infiltration 60.00 Running or Trickling H16-2089-H16-2088 611023 12/14/2023 Roots 80.00 Light H16-2088 C11-2013-C11-2008 609739 10/4/2022 Inflow and Infiltration 80.00 Weeping or Dripping C11-2013-C11-2008 609739 10/4/2022 Cracks or Fractures 80.00 Minor Cracking K19-4008-K19-4007 609043 2/10/2022 Inflow and Infiltration 60.00 Running or Trickling Inflow and Infiltration 60.00 Minor Cracking Inflow and Infiltration 60.00 Minor Cracking Inflow and Infiltration 60.00 Minor Cracking Inflow and Infiltration 60.00 Moderate Inflow and Infiltration 60.00 Moderate Inflow In	
D23-2107-D23-2156   608031   3/10/2021   Inflow and Infiltration   60.00   Running or Trickling   H16-2088   H16-2088   611023   12/14/2023   Roots   80.00   Light   H16-2088   H16-2088   C11-2013-C11-2008   609739   10/4/2022   Inflow and Infiltration   80.00   Weeping or Dripping   C11-2013-C11-2008   609739   10/4/2022   Cracks or Fractures   80.00   Minor Cracking   K19-4008-K19-4007   609043   2/10/2022   Inflow and Infiltration   60.00   Running or Trickling   L18-4008-L18-4007   609293   4/22/2022   Cracks or Fractures   80.00   Minor Cracking   C13-2054-D23-2053   608139   4/12/2021   Obstruction or Intrusion   60.00   Moderate   C23-2054-D23-2053   608139   4/12/2021   Roots   30.00   Heavy   CANNOT PROCEDE THROUGH ROOTS   C11-2028-J11-2027   608460   7/14/2021   Belly or Sag   40.00   Severe (>30%)   K10-1016-K10-1006   608339   5/27/2021   Belly or Sag   80.00   Minor (<10%)   K19-1056-K19-1055   608959   1/24/2022   Inflow and Infiltration   60.00   Running or Trickling   J11-3084-J11-3083   608377   6/9/2021   Cracks or Fractures   80.00   Minor Cracking   J11-3084-J11-3083   608377   6/9/2021   Joint Separation or Offset   80.00   Minor (< Pipe Wall Thickness)   J11-3094-J11-3014   608399   6/22/2021   Roots   80.00   Light   @ LATERAL PIPE 5′:	
H16-2089-H16-2088 611023 12/14/2023 Roots 80.00 Light H16-2088  C11-2013-C11-2008 609739 10/4/2022 Inflow and Infiltration 80.00 Weeping or Dripping  C11-2013-C11-2008 609739 10/4/2022 Cracks or Fractures 80.00 Minor Cracking  K19-4008-K19-4007 609043 2/10/2022 Inflow and Infiltration 60.00 Running or Trickling  L18-4008-L18-4007 609293 4/22/2022 Cracks or Fractures 80.00 Minor Cracking  D23-2054-D23-2053 608139 4/12/2021 Obstruction or Intrusion 60.00 Moderate  D23-2054-D23-2053 608139 4/12/2021 Roots 30.00 Heavy CANNOT PROCEDE THROUGH ROOTS  J11-2028-J11-2027 608460 7/14/2021 Belly or Sag 40.00 Severe (>30%)  K10-1016-K10-1006 608339 5/27/2021 Belly or Sag 80.00 Minor (<10%)  K19-1056-K19-1055 608959 1/24/2022 Inflow and Infiltration 60.00 Running or Trickling  J11-3084-J11-3083 608377 6/9/2021 Cracks or Fractures 80.00 Minor ( <pippe 2021="" 22="" 5'.<="" 6="" 608399="" 80.00="" @="" j11-3094-j11-3014="" lateral="" light="" pipe="" roots="" td="" thickness)="" wall=""><td></td></pippe>	
C11-2013-C11-2008 609739 10/4/2022 Inflow and Infiltration 80.00 Weeping or Dripping C11-2013-C11-2008 609739 10/4/2022 Cracks or Fractures 80.00 Minor Cracking K19-4008-K19-4007 609043 2/10/2022 Inflow and Infiltration 60.00 Running or Trickling L18-4008-L18-4007 609293 4/22/2022 Cracks or Fractures 80.00 Minor Cracking D23-2054-D23-2053 608139 4/12/2021 Obstruction or Intrusion 60.00 Moderate D23-2054-D23-2053 608139 4/12/2021 Roots 30.00 Heavy CANNOT PROCEDE THROUGH ROOTS J11-2028-J11-2027 608460 7/14/2021 Belly or Sag 40.00 Severe (>30.00 Minor (<10%) K19-1056-K19-1055 608959 1/24/2022 Inflow and Infiltration 60.00 Running or Trickling J11-3084-J11-3083 608377 6/9/2021 Cracks or Fractures 80.00 Minor (< 10%) J11-3084-J11-3083 608377 6/9/2021 Joint Separation or Offset 80.00 Minor (< 10% Winor (< 10%) J11-3094-J11-3014 608399 6/22/2021 Roots 80.00 Light @ LATERAL PIPE 5'.	
C11-2013-C11-2008 609739 10/4/2022 Cracks or Fractures 80.00 Minor Cracking  K19-4008-K19-4007 609043 2/10/2022 Inflow and Infiltration 60.00 Running or Trickling  L18-4008-L18-4007 609293 4/22/2022 Cracks or Fractures 80.00 Minor Cracking  D23-2054-D23-2053 608139 4/12/2021 Obstruction or Intrusion 60.00 Moderate  D23-2054-D23-2053 608139 4/12/2021 Roots 30.00 Heavy CANNOT PROCEDE THROUGH ROOTS  J11-2028-J11-2027 608460 7/14/2021 Belly or Sag 40.00 Severe (>30%)  K10-1016-K10-1006 608339 5/27/2021 Belly or Sag 80.00 Minor (<10%)  K19-1056-K19-1055 608959 1/24/2022 Inflow and Infiltration 60.00 Running or Trickling  J11-3084-J11-3083 608377 6/9/2021 Joint Separation or Offset 80.00 Minor (< Pipe Wall Thickness)  J11-3094-J11-3014 608399 6/22/2021 Roots 80.00 Light @ LATERAL PIPE 5'.	
K19-4008-K19-4007   609043   2/10/2022   Inflow and Infiltration   60.00   Running or Trickling	
L18-4008-L18-4007 609293 4/22/2022 Cracks or Fractures 80.00 Minor Cracking  D23-2054-D23-2053 608139 4/12/2021 Obstruction or Intrusion 60.00 Moderate  D23-2054-D23-2053 608139 4/12/2021 Roots 30.00 Heavy CANNOT PROCEDE THROUGH ROOTS  J11-2028-J11-2027 608460 7/14/2021 Belly or Sag 40.00 Severe (>30%)  K10-1016-K10-1006 608339 5/27/2021 Belly or Sag 80.00 Minor (<10%)  K19-1056-K19-1055 608959 1/24/2022 Inflow and Infiltration 60.00 Running or Trickling  J11-3084-J11-3083 608377 6/9/2021 Cracks or Fractures 80.00 Minor Cracking  J11-3084-J11-3083 608377 6/9/2021 Joint Separation or Offset 80.00 Minor (< Pipe Wall Thickness)  J11-3094-J11-3014 608399 6/22/2021 Roots 80.00 Light @ LATERAL PIPE 5'.	
D23-2054-D23-2053   608139   4/12/2021   Roots   30.00   Heavy   CANNOT PROCEDE THROUGH ROOTS	
D23-2054-D23-2053         608139         4/12/2021         Roots         30.00         Heavy         CANNOT PROCEDE THROUGH ROOTS           J11-2028-J11-2027         608460         7/14/2021         Belly or Sag         40.00         Severe (>30%)           K10-1016-K10-1006         608339         5/27/2021         Belly or Sag         80.00         Minor (<10%)	
ROOTS   ROOT	
K10-1016-K10-1006       608339       5/27/2021       Belly or Sag       80.00       Minor (<10%)	1
K19-1056-K19-1055       608959       1/24/2022       Inflow and Infiltration       60.00       Running or Trickling         J11-3084-J11-3083       608377       6/9/2021       Cracks or Fractures       80.00       Minor Cracking         J11-3084-J11-3083       608377       6/9/2021       Joint Separation or Offset       80.00       Minor (< Pipe Wall Thickness)	
J11-3084-J11-3083         608377         6/9/2021         Cracks or Fractures         80.00         Minor Cracking           J11-3084-J11-3083         608377         6/9/2021         Joint Separation or Offset         80.00         Minor (< Pipe Wall Thickness)	
J11-3084-J11-3083         608377         6/9/2021         Joint Separation or Offset         80.00         Minor (< Pipe Wall Thickness)	
J11-3094-J11-3014 608399 6/22/2021 Roots 80.00 Light @ LATERAL PIPE 5'.	
K18-3004-K18-3003 609357 5/5/2022 Inflow and Infiltration 80.00 Weeping or Dripping	
L17-1064-L17-1063 607962 2/4/2021 Inflow and Infiltration 80.00 Weeping or Dripping	
D10-2052-D10-2051 609482 6/22/2022 Inflow and Infiltration 60.00 Running or Trickling	
L17-1034-L17-1033 607898 1/12/2021 Inflow and Infiltration 40.00 Gushing or Spurting	
B26-2028-B26-2027 610889 11/20/2023 Roots 80.00 Light ROOTS IN BOTH MANHOLES	
B26-2028-B26-2027 610889 11/20/2023 Obstruction or Intrusion 60.00 Moderate	
D10-1001-D11-4055 609614 8/8/2022 Belly or Sag 60.00 Moderate (10 to 30%)	
G16-2033-G16-2032 610394 4/12/2023 Roots 50.00 Medium	
G15-2008-G15-2002 610685 8/17/2023 Belly or Sag 80.00 Minor (<10%)	
J11-2024-J11-2023 608379 6/9/2021 Cracks or Fractures 80.00 Minor Cracking	
D23-2020-D23-2019 608116 4/6/2021 Roots 80.00 Light ROOTS IN SIDE SERVEVICE A	T 45.9
K19-1072-K19-1071 609417 6/7/2022 Belly or Sag 80.00 Minor (<10%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
K19-1072-K19-1071	609417	6/7/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
B26-2034-B26-2033	610883	11/20/2023	Obstruction or Intrusion	80.00	Minor	
J18-3058-J18-3054	609368	5/23/2022	Roots	30.00	Heavy	J18-3054: ROOTS IN STRUCTURE
H15-4002-H15-4001	610518	7/6/2023	Roots	30.00	Heavy	ROOTS IN DOWNSTREAM STRUCTURE H15-4001
K10-1024-K10-1023	608272	5/13/2021	Roots	80.00	Light	AT LATERAL CONNECTIONS109', 252.6'
K10-1024-K10-1023	608272	5/13/2021	Cracks or Fractures	80.00	Minor Cracking	
K10-1024-K10-1023	608272	5/13/2021	Break or Failure	30.00	Hole Soil Visible	
J11-3064-J11-3063	608384	6/10/2021	Worn Surface	80.00	Minor	
J11-3064-J11-3063	608384	6/10/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-2011-J11-2026	608320	5/20/2021	Roots	50.00	Medium	roots throughout the whole pipe
J11-3107-J11-3077	608477	7/20/2021	Roots	80.00	Light	SEE ROOTS LIST
J16-4028-H16-3042	610850	10/3/2023	Belly or Sag	80.00	Minor (<10%)	
K10-1053-K10-1005	608304	5/18/2021	Inflow and Infiltration	60.00	Running or Trickling	
K10-1053-K10-1005	608304	5/18/2021	Cracks or Fractures	80.00	Minor Cracking	
J16-4016C-J16-4015	610922	11/29/2023	Roots	80.00	Light	
J16-4016C-J16-4015	610922	11/29/2023	Cracks or Fractures	60.00	Moderate Cracking	
D23-2038-D23-2036	608189	5/4/2021	Cracks or Fractures	80.00	Minor Cracking	
D23-3038-D23-3037	608360	6/7/2021	Roots	50.00	Medium	D23-3038-D23-3037 ROOTS IN JOINT AT
K10-1041-J10-2005	608316	5/20/2021	Roots	50.00	Medium	ROOTS IN MANHOLE AND AT 12 FT
J11-3043-J11-3041	608437	7/6/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3043-J11-3041	608437	7/6/2021	Obstruction or Intrusion	80.00	Minor	
G16-4036-G16-4033	610143	1/18/2023	Roots	50.00	Medium	
K18-3003-K18-3002	609356	5/5/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
K18-3003-K18-3002	609356	5/5/2022	Obstruction or Intrusion	80.00	Minor	
H16-2007-H16-2008	611009	12/13/2023	Roots	50.00	Medium	PRETTY HEAVY ROOTS IN THE DROP AT THE END OF THIS PIPE
H16-2007-H16-2008	611009	12/13/2023	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
D11-4057-D11-4056	609621	8/15/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
D11-4009-D11-4008	609728	9/29/2022	Break or Failure	30.00	Hole Soil Visible	
D11-4009-D11-4008	609728	9/29/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
D11-4009-D11-4008	609728	9/29/2022	Cracks or Fractures	60.00	Moderate Cracking	
K18-2012-K18-2011	609572	7/20/2022	Inflow and Infiltration	60.00	Running or Trickling	
L17-1058-L17-1056	609533	7/18/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1058-L17-1056	609533	7/18/2022	Belly or Sag	80.00	Minor (<10%)	
J16-4013-J16-4012	610921	11/29/2023	Cracks or Fractures	60.00	Moderate Cracking	
J16-4013-J16-4012	610921	11/29/2023	Roots	50.00	Medium	
H17-3072C-H17-3038	609059	2/14/2022	Obstruction or Intrusion	0.00	Severe or Impassable	
K18-1008-K18-1007	609593	7/27/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4054-G16-4053	610150	1/19/2023	Roots	30.00	Heavy	G16-4053 HEAVY ROOTS IN MH
H16-3113-H16-3112	610760	9/11/2023	Belly or Sag	80.00	Minor (<10%)	
K18-3071-K18-3066	609099	3/1/2022	Obstruction or Intrusion	80.00	Minor	
H15-4016-H15-4013	610599	8/7/2023	Roots	50.00	Medium	IN STRUCTURE 4016, NEEDS ROOTX
G21-2014-G21-2002	609898	11/10/2022	Obstruction or Intrusion	60.00	Moderate	
G21-2014-G21-2002	609898	11/10/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
K19-4034C-K19-4030	609032	2/7/2022	Roots	80.00	Light	MINOR ROOT INTRUSION AT K19- 4034C
G15-3042-G15-3014	610255	3/8/2023	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J16-1033-J16-1032	610618	8/8/2023	Roots	80.00	Light	ROOTS IN STRUCTURE/MANHOLE
K18-3016-K18-3106	609325	4/28/2022	Cracks or Fractures	60.00	Moderate Cracking	
K18-3016-K18-3106	609325	4/28/2022	Break or Failure	15.00	Hole Void Visible	
K18-3016-K18-3106	609325	4/28/2022	Belly or Sag	40.00	Severe (>30%)	
K18-3016-K18-3106	609325	4/28/2022	Worn Surface	60.00	Moderate	
K19-1008-K19-1007	609473	6/17/2022	Roots	30.00	Heavy	K19-1008 HEAVY ROOTS K19-1007 MEDIUM ROOTS
D10-1013-D10-1012	609699	9/13/2022	Belly or Sag	80.00	Minor (<10%)	
D10-1013-D10-1012	609699	9/13/2022	Inflow and Infiltration	60.00	Running or Trickling	
D23-2036-D23-2001	608190	5/4/2021	Cracks or Fractures	80.00	Minor Cracking	
H17-3037-H17-3030	611040	12/19/2023	Obstruction or Intrusion	0.00	Severe or Impassable	
H17-3037-H17-3030	611040	12/19/2023	Break or Failure	15.00	Hole Void Visible	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H17-3037-H17-3030	611040	12/19/2023	Cracks or Fractures	60.00	Moderate Cracking	
H16-2023-H16-2021	611004	12/13/2023	Cracks or Fractures	60.00	Moderate Cracking	
H16-2023-H16-2021	611004	12/13/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
CAP-K18-3094	609544	7/18/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
L18-4060-L18-4001	608888	12/21/2021	Belly or Sag	80.00	Minor (<10%)	
J11-3045-J11-3043	608438	7/6/2021	Belly or Sag	80.00	Minor (<10%)	
J18-2015-K18-1020	609445	6/14/2022	Roots	50.00	Medium	K18-1020: ROOTS IN MH
J11-2017-J11-2014	608322	5/21/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-4088-K18-4087	609301	4/25/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
K18-4088-K18-4087	609301	4/25/2022	Belly or Sag	80.00	Minor (<10%)	
G21-2028-G21-2026	609872	11/7/2022	Belly or Sag	80.00	Minor (<10%)	
K20-4019-K20-4003	609374	5/24/2022	Roots	80.00	Light	K20-4019 ROOTS IN STRUCTURE
K19-1059-K19-1058	609244	4/13/2022	Roots	50.00	Medium	ROOTS IN UPSTREAM STRUCTURE K19-1059
K10-1021-K10-1019	608277	5/13/2021	Break or Failure	30.00	Hole Soil Visible	
K10-1021-K10-1019	608277	5/13/2021	Cracks or Fractures	60.00	Moderate Cracking	
G16-4111-G16-4107	610153	1/19/2023	Cracks or Fractures	80.00	Minor Cracking	
G16-3079-G16-3084	610308	3/23/2023	Roots	50.00	Medium	SIGNIFICANT ROOTS IN DOWNSTREAM STRUCTURE G16- 3084
D10-2043-D10-2042	609506	7/6/2022	Belly or Sag	80.00	Minor (<10%)	
K18-1016-K18-1015	609450	6/15/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
L19-4012-L19-4011	609209	4/7/2022	Obstruction or Intrusion	60.00	Moderate	
E23-1007-E23-1006	608086	3/29/2021	Belly or Sag	80.00	Minor (<10%)	
E23-1007-E23-1006	608086	3/29/2021	Obstruction or Intrusion	60.00	Moderate	
J11-3016-J11-3015	608456	7/13/2021	Obstruction or Intrusion	80.00	Minor	
H16-2015-H16-2014	611026	12/14/2023	Cracks or Fractures	80.00	Minor Cracking	
H16-2015-H16-2014	611026	12/14/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
H16-2015-H16-2014	611026	12/14/2023	Roots	80.00	Light	H16-2014
K18-3012-K18-3011	609536	7/18/2022	Belly or Sag	40.00	Severe (>30%)	
J16-4009C-J16-4008	610929	12/1/2023	Cracks or Fractures	60.00	Moderate Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J16-4009C-J16-4008	610929	12/1/2023	Roots	80.00	Light	IN JOINT AT MATERIAL CHANGE
K18-3057-K18-3056	608732	10/19/2021	Belly or Sag	80.00	Minor (<10%)	
K18-2003-K18-2002	609355	5/4/2022	Inflow and Infiltration	60.00	Running or Trickling	
K18-2003-K18-2002	609355	5/4/2022	Cracks or Fractures	80.00	Minor Cracking	
D11-4004-D11-4003	609737	10/4/2022	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
K18-3001-LS-1	609359	5/5/2022	Obstruction or Intrusion	0.00	Severe or Impassable	
K18-3001-LS-1	609359	5/5/2022	Inflow and Infiltration	60.00	Running or Trickling	
K18-3001-LS-1	609359	5/5/2022	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
J18-2088-J18-2008	608617	9/9/2021	Roots	50.00	Medium	J1802008 SECTION JOINT
J19-2068-K20-4012	608829	12/8/2021	Roots	50.00	Medium	ROOTS IN BOTH MANHOLE STRUCTURES
J18-2010-J18-2009	608615	9/9/2021	Roots	50.00	Medium	WALL AND SAND COLLAR OF J18- 2009
J11-3072-J11-3069	608415	6/23/2021	Break or Failure	15.00	Hole Void Visible	
J11-3072-J11-3069	608415	6/23/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3072-J11-3069	608415	6/23/2021	Belly or Sag	40.00	Severe (>30%)	
K18-3106-K18-3021	609396	6/6/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
K18-3106-K18-3021	609396	6/6/2022	Cracks or Fractures	40.00	Severe Cracking	
K18-3106-K18-3021	609396	6/6/2022	Worn Surface	60.00	Moderate	
K18-3106-K18-3021	609396	6/6/2022	Break or Failure	30.00	Hole Soil Visible	
K18-3106-K18-3021	609396	6/6/2022	Belly or Sag	40.00	Severe (>30%)	
K18-1012-K18-1011	609454	6/15/2022	Roots	80.00	Light	ROOTS IN STRUCTURE 1011
K10-1027-K10-1026	608270	5/12/2021	Cracks or Fractures	80.00	Minor Cracking	
K10-1027-K10-1026	608270	5/12/2021	Break or Failure	15.00	Hole Void Visible	
J20-2005-J20-2004	608799	11/15/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-1036-H16-1035	610458	5/5/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-1036-H16-1035	610458	5/5/2023	Cracks or Fractures	40.00	Severe Cracking	
H16-1036-H16-1035	610458	5/5/2023	Roots	50.00	Medium	SOME ROOTS IN PIPE, SOME GROWING IN FROM LATERALS.
H16-1036-H16-1035	610458	5/5/2023	Break or Failure	15.00	Hole Void Visible	
G21-2029-G21-2028	609870	11/7/2022	Cracks or Fractures	80.00	Minor Cracking	
M18-4036-M18-4035	607872	1/6/2021	Belly or Sag	60.00	Moderate (10 to 30%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
D23-2040-D23-2039	608180	5/3/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
D23-2040-D23-2039	608180	5/3/2021	Roots	80.00	Light	LIGHT ROOTS AT VARIOUS SPOTS @ LATSRECOMMENDING ROOT TREATMENT
K10-1032-K10-1026	608254	5/11/2021	Cracks or Fractures	80.00	Minor Cracking	
L18-1050-L18-1049	610862	5/18/2022	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L18-1050-L18-1049	610862	5/18/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-2025-H16-2024	610996	12/12/2023	Inflow and Infiltration	40.00	Gushing or Spurting	
D24-3011-D24-3010	608013	3/5/2021	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
J11-4016-J11-4015	608401	6/22/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-4016-J11-4015	610745	9/7/2023	Roots	80.00	Light	
H16-4047-H16-4046	610313	3/23/2023	Roots	50.00	Medium	ROOTS IN UPSTREAM STRUCTURE H16-4047
F16-2021-F16-2020	610011	11/29/2022	Belly or Sag	80.00	Minor (<10%)	
L17-1029-L17-1028	608767	10/22/2021	Roots	30.00	Heavy	185.0
L17-1029-L17-1028	608767	10/22/2021	Cracks or Fractures	40.00	Severe Cracking	
D23-2072-D23-2071	608073	3/22/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2072-D23-2071	608073	3/22/2021	Lining or Repair Failure	80.00	Minor	
D10-2022-D10-2021	609588	7/26/2022	Roots	80.00	Light	light in structure D10-2021 ROOTX
J18-2004-J18-2003	608573	8/24/2021	Roots	50.00	Medium	J18-2004 ON WALLS
J18-2004-J18-2003	608573	8/24/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4099-G16-4098	610154	1/25/2023	Roots	50.00	Medium	G16-4099
D23-2092-D23-2091	608058	3/18/2021	Obstruction or Intrusion	80.00	Minor	
K18-3070-K18-3023	609327	4/28/2022	Roots	80.00	Light	25' UP STREAM
K18-3070-K18-3023	609327	4/28/2022	Cracks or Fractures	60.00	Moderate Cracking	
K18-3018-K18-3017	609322	4/27/2022	Break or Failure	15.00	Hole Void Visible	
J11-2004-J11-2003	608495	7/21/2021	Worn Surface	60.00	Moderate	
J11-2004-J11-2003	608495	7/21/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-2004-J11-2003	608495	7/21/2021	Lining or Repair Failure	80.00	Minor	
J18-2140-J18-2139	608582	8/25/2021	Roots	80.00	Light	WALL OF J18-2139
J11-4028-J11-4027T	608390	6/14/2021	Belly or Sag	60.00	Moderate (10 to 30%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J11-4028-J11-4027T	608390	6/14/2021	Obstruction or Intrusion	60.00	Moderate	
K18-4005-K18-4003	609266	4/18/2022	Inflow and Infiltration	60.00	Running or Trickling	
J11-2013C-J11-2012	608443	7/7/2021	Roots	80.00	Light	
J11-2013C-J11-2012	608443	7/7/2021	Cracks or Fractures	80.00	Minor Cracking	
K19-1004-K19-1087	608927	1/10/2022	Roots	80.00	Light	IN BOTH STRUCTURES
K18-2039-K18-2038	609335	5/2/2022	Cracks or Fractures	80.00	Minor Cracking	
J18-2016-J18-2087	609253	4/14/2022	Roots	80.00	Light	
H16-3033-H16-3032	610824	9/26/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
J16-1047-J16-1046	610914	11/29/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-3038-G16-3037	610316	3/27/2023	Cracks or Fractures	80.00	Minor Cracking	
G15-2020-G15-2019	610392	4/12/2023	Roots	80.00	Light	
H15-2010-H15-2009	610853	10/3/2023	Roots	80.00	Light	H15-2009
G15-2013-G15-2012	610540	7/12/2023	Obstruction or Intrusion	0.00	Severe or Impassable	
H16-3034-H16-3033	610823	9/26/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
J18-2040-J18-2039	608595	8/26/2021	Roots	80.00	Light	J18-2040 FROM LIFTING HOLE OF CONE
J19-2087-J19-2034	609075	2/16/2022	Roots	50.00	Medium	J19-2034 IN STRUCTURE
G16-3039-G16-3038	610315	3/27/2023	Cracks or Fractures	80.00	Minor Cracking	
J20-3024-J20-3023	609047	2/10/2022	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J20-3024-J20-3023	609047	2/10/2022	Roots	50.00	Medium	J20-3024- ROOTS THROUGHOUT BOTTOM OF STRUCTURE
J16-1045-J16-4013	610918	11/29/2023	Roots	50.00	Medium	ROOTS IN PIPE CRACK ROOTS IN MYSTERY MANHOLE
J16-1045-J16-4013	610918	11/29/2023	Cracks or Fractures	60.00	Moderate Cracking	
J11-3096-J11-3041	608445	7/8/2021	Roots	80.00	Light	
J11-3096-J11-3041	608445	7/8/2021	Belly or Sag	80.00	Minor (<10%)	
J11-3018-J11-3014	608398	6/22/2021	Worn Surface	80.00	Minor	
J11-3018-J11-3014	608398	6/22/2021	Roots	80.00	Light	LIGHT ROOTS IN VARIOUS JOINTSLOGGED IN ROOTS LIST FOR TREATMENT
J11-3018-J11-3014	608398	6/22/2021	Break or Failure	15.00	Hole Void Visible	
H17-3077-H17-3061	611083	12/27/2023	Roots	80.00	Light	H17-3061
J11-3037-J11-3036	608434	7/6/2021	Cracks or Fractures	80.00	Minor Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J11-3037-J11-3036	608434	7/6/2021	Roots	50.00	Medium	AT VARIOUS JOINTS THROUGHOUT MAIN RUNTRANSFERRED TO ROOTS LIST
J11-3037-J11-3036	608434	7/6/2021	Break or Failure	30.00	Hole Soil Visible	
D11-4001-D11-1002	609707	9/26/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
G16-3036-G16-3035	610413	4/21/2023	Break or Failure	30.00	Hole Soil Visible	
G16-3036-G16-3035	610413	4/21/2023	Cracks or Fractures	80.00	Minor Cracking	
G16-4109-G16-4108	610186	1/26/2023	Belly or Sag	80.00	Minor (<10%)	
J20-3035C-J20-3034	608831	12/8/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H16-STUB-H16-1046	610481	5/15/2023	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-3067-J11-3104	608430	7/1/2021	Belly or Sag	40.00	Severe (>30%)	
J20-3036-K20-4007	608813	11/22/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J19-2018-J19-2017	608918	1/6/2022	Roots	80.00	Light	IN J19-2017 STRUCTURE
G21-2036-G21-2028	609869	11/7/2022	Belly or Sag	80.00	Minor (<10%)	
D11-4058-D11-4057	609622	8/15/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
D11-4058-D11-4057	609622	8/15/2022	Roots	80.00	Light	D11-4058
J19-3050-J19-3049	609004	2/3/2022	Roots	80.00	Light	J19-3050 ROOTS IN STRUCTURE
K10-1030-K10-1029	608266	5/12/2021	Cracks or Fractures	80.00	Minor Cracking	
K10-1030-K10-1029	608266	5/12/2021	Break or Failure	15.00	Hole Void Visible	
K18-4054-K18-4053	609007	2/3/2022	Roots	80.00	Light	ROOTS IN STRUCTURE K18-4054
H17-3032-H17-3031	611050	12/19/2023	Break or Failure	15.00	Hole Void Visible	
H17-3032-H17-3031	611050	12/19/2023	Cracks or Fractures	60.00	Moderate Cracking	
K19-1055-K19-1002	608960	1/24/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-3070-H17-3049	611054	12/19/2023	Cracks or Fractures	80.00	Minor Cracking	
G16-3071-G16-3070	610310	3/23/2023	Belly or Sag	80.00	Minor (<10%)	
G16-4088-G16-4084	610106	1/3/2023	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-3111-J11-3110	608471	7/19/2021	Belly or Sag	80.00	Minor (<10%)	
K18-2009-K18-2008	609347	5/3/2022	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H17-3028-H17-3027	611061	12/26/2023	Cracks or Fractures	80.00	Minor Cracking	
H15-1054-H15-1053	610574	8/1/2023	Cracks or Fractures	80.00	Minor Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
J11-2012-J11-2011	608319	5/20/2021	Roots	50.00	Medium	ROOTS IN ALMOST EVERY JOINT TREAT WHOLE LINE
J11-2012-J11-2011	608319	5/20/2021	Belly or Sag	80.00	Minor (<10%)	
J11-4015-J11-3078	608402	6/22/2021	Roots	80.00	Light	
J11-4015-J11-3078	608402	6/22/2021	Break or Failure	15.00	Hole Void Visible	
J11-4015-J11-3078	608402	6/22/2021	Worn Surface	80.00	Minor	
J11-4015-J11-3078	608402	6/22/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J11-4015-J11-3078	608402	6/22/2021	Belly or Sag	80.00	Minor (<10%)	
J11-4015-J11-3078	610744	9/7/2023	Roots	80.00	Light	
K19-1010-K19-1009	609471	6/17/2022	Break or Failure	15.00	Hole Void Visible	
K19-1010-K19-1009	609471	6/17/2022	Roots	80.00	Light	K19-1010 ROOTS IN MH
D11-1043-D11-4066	609667	9/1/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
J18-2048-J18-2047	608971	1/28/2022	Roots	50.00	Medium	IN DOWNSTREAM STRUCTURE J18- 2047
B26-2029-B26-2028	610888	11/20/2023	Roots	80.00	Light	ROOTS IN INFLOW AND OUTFLOW OF BOTH MANHOLES
B26-2029-B26-2028	610888	11/20/2023	Inflow and Infiltration	60.00	Running or Trickling	
B26-2029-B26-2028	610888	11/20/2023	Obstruction or Intrusion	80.00	Minor	
C11-3003C-C11-3002	609825	10/19/2022	Cracks or Fractures	60.00	Moderate Cracking	
G16-1021-G16-1020	610452	5/3/2023	Roots	50.00	Medium	MAHOLE FULL OF ROOTS STARTING TO COME DOWN INTO CHANNLE
H17-3019-H17-3018	611070	12/26/2023	Roots	30.00	Heavy	IMPASSABLE BEFORE FLUSHING
H17-3031-H17-3030	611043	12/19/2023	Cracks or Fractures	60.00	Moderate Cracking	
H17-3031-H17-3030	611043	12/19/2023	Break or Failure	15.00	Hole Void Visible	
H17-3069-H17-3050	611052	12/19/2023	Cracks or Fractures	60.00	Moderate Cracking	
H17-3069-H17-3050	611052	12/19/2023	Break or Failure	30.00	Hole Soil Visible	
J11-4008-J11-4007	608375	6/8/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-4008-J11-4007	608375	6/8/2021	Roots	50.00	Medium	ROOTS IN ALMOST EVERY JOINT
J18-2023-J18-2022	609465	6/16/2022	Roots	80.00	Light	ROOTS IN LATERAL
G21-2016-G21-2014	609895	11/10/2022	Belly or Sag	80.00	Minor (<10%)	
G21-2016-G21-2014	609895	11/10/2022	Roots	80.00	Light	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H21-4015-H21-4014	609921	11/16/2022	Lining or Repair Failure	80.00	Minor	
L17-1036-L17-1035	607890	1/11/2021	Break or Failure	30.00	Hole Soil Visible	
K19-1019-K19-1018	608922	1/10/2022	Roots	50.00	Medium	IN K19-1019 STRUCTURE
K19-1046-K19-1082	609400	6/6/2022	Lining or Repair Failure	80.00	Minor	
J16-4005-J16-4004	610936	12/1/2023	Cracks or Fractures	60.00	Moderate Cracking	
J16-4005-J16-4004	610936	12/1/2023	Roots	50.00	Medium	ROOTS THROUGHOUT
J16-4005-J16-4004	610936	12/1/2023	Break or Failure	15.00	Hole Void Visible	
L17-1027-L17-1026	607912	1/21/2021	Obstruction or Intrusion	0.00	Severe or Impassable	
L17-1027-L17-1026	607912	1/21/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1027-L17-1026	607912	1/21/2021	Break or Failure	15.00	Hole Void Visible	
L17-1027-L17-1026	607912	1/21/2021	Lining or Repair Failure	80.00	Minor	
D23-2070-D23-2069	608091	3/30/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
M18-3010-M18-2015	610238	3/2/2023	Belly or Sag	80.00	Minor (<10%)	
J20-2008-J20-2005	608798	11/15/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
J18-3107C-J18-3103	608659	9/27/2021	Obstruction or Intrusion	60.00	Moderate	
D23-2077-D23-2076	608083	3/24/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J20-3025-J20-3024	608837	12/9/2021	Roots	50.00	Medium	ROOTS IN DOWNSTREAM MANHOLE STRUCTURE
G21-2019-G21-2018	609884	11/8/2022	Belly or Sag	80.00	Minor (<10%)	
K18-4031-K18-4030	609308	4/25/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
H15-1024-H15-1023	610353	4/3/2023	Roots	80.00	Light	H15-1023
J11-3075-J11-3074	608480	7/20/2021	Cracks or Fractures	80.00	Minor Cracking	
H16-1023-H16-1021	610473	5/11/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-1023-H16-1021	610473	5/11/2023	Belly or Sag	80.00	Minor (<10%)	
H16-1023-H16-1021	610473	5/11/2023	Obstruction or Intrusion	80.00	Minor	
D23-2082-D23-2081	608070	3/22/2021	Roots	80.00	Light	FOAMING SUGESTED @ 8'-15' FROM D23-2082
H16-1033-H16-1028	610369	4/5/2023	Cracks or Fractures	60.00	Moderate Cracking	
H16-1033-H16-1028	610369	4/5/2023	Roots	30.00	Heavy	BLOCKAGE CLEARED, STILL HEAVY ROOTS IN PIPE. HEAVY ROOTS IN SOME LATERALS
G16-1028-G16-1027	610488	5/30/2023	Belly or Sag	80.00	Minor (<10%)	
G15-3039-G15-3037	610261	3/9/2023	Roots	80.00	Light	G15-3039: ROOTS STARTING IN OUTFLOW SAND COLLAR

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H16-2012-H16-2011	611002	12/13/2023	Obstruction or Intrusion	0.00	Severe or Impassable	
H16-2012-H16-2011	611002	12/13/2023	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
G16-1046-G16-1043	610202	1/27/2023	Belly or Sag	80.00	Minor (<10%)	
K18-3088-K18-3022	609330	4/28/2022	Cracks or Fractures	80.00	Minor Cracking	
K18-3027-K18-3026	609566	7/20/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-3034-J11-3028	608380	6/9/2021	Worn Surface	60.00	Moderate	
J11-3034-J11-3028	608380	6/9/2021	Cracks or Fractures	80.00	Minor Cracking	
K19-4007-K19-4006	609044	2/10/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
K18-3002-K18-3001	609358	5/5/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
G16-4029-G16-4028	610116	1/11/2023	Roots	50.00	Medium	LATERAL JOINT NEAR DOWNSTREAM MH
G16-4029-G16-4028	610116	1/11/2023	Belly or Sag	80.00	Minor (<10%)	
J16-4002-J16-4001	610939	12/1/2023	Cracks or Fractures	60.00	Moderate Cracking	
J16-4002-J16-4001	610939	12/1/2023	Break or Failure	30.00	Hole Soil Visible	
J16-4002-J16-4001	610939	12/1/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2069-D23-2068	608092	3/30/2021	Cracks or Fractures	80.00	Minor Cracking	
J19-3110-J19-3109	607995	3/1/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1098-L17-1065	607960	2/4/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-2042-H16-2041	610944	12/4/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-2010-J11-2009	608489	7/21/2021	Break or Failure	15.00	Hole Void Visible	
J11-2010-J11-2009	608489	7/21/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-3036-H17-3034	611042	12/19/2023	Break or Failure	15.00	Hole Void Visible	
H17-3036-H17-3034	611042	12/19/2023	Cracks or Fractures	60.00	Moderate Cracking	
L18-4038-L18-4036	607956	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
J16-4001-LS-11	610941	12/4/2023	Cracks or Fractures	60.00	Moderate Cracking	
J16-4001-LS-11	610941	12/4/2023	Roots	80.00	Light	ROOTS INSIDE THE WETWELL
J16-4001-LS-11	610941	12/4/2023	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J11-4007-J11-4019	608376	6/8/2021	Break or Failure	15.00	Hole Void Visible	
J11-4007-J11-4019	608376	6/8/2021	Cracks or Fractures	80.00	Minor Cracking	
J19-3043-J19-3006	609023	2/7/2022	Belly or Sag	80.00	Minor (<10%)	
D11-4059-D11-4058	609620	8/15/2022	Roots	80.00	Light	D11-4058
D11-4059-D11-4058	609620	8/15/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-3098-J11-3019	608393	6/17/2021	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
D11-4003-D11-4002	610288	3/21/2023	Obstruction or Intrusion	80.00	Minor	
J11-3038-J11-3037	608433	7/6/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3038-J11-3037	608433	7/6/2021	Worn Surface	80.00	Minor	
J11-4025-J11-4024	608468	7/19/2021	Belly or Sag	80.00	Minor (<10%)	
J18-3017-J18-3016	608676	9/28/2021	Roots	50.00	Medium	ROOTS AT LATERAL CONNECTION POINT IN MAIN @81' NO BLOCKAGES
J11-4013-J11-4012	608408	6/23/2021	Roots	80.00	Light	
J11-4013-J11-4012	608408	6/23/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-4020-J11-4021	608475	7/20/2021	Belly or Sag	80.00	Minor (<10%)	
J18-3152C-J18-3150	608624	9/14/2021	Obstruction or Intrusion	60.00	Moderate	
D23-2071-D23-2049	608128	4/8/2021	Roots	50.00	Medium	D23-2071 ROOTS IN THE PIPE AT 233 FROM UPPER M/H
K20-4013-K20-4002	609373	5/24/2022	Roots	50.00	Medium	ROOTS IN BOTH MANHOLES
J19-2034-J19-2029	609077	2/17/2022	Roots	50.00	Medium	ROOTS IN UPSTREAM STRUCTURE J19-2034
K19-1005-K19-1004	609120	3/9/2022	Roots	80.00	Light	ROOTS IN DOWNSTREAM STRUCTURE K19-1004
K19-4002-K19-4001	609114	3/3/2022	Belly or Sag	80.00	Minor (<10%)	
K19-1021-K19-1020	609071	2/16/2022	Roots	80.00	Light	K19-1020- ROOTS IN STRUCTURE
J11-2029-J11-2028	608459	7/14/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
D23-2085-D23-2083	608067	3/22/2021	Inflow and Infiltration	60.00	Running or Trickling	
D23-2085-D23-2083	608067	3/22/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-3042-K18-3035	608880	12/21/2021	Belly or Sag	80.00	Minor (<10%)	
K10-1008-K10-1074	608315	5/19/2021	Roots	30.00	Heavy	K10-1008-K10-1074 ROOTS THE THE TOP OF THE PIPE 3 FT IN, ROOTS AT 29FT, ROOTS AT 48 FT, 75 FT, 79 FT, 84 FT
D23-3041-D23-3040	608194	5/4/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
D10-1030-D10-1029	609625	8/15/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
D10-2048-D10-2047	609504	7/6/2022	Roots	80.00	Light	D10-2048 D10-2047
K10-1020-K10-1019	608274	5/13/2021	Break or Failure	15.00	Hole Void Visible	
K10-1020-K10-1019	608274	5/13/2021	Roots	50.00	Medium	AT 45'

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
G16-4053-G16-4036	610139	1/18/2023	Roots	30.00	Heavy	HEAVY ROOTS IN UPSTREAM MH G16-4053 NEAR BLOCKAGE IN CHANEL
D11-1028-C11-2002	609790	10/12/2022	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
D11-1028-C11-2002	609790	10/12/2022	Worn Surface	60.00	Moderate	
D11-1028-C11-2002	609790	10/12/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
H15-4037-H15-4036	610512	6/29/2023	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-1031-H16-1030	610389	4/10/2023	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
J11-3095-J11-3036	608455	7/13/2021	Roots	50.00	Medium	MANY MANY JOINTS
J19-2004-J19-2003	608610	8/30/2021	Worn Surface	80.00	Minor	
J11-3104-J11-3066	608440	7/6/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
L17-1086-L17-1017	607889	1/11/2021	Lining or Repair Failure	80.00	Minor	
L17-1086-L17-1017	607889	1/11/2021	Roots	50.00	Medium	ROOTS IN JOINTS AND CRACKS MULTIPLE AREAS 82FT 98 FT AND 103 FT
L17-1086-L17-1017	607889	1/11/2021	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
L17-1086-L17-1017	607889	1/11/2021	Cracks or Fractures	80.00	Minor Cracking	
L17-1086-L17-1017	607889	1/11/2021	Belly or Sag	80.00	Minor (<10%)	
J19-3004-J19-3003	608545	8/12/2021	Roots	80.00	Light	D9 @ 210 SIDESEWER
K18-4086-K18-4039	609303	4/25/2022	Roots	80.00	Light	K18-4039 ROOTS IN STRUCTURE
K18-4086-K18-4039	609303	4/25/2022	Cracks or Fractures	60.00	Moderate Cracking	
K19-4021-K19-1010	609474	6/17/2022	Obstruction or Intrusion	0.00	Severe or Impassable	
E23-1012-E23-1011	608098	3/31/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G16-3012-G16-3011	610279	3/13/2023	Roots	30.00	Heavy	STRUCTURE
J11-3CAP-J11-3071	608424	7/1/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H15-4034-H15-4003	610515	6/29/2023	Belly or Sag	80.00	Minor (<10%)	
B26-2030-B26-2029	610887	11/20/2023	Roots	80.00	Light	B26-2029- ROOTS ABOVE INFLOW
B26-2030-B26-2029	610887	11/20/2023	Obstruction or Intrusion	80.00	Minor	
J16-4014-J16-4013	610920	11/29/2023	Break or Failure	30.00	Hole Soil Visible	
J16-4014-J16-4013	610920	11/29/2023	Cracks or Fractures	60.00	Moderate Cracking	
K19-1062-K19-1061	609246	4/13/2022	Roots	80.00	Light	IN UPSTREAM STRUCTURE K19- 1062

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
L18-4004-K18-3032	609292	4/22/2022	Belly or Sag	80.00	Minor (<10%)	
L18-4004-K18-3032	609292	4/22/2022	Inflow and Infiltration	60.00	Running or Trickling	
L18-4004-K18-3032	609292	4/22/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
G21-2015-G21-2014	609897	11/10/2022	Obstruction or Intrusion	60.00	Moderate	
G21-2015-G21-2014	609897	11/10/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-4056-K18-4054	609094	3/1/2022	Roots	80.00	Light	IN K18-4054 STRUCTURE
J16-1011-J16-1010	610705	8/22/2023	Belly or Sag	80.00	Minor (<10%)	
G15-3012-G15-3050	610465	3/8/2023	Roots	30.00	Heavy	ROOTS IN BOTH MANHOLES, SEVERE IN G15-3012.
K18-3094-K18-3005	609545	7/18/2022	Break or Failure	15.00	Hole Void Visible	
K18-3094-K18-3005	609545	7/18/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
K20-4006-K20-4005	608807	11/17/2021	Roots	80.00	Light	ROOTS IN DOWNSTREAM MANHOLE STRUCTURE
L17-1011-L17-1009	608729	10/18/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1011-L17-1009	608729	10/18/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
D10-2049-D10-2048	609481	6/22/2022	Roots	80.00	Light	D10-2048
D10-2049-D10-2048	609481	6/22/2022	Belly or Sag	80.00	Minor (<10%)	
K18-3108-L18-4036	607957	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
F16-4002-F16-4006	609987	11/28/2022	Roots	80.00	Light	IN UPSTREAM SAND COLLAR
G16-4026-G16-4018	610120	1/11/2023	Cracks or Fractures	60.00	Moderate Cracking	
G16-4026-G16-4018	610120	1/11/2023	Roots	80.00	Light	ROOTS IN LATERAL
D23-2034-D23-2033	608117	4/7/2021	Roots	50.00	Medium	ROOTS AT 133FT FROM BOTTOM M/H
J11-3049-J11-3108	608391	6/17/2021	Roots	80.00	Light	ROOTS IN JOINTS 130'-140'
J11-3049-J11-3108	608391	6/17/2021	Cracks or Fractures	80.00	Minor Cracking	
G21-2009-G21-2008	609889	11/9/2022	Belly or Sag	80.00	Minor (<10%)	
G16-4063-G16-4061	610094	12/28/2022	Obstruction or Intrusion	80.00	Minor	
L17-1042C-L17-1041	607920	1/21/2021	Cracks or Fractures	80.00	Minor Cracking	
L17-1042C-L17-1041	607920	1/21/2021	Roots	50.00	Medium	ROOTS IN THE FIRST 50 FEET
L17-1042C-L17-1041	607920	1/21/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L18-4006-L18-4005	608892	12/23/2021	Belly or Sag	80.00	Minor (<10%)	
L17-1060-L17-1059	609432	6/13/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-2093C-H16-2017	611028	12/18/2023	Lining or Repair Failure	80.00	Minor	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H16-2093C-H16-2017	611028	12/18/2023	Cracks or Fractures	60.00	Moderate Cracking	
H16-2093C-H16-2017	611028	12/18/2023	Break or Failure	15.00	Hole Void Visible	
D23-2068-D23-2067	608093	3/30/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-3104-H16-3094	610792	9/18/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
J18-3057-J18-3056	609362	5/6/2022	Roots	50.00	Medium	J18-3057 ROOTS IN MANHOLE
G16-4005-LS-8	609053	2/11/2022	Roots	50.00	Medium	ROOTS IN JOINT AT 62 FEET
G16-4005-LS-8	610157	1/25/2023	Roots	80.00	Light	
G16-4005-LS-8	610157	1/25/2023	Obstruction or Intrusion	60.00	Moderate	
K18-1032-K18-1025	609273	4/19/2022	Obstruction or Intrusion	60.00	Moderate	
K18-1032-K18-1025	609273	4/19/2022	Cracks or Fractures	40.00	Severe Cracking	
K18-1032-K18-1025	609273	4/19/2022	Break or Failure	30.00	Hole Soil Visible	
K18-2013-K18-2012	609573	7/20/2022	Inflow and Infiltration	60.00	Running or Trickling	
K18-3048-K18-3049	609529	7/17/2022	Inflow and Infiltration	40.00	Gushing or Spurting	
D23-3034-D23-3033	608222	5/6/2021	Inflow and Infiltration	60.00	Running or Trickling	
H16-2009-H16-2010	611011	12/13/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2090-D23-2085	608066	3/22/2021	Obstruction or Intrusion	80.00	Minor	
D23-2090-D23-2085	608066	3/22/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1004-L17-1003	608726	10/18/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
G16-4003-G16-4005	609052	2/11/2022	Roots	80.00	Light	ROOTS BEGINNING TO FORM IN 2 LATERALS
K10-1023-K10-1020	608273	5/13/2021	Roots	80.00	Light	LIGHT ROOTS @112.3'
K10-1023-K10-1020	608273	5/13/2021	Cracks or Fractures	60.00	Moderate Cracking	
K18-2007-K18-2006	609571	7/20/2022	Inflow and Infiltration	60.00	Running or Trickling	
K18-3089-K18-3026	609105	3/1/2022	Roots	80.00	Light	IN K18-3089 SAND COLLAR JOINT
K18-3089-K18-3026	609105	3/1/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3103-J11-3061	608419	6/28/2021	Roots	50.00	Medium	
J16-1032-J16-1031	610615	8/8/2023	Roots	80.00	Light	ROOTS IN STRUCTURE/MANHOLE J16-1032
L17-1009-L17-1005	608727	10/18/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L17-1009-L17-1005	608727	10/18/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
H16-4004-H16-4003	610347	3/29/2023	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
L18-4036-L18-4037	607958	2/3/2021	Inflow and Infiltration	60.00	Running or Trickling	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
B26-2035-B26-2034	610882	11/20/2023	Obstruction or Intrusion	80.00	Minor	
H16-2022-H16-2021	610994	12/12/2023	Inflow and Infiltration	60.00	Running or Trickling	
H16-2022-H16-2021	610994	12/12/2023	Cracks or Fractures	40.00	Severe Cracking	
H16-2022-H16-2021	610994	12/12/2023	Break or Failure	15.00	Hole Void Visible	
K19-1013-K19-1004	608926	1/10/2022	Roots	80.00	Light	IN K19-1004 STRUCTURE
J11-3040-J11-3039	608431	7/1/2021	Cracks or Fractures	80.00	Minor Cracking	
D11-1009-D11-1008	609734	10/4/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
D11-1009-D11-1008	609734	10/4/2022	Belly or Sag	80.00	Minor (<10%)	
J16-1058-J16-1056	610902	11/28/2023	Belly or Sag	80.00	Minor (<10%)	
J11-3052-J11-3099	608387	6/10/2021	Roots	80.00	Light	
G15-2010-G15-2009	610546	7/12/2023	Obstruction or Intrusion	0.00	Severe or Impassable	
J11-4017-J11-4010	608412	6/23/2021	Cracks or Fractures	80.00	Minor Cracking	
G15-3056-G15-3003	610522	7/10/2023	Obstruction or Intrusion	60.00	Moderate	
D23-2118-D23-2117	608077	3/24/2021	Roots	80.00	Light	FINE ROOTS AT JOINT
D23-2001-D23-1002	608191	5/4/2021	Cracks or Fractures	80.00	Minor Cracking	
J18-3037-J18-3030	608265	5/12/2021	Roots	80.00	Light	ROOTS IN STRUCTURE J18-3037,
D11-4040-D11-4039	609518	7/14/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
H17-3042-H17-3041	611058	12/20/2023	Cracks or Fractures	80.00	Minor Cracking	
G15-3050-G15-3011	610263	3/8/2023	Roots	80.00	Light	ROOTS IN PIPE JOINT, NEEDS FOAMED
B26-2033-B26-2032	610884	11/20/2023	Obstruction or Intrusion	80.00	Minor	
L17-1024-L17-1023	607901	1/12/2021	Roots	80.00	Light	ROOTBALL IN THE BOTTOM OF MANHOLE L17-1023
D11-4023-D11-4022	609697	9/12/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
L16-2024-L16-2022	609793	10/13/2022	Belly or Sag	80.00	Minor (<10%)	
J11-3088C-J11-3084	608444	7/7/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
J11-3088C-J11-3084	608444	7/7/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3088C-J11-3084	608444	7/7/2021	Obstruction or Intrusion	80.00	Minor	
J16-1025-J16-1022	610624	8/9/2023	Roots	80.00	Light	ROOTS IN STRUCTURE/MANHOLE 1022
L14-3005-LS-14	607924	1/27/2021	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
L14-3005-LS-14	607924	1/27/2021	Lining or Repair Failure	40.00	Severe	
D10-1014-D10-1013	609700	9/13/2022	Obstruction or Intrusion	80.00	Minor	
D10-1014-D10-1013	609700	9/13/2022	Inflow and Infiltration	60.00	Running or Trickling	
J18-3014-J18-3013	608692	9/30/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
H15-4017-H15-4016	610601	8/7/2023	Roots	50.00	Medium	IN STRUCTURE 4016
D23-2044-D23-2043	608174	4/28/2021	Cracks or Fractures	80.00	Minor Cracking	
D23-2044-D23-2043	608174	4/28/2021	Roots	80.00	Light	REFER TO ROOTS LIST FOR FOOTAGESLIGHT ROOTS AT VARIOUS SPOTS THROUGHOUT PIPE
D23-3040-D23-3038	608195	5/4/2021	Belly or Sag	80.00	Minor (<10%)	
H16-3016-H16-3013	610840	9/28/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
K10-1019-K10-1044	608275	5/13/2021	Cracks or Fractures	80.00	Minor Cracking	
K18-4006-K18-4005	609265	4/18/2022	Inflow and Infiltration	60.00	Running or Trickling	
E23-1005-E23-1004	608088	3/29/2021	Roots	50.00	Medium	E23-1004 @ SAND COLLAR
G16-4027-G16-4026	610119	1/11/2023	Cracks or Fractures	60.00	Moderate Cracking	
G16-4027-G16-4026	610119	1/11/2023	Roots	50.00	Medium	MINOR ROOTS THROUGHOUT
G16-4027-G16-4026	610119	1/11/2023	Obstruction or Intrusion	80.00	Minor	
D11-4035-D11-4034	609808	10/18/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-3069-J11-3067	608429	7/1/2021	Belly or Sag	40.00	Severe (>30%)	
J11-3069-J11-3067	610185	1/26/2023	Break or Failure	30.00	Hole Soil Visible	
J11-3069-J11-3067	610185	1/26/2023	Belly or Sag	80.00	Minor (<10%)	
J11-3069-J11-3067	610185	1/26/2023	Inflow and Infiltration	60.00	Running or Trickling	
G21-2031-G21-2007	609887	11/9/2022	Belly or Sag	80.00	Minor (<10%)	
M17-1011-M18-4061	608974	1/28/2022	Inflow and Infiltration	60.00	Running or Trickling	
L17-1041-L17-1092	607919	1/21/2021	Roots	50.00	Medium	ROOTS IN THE JOINTS AND SAND COLLARS LINE IS ONLY 10 FEET LONG
H16-2118-H16-2117	610957	12/5/2023	Roots	80.00	Light	ROOTS IN UPSTREAM MH H16- 2118C
K18-3023-K18-3086	609328	4/28/2022	Cracks or Fractures	60.00	Moderate Cracking	
K18-3023-K18-3086	609328	4/28/2022	Roots	50.00	Medium	
J20-2003-J20-2002	609050	2/10/2022	Obstruction or Intrusion	0.00	Severe or Impassable	
J20-2003-J20-2002	609050	2/10/2022	Cracks or Fractures	40.00	Severe Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
H16-2024-H16-2023	610997	12/12/2023	Worn Surface	80.00	Minor	
D23-2064-D23-2063	608096	3/30/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-2005-J11-2004	608494	7/21/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
L16-2016-L16-2015	609801	10/13/2022	Roots	50.00	Medium	ROOTS IN UPSTREAM MH L16-2016
K19-1040-K19-1039	609409	6/7/2022	Roots	80.00	Light	K19-1039 ROOTS IN MANHOLE
D23-1022-D23-1021	608148	4/14/2021	Roots	0.00	Blockage	109 FROM UPPER MANHOLE CANNOT CONTINUE TOOTS TO HEAVY TO GET PAST
J11-2040-J11-2004	608534	8/5/2021	Cracks or Fractures	80.00	Minor Cracking	
K18-4075C-K18-4074	609350	5/4/2022	Roots	80.00	Light	ROOT INTRUSION STARTING IN CLEANOUT
K18-2040-K18-2036	609337	5/2/2022	Cracks or Fractures	80.00	Minor Cracking	
J18-2065-J18-2064	608648	9/23/2021	Roots	50.00	Medium	IN STRUCTURE J18-2064
J18-2065-J18-2064	608648	9/23/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
K19-1043-K19-1039	609406	6/6/2022	Roots	80.00	Light	IN STRUCTURE K19-1039
J11-3055-J11-3054	608422	6/28/2021	Roots	50.00	Medium	ROOTS THROUGH OUT LINE
L17-1005-L17-1004	608724	10/18/2021	Belly or Sag	80.00	Minor (<10%)	
L17-1005-L17-1004	608724	10/18/2021	Inflow and Infiltration	60.00	Running or Trickling	
K18-4039-K18-4038	609305	4/25/2022	Roots	80.00	Light	K18-4039: ROOTS IN STRUCTURE
K19-1009-K19-1008	609472	6/17/2022	Obstruction or Intrusion	80.00	Minor	
K19-1009-K19-1008	609472	6/17/2022	Roots	30.00	Heavy	K19-1008
H17-3061-H17-3060	611084	12/27/2023	Roots	80.00	Light	H17-3060
G16-1072-G16-1007	610632	8/10/2023	Belly or Sag	80.00	Minor (<10%)	
D23-2056-D23-2055	608142	4/12/2021	Belly or Sag	80.00	Minor (<10%)	
D23-2056-D23-2055	608142	4/12/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1089C-L17-1086	607888	1/11/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J18-3055-J18-3054	609364	5/6/2022	Roots	50.00	Medium	J18-3054 ROOTS IN STRUCTURE
D23-1012-D23-1011	608149	4/15/2021	Roots	50.00	Medium	D23-1012-D23-1011 283 FROM LOWER M/H ROOTS IN THE JOINT
D11-4068-D11-4067	609716	9/27/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
K10-1028-K10-1027	608269	5/12/2021	Roots	80.00	Light	IN MAIN/LATERAL 60'-75'

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index Measured Value		Notes
K10-1028-K10-1027	608269	5/12/2021	Cracks or Fractures	80.00	Minor Cracking	
K18-2113-K18-2108	609232	4/11/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-2113-K18-2108	609232	4/11/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
H15-1034-LS-69	610592	8/3/2023	Roots	80.00	Light	IN INSERT A TEE JOINT
G16-3009-G16-3008	610278	3/13/2023	Lining or Repair Failure	80.00	Minor	
M18-4026-M18-4025	607869	1/4/2021	Roots	30.00	Heavy	HEAVY ROOTS IN MANHOLE M18- 4027
G16-3095-G16-3001	609868	11/7/2022	Belly or Sag	80.00	Minor (<10%)	
J19-2082-J19-2041	607944	2/2/2021	Roots	50.00	Medium	ROOTS IN MANHOLE J19-2082
J20-3021-K20-4007	609366	5/16/2022	Roots	30.00 Heavy		J20-3021: ROOTS IN STRUCTURE
K10-1052C-K10-1051	608282	5/17/2021	Roots	80.00	Light	SMALL ROOT IN THE LATERA CONNECTION AT 45 FT
H17-3074C-H17-3033	611048	12/19/2023	Cracks or Fractures	80.00	Minor Cracking	
G16-1039-G16-1038	610397	4/19/2023	Belly or Sag	80.00	Minor (<10%)	
E23-1008-E23-1003	608069	3/22/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
D23-1009-D23-1008	608158	4/21/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
G21-2033-G21-2007	609886	11/9/2022	Roots	30.00	Heavy	HEAVY ROOTS IN THE LATERAL AT THE TOP END OF PIPE
G16-3084-G16-3078	610409	4/20/2023	Roots	50.00	Medium	ROOTS IN UPSTREAM MH G16-3084
J16-1014-J16-1013	610692	8/21/2023	Belly or Sag	40.00	Severe (>30%)	
J19-3052-J19-3051	609001	2/2/2022	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
H16-1066-H16-1065	610463	5/8/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-3033-H17-3032	611049	12/19/2023	Cracks or Fractures	80.00	Minor Cracking	
J18-3038-J18-3037	608207	5/5/2021	Roots	80.00	Light	IN STRUCTURE J18-3038 AND 3037 ROOT X
D23-2123-D23-2122	608025	3/9/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3032-J11-3031	608442	7/6/2021	Roots	80.00	Light	ON ROOTS LIST
K18-2020-K18-3041	608851	12/15/2021	Belly or Sag	80.00	Minor (<10%)	
G16-4006-G16-4005	610871	5/17/2022	Cracks or Fractures	60.00	Moderate Cracking	
G16-4006-G16-4005	610135	1/17/2023	Cracks or Fractures	60.00	Moderate Cracking	
M18-4002-M18-4001	607881	1/6/2021	Inflow and Infiltration	40.00	Gushing or Spurting	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index Measured Value		Notes
H15-4009-H15-4008	610593	8/3/2023	Cracks or Fractures	80.00	Minor Cracking	
D10-2027-D10-2016	609521	7/14/2022	Cracks or Fractures	80.00	Minor Cracking	
D10-2027-D10-2016	609521	7/14/2022	Belly or Sag	80.00	Minor (<10%)	
K19-1027-K19-1026	608901	12/23/2021	Roots	80.00	Light	IN UPSTREAM MH
L17-1061-L17-1060	609431	6/13/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
J19-2007-J19-2006	609477	6/17/2022	Roots	80.00	Light	J19-2007
J19-2007-J19-2006	609477	6/17/2022	Belly or Sag	80.00 Minor (<10%)		
H15-4012-H15-4007	610604	8/7/2023	Roots	50.00	Medium	IN STRUCTURE 4007
K19-1007-K19-1006	609122	3/9/2022	Roots	50.00	Medium	ROOTS IN DOWNSTREAM STRUCTURE K19-1006
D23-1002-D23-1001	608192	5/4/2021	Cracks or Fractures	80.00	Minor Cracking	
J18-2118-J18-2117	608567	8/18/2021	Roots	80.00	Light	WALL OF J18-2117
G16-4011-G16-4010	610131	1/17/2023	Roots	30.00	Heavy	G16-4011: ROOTS IN STRUCTURE CAUSING I&I
G16-4011-G16-4010	610131	1/17/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
H16-1005-H16-1004	610283	3/16/2023	Inflow and Infiltration	60.00	Running or Trickling	
G15-3051-G15-3013	610257	3/8/2023	Roots	80.00	Light	COMING FROM BEHIND LADDER
D11-1011-D11-1008	609733	10/3/2022	Roots	80.00	Light	ROOTS IN LAST 15-20 FEET OF PIPE DOWNSTREAM
G16-1038-G16-1037	610398	4/19/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-1038-G16-1037	610398	4/19/2023	Belly or Sag	80.00	Minor (<10%)	
J19-2017-J19-2015	608847	12/9/2021	Roots	80.00	Light	IN STRUCTURE
J16-1076-J16-1075	610865	10/24/2023	Worn Surface	80.00	Minor	
J19-2079-J19-2012	607939	2/1/2021	Break or Failure	30.00	Hole Soil Visible	
K10-1022-K10-1020	608276	5/13/2021	Roots	50.00	Medium	@49.8' @170.9'
K10-1022-K10-1020	608276	5/13/2021	Cracks or Fractures	80.00	Minor Cracking	
J18-2035C-J18-2034	608593	8/26/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
H16-3011-H16-3010	610838	9/28/2023	Belly or Sag	40.00	Severe (>30%)	
H16-3011-H16-3010	610838	9/28/2023	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
K18-2046-K18-2045	609345	5/3/2022	Roots	80.00	Light	K18-2045: ROOTS IN STRUCTURE
D23-2119-D23-2118	608023	3/9/2021	Cracks or Fractures	40.00	Severe Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	_ ,		Notes
D23-2119-D23-2118	608023	3/9/2021	Break or Failure	0.00	Collapse	
H17-3034-H17-3030	611041	12/19/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-3034-H17-3030	611041	12/19/2023	Cracks or Fractures	80.00	Minor Cracking	
H17-3034-H17-3030	611041	12/19/2023	Break or Failure	30.00	Hole Soil Visible	
J11-2018-J11-2017	608463	7/14/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
J18-3039-J18-3038	608206	5/5/2021	Belly or Sag	80.00	Minor (<10%)	
J18-3099-J18-3098	608705	9/30/2021	Break or Failure	15.00	Hole Void Visible	
J18-3099-J18-3098	608705	9/30/2021	Joint Separation or Offset	60.00 Moderate (1 to 1.5 Pipe Thickness)		
D11-4029-D11-4028	609641	8/29/2022	Cracks or Fractures	80.00	Minor Cracking	
D11-4029-D11-4028	609641	8/29/2022	Inflow and Infiltration	80.00	Weeping or Dripping	
J11-3017-J11-3015	608532	8/5/2021	Obstruction or Intrusion	80.00	Minor	
J11-3017-J11-3015	608532	8/5/2021	Cracks or Fractures	80.00	Minor Cracking	
K10-1070-K10-1022	608318	5/20/2021	Roots	80.00	Light	ROOTS AT 80.4 IN LATERAL
E23-1004-D23-2071	608089	3/30/2021	Worn Surface	60.00	Moderate	
E23-1004-D23-2071	608089	3/30/2021	Cracks or Fractures	60.00	Moderate Cracking	
J16-1075-J16-1074	610868	10/25/2023	Roots	80.00 Light		J16-1075 ROOTS STARTING IN STRUCTURE WALL
L16-2022-L16-2021	609795	10/13/2022	Belly or Sag	80.00	Minor (<10%)	
K19-1014-K19-1013	608925	1/10/2022	Roots	80.00	Light	IN K19-1013 STRUCTURE
G16-4055-G16-4054	610149	1/19/2023	Roots	80.00	Light	G16-4054: ROOTS IN MH
D11-1014-D11-1013	609776	10/11/2022	Roots	50.00	Medium	ROOTS IN UPSTREAM STRUCTURE D11-1014 AND LATERAL THAT TIES IN
D10-2042-LS-49	609597	7/14/2022	Belly or Sag	80.00	Minor (<10%)	
G16-3018-G16-3017	610528	7/11/2023	Worn Surface	80.00	Minor	
G16-3073-G16-3078	610276	3/13/2023	Inflow and Infiltration	80.00	Weeping or Dripping	
D23-2091-D23-2090	608059	3/18/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
K18-4022-K18-4021	609313	4/26/2022	Cracks or Fractures	80.00	Minor Cracking	
K19-1022-K19-1018	608921	1/10/2022	Roots	50.00	Medium	IN K19-1022 STRUCTURE AND ENTERING PIPE
D11-4034-D11-4024	609809	10/18/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
G21-2004-G21-2002	609894	11/10/2022	Belly or Sag	80.00	Minor (<10%)	
G21-2004-G21-2002	609894	11/10/2022	Cracks or Fractures	80.00	Minor Cracking	

Pipe ID	Inspection ID	Inspection Date	Condition_Category Index Measured Value		Notes	
J18-2012-J18-2011	608556	8/16/2021	Roots	80.00	Light	J18-2011 WALL AND SAND COLLAR
D23-2076-D23-2075	608084	3/24/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-4022-J11-4023	608466	7/19/2021	Belly or Sag	80.00	Minor (<10%)	
G16-4072-G16-4071	610060	12/8/2022	Inflow and Infiltration	60.00	Running or Trickling	
G16-4062-G16-4061	610092	12/28/2022	Cracks or Fractures	80.00	Minor Cracking	
G21-2026-G21-2018	609873	11/7/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-3036-K18-3035	608881	12/21/2021	Belly or Sag	80.00	Minor (<10%)	
D23-2015-D23-2013	608159	4/21/2021	Cracks or Fractures	80.00	Minor Cracking	
D23-2118-D23-2152	608037	3/11/2021	Cracks or Fractures	80.00	Minor Cracking	
D23-2118-D23-2152	608037	3/11/2021	Roots	80.00	Light	LIGHT ROOTS AT LATERAL
K10-1035-K10-1034	608249	5/11/2021	Belly or Sag	80.00	Minor (<10%)	
J18-3030-J18-3029	608241	5/10/2021	Roots	80.00	Light	AT OUT FLOW OF J18-3030
J16-1004-J16-1001	610852	10/3/2023	Roots	50.00	Medium	ROOTS IN J16-1001
H16-2092C-H16-2022	610993	12/12/2023	Roots	80.00	Light	
H16-2092C-H16-2022	610993	12/12/2023	Break or Failure	30.00	Hole Soil Visible	
H16-2092C-H16-2022	610993	12/12/2023	Cracks or Fractures	60.00	Moderate Cracking	
J19-2008-J19-2004	608611	8/30/2021	Worn Surface	80.00	Minor	
J16-4003-J16-4002	610938	12/1/2023	Cracks or Fractures	80.00	Minor Cracking	
J16-4003-J16-4002	610938	12/1/2023	Roots	80.00	Light	
K19-1057-K19-1056	608958	1/24/2022	Inflow and Infiltration	60.00	Running or Trickling	
J11-4014-J11-4018	608407	6/23/2021	Cracks or Fractures	80.00	Minor Cracking	
K18-2035-K18-2011	609338	5/2/2022	Inflow and Infiltration	40.00	Gushing or Spurting	
H17-3038-H17-3037	611039	12/18/2023	Break or Failure	30.00	Hole Soil Visible	
H17-3038-H17-3037	611039	12/18/2023	Cracks or Fractures	60.00	Moderate Cracking	
J11-3015-J11-3094	608400	6/22/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3015-J11-3094	608400	6/22/2021	Break or Failure	30.00	Hole Soil Visible	
B26-2048-B26-2047	610880	11/16/2023	Break or Failure	0.00	Collapse	
K18-3030-K18-3028	609564	7/19/2022	Inflow and Infiltration	low and Infiltration 60.00 Running or Trickling		
D23-2010-D23-2009	608218	5/6/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-4009-J11-4008	608389	6/14/2021	Roots	50.00	Medium	ROOTS MAINLY TO 60 FT IN
J11-3059-J11-3101	608385	6/10/2021	Roots	80.00	Light	@ JOINTS @ 41', 55', 65'
G16-1047-G16-1046	610200	1/27/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index Measured Value		Notes
D23-2047-D23-2046	608177	4/28/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2047-D23-2046	608177	4/28/2021	Cracks or Fractures	80.00	Minor Cracking	
G21-2020-G21-2019	608052	3/16/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
G21-2020-G21-2019	609883	11/8/2022	Belly or Sag	80.00	Minor (<10%)	
G16-2035-G16-2019	610500	5/31/2023	Belly or Sag	60.00	Moderate (10 to 30%)	
K10-1039-K10-1033	608251	5/11/2021	Roots	50.00	Medium	
K10-1039-K10-1033	608251	5/11/2021	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
K10-1039-K10-1033	608251	5/11/2021	Cracks or Fractures	80.00	Minor Cracking	
K10-1039-K10-1033	608251	5/11/2021	Break or Failure	15.00	Hole Void Visible	
J18-2063-J18-2004	608650	9/23/2021	Obstruction or Intrusion	80.00	Minor	
J18-2063-J18-2004	608650	9/23/2021	Roots	50.00	Medium	J18-2004 IN STRUCTURE
J11-3100-J11-3053	608423	6/28/2021	Cracks or Fractures	80.00	Minor Cracking	
J16-4012-J16-4011	610934	12/1/2023	Cracks or Fractures	80.00	Minor Cracking	
K18-3067-K18-3008	608948	1/18/2022	Belly or Sag	80.00	Minor (<10%)	
G16-2031-G16-2029	610380	4/6/2023	Roots	80.00	Light	
K18-4017-K18-4016	608236	5/10/2021	Belly or Sag	80.00	Minor (<10%)	
L18-4045-L18-4038	607955	2/3/2021	Belly or Sag	80.00	Minor (<10%)	
G21-2034C-G21-2029	609871	11/7/2022	Roots	30.00	Heavy	HEAVY ROOTS AT END OF PIPE
G21-2034C-G21-2029	609871	11/7/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
H17-3040-H17-3039	611036	12/18/2023	Break or Failure	30.00	Hole Soil Visible	
H17-3040-H17-3039	611036	12/18/2023	Cracks or Fractures	80.00	Minor Cracking	
K18-3006-K18-3005	609096	3/1/2022	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
K18-2022-K18-2021	608849	12/15/2021	Belly or Sag	80.00	Minor (<10%)	
D23-2114-D23-2113	608026	3/10/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
L17-1013-L17-1012	608730	10/18/2021	Obstruction or Intrusion	60.00	Moderate	
K18-4048-K18-4047	608791	11/9/2021	Obstruction or Intrusion	60.00	Moderate	
H16-4001-H16-1018	610322	3/28/2023	Inflow and Infiltration	60.00	Running or Trickling	
J11-2016-J11-2015	608324	5/21/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
L18-4057-L18-4028	609197	3/30/2022	Worn Surface	80.00	Minor	
L18-4057-L18-4028	609197	3/30/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
K18-2044-K18-2043	609239	4/11/2022	Inflow and Infiltration	80.00	Weeping or Dripping	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index Measured Value		Notes	
K18-1015-K18-1014	609451	6/15/2022	Roots	80.00	Light	K18-1014 ROOTS IN STRUCTURE	
J11-3019-J11-3018	608394	6/17/2021	Roots	80.00	Light	ROOTS IN JOINTS FROM 35' TO 55'	
J11-3019-J11-3018	608394	6/17/2021	Obstruction or Intrusion	60.00	Moderate		
J11-3019-J11-3018	608394	6/17/2021	Worn Surface	80.00	Minor		
J20-2001-J20-3055	608802	11/15/2021	Roots	80.00	Light	IN STRUCTURE 3055	
G16-3015-G16-3014	610273	3/13/2023	Cracks or Fractures	40.00	Severe Cracking		
G16-3015-G16-3014	610273	3/13/2023	Roots	50.00 Medium			
L17-1033-L17-1032	607899	1/12/2021	Roots	80.00 Light		ROOTS JUST INSIDE THE SAND COLLAR OF MANHOLE L17-1032	
L17-4018C-L17-4004	607893	1/11/2021	Belly or Sag	80.00	Minor (<10%)		
L17-4018C-L17-4004	607893	1/11/2021	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)		
L17-1065-L17-1064	607961	2/4/2021	Obstruction or Intrusion	0.00 Severe or Impassable			
L17-1065-L17-1064	607961	2/4/2021	Roots	0.00 Blockage		SIDE SERVICE BLOCKED AT 334.4 FROM THE GROCERY STORE	
L17-1065-L17-1064	607961	2/4/2021	Inflow and Infiltration	80.00	Weeping or Dripping		
L16-2017-L16-2016	609800	10/13/2022	Roots	30.00	Heavy	ROOTS IN DOWNSTREAM MH -L16- 2016	
J19-3114-J19-3107	608000	3/2/2021	Obstruction or Intrusion	0.00	Severe or Impassable		
J18-2019-J18-2018	609515	7/12/2022	Roots	80.00	Light	J18-2018 IN STRUCTUREREQUEST ROOT X TREATMENT	
D23-2051-D23-2050	608141	4/12/2021	Belly or Sag	80.00	Minor (<10%)		
L17-1016-L17-1015	607908	1/14/2021	Cracks or Fractures	80.00	Minor Cracking		
L17-1016-L17-1015	607908	1/14/2021	Inflow and Infiltration	90.00	Stain, Possible I&I		
L17-1057-L17-1063	607963	2/4/2021	Inflow and Infiltration	90.00	Stain, Possible I&I		
L17-1057-L17-1063	607963	2/4/2021	Roots	80.00	Light	LIGHT ROOTS IN THE TOP OF THE PIPE AT 125 FT	
L17-1057-L17-1063	607963	2/4/2021	Belly or Sag	80.00	Minor (<10%)		
K20-4007-K20-4006	609365	5/16/2022	Roots	50.00	Medium	K20-4007: roots in structure	
K10-1010-K10-1007	608346	5/27/2021	Belly or Sag	60.00	Moderate (10 to 30%)		
K10-1010-K10-1007	608346	5/27/2021	Roots	80.00	Light		

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index Measured Value		Notes
H16-3106-H16-3105	610790	9/18/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
J16-4011-J16-4006	610935	12/1/2023	Cracks or Fractures	60.00	Moderate Cracking	
D23-2012-D23-2009	608216	5/6/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3081-J11-3066	608523	8/3/2021	Roots	80.00	Light	REFER ROOTS LIST
D23-2108-D23-2107	608030	3/10/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
D10-1032-D10-1031	609623	8/15/2022	Cracks or Fractures 80.00 Minor Cracking			
D11-4002-D11-4001	610302	3/22/2023	Obstruction or Intrusion	80.00	Minor	
J19-2006-J19-2005	609478	6/17/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
J11-4011-J11-4010	608409	6/23/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-4011-J11-4010	608409	6/23/2021	Belly or Sag	80.00	Minor (<10%)	
J11-4011-J11-4010	608409	6/23/2021	Break or Failure	30.00	Hole Soil Visible	
J11-4011-J11-4010	608409	6/23/2021	Worn Surface	80.00	Minor	
H16-3038-H16-3034	610822	9/26/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
K18-3049-LS-2	608753	10/20/2021	Inflow and Infiltration	40.00	Gushing or Spurting	
D23-3050-D23-3049	608200	5/4/2021	Belly or Sag	80.00	Minor (<10%)	
D23-3050-D23-3049	608200	5/4/2021	Obstruction or Intrusion	truction or Intrusion 60.00 Moderate		
F16-4009-F16-4002	609986	11/28/2022	Roots	80.00	Light	IN DOWNSTREAM SAND COLLAR MH F16-4002
L17-1023-L17-1022	607903	1/12/2021	Break or Failure	0.00	Collapse	
L17-1023-L17-1022	607903	1/12/2021	Inflow and Infiltration	60.00	Running or Trickling	
L17-1023-L17-1022	607903	1/12/2021	Roots	80.00	Light	ROOTS IN THE SAND COLLAR OF L17-1023
L17-1023-L17-1022	607903	1/12/2021	Cracks or Fractures	40.00	Severe Cracking	
L17-1023-L17-1022	607903	1/12/2021	Lining or Repair Failure	80.00	Minor	
L18-4067-L18-4066	608896	12/23/2021	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
L18-4067-L18-4066	608896	12/23/2021	Obstruction or Intrusion	80.00	Minor	
K18-3028-K18-3027	609565	7/19/2022	Inflow and Infiltration	60.00	Running or Trickling	
K18-2025-K18-2024	608891	12/23/2021	Inflow and Infiltration	60.00	Running or Trickling	
G16-1013-G16-1019	610493	5/30/2023	Roots	80.00	Light	
J19-3112-J19-3111	607993	3/1/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
J11-2030-J11-2029	608458	7/14/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
K18-4047-K18-4046	608790	11/9/2021	Belly or Sag	80.00	Minor (<10%)	
G16-4101-G16-4100	610156	1/25/2023	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	Index	Measured Value	Notes
D23-2087-D23-2086	608064	3/18/2021	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
K18-3099C-K18-3052	609320	4/27/2022	Joint Separation or Offset	60.00	Moderate (1 to 1.5 Pipe Thickness)	
K18-3099C-K18-3052	609320	4/27/2022	Belly or Sag	40.00	Severe (>30%)	
K18-3099C-K18-3052	609320	4/27/2022	Obstruction or Intrusion	Obstruction or Intrusion 0.00 Severe or Impassable		
J11-3044-J11-3043	608436	7/6/2021	Obstruction or Intrusion	80.00	Minor	
J11-3044-J11-3043	608436	7/6/2021	Break or Failure	15.00	Hole Void Visible	
J11-3044-J11-3043	608436	7/6/2021	Cracks or Fractures	80.00	Minor Cracking	
D23-1003-D23-1002	608172	4/27/2021	Roots	80.00	Light	
K10-1009-K10-1008	608313	5/19/2021	Roots	80.00 Light		K10-1009-K10-1008 ROOTS IN THE LATERAL 29 FT FROM THE UPPER M/H, 58 FT FROM UPPER M/H, 137 FROM UPPER M/H
K10-1009-K10-1008	609008	2/4/2022	Joint Separation or Offset	80.00 Minor (< Pipe Wall Thickness)		
K10-1009-K10-1008	609008	2/4/2022	Roots	50.00	Medium	SIDE SERVICE BLOCKED BY ROOTS AND POSSIBLY COLLAPSED
K19-4014-K19-4013	609029	2/7/2022	Roots	50.00	Medium	ROOT BUILD UP IN K19-4013
B26-2031-B26-2030	610886	11/20/2023	Obstruction or Intrusion	80.00	Minor	
H17-3050-H17-3049	611053	12/19/2023	Cracks or Fractures	60.00	Moderate Cracking	
H17-3050-H17-3049	611053	12/19/2023	Break or Failure	30.00	Hole Soil Visible	
D11-4026-D11-4025	609689	9/6/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
D11-4047-D11-4045	609684	9/6/2022	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
G21-2017-G21-2016	609891	11/9/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
K17-2011-LS-39	608742	10/19/2021	Worn Surface	80.00	Minor	
G21-2025-G21-2024	609876	11/8/2022	Cracks or Fractures	80.00	Minor Cracking	
K18-3035-K18-3031	608882	12/21/2021	Belly or Sag	80.00	Minor (<10%)	
L18-4080-L18-4079	609278	4/20/2022	Obstruction or Intrusion	80.00	Minor	
D10-1002-D10-1001	609613	8/8/2022	Belly or Sag	40.00	Severe (>30%)	
G21-2003-G21-2002	609903	11/14/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
G21-2003-G21-2002	609903	11/14/2022	Cracks or Fractures	80.00	Minor Cracking	
K18-2006-K18-2005	609353	5/4/2022	Inflow and Infiltration	60.00	Running or Trickling	
L18-4051-L18-4050	607967	2/5/2021	Inflow and Infiltration	60.00	Running or Trickling	

Pipe ID	Inspection ID	Inspection Date	Condition_Category	n_Category Index Measured Value		Notes
L18-4051-L18-4050	607967	2/5/2021	Cracks or Fractures	80.00	Minor Cracking	
K10-1054-K10-1053	608303	5/18/2021	Cracks or Fractures	80.00	Minor Cracking	
K10-1054-K10-1053	608303	5/18/2021	Inflow and Infiltration	60.00	Running or Trickling	
G16-3070-G16-3062	610311	3/23/2023	Belly or Sag	80.00	Minor (<10%)	
G15-3037-G15-3036	610262	3/9/2023	Belly or Sag	80.00	Minor (<10%)	
D23-2011-D23-2010	608219	5/6/2021	Inflow and Infiltration	80.00	Weeping or Dripping	
K19-1020-K19-1019	609072	2/16/2022	Roots 80.00 Light K19		K19-1019- ROOTS IN STRUCTURE	
K18-4001-K18-3003	609270	4/19/2022	Belly or Sag	60.00	Moderate (10 to 30%)	
K19-1038-K19-1037	609410	6/7/2022	Roots	80.00	Light	ROOTS IN LATERAL 49' DOWNSTREAM
J16-4015-J16-4014	610923	11/29/2023	Cracks or Fractures	80.00	Minor Cracking	
G16-4031-G16-4029	610115	1/11/2023	Belly or Sag	80.00	Minor (<10%)	
J11-3065-J11-3064	608383	6/10/2021	Worn Surface	80.00	Minor	
G16-1051-G16-1050	610197	1/27/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-1051-G16-1050	610197	1/27/2023	Obstruction or Intrusion	80.00	Minor	
J19-2086-J19-2008	608612	8/30/2021	Roots	80.00	Light	
K19-1037-K19-1036	609411	6/7/2022	Roots	80.00	Light	K19-1036 ROOTS ON LADDER RUNGS
G16-2037-G16-2018	610634	8/10/2023	Belly or Sag	80.00	Minor (<10%)	
J11-4012-J11-4011	608410	6/23/2021	Worn Surface	80.00	Minor	
J11-4012-J11-4011	608410	6/23/2021	Break or Failure	30.00	Hole Soil Visible	
J11-4012-J11-4011	608410	6/23/2021	Cracks or Fractures	80.00	Minor Cracking	
K18-2057-K18-2031	609257	4/18/2022	Belly or Sag	80.00	Minor (<10%)	
H16-2094C-H16-2012	611003	12/13/2023	Break or Failure	30.00	Hole Soil Visible	
H16-2094C-H16-2012	611003	12/13/2023	Roots	50.00	Medium	
H16-2094C-H16-2012	611003	12/13/2023	Cracks or Fractures	60.00	Moderate Cracking	
H17-3054-H17-3053	611075	12/27/2023	Break or Failure	30.00	Hole Soil Visible	
K18-4026-K18-4025	609312	4/26/2022	Cracks or Fractures	80.00	Minor Cracking	
J18-2006-J18-2005	608639	9/16/2021	Roots	80.00	80.00 Light ROOTS IN J18-20 ROOT TREATME	
K18-1018-K18-1017	609448	6/15/2022	Roots	80.00	Light	K18-1017 ROOTS IN STRUCTURE
J19-2019-J19-2018	608919	1/10/2022	Roots	80.00	Light	IN J19-2019 STRUCTURE

Pipe ID	Inspection ID	Inspection Date	Condition_Category			Notes
G16-4012-G16-4011	610132	1/17/2023	Roots	50.00	Medium	G16-4012 ROOTS IN MH CAUSING I&I
G16-4012-G16-4011	610132	1/17/2023	Inflow and Infiltration	60.00	Running or Trickling	
K10-1037-K10-1036	608245	5/11/2021	Joint Separation or Offset	80.00	Minor (< Pipe Wall Thickness)	
K10-1037-K10-1036	608245	5/11/2021	Belly or Sag	80.00	Minor (<10%)	
L17-1088C-L17-1087	607886	1/8/2021	Roots	50.00	Medium	
L17-1088C-L17-1087	607886	1/8/2021	Inflow and Infiltration	60.00	Running or Trickling	
L17-1088C-L17-1087	607886	1/8/2021	Cracks or Fractures	80.00	Minor Cracking	
L17-1088C-L17-1087	610746	9/7/2023	Break or Failure	30.00	Hole Soil Visible	
L17-1088C-L17-1087	610746	9/7/2023	Roots	0.00	Blockage	
K18-1009-K18-1008	609592	7/27/2022	Inflow and Infiltration	90.00	Stain, Possible I&I	
K18-4044-K18-4024	609309	4/25/2022	Obstruction or Intrusion	0.00	Severe or Impassable	
K18-4044-K18-4024	609309	4/25/2022	Cracks or Fractures	80.00	Minor Cracking	
J16-1027-J16-1025	610622	8/8/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
D23-2066-D23-2065	608094	3/30/2021	Roots	80.00	Light	ROOTS IN LATERAL @60.4
C11-3010-C11-3008	609711	9/27/2022	Belly or Sag	80.00	Minor (<10%)	
J11-3102-J11-3058	608416	6/28/2021	Belly or Sag	80.00	Minor (<10%)	
H15-1023-H15-1001	610356	4/3/2023	Cracks or Fractures	60.00	Moderate Cracking	
H16-1030-H16-1029	610390	4/10/2023	Joint Separation or Offset	40.00	Severe (> 1.5 Pipe Thickness)	
K18-4058-K18-4036	609295	4/22/2022	Cracks or Fractures	60.00	Moderate Cracking	
D23-2045-D23-2044	608173	4/27/2021	Roots	80.00	Light	IN D23-2045
L18-4048-L18-4047	607972	2/5/2021	Roots	50.00	Medium	ROOTS IN MANHOLE L18-4047
H16-4048-H16-4047	610312	3/23/2023	Roots	50.00	Medium	ROOTS IN DOWNSTREAM STRUCTURE H16-4047
H15-1001-G15-2011	610544	7/12/2023	Break or Failure	15.00	Hole Void Visible	
K18-2041-K18-2040	609339	5/2/2022	Roots	80.00	Light	K-18-2040: ROOT NEAR TOP OF STRUCTURE
J11-3089-J11-3095	608454	7/13/2021	Roots	80.00	Light	ON ROOTS LIST
L17-1062-L17-1058	607966	2/4/2021	Inflow and Infiltration	90.00	Stain, Possible I&I	
L17-1062-L17-1058	607966	2/4/2021	Belly or Sag	80.00	Minor (<10%)	
K19-1060-K19-1059	609248	4/13/2022	Roots	50.00	, , ,	
H16-3041-H16-3040	610820	9/26/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
H16-3041-H16-3040	610820	9/26/2023	Belly or Sag	80.00	Minor (<10%)	

Pipe ID	Inspection ID	Inspection Date	Condition_Category Index Measured Value		Measured Value	Notes
J16-4008-J16-4007	610931	12/1/2023	Cracks or Fractures	80.00	Minor Cracking	
G16-3078-G16-3009	610277	3/13/2023	Inflow and Infiltration	60.00	Running or Trickling	
J19-2067-J19-2068	608828	12/8/2021	Roots	50.00	Medium	ROOTS IN DOWNSTREAM MANHOLE STRUCTURE
K18-3031-K18-3030	609563	7/19/2022	Inflow and Infiltration	60.00	Running or Trickling	
J11-4018-J11-4013	608406	6/23/2021	Roots	80.00	Light	
J11-3046-J11-3045	608435	7/6/2021	Roots	80.00	Light	ON ROOTS LIST
J11-3046-J11-3045	608435	7/6/2021	Cracks or Fractures	80.00	Minor Cracking	
J11-3046-J11-3045	608435	7/6/2021	Worn Surface	80.00	Minor	
J11-3046-J11-3045	608435	7/6/2021	Obstruction or Intrusion	80.00	Minor	
G16-4089-G16-4088	610086	12/15/2022	Belly or Sag	80.00	Minor (<10%)	
D23-2143-D23-2142	608367	6/7/2021	Belly or Sag	60.00	Moderate (10 to 30%)	
D23-2062-D23-2061	608193	5/4/2021	Worn Surface	80.00	Minor	
J11-3051-J11-3048	608528	8/3/2021	Worn Surface	80.00	Minor	
H16-4002-H16-4001	610360	4/4/2023	Belly or Sag	60.00	Moderate (10 to 30%)	
J18-3044-J18-3043	608204	5/5/2021	Roots	80.00	Light	J18-3043 STRUCTURE HAS LIGH ROOTSRECOMMEND ROOT X TREATMENT
K18-3008-K18-3007	609426	6/8/2022	Cracks or Fractures	80.00	Minor Cracking	
K18-4067-K18-4066	608784	11/9/2021	Belly or Sag	80.00	Minor (<10%)	
K19-4022-K19-4025	609475	6/17/2022	Roots	80.00	Light	K19-4022
L17-1039-L17-1038	610348	3/30/2023	Belly or Sag	80.00	Minor (<10%)	
L17-1039-L17-1038	610348	3/30/2023	Obstruction or Intrusion	60.00	Moderate	
L17-1039-L17-1038	610348	3/30/2023	Lining or Repair Failure	40.00	Severe	
J16-4004-J16-4003	610937	12/1/2023	Roots	80.00	Light	
J16-4004-J16-4003	610937	12/1/2023	Break or Failure	15.00	Hole Void Visible	
G16-4087-G16-4086	610108	1/3/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-4013-G16-4010	610129	1/17/2023	Inflow and Infiltration	90.00	Stain, Possible I&I	
G16-2024-G16-2020	610383	4/7/2023	Belly or Sag	60.00	Moderate (10 to 30%)	



Facility Name: Headworks

Location: Headworks Building

Unit Process: Headworks

Description: The preliminary treatment processes at Kingston WWTP include a rotary bar screen with a bypass channel with a manual screen, a grit tank, grit cyclone and classifier. The preliminary treatment

equipment is located in the Headworks building, which was constructed in 2005.

## EQUIPMENT

Equipment Name   Equipment Tag   Condition   Criticality/Cos   Serviceability   Install Year   Location   Type   Manufacturer   Model   Motor HP   Capacity	EQUIPIVIENT											
Sereen   M-201   1   2   2   2019	Equipment Name	Equipment Tag		,,,	,	Install Year	Location	Type	Manufacturer	Model	Motor HP	Capacity
P-213   1   2   2   2019		M-201	1	2	2	2019		Rotating drum screen	Huber	Rotamat (6 mm)	2	2.574 MGD
Booster Pump   P-214   1	Pressate Pump	P-213	1	2	2	2019		Centrifugal Explosion Proof	Gorman-Rupp	81 1/2D3-X1 3P	1	75 gpm
Second   No.   N	Booster Pump	P-214	1	2	2	2019		Ü	Grundfos	CR	3	
Manual Screen   M-202   N/A   1   2   2005   level   Bar Screen Rack 1 inch   2.1 MGD	Booster W3 strainer	N/A	1	1	2	2019		Manual disc filter	Netafim			40-120 gpm
Second   M-210   2   2   2   2   2   2   2   2   2	Manual Screen	M-202	N/A	1	2	2005		Bar Screen Rack 1 inch				2.1 MGD
Serif Cyclone   M-205   3	Grit Chamber	M-210	2	2	2	2005		Vortex	Smith & Loveless	2.5	0.75	2.26 MGD
Grit Classifier M-205 3 2 2 2005 level dewatering classifier WEMCO Hydrogritter 1/2 15 gpm  Grit Pump P-212 2 2 2 2005 Headworks lower level centrifugal WEMCO C 3x3 Torque Flow Pump 5 220 gpm  Screenings and Grit Hopper 2 2 1 2005 Headworks lower level Pump Flow Pump 5 220 gpm  Influent Sampler M-220 2 4 2 2005 Headworks upper level Pump Pump Flow Pump 5 220 gpm  Influent Sampler M-220 2 4 2 2005 Headworks upper level Pump Pump Flow Flow Flow Pump Flow Pump Flow Flow Pump Flow Flow Pump Flow Pump Flow Pump Flow Flow Pump Flow Pump Flow Flow Pump Flow Flow Pump Flow Pump Flow Pump Flow Pump Flow Pump Flow Pump Flow Flow Pump Flow Flow Pump Flow Pump Flow Pump Flow Pump Flow Pump Flow Flow Pump Flow Flow Flow Pump Flow Flow Flow Flow Flow Flow Flow Flow	Grit Cyclone	M-205	3	2	2	2005		Vortex	WEMCO	12 inch	1/2	220 gpm
Grit Pump P-212 2 2 2 2005 level centrifugal WEMCO Flow Pump 5 220 gpm  Screenings and Grit Hopper 2 2 2 1 2005 Headworks lower level Outdoor auto sampler Southwell Controls CDFX  Influent Sampler M-220 2 4 2 2005 Headworks upper level Outdoor auto sampler Controls CDFX  INSTRUMENTATION  Influent Level Ultrasonic LE 200 1 3 1 2019 Headworks upper level Ultrasonic Willtrasonic Willtrasonic Fe/Fit 219 2 2 1 2005 Headworks upper level Ultrasonic Willtrasonic Willtrasonic Structural Flow Fe/Fit 219 2 2 1 2005 Headworks upper level Willtrasonic Willtrasonic OCM III  STRUCTURAL/FACILITIES	Grit Classifier	M-205	3	2	2	2005		"	WEMCO		1/2	15 gpm
Hopper   2   2   1   2005   level	Grit Pump	P-212	2	2	2	2005		_	WEMCO	· ·	5	220 gpm
Influent Sampler M-220 2 4 2 2005 level Outdoor auto sampler Controls CDFX  INSTRUMENTATION  Influent Level Ultrasonic LE 200 1 3 1 2019 Headworks upper level Ultrasonic Milltronics Hydroranger Influent Float LSH LSH 206 1 3 1 2019 Headworks upper level Headworks upper level Milltronics OCM III  Parshall Flume Flow Transducer FE/FIT 219 2 2 1 2005 Headworks upper level Milltronics OCM III  STRUCTURAL/FACILITIES	-		2	2	1	2005						~ 2 CY
Influent Level Ultrasonic LE 200 1 3 1 2019 Headworks upper level Ultrasonic Milltronics Hydroranger Influent Float LSH LSH 206 1 3 1 2019 Headworks upper level Level Float Parshall Flume Flow Transducer FE/FIT 219 2 2 1 2005 Headworks upper level Milltronics OCM III  STRUCTURAL/FACILITIES	Influent Sampler	M-220	2	4	2	2005		Outdoor auto sampler				
Influent Level Ultrasonic LE 200 1 3 1 2019 Headworks upper level Ultrasonic Milltronics Hydroranger Influent Float LSH LSH 206 1 3 1 2019 Headworks upper level Level Float Milltronics OCM III  Parshall Flume Flow Transducer FE/FIT 219 2 2 1 2005 Headworks upper level Milltronics OCM III  STRUCTURAL/FACILITIES	INSTRUMENTATION											
Influent Float LSH 206 1 3 1 2019   level   Level Float   Level Float	Influent Level	LE 200	1	3	1	2019		Ultrasonic	Milltronics	Hydroranger		
Transducer FE/FIT 219 2 2 1 2005 level Milltronics OCM III  STRUCTURAL/FACILITIES	Influent Float LSH	LSH 206	1	3	1	2019		Level Float				
		FE/FIT 219	2	2	1	2005			Milltronics	OCM III		
	STRUCTURAL/FACILIT	TIES										
Influent Parshall Flume M-221 Not obs 2 2005 Headworks upper level 12-inch, 10.4 MGD	,		Not obs	2		2005	Headworks upper level					12-inch, 10.4 MGD
Headworks Building N/A 2 4 2005 Headworks	Headworks Building	N/A	2	4		2005	Headworks					

Facility Name: Headworks

Location: Headworks Building

Unit Process: Headworks

PIPING

Influent Piping	N/A	2	5	1	2005			
Mixed Liquor Piping	N/A	2	3	1	2005			

<sup>\*</sup>Condition (1 = very good, 5 = very poor). CoF (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

### Photos:

M-201 Mechanical







P-214 Booster Pump



M-210 Grit Chamber



M-205 Grit Cyclone and Classifier



Corrosion on M-205 Grit Cyclone and Classifier



P-212 Grit Pump



Facility Name: Headworks

Location: Headworks Building

Unit Process: Headworks

Photos:

# M-220 Influent Sampler









### Notes:

Corrosion on Grit Classifier Poor access to pressate and booster pumps Corrosion on grit classifier body

Facility Name: Secondary Treatment

Location: Oxidation Ditches, Blower Building and Secondary Clarifiers

Unit Process: Secondary Treatment

Description: Kingston WWTP has two parallel oxidation ditches that are operated one at a time and rotated once per year. Oxidation ditch No. 2 was retrofitted with new equipment in 2020, and Oxidation

ditch No. 1 has the same retrofit planned. Blowers for the oxidation ditches are in the blower building north of the oxidation ditches. Two Secondary clarifiers are located north of the oxidation

ditches and east of the blower building.

#### **EQUIPMENT**

Equipment Name	Equipment Tag	Condition (1-5)	Criticality/CoF (1-5)	Serviceability (1-4)	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
Submersible Mixer	MXR-301	N/A	N/A	N/A	N/A	Oxidation ditch no. 1	Banana blade slow speed submersible				
Submersible Mixer	MXR-302	N/A	N/A	N/A	N/A	Oxidation ditch no. 1	Banana blade slow speed submersible				
Submersible Mixer	MXR-303	1	3	1	2020	Oxidation ditch no. 2	Banana blade slow speed submersible			6.2	
Submersible Mixer	MXR-304	1	3	1	2020	Oxidation ditch no. 2	Banana blade slow speed submersible			6.2	
Air diffusers (installation is ongoing)		1	3	1	2020	Oxidation ditch no. 1	9" fine bubble disc	Sanitaire	SS-II		
Air diffusers		1	3	1	2020	Oxidation ditch no. 2	9" fine bubble disc	Sanitaire	SS-II		
Aeration Blower No. 1	B-301	1	3	1	2020	Blower area	Variable speed PD	Aerzen USA	GM 10 S SO-19- 00281	15	264 scfm @ 5.5 psig
Aeration Blower No. 2	B-302	1	3	1	2020	Blower area	Variable speed PD	Aerzen USA	GM 10 S SO-19- 00281	15	264 scfm @ 5.5 psig
Aeration Blower No. 3	B-303	1	3	1	2020	Blower area	Variable speed PD	Aerzen USA	GM 10 S SO-19- 00281	15	264 scfm @ 5.5 psig
Secondary Clarifier 1 Drive	M-401	3	3	1	2005	Secondary clarifiers	Center column	Dodge Quantis	HB382CN56C		
Secondary Clarifier 2 Drive	M-402	3	3	1	2005	Secondary clarifiers	Center column	Dodge Quantis	HB382CN56C		

#### INSRUMENTATION

4" Air Flow Meter	AE/AIT 302	1	3	1	2020	Oxidation ditches			
DO Probe	DOP-302	1	4	1	2020	Oxidation ditches			
ORP Probe	ORP-302	1	4	1	2020	Oxidation ditches			

<sup>\*</sup>Condition (1 = very good, 5 = very poor). Criticality (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

Facility Name: Secondary Treatment

Oxidation Ditches, Blower Building and Secondary Clarifiers Location:

Unit Process: Secondary Treatment
STRUCTURAL/FACILITIES

STRUCTURAL/FACILIT						T	ı	1	T		1
Equipment Name	Equipment	Condition	Criticality	Serviceability	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
	Tag	(1-5)	(1-5)	(1-4)							
Oxidation Ditch No. 1	N/A	1	4	N/A	2005	Oxidation ditches					
Oxidation Ditch No. 2	N/A	1	4	N/A	2005	Oxidation ditches					
Oxidation Ditch No. 1 Effluent Weir	N/A	1	N/A	N/A	2005	Oxidation ditches		AUMA	GF80.3R90		
Oxidation Ditch No. 2 Effluent Weir	N/A	1	4	N/A	2005	Oxidation ditches		AUMA	GF80.3R90		
Flow Splitter to Oxidation Ditches	N/A	1	4	N/A	2005	Oxidation ditches					
Flow Splitter to Secondary Clarifiers	N/A	1	4	N/A	2005	Secondary clarifiers					
Secondary Clarifier 1	N/A	1	3	N/A	2005	Secondary clarifiers					
Secondary Clarifier 2	N/A	1	3	N/A	2005	Secondary clarifiers					

### PIPING

Secondary Effluent Piping	N/A	2	3	1	2005				
RAS Piping	N/A	2	3	1	2005				
Aeration air piping	N/A	1	5	N/A	2020	Blower and Oxidation Ditch	SST piping		

<sup>\*</sup>Condition (1 = very good, 5 = very poor). CoF (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

## Photos:

Oxidation Ditches





B-303 Aeration Blower





Facility Name: Secondary Treatment

Location: Oxidation Ditches, Blower Building and Secondary Clarifiers

Unit Process: Secondary Treatment

#### Photos:

Flow Splitter to secondary clarifiers



Secondary Clarifiers



Clarifier effluent box valve stem



#### Notes:

There are two submersible mixers for the oxidation ditches. The oxidation ditches are operated one at a time and rotate once per year. Submersible mixers will be moved between the oxidation ditches. When they are location in OD No. 1 they will be MXR-301 and MXR-302. When they are location in OD No. 2 they will be MXR-303 and MXR-304.

Corrosion on secondary clarifier drives

Corrosion on secondary clarifier effluent box valve stems and assemblies

Facility Name: UV Disinfection and Reclaimed Water

Location: UV Area

Unit Process: UV Disinfection

Description: Kingston WWTP treats secondary effluent using UV disinfection prior to the outfall, and meters effluent flow with a Parshall flume and ultrasonic level.

### EQUIPMENT

Equipment	Condition	Criticality/CoF	Serviceability	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
Tag	(1-5)	(1-5)	(1-4)							
N/A	4	3	3	2005	UV Area		Trojan	3000B		1.4 MGD
N/A	4	3	3	2005	UV Area		Trojan	3000B		1.4 MGD
M-510	3	4	2	2005	UV Area	Outdoor auto sampler	Southwell Controls	BVS-CM1RC9-CDF		
т	<del>1</del>	1	Г		T	T		<u> </u>	1	
FE/FIT 505	2	4	2	2005	Effluent Parshall Flume	Ultrasonic	Milltronics	OCM 111		
LSL/H 504	2	3	2	2005	UV Area	Level floats				
•	•	•	•	•	•	•		•	•	•
IES										
	N/A N/A N/A M-510	N/A 4 N/A 4 N-510 3  FE/FIT 505 2	Tag (1-5) (1	Tag (1-5) (1-5) (1-4) (1-4) (1-4) (1-5) (1-4) (1-5) (1-4) (1-5) (1-4) (1-5) (1-4) (1-5) (1-4) (1-5) (1-5) (1-4) (1-5) (1-4) (1-5) (1-4) (1-5) (1-5) (1-4) (1-5) (1-5) (1-4) (1-5) (1-4) (1-5) (1-5) (1-5) (1-5) (1-4) (1-5) (1	Tag (1-5) (1-5) (1-4) (1-4) (1-4) (1-5) (1-4) (1-4) (1-4) (1-5) (1-4) (1	Tag     (1-5)     (1-5)     (1-4)     UV Area       N/A     4     3     3     2005     UV Area       M-510     3     4     2     2005     UV Area       FE/FIT 505       2     4     2     2005     Effluent Parshall Flume	Tag       (1-5)       (1-5)       (1-4)       UV Area         N/A       4       3       3       2005       UV Area         M-510       3       4       2       2005       UV Area       Outdoor auto sampler         FE/FIT 505       2       4       2       2005       Effluent Parshall Flume       Ultrasonic	Tag         (1-5)         (1-5)         (1-4)         UV Area         Trojan           N/A         4         3         3         2005         UV Area         Trojan           M-510         3         4         2         2005         UV Area         Outdoor auto sampler         Southwell Controls           FE/FIT 505         2         4         2         2005         Effluent Parshall Flume         Ultrasonic         Milltronics	Tag         (1-5)         (1-5)         (1-4)         We have a construction of the control of th	Tag         (1-5)         (1-5)         (1-4)         Image: Control of the property of the propert

<sup>\*</sup>Condition (1 = very good, 5 = very poor), CoF (1 = not critical, 5 = highly critical), Serviceability (1 = very good, 4 = very poor)

Facility Name: UV Disinfection and Reclaimed Water

Location: UV Area

Unit Process: UV Disinfection

Photos:

UV Bank and Effluent



M-510 Effluent Sampler



M-505 Parshall Flume



Effluent Flowmeter



Notes:

Facility Name	e: Process Building	
i aciiity ivaiiii	E. I TOCC33 DUITUING	

Location: Process Building

Unit Process: Sludge Processing

Description: Two RAS pumps pump sludge from secondary clarifiers back to the oxidation ditches. WAS is metered off the RAS discharge line, and sent to the WAS Tank. Two sludge pumps can be used pump

WAS to the GBT, or pump the TWAS to the sludge truck loadout.

## EQUIPMENT

Equipment Name	Equipment Tag	Condition (1-5)	Criticality/CoF (1-5)	Serviceability (1-4)	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
Gravity Belt Thickener	M-615	2	4	2	2005	Process Building	Gravity belt thickener	Ashbrook	Aquabelt		200 gpm
Polymer System	M-800	2	2	2	2005	Process Building	Liquid polymer mix/activation	Polyblend	SP60101954		
Polymer metering pump	M-801	2	2	2	2005	Process Building	Metering				
Sludge Tank Blower	B-601	2	3	2	2005	Process Building	Positive Displacement	Gardner Denver	Sutorbilt GACMDPA	15	200 scfm @ 7.0 psig
Sludge Tank Blower	B-602	2	3	2	2005	Process Building	Positive Displacement	Gardner Denver	Sutorbilt GACMDPA	15	200 scfm @ 7.0 psig
Sludge Tank Blower	B-603	2	3	2	2005	Process Building	Positive Displacement	Gardner Denver	Sutorbilt GACMDPA	15	200 scfm @ 7.0 psig
Sludge Pump	P-611	2	3	2	2005	Process Building	Progressing cavity	Mono Pump	Monoflo C177500- 01	15	200 gpm @ 50 psig
Sludge Pump	P-612	2	3	2	2005	Process Building	Progressing cavity	Mono Pump	Monoflo C177500- 01	15	200 gpm @ 50 psig
Scum Pump	P-405	2	4	2	2005	Secondary clarifiers	Submersible			1	100 gpm
RAS Pump	P-411	2	3	1	2005	Process Building	End suction	Flygt	NSX	5	275 gpm
RAS Pump	P-412	2	3	1	2005	Process Building	End suction	Flygt	NSX	5	275 gpm
Compressed Air System	M-230	2	2	2	2005	Process building	Reciprocating	Devair	TAPV-5052-45XL	5	

<sup>\*</sup>Condition (1 = very good, 5 = very poor). Criticality (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

Kingston Wastewater Tr	reatment Plant
------------------------	----------------

Facility Name: Process Building

Location: Process Building

Unit Process: Sludge Processing

INTRUMENTATION

Equipment Name	Equipment Tag	Condition (1-5)	Criticality (1-5)	Serviceability (1-4)	Install Year	Location	Type	Manufacturer	Model	Motor HP	Capacity
Sludge to GBT Magmeter	FE/FIT 606	Not obs	2	1	2005	Process Building	Magnetic flowmeter	Siemens	MAG5000		
Scum Tank float	LSL/LSH 405	2	2	2	2005	Process Building	Level floats				
RAS Magmeter	FE/FIT 415	1	2	2	2005	Process Building	Magnetic flowmeter	Siemens	MAG5000		
RAS Magmeter	FE/FIT 416	1	2	2	2005	Process Building	Magnetic flowmeter	Siemens	MAG5000		
WAS Magmeter	FE/FIT 417	1	2	2	2005	Process Building	Magnetic flowmeter	Siemens	MAG5000		
Control Valve to WAS Fanks 3 inch	FV 410	2	2	2	2005	Process Building					
WAS Tank Level Transmitter	LE/LIT 631	2	3	2	2005	Process Building	Ultrasonic	Milltronics	Hydroranger 200		
WAS Tank Level Transmitter	LE/LIT 632	2	3	2	2005	Process Building	Ultrasonic	Milltronics	Hydroranger 200		
TWAS Level Transmitter	LE/LIT 605	2	4	2	2005	Process Building	Ultrasonic	Milltronics	Hydroranger 201		
WAS Tanks LEL monitor	AE 633	4	2	3	2005	Process Building	Combustible gas detector	MSA	Ultima X		not working per operator
WAS Tanks LEL monitor	AE 634	4	2	3	2005	Process Building	Combustible gas detector	MSA	Ultima X		not working per operato
TWAS Tank LEL monitor	AE 604	4	2	3	2005	Process Building	Combustible gas detector	MSA			not working per operato
STRUCTURAL/ FACILI	TIES										
Process Building		2	4		2005						
cum Wetwell		2	3		2005						
WAS Tank	T-605	2	3		2005	Process Building					16,000 gallons
WAS Tank	T-631	2	3		2005	Process Building					25,000 gallons
WAS Tank	T-632	2	3		2005	Process Building					25,000 gallons
Truck Loading		2	5		2005	Outside of Headworks					

Ductile iron

Sludge Piping N/A 2 5 N/A 2005 Process Building Ductile in \*Condition (1 = very good, 5 = very poor). CoF (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

Facility Name: Process Building

Location: Process Building

Unit Process: Sludge Processing

Photos:

P-411/ P-412 RAS Pumps



P-405 Scum Pump



B-601-3 Sludge Tank Blowers



P-611-2 Sludge Pumps



M-615 Gravity Belt Thickener



M-800 Polymer System



Facility Name: Process Building

Location: Process Building

Unit Process: Sludge Processing

### Photos:

P-811 Polymer Metering Pump



M-230 Air Compressor

DEVI

WAS Metering and Control



Scum Pump Wetwell



FE/FIT 415-6 RAS Magmeters



Process Building



Facility Name: Process Building

Location: Process Building

Unit Process: Sludge Processing

## Photos:

## T-631-2 WAS Tanks



## Notes:

WAS tanks are filled and emptied simultaneously





Facility Name: Process Building

Location: Process building

Unit Process: Sodium Hypochlorite

Description: Kingston WWTP has a 2,000-gallon FRP sodium hypochlorite tank that is not in use. The tank was originally designed to feed sodium hypochlorite to headworks, the secondary clarifiers and the W-

3 system. It is not able to be fully pumped out or drained and is not functional. The associated pumps and instrumentation are also not in use.

#### FOUIPMENT

EQUIPIVIENT											
Equipment Name	Equipment Tag	Condition (1-5)	Criticality/CoF (1-5)	Serviceability (1-4)	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
NaOCl Feed Pump	P-811	N/A	1	N/A	2005	Process Building		Milton Roy	RA-12		
NaOCl Feed Pump	P-812	N/A	1	N/A	2005	Process Building		Milton Roy	RA-12		

#### INSTRUMENTATION

Hypo Tank Ultrasonic	LE/LIT 810	N/A	1	N/A	2005	Hypo tank	Milltronics	MIN-RANGER+	

## STRUCTURAL/FACILITIES

Sodium Hydrochlorite	T-810	Е	1	4	2005	Outdoors - Outside	Harrington	2.000 gallons FRP	
Tank	1-010	3	1	4		Headworks	Harrington	2,000 gailoris FNF	·

#### PIPING

1111110								
Hypochlorite System Piping	N/A	2	1	1	2005			

<sup>\*</sup>Condition (1 = very good, 5 = very poor). CoF (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

#### Photos:

T-810 Sodium Hydrochlorite Tank



#### Notes:

2,000 gal bulk hypo storage tank outside headworks and hypo pumps next to GBT in Process Building - not in use

Kingston Wastewa Facility Name:	ter Treatment Plant Biofilter								
Location:	Biofilter/Headworks								
Unit Process:	Odor Control								
Description:	•	or control system that was co and TWAS tanks, and GBT roo					er and sump.	. The system is p	ulling foul air from the
EQUIPMENT							T		T
Equipment Name	Equipment Condition	Criticality/CoF Serviceab	ility Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity

Equipment Name	Equipment Tag	Condition (1-5)	Criticality/CoF (1-5)	Serviceability (1-4)	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
Odor Control Fan	B-705	3	1	2	2005	Outside headworks		Hartzell	A41P0-182FA- 66FGFQM3		
Odor Control Duct Heater	H-706	2	1	2	2005	Outside headworks		Chromalox			
Odor Control Humidifier	HF-706	2	1	2	2005	Outside headworks					
Biofilter Sump Pump No. 1	P-711	Not obs	1	4	2005	Biofilter			HPGLX		
Biofilter Sump Pump No. 2	P-712	Not obs	1	4	2005	Biofilter			HPGLX		
INSTRUMENTATION		•						•	•	•	
		N/A									
STRUCTURAL/FACILIT	IES										
Biofilter		N/A	1	4	2005	Biofilter		Special-Made	FRP		
Biofilter Sump		4	1	4		Biofilter					
PIPING											

<sup>\*</sup>Condition (1 = very good, 5 = very poor). CoF (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

Facility Name: Bio

Biofilter

Location:

Biofilter/Headworks

Unit Process:

Odor Control

Photos:

Biofilter



B-705 Odor Control Fan



## Notes:

Biofilter no longer operational; media needs to be replaced.

Facility Name: W2 and W3 systems and Sump

Location: Process Building

Unit Process: Plant water

Description: Kingston WWTP has a process building sump to handle plant and process drainage. W2 and W3 systems support plant operations and process water needs.

## EQUIPMENT

Equipment Name	Equipment Tag	Condition (1-5)	Criticality/CoF (1-5)	Serviceability (1-4)	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
Process Building Sump Pump	P-921	Not obs	3	3	2005	Process Building LL	Submersible	Hydromatic	S4PX	5	180 gpm @ 43 psig
Process Building Sump Pump	P-922	Not obs	3	3	2005	Process Building LL	Submersible	Hydromatic	S4PX	5	180 gpm @ 43 psig
W3 Pump	P-901	2	3	2	2005	Process Building LL	Horizontal centrifugal	Goulds	3196	20	150 gpm @ 100 psig
W3 Pump	P-902	2	3	2	2005	Process Building LL	Horizontal centrifugal	Goulds	3196	20	150 gpm @ 100 psig
Flush Pump	P-907	2	3	2	2005	Process Building LL	Horizontal centrifugal	Goulds	3196	5	
Automatic Strainer	M-905	2	1	2	2005	Process Building LL		Evoqua	VAF V325J		200 gpm
W2 Pump No. 1	P-931	2	3	1	2005	Process Building GL	Vertical Centrifugal inline	Grundfos	A96425945P1043 1US760	15	125 gpm @ 100 psig
W2 Pump No. 2	P-932	2	3	1	2005	Process Building GL	Vertical Centrifugal inline	Grundfos	A96425945P1043 1US761	15	125 gpm @ 100 psig
INSTRUMENTATION							•				
W3 Flow Totalizer	FE 906	Not obs	1		2005	Process Building LL		Mccrometer	RE 100-012		
STRUCTURAL/FACLILI	TIES		•				•				•
Hydropneumatic Tank	T-935	2	2	1	2005	Process Building LL		Wessels	6759		
Process building sump	N/A	Not obs	4	3	2005	Process Building LL					
PIPING		•	•		•	•		-	•	•	•
W2 Piping	N/A	2	3	1	2005						
	· · · · · · · · · · · · · · · · · · ·	1	+		1	+	†	1	1	1	

W3 Piping N/A 2 3 1 2005

\*Condition (1 = very good, 5 = very poor). CoF (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

Facility Name: W2 and W3 systems and Sump

Location: Process Building

Unit Process: Plant water

Photos:

P-901-2 W3 Pump



P-902 W32 Pump gasket leak



M-905 Automatic Strainer



W2 Water System



P-931-2 W2 Pumps



## Notes:

P-902 appears to have a leaking casing gasket that should be repaired

Facility Name: C	Other Facilities
------------------	------------------

Location: Site

Unit Process: Other Facilities

Description: The Operations Building houses the backup generator room, electrical room, garage/shop, bathroom and locker room, plant control room and lab area. The backup diesel generator fuel tank is

outside of the operations building.

## EQUIPMENT

Equipment Name	Equipment Tag	Condition (1-5)	Criticality/CoF (1-5)	Serviceability (1-4)	Install Year	Location	Туре	Manufacturer	Model	Motor HP	Capacity
Puget Sound Energey Utility Transformer and Meter (Service)		2	5	1	2005	Outside, North of Main Control Building	underground primary power source, padmount transformer				
Diesel Tank		2	5	2	2005	Outside operations building					2000 gallons
Generator		2	3	1	2005	Operations building		Cummins	DFCC-5667361		350 kW
Service Entrance Equipment		2	3	1	Estimate 2004	Operations Building		Cutler Hammer	MDL3800F		
Automatic/Manual Transfer Switch		2	4	1	Estimate 2004	Operations Building		Asco	7000 Series H07ATSA30800N5 XC		
Switchboard/Panelboa rd	DPP-01	2	4	1	5/1/2004	Operations Building		Cutler Hammer	PRL3A		
Switchboard/Panelboa rd	DPP-02	2	4	1	5/1/2004	Process Building		Cutler Hammer	PRL3A		
Switchboard/Panelboa rd	DPP-UV	2	4	1	5/1/2004	Operations Building		Cutler Hammer	PRL1A		
Switchboard/Panelboard	DPL-01	2	4	1	5/1/2004	Operations Building		Cutler Hammer	PRL1A		
Switchboard/Panelboa rd	DPL-02	2	4	1	5/1/2004	Process Building		Cutler Hammer	PRL1A		
Transformer	XFMR-01	2	4	1	5/1/2004	Operations Building		Cutler Hammer	V48M28T45K		45 KVA
Transformer	XFMR-02	2	4	1	4/1/2004	Process Building		Cutler Hammer	V48M28T30K		30 KVA
Transformer	XFMR-03	2	4	1	5/1/2004	Operations Building		Cutler Hammer	H48M28T15A		15 KVA
MCC	MCC-01	2	4	1	6/1/2004	Process Building		Cutler Hammer	Freedom Series 2100		
MCC	MCC-01A	1	4	1	6/1/2020	Process Building		Cutler Hammer	Freedom Series 2100		
Control Panel	CP-200 Plant Main PLC Pnl	2	4	1	Estimate 2020	Operations Building		Quality Controls Corp.	PLC Brand/Model: Allen-Bradley CompactLogix L33ER		

Site										
			_							
Other Facilities										
CP-300 Plant Remote I/O Pnl	2	4	1	Estimate 2000	Process Building		Quality Controls Corp.	PLC Brand/Model: Allen-Bradley CompactLogix 1769 I/O		
FCP-201 Fine Screen Pnl	2	4	1	5/1/2020	Headworks Area		Elemech Control Systems	PLC Brand/Model: Allen-Bradley MicroLogix 1400		
LP-200 Grit Collection Pnl	2	2	1	Estimate 2005	Headworks Area		Quality Controls Corp.			
LP-710 Bio Filter Sump Pnl	3	1	1	Estimate 2005	Bioswale Area		Hydronix			
LP-920 Sump Pump Pnl	2	4	1	Estimate 2005	Process Building (lower level)		Hydronix			
LP-TLP Truck Loading Pnl	2	2	1	Estimate 2005	Process Building		Quality Controls Corp.			
LP-TCP Thickening Panel	2	4	1	Estimate 2005	Process Building		Quality Controls Corp.			
Gravity Belt Panel	2	4	1	Estimate 2005	Process Building		Ashbrook Corp.			
LP-Scum Pump	4	2	1	Estimate 2005	Process Building		Quality Controls Corp.			
UV System Panel	2	4	1	Estimate 2005	Effluent Area		Trojan Technologies Inc.			
	1	1	1		Process Area					
	1	1	1		Process/Operations Building					
	CP-300 Plant Remote I/O Pnl  FCP-201 Fine Screen Pnl  LP-200 Grit Collection Pnl LP-710 Bio Filter Sump Pnl LP-920 Sump Pump Pnl LP-TLP Truck Loading Pnl LP-TCP Thickening Panel Gravity Belt Panel LP-Scum Pump UV System	CP-300 Plant Remote I/O Pnl  2  FCP-201 Fine Screen Pnl  LP-200 Grit Collection Pnl  LP-710 Bio Filter Sump Pnl  LP-920 Sump Pump Pnl  LP-TLP Truck Loading Pnl LP-TCP Thickening Panel Gravity Belt Panel  UV System Panel  1	CP-300 Plant Remote I/O PnI         2         4           FCP-201 Fine Screen PnI         2         4           LP-200 Grit Collection PnI         2         2           LP-710 Bio Filter Sump PnI         3         1           LP-920 Sump Pump PnI         2         4           LP-TLP Truck Loading PnI         2         2           LP-TCP Thickening Panel         2         4           Gravity Belt Panel         2         4           LP-Scum Pump         4         2           UV System Panel         2         4           1         1         1           1         1         1	CP-300 Plant Remote I/O PnI         2         4         1           FCP-201 Fine Screen PnI         2         4         1           LP-200 Grit Collection PnI         2         2         1           LP-710 Bio Filter Sump PnI         3         1         1           LP-920 Sump Pump PnI         2         4         1           LP-TLP Truck Loading PnI         2         2         1           LP-TCP Thickening Panel         2         4         1           Gravity Belt Panel         2         4         1           LP-Scum Pump         4         2         1           UV System Panel         2         4         1           1         1         1         1           1         1         1         1	CP-300 Plant   Remote I/O Pnl   2	CP-300 Plant Remote I/O PnI 2 4 1 Estimate 2000 Process Building  FCP-201 Fine Screen PnI 2 4 1 5/1/2020 Headworks Area  LP-200 Grit Collection PnI 2 2 1 Estimate 2005 Headworks Area  LP-710 Bio Filter Sump PnI 3 1 1 Estimate 2005 Bioswale Area  LP-920 Sump Pump PnI 2 4 1 Estimate 2005 Process Building (lower level)  LP-TLP Truck 2005 Process Building PnI LP-TCP Thickening Panel 2 4 1 Estimate 2005 Process Building PnI Estimate 2005 Process Building PnI Estimate 2005 Process Building PnI Estimate 2005 Process Building Process Building Process Building Process Building Process Buildi	CP-300 Plant   Remote I/O Pnl   2	CP-300 Plant Remote I/O PnI 2 4 1 5/1/2020 Headworks Area Elemech Controls Corp.  ECP-201 Fine Screen PnI 2 4 1 5/1/2020 Headworks Area Elemech Control Systems  LP-200 Grit Collection PnI 2 2 1 Estimate 2005 Headworks Area Quality Controls Corp.  LP-710 Bio Filter Sump PnI 3 1 1 Estimate 2005 Bloswale Area Hydronix  LP-920 Sump Pump PnI 2 4 1 Estimate 2005 (lower level) LP-TLP Truck Loading PnI 2 2 1 Estimate 2005 Process Building LP-TLP Truck Loading PnI 2 4 1 Estimate 2005 Process Building Corp.  LP-TLP Truck Loading PnI 2 4 1 Estimate 2005 Process Building Corp.  Gravity Belt Panel 2 4 1 Estimate 2005 Process Building Corp.  LP-Sump PnI 4 2 1 Estimate 2005 PnI 4 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	CP-300 Plant Remote I/O PnI 2 4 1 Estimate 2000 Process Building CP-201 Fine Screen PnI 2 4 1 S/1/2020 Headworks Area Elemech Control Systems Corp.  Elemech Control Systems MicroLogix 1769 I/O  Elemech Control Systems MicroLogix 1400  Elemech Control Systems MicroLogix 1400  Elemech Control Systems MicroLogix 1400  EP-200 Grit Corp.  E-710 Bio Filter Sump PnI 3 1 1 Estimate 2005 Bioswale Area Elemech Control Systems MicroLogix 1400  Estimate 2005 Bioswale Area Hydronix  Elemech Control Systems MicroLogix 1400  Estimate 2005 Bioswale Area Hydronix  Elemech Control Systems MicroLogix 1400  Estimate 2005 Bioswale Area Hydronix  Elemech Control Systems MicroLogix 1400  Estimate 2005 Bioswale Area Hydronix  UN-TIP Truck Loading PnI 2 4 1 Estimate 2005 Process Building Corp.  Estimate 2005 Process Building Ashbrook Corp.  UN System 2 4 1 Estimate 2005 Frocess Building Corp.  Estimate 2005 Process Building Corp.  UN System 2 4 1 Estimate 2005 Process Building Corp.  UN System 2 4 1 Process Area Elemech Control Scorp.  Estimate 2005 Process Building Corp.  Estimate 2005 Process Building	CP-300 Plant Remote I/O Pnl   2

Operations building

2005

Kingston Wastewater Treatment Plant

Operations Building

<sup>\*</sup>Condition (1 = very good, 5 = very poor). CoF (1 = not critical, 5 = highly critical). Serviceability (1 = very good, 4 = very poor)

Facility Name: Other Facilities

Location: Site

Unit Process: Other Facilities

PIPING						

## Photos:

Operations Building and diesel tank







Generator




Notes:



APPENDIX F SEWER UTILITY SCADA MASTER PLAN TECHNICAL MEMORANDUM








# TM-1: Existing System Overview

**FINAL** 

Sewer Utility SCADA Master Plan

Kitsap County Public Works Sewer Utility Division

November 2, 2020



## Kitsap County Public Works, Sewer Utility Division Sewer Utility SCADA Master Plan

TM-1: Existing System Overview

November 2, 2020

Prepared by:

John M. Thomas, P.E. HDR Engineering, Inc. (425) 450-6240



I hereby certify that the technical memorandum was prepared under my direct supervision and that I am a duly registered Engineer under the laws of the State of Washington.



# **Contents**

1	Intro	duction		1-1
	1.1	Techni	cal Memorandum Organization	1-1
	1.2	Site De	escriptions	1-2
		1.2.1	Central Kitsap Treatment Plant	
		1.2.2	Kingston Wastewater Treatment Plant	
		1.2.3	Manchester Wastewater Treatment Plant	
		1.2.4 1.2.5	Suquamish Wastewater Treatment Plant  Pump Stations	
	4.0		•	
	1.3		sessment Protocol	
		1.3.1 1.3.2	Existing DocumentationField Surveys	
2	Netw	ork Arch	nitecture	2-1
	2.1		ional Technology versus Information Technology	
	2.2	WWTP	Network Architecture Overview	2-2
		2.2.1	Central Kitsap Treatment Plant	
		2.2.2	Kingston Wastewater Treatment Plant	2-4
		2.2.3	Manchester Wastewater Treatment Plant	2-4
		2.2.4	Suquamish Wastewater Treatment Plant	
		2.2.5	Resilience Considerations	
	2.3		rea Network Architecture Overview	
		2.3.1	WWTP WAN	2-7
		2.3.2 2.3.3	Pump Station VHF Licensed Radio WAN	
	2.4		k Cabling	
	∠.¬	2.4.1	Central Kitsap Treatment Plant	
		2.4.2	Kingston Wastewater Treatment Plant	
		2.4.3	Manchester Wastewater Treatment Plant	2-17
		2.4.4	Suquamish Wastewater Treatment Plant	
		2.4.5	Pump Stations	2-17
	2.5	Networ	k Switches	2-18
	2.6		emises Wireless Access to OT Networks	
	2.7	Networ	k Segmentation and Segregation	
		2.7.1	Segmentation	
		2.7.2	Unused Access Ports	
		2.7.3	Segregation	
	2.8		t Service	
		2.8.1	Central Kitsap Treatment Plant	
		2.8.2 2.8.3	Kingston Wastewater Treatment Plant  Manchester Wastewater Treatment Plant	
		2.8.4	Suquamish Wastewater Treatment Plant	
	2.9		e Access	
		2.9.1	Central Kitsap Treatment Plant	
		2.9.2	Kingston, Manchester, and Suquamish Wastewater Treatment Plants	2-33
		2.9.3	Pump Stations	2-34
	2.10	Networ	k Security Hardware and Software	2-34
		2.10.1	Tempered Networks Conductor	
			Firewalls	
		2.10.3	Central Kitsap Treatment Plant	2-37

			Kingston, Manchester, and Suquamish Wastewater Treatment PlantsPump Stations		
	2.11	Server	s and Personal Computers	2-41	
			Central Kitsap Treatment Plant		
		2.11.2	Kingston, Manchester, and Suquamish Wastewater Treatment Plants	2-42	
	2.12		Network Infrastructure Physical Security, Environmental Conditions, and Power Supply		
			Physical Security		
			Environmental Conditions		
			Network Infrastructure Battery Backup Power		
			Power Supply Redundancy		
	2.13	-	o Procedures and Disaster Recovery		
			Backup Procedures		
			Disaster Recovery		
	2.14		rk Management		
			Central Kitsap Treatment Plant		
	o . =		Kingston, Manchester, and Suquamish Wastewater Treatment Plants		
	2.15		rk Documentation and Tagging		
			Network Architecture Diagrams		
			Fiber-Optic Patch Panels and Fiber-Optic Cabling  Copper Ethernet Cabling		
	0.10				
•		•	security Incident Response Program		
3			ntrol System Hardware		
	3.1	•	mmable Logic Controllers		
		3.1.1	Controller Hardware		
		3.1.2 3.1.3	DeviceNet Networks		
		3.1.3	Hardwired Input/OutputIP Network Input/Output		
	3.2		n-Machine Interfaces		
	0.2	3.2.1	Wonderware Thick Clients		
		3.2.2	Control Panel Operator Interface Terminals		
	3.3	Power	Supply and Environmental Conditions		
	0.0	3.3.1	ICS Battery Backup Power		
		3.3.2	24 VDC Power Supplies		
		3.3.3	NFPA 70E Considerations		
		3.3.4	Environmental Conditions	3-18	
	3.4	Contro	l Room	3-21	
	3.5	Instrun	nentation	3-24	
		3.5.1	Instrumentation Calibration and Maintenance Program		
		3.5.2	Central Kitsap Treatment Plant	3-25	
		3.5.3	Kingston Wastewater Treatment Plant		
		3.5.4	Manchester Wastewater Treatment Plant		
		3.5.5 3.5.6	Suquamish Wastewater Treatment PlantPump Stations		
			·		
4	Industrial Control System Software				
	4.1		rogramming Software		
		4.1.1 4.1.2	Programming EnvironmentsFirmware and Software Versions		
		4.1.2	Programming Methods		
	4.2		n-Machine Interface Software		
	<b>→.∠</b>	riullial		+-∠	



		4.2.1	Wonderware InTouch		
		4.2.2	Human-Machine Interface Screens	4-3	
	4.3	Histori	an	4-16	
		4.3.1	Central Kitsap Treatment Plant		
		4.3.2	Kingston, Manchester, and Suquamish Wastewater Treatment Plants		
		4.3.3 4.3.4	Historical SCADA DataSewer Utility Use of Historical SCADA Data		
	4.4		Notification Software		
5			ntrol System Documentation		
0	5.1		and Instrumentation Diagrams		
	5.2		Strategies		
	5.3		I Panel Drawings and Loop Diagrams		
	5.4		Occumentation		
	5.5		andards and Governance Documentation		
<u></u>					
6		Other Software Packages.			
	6.1 6.2	-	uterized Maintenance Management System  Management System		
	6.3	٠.	•		
	6.4		tory Information Management System		
			nalytics and Visualization Software		
7			al Improvement Categories		
	7.1	_	zational Improvement Categories		
		7.1.1 7.1.2	Operational OptimizationInfrastructure Stability and Modernization		
		7.1.3	Cybersecurity Risk Mitigation		
		7.1.4	Critical System Resilience		
		7.1.5	Workforce Efficiency		
8	Risk	and Def	iciency Summary	8-1	
9	Refe	rences .		9-1	
			Tables		
Tabl	e 1-1.	Sewer L	Itility pump station summary	1-4	
			ged switches recommended for replacement		
			T network PC and server summary		
Tabl	e 3-1.	WWTP :	and pump station PLC summary	3-2	
Tabl	e 3-2.	CKTP in	dustrial panel PC summary	3-12	
Tabl	e 3-3.	WWTP :	and pump station OIT summary	3-13	
Tabl			al control panels containing OT network and ICS components with no battery	0.40	
Tabi			weral control panels containing OT network and ICS components without 24 VDC	3-16	
ıadı			al control panels containing OT network and ICS components without 24 VDC	3-17	
Tabl	•		d deficiency ranking system description		
			and pump station PLC summary		

# **Figures**

Figure 2-1. CIA Triad for IT and OT networks	2-1
Figure 2-2. Unmanaged switch (N-Tron 526FX2) in SPB control room network cabinet	2-3
Figure 2-3. Modular access switches in PNL 8580A	2-4
Figure 2-4. Consequences of cable path or switch port failure in star versus ring topology	2-5
Figure 2-5. Tempered Networks Airwall system general overview diagram	2-7
Figure 2-6. CalAmp Viper SC 100 VHF radio	2-9
Figure 2-7. Pump station VHF licensed radio WAN radio path uptime percentages	2-11
Figure 2-8. Cradlepoint IBR600C Series cellular router	2-13
Figure 2-9. OM1 patch cord used to patch OM3 cables in PNL 2920	2-16
Figure 2-10. UTP cable received from 480 VAC VFD enclosure	2-17
Figure 2-11. OSI Model summary	2-19
Figure 2-12. N-Tron 716TX industrial managed Ethernet switch	2-20
Figure 2-13. N-Tron 7900 Series modular, industrial, managed Ethernet switch	2-21
Figure 2-14. Ubiquiti Rocket Prism 5AC Gen 2 5 GHz access point	2-22
Figure 2-15. Example managed switch port configuration screen	
Figure 2-16. TP-Link MR3040 cellular router connected to OT network unmanaged switch	2-27
Figure 2-17. KWWTP operations building electrical room communications backboard	2-29
Figure 2-18. MWWTP operations building electrical room communications backboard	2-30
Figure 2-19. SWWTP process building electrical room communications backboard	
Figure 2-20. UltraVNC Viewer screenshot	2-32
Figure 2-21. Tempered Networks Conductor diagram	2-35
Figure 2-22. Tempered Networks HIPswitch 100g	2-38
Figure 2-23. Tempered Networks HIPswitch 150e	2-39
Figure 2-24. Exposed plumbing next to network components in CKTP administration and lab building electrical room	2-45
Figure 2-25. Battery runtime graph for APC Back-UPS 1500	2-47
Figure 2-26. KWWTP SCADA PC with connected external hard drive	2-49
Figure 3-1. Allen-Bradley CompactLogix PLC with 1769-L33ER controller and Bulletin 1769  Compact I/O modules	3-5
Figure 3-2. Allen-Bradley 1766-L32BXBA MicroLogix 1400 PLC	
Figure 3-3. CKTP bar screen 1023 main control panel PLC controller battery alarm light illuminated	
Figure 3-4. MWWTP blower building RIO control panel installation	
Figure 3-5. DeviceNet scanners in PNL 2939 PLC rack	
Figure 3-6. Headworks building electrical room Wonderware InTouch thick client	
Figure 3-7. H <sub>2</sub> S corrosion on digester control building control panel (PNL 6000) copper ground	5-11
bar	3-19
Figure 3-8. Headworks building electrical room thermostat	
Figure 3-9. Temporary ventilation measure for MWWTP electrical room	
Figure 3-10. CKTP SPB control room	
Figure 3-11. SPB control room SCADA PC monitors	
Figure 3-12. SPB annex, ground floor: potential location for future server room	
Figure 3-13. CKTP flow balance SCADA screen	
Figure 3-14. Out-of-service headworks odor control biofilter sprinkler control panel	
Figure 3-15. CKTP headworks odor control fan ductwork LEL transmitter in fault	



Figure 3-16. CKTP reclaimed-water filtration system chlorine residual analyzer powered down	3-29
Figure 3-17. CKTP reclaimed-water filtration system turbidity analyzer powered down	3-30
Figure 3-18. CKTP aerated grit tank 1 stage 2 flowmeter reading zero flowflow	3-31
Figure 3-19. MWWTP odor control system control panel instrumentation	3-33
Figure 3-20. Corroded magmeter on sludge line to MWWTP gravity belt thickener	3-33
Figure 3-21. MWWTP sludge pumping gallery faulted LEL gas monitor	3-34
Figure 3-22. MWWTP W3 pump flow transmitter and totalizer	3-35
Figure 3-23. SWWTP odor control system analytical probe with splice in manufacturer cable	3-36
Figure 3-24. Non-functional LEL gas monitor in the SWWTP process building upper-floor process room	3-36
Figure 3-25. SWWTP thickened sludge tank level transmitter on truck loadout pump suction piping	3-37
Figure 3-26. SWWTP sludge storage tank high-level switch installation	3-38
Figure 3-27. Failed fire alarm system panel at SWWTP process building	3-39
Figure 3-28. Damaged flow switch on SWWTP RDT spray water supply line	3-40
Figure 3-29. Faulted PS-24 wet well gas monitor	3-41
Figure 3-30. PS-24 wet well ultrasonic level transducer coated with grime and dried scum	3-41
Figure 3-31. PS-34 control panel	3-42
Figure 3-32. Failed ultrasonic level probe disconnected from PS-71 BIOXIDE storage tank	3-43
Figure 3-33. PS-71 wet well LEL monitor in alarm	3-43
Figure 4-1. KWWTP secondary clarifiers and UV disinfection HMI screen	4-4
Figure 4-2. CKTP aeration basin 2 HMI screen	4-5
Figure 4-3. CKTP overview HMI screen	4-6
Figure 4-4. KWWTP overview HMI screen	4-6
Figure 4-5. MWWTP overview HMI screen	4-7
Figure 4-6. SWWTP overview HMI screen	4-8
Figure 4-7. Example HMI graphics content providing additional context and situational awareness	4-9
Figure 4-8. Pump station alarm HMI screen	4-10
Figure 4-9. Example pump station pop-up HMI screen	4-11
Figure 4-10. CKTP HRR pump 1 equipment pop-up window	4-12
Figure 4-11. KWWTP hourly influent trend HMI screen	4-13
Figure 4-12. CKTP alarm history HMI screen	4-14
Figure 4-13. Summary of available Wonderware tags included in historical data	4-18
Figure 5-1. PS-17 level set point documentation	5-2
Figure 6-1. Open work orders visualization from LLumin home page	6-2
Figure 6-2. GE EPM 6000 power monitor	6-3
Figure 6-3. CKTP GE EnerVista Viewpoint one-line diagram screen	6-3
Figure 7-1. Organizational improvement categories	7-2

# **Appendices**

Appendix A. Site Maps

Appendix B. Network Architecture Diagrams

Appendix C. QCC Network Design Diagrams

Appendix D. WWTP PLC I/O Summary and PLC and Remote I/O Module Summary

## **Abbreviations**

μm micron(s)

AAA authentication, authorization, and accounting

AES Advanced Encryption Standard
ANSI American National Standards Institute

AOI Add-on Instruction

BNR biological nutrient removal Branom Instrument Co.

CIA Confidentiality, Integrity, and Availability

CIP capital improvement program
CKTP Central Kitsap Treatment Plant

CMMS computerized maintenance management system

County Kitsap County
CTU central telemetry unit

DHS U.S. Department of Homeland Security

DO dissolved oxygen

EMS energy management system

eO&M electronic operation and maintenance FCC Federal Communications Commission

ft<sup>3</sup> cubic foot/feet

FVNR full-voltage non-reversing

GbE gigabit(s) Ethernet
GBT gravity belt thickener
GE General Electric

GHz gigahertz

gpm gallon(s) per minute
H<sub>2</sub>S hydrogen sulfide
HDR HDR Engineering, Inc.
HIP Host Identity Protocol
HMI human-machine interface

HOA Hand-Off-Auto horsepower

HVAC heating, ventilation, and air conditioning

Hz hertz

I&C instrumentation and controls ICS industrial control system

IEEE Institute of Electrical and Electronics Engineers

IGMP Internet Group Management Protocol

in inch(es)
I/O input/output
IP Internet Protocol

IR infrared

ISA International Society of Automation

IT Information Technology

kB kilobyte(s)

kbps kilobit(s) per second

kHz kilohertz

KPI key performance indicator KPUD Kitsap Public Utility District

kW kilowatt(s)

KWWTP Kingston Wastewater Treatment Plant

LAN local area network
LEL lower explosive limit



LIMS laboratory information management system

LTE Long-Term Evolution
M2M machine-to-machine
mA milliampere(s)
MB megabyte(s)

Mbps megabit(s) per second
MCC motor control center
MFA multi-factor authentication
mgd million gallons per day

MHz megahertz

MTU master telemetry unit

MWWTP Manchester Wastewater Treatment Plant

N/A not applicable

NAT Network Address Translation
NEC National Electrical Code
NIC network interface card

NEMA National Electrical Manufacturers Association

NFPA National Fire Protection Association

NIST National Institute of Standards and Technology

OIT operator interface terminal O&M operation and maintenance OM1 Optical Multi-mode 1 Optical Multi-mode 3

OOP object-oriented programming

OS2 Optical Single-mode 2

OSI Open Systems Interconnection

OT Operational Technology PC personal computer

P&ID piping and instrumentation diagram
PID proportional-integral-derivative
PLC programmable logic controller

PNL panel

PS pump station

PSTN public switched telephone network QCC Quality Controls Corporation

QoS Quality of Service

RACS Raptor Acceptance Control System

RAS return activated sludge **RDT** rotary-drum thickener RFB Remote Frame Buffer RIO remote input/output RS Recommended Standard RTU remote telemetry unit **RVSS** reduced-voltage soft starter SBR sequencing batch reactor

SCADA supervisory control and data acquisition Sewer Utility Public Works Sewer Utility Division

SMS Short Message Service

SNMP Simple Network Management Protocol

SOP standard operating procedure

SP1 Service Pack 1

SPB solids processing building SSID Service Set Identifier

ST straight-tip SWGR switchgear SWWTP Suguamish Wastewater Treatment Plant

TCC total calculated capacity

TCP Transmission Control Protocol

THD total harmonic distortion
TM technical memorandum
UDT User-defined Data Type
UPS uninterruptible power supply

USB Universal Serial Bus UTP unshielded twisted pair

UV ultraviolet V volt(s)

VAC volt(s) alternating current
VDC volt(s) direct current
VFD variable-frequency drive
VHF very high frequency
VLAN virtual local area network

VM virtual machine

VNC Virtual Network Computing VPN virtual private network

WAN service water
WAN wide-area network
WAS waste activated sludge

WIMS Water Information Management Solution

WWTP wastewater treatment plant



# 1 Introduction

This Existing System Overview Technical Memorandum (TM)-1 describes the current condition, arrangement, life-cycle state, and identified areas of risk for the Kitsap County (County) Public Works Sewer Utility Division (Sewer Utility) supervisory control and data acquisition (SCADA) system components and associated wastewater treatment plant (WWTP) and pump station (PS) systems. The content of TM-1 is based on information that HDR Engineering, Inc. (HDR) obtained from the Sewer Utility and field data collected by HDR during various site assessment visits conducted in August 2020.

# 1.1 Technical Memorandum Organization

TM-1 is organized into nine sections and four appendices, as described below. In any subsection where a risk or deficiency is identified, a summary risk or deficiency description is presented at the end of that subsection, as shown below, so that these risks and deficiencies are easily visible and can be quickly located. Risks and deficiencies are compiled in Section 8 in Table 8-2.

\* Identified risks and deficiencies are shown in condensed highlighted form like this throughout the report.

**Section 1: Introduction** summarizes TM organization, briefly describes each Sewer Utility wastewater facility included in the TM, and details the site assessment work performed in preparation of TM-1.

**Section 2: Network Architecture** describes the existing Operational Technology (OT) network architecture at the Sewer Utility WWTPs and pump stations. It includes an overview of the current network topologies and segmentation practices, major hardware and software elements, network management and system backup procedures, and cybersecurity measures currently implemented at the facilities.

**Section 3: Industrial Control System Hardware** describes the current industrial control system (ICS) hardware at Sewer Utility WWTPs and wastewater pump stations. It includes a description of the major hardware elements and a summary of the WWTP control room equipment.

**Section 4: Industrial Control System Software** describes the Sewer Utility's current ICS software, including an overview of the programmable logic controller (PLC) programming, human-machine interface (HMI), historian, and alarm notification software packages in use at the WWTPs and wastewater pump stations. It also describes the SCADA system functionality that has been implemented with this software.

**Section 5: Industrial Control System Documentation** summarizes documentation associated with the Sewer Utility's wastewater ICS. It describes the type of documents that the Sewer Utility has available along with a general description of how they are organized and maintained.

**Section 6: Other Software Packages** provides an overview of the non-ICS software packages at the Sewer Utility's WWTPs that bear a relationship to the Sewer Utility

SCADA system and the assets with which it interacts. It includes a description of the software tools and provides a general summary of their current uses at Sewer Utility facilities.

**Section 7: Organizational Improvement Categories** presents five organizational improvement categories that apply to utility control systems and how they will be applied within the Sewer Utility SCADA Master Plan to relate risks, deficiencies, and proposed improvements to facets of the Sewer Utility's organizational health.

**Section 8: Risk and Deficiency Summary** compiles the risks and deficiencies associated with the Sewer Utility's OT networks, SCADA system components, and associated infrastructure that were identified in previous sections of TM-1, correlating each of them to one or more of the organizational improvement categories.

Section 9: References lists the supporting source materials cited in TM-1.

**Appendix A: Site Maps** includes an overall site map showing the general locations of the Sewer Utility's WWTPs and pump stations. The appendix also includes a site map for each of the WWTPs, labeled with major buildings and process areas.

**Appendix B: Network Architecture Diagrams** includes various network architecture diagrams that are referenced throughout TM-1.

Appendix C: QCC Network Design Diagrams includes various network diagrams that Quality Controls Corporation (QCC) has developed to document implementation of telemetry and wide-area network (WAN) upgrades it is contracted to perform for the Sewer Utility. At the time of this writing, QCC's work is ongoing and the network documentation included in Appendix C may not reflect as-built conditions once QCC's work is complete.

Appendix D: WWTP PLC I/O Summary and PLC and Remote I/O Module Summary includes a summary of input/output (I/O) quantities and types by PLC and a summary of the installed modules at the various PLC and remote input/output (RIO) racks throughout each WWTP.

# 1.2 Site Descriptions

The following site descriptions provide a general summary of the Sewer Utility's 4 WWTPs and 12 pump stations included in HDR's site assessments. The Sewer Utility has a total of 62 pump stations that are currently in service with remote alarm monitoring. An overall site map showing the general locations of the Sewer Utility's WWTP and pump station facilities can be found in Appendix A.

# 1.2.1 Central Kitsap Treatment Plant

The Central Kitsap Treatment Plant (CKTP), located at 12351 Brownsville Highway NE in Poulsbo, Washington, is a regional facility serving the central area of Kitsap County. The facility, which was put into service in 1979, uses a conventional activated sludge secondary treatment process, ultraviolet (UV) disinfection, and sand filtration for tertiary treatment and reclaimed water. CKTP has a design flow of 6.0 million gallons per day (mgd) of average dry weather flow and has attended operations 17 hours per day, 7 days



per week, with significantly reduced staff during evening operations. Appendix A provides a site plan with major buildings and process areas indicated.

## 1.2.2 Kingston Wastewater Treatment Plant

The Kingston Wastewater Treatment Plant (KWWTP), located at the end of a gravel road near 23055 S Kingston Road NE in Kingston, Washington, is an oxidation ditch type activated sludge facility with a mechanical fine screen and aerated grit chamber for preliminary treatment. Following the oxidation ditches, the liquid stream flows through secondary clarifiers for solids settling and then to UV disinfection before reaching the KWWTP outfall. Sludge removed from the secondary clarifiers is thickened by a gravity belt thickener (GBT) and stored for transport to CKTP for further treatment and disposal. KWWTP has a design flow of 0.292 mgd for the average day within the maximum month flow. The facility, which was first put into service in 2005, is currently manned 8 hours per day, 5 days per week. Appendix A provides a site plan with major buildings and process areas indicated.

## 1.2.3 Manchester Wastewater Treatment Plant

The Manchester Wastewater Treatment Plant (MWWTP), located at 8020 E Caraway Road in Port Orchard, Washington, is an activated sludge facility with a rotary screen and aerated grit chamber for preliminary treatment and aeration basins for biological treatment. Following the aeration basins, the liquid stream flows through secondary clarifiers for solids settling and then to UV disinfection before reaching the plant outfall. Sludge removed from the secondary clarifiers is thickened by a GBT and stored for transport to CKTP for further treatment and disposal. MWWTP has a design flow of 0.460 mgd for the average day within the maximum month flow. The original facility, which consisted of primary treatment only, was first put into service in 1969. The final phase of secondary treatment improvements was completed in 1998. MWWTP is currently manned 8 hours per day, 5 days per week. Appendix A provides a site plan with major buildings and process areas indicated.

# 1.2.4 Suguamish Wastewater Treatment Plant

The Suquamish Wastewater Treatment Plant (SWWTP), located on land belonging to the Suquamish Tribe at 18019 Division Avenue NE in Suquamish, Washington, is a sequencing batch reactor (SBR)-type activated sludge facility with a rotary bar screen and aerated grit chamber for preliminary treatment. Supernatant from the SBRs is decanted to an equalization tank and then flows to UV disinfection before reaching the plant outfall. Sludge removed from the SBRs is thickened by a rotary-drum thickener (RDT) and stored for transport to CKTP for further treatment and disposal. SWWTP has an average design flow of 0.4 mgd. The facility, which was first put into service in the 1970s, was upgraded in 1998 to accommodate increased flows and to convert SWWTP to an SBR-type activated sludge facility. SWWTP is currently manned 8 hours per day, 5 days per week. Appendix A provides a site plan with major buildings and process areas indicated.

# 1.2.5 Pump Stations

The Sewer Utility selected the wastewater pump stations listed in Table 1-1 for inclusion based on criticality; they serve as a representative sample for all of the Sewer Utility's wastewater conveyance system pump stations. The table presents the pump station numbers and descriptions along with their site address, number and type of pump, pump horsepower (hp), and type of pump motor controller (e.g., variable-frequency drive [VFD], reduced-voltage soft starter [RVSS], or full-voltage non-reversing [FVNR] starter). The pump station wet well total calculated capacities (TCCs) listed in Table 1-1 were obtained from Sewer Utility—provided documentation and were not verified by HDR. The County's Utilities group handles day-to-day operation and maintenance (O&M) of the pump stations. The Utilities staff visit the pump stations on a weekly basis to test pump station alarms and perform maintenance as needed.

Table 1-1. Sewer Utility pump station summary

Table 1 in Series Standy parish Station Summary									
Station	Pump station description	Site address	Pump qty.	Pump type	hp	Motor controller	TCC (ft³)		
PS-01	Levin Road	10015 Levin Rd. NW Silverdale, Washington	3	Submersible	160	VFD	3,334		
PS-04	Pump station 4	9606 Frederickson Rd. NW Bremerton, Washington	3	Vertical non-clog centrifugal	75	VFD	5,636		
PS-06	Parkwood East	457 NE Conifer Dr. Bremerton, Washington	3	Submersible	60	VFD	2,837		
PS-07	Fairgrounds	1300 NE Fairgrounds Rd. Bremerton, Washington	3	Submersible	150	VFD	1,948		
PS-12	Newberry Hill	8160 Chico Way NW Silverdale, Washington	2	Vertical non-clog centrifugal	10	FVNR	673		
PS-17	Bangor	14690 Clear Creek Rd. NW Silverdale, Washington	3	Vertical non-clog centrifugal	40	VFD	1,920		
PS-24	Brownsville Highway	14501 Brownsville Hwy. NE Poulsbo, Washington	3	Vertical non-clog centrifugal	250	VFD	4,111		
PS-32	Riddell Road	1552 NE Riddell Rd. Bremerton, Washington	2	Vertical non-clog centrifugal	10	FVNR	874		
PS-34	Central Valley	6240 Central Valley Rd. NE Bremerton, Washington	2	Submersible	60	FVNR	1,884		
PS-41	Kingston waterfront	10809 NE West Kingston Rd. Kingston, Washington	2	Vertical non-clog centrifugal	15	FVNR	558		
PS-67	Keyport	15378 Washington Ave. NE Keyport, Washington	3	Submersible	70	VFD	6,030		
PS-71	Kingston (old plant)	26198 Dulay Rd. NE Kingston, Washington	2	Vertical non-clog centrifugal	75	RVSS w/ FVNR bypass	942		

# 1.3 Site Assessment Protocol

The current Sewer Utility SCADA Master Plan effort (for which TM-1 is a deliverable) is part of a larger effort the Sewer Utility is currently undertaking to update its sewer and wastewater treatment facility plans. The site assessment work conducted under this first



phase of the Sewer Utility SCADA Master Plan was focused on identifying the current condition, arrangement, life-cycle state, and areas of risk for the major SCADA infrastructure components and associated systems.

## 1.3.1 Existing Documentation

To the extent possible, existing documentation provided by the Sewer Utility was used in conjunction with fieldwork assessments to identify SCADA and associated system components and determine their arrangement, configuration, and potential risks and deficiencies. This documentation includes the following:

- Contract and record drawings
- Internet Protocol (IP) address lists
- O&M manuals
- Monthly lab reports
- Pump station holding time data

## 1.3.2 Field Surveys

Fieldwork for the site assessments consisted of site visits to all WWTP facilities and 12 pump stations, occurring over two rounds of site visits totaling 7 days in August 2020. HDR instrumentation and controls (I&C) engineer John Thomas and HDR I&C engineer-in-training Maddi Hutson performed the fieldwork. As part of the fieldwork, HDR obtained the following additional documentation to include in its assessment:

- Photo documentation of existing Sewer Utility infrastructure
- Screenshots of various software packages
- Wonderware Historian and General Electric (GE) EnerVista Viewpoint database exports
- PLC program files

This page intentionally left blank.




# 2 Network Architecture

This section describes the existing OT network architecture at the Sewer Utility WWTPs and pump stations. It includes an overview of the current network topologies and segmentation practices, major hardware and software elements, network management and system backup procedures, and cybersecurity measures currently implemented at the facilities.

# 2.1 Operational Technology versus Information Technology

Before discussing the Sewer Utility's OT networks, it is important that some of the differences between Information Technology (IT) and OT networks are understood. To facilitate the comparison, Figure 2-1 introduces an information security industry model known as the Confidentiality, Integrity, and Availability (CIA) Triad. The CIA Triad consists of three core components for the security of any communication network, and the figure depicts how these security components are prioritized in IT and OT networks.

Figure 2-1. CIA Triad for IT and OT networks

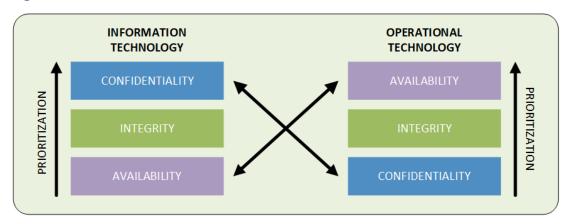

Many readers may be more familiar with IT networks because these are the standard home and office network environments. In IT networks, confidentiality, or the securing of sensitive and/or private information, is typically the highest priority. Preventing unauthorized access to trade secrets, employee/customer personally identifiable information, or credit card information is mission critical. Data integrity is also very important, and typically involves taking steps to back up critical files and databases to avoid loss of information and preventing unauthorized access that could lead to data corruption and/or manipulation. While availability is also important in IT networks, it is the lowest priority of the three security components. Outages to services, file systems, and databases typically result only in lost revenue or efficiency and planned outages for updates and maintenance can often be scheduled around business hours.

In OT networks, availability is the highest priority. OT networks involve equipment and processes that interact with the physical world. Disruption of OT network communication can jeopardize the safety of an organization's personnel and infrastructure, as well as the

natural environment. Data integrity is equally important to both IT and OT networks, as they both rely on these data for day-to-day operation. Confidentiality, on the other hand, is much less of a priority in OT networks. Though organizations may prefer to keep SCADA and other OT network data private, their chief concerns are with maintaining the availability of the OT network resources and ensuring that the data being generated are of sufficient quality to provide insight and inform decisions.

Because IT and OT networks have different priorities, they require different approaches to security and architecture. The discussions and observations provided in Section 2 are based on the OT network priorities described above and tailored to the specific requirements of wastewater facilities as critical infrastructure.

## 2.2 WWTP Network Architecture Overview

This subsection provides an overview of the network at each of the Sewer Utility WWTPs.

## 2.2.1 Central Kitsap Treatment Plant

The CKTP OT network is configured in an extended-star topology, as shown in the Central Kitsap Treatment Plant Physical Network Diagram in Appendix B, Figure B1. The network has no core or distribution switches and consists only of managed and unmanaged industrial access switches installed within control panels in the various buildings and process areas. These switches provide access to the CKTP OT network for the various IP-connected devices (IP nodes) near their respective locations.

The most critical switch within the OT network is an unmanaged access switch located within a network cabinet in the solids process building (SPB) control room (see Figure 2-2). This switch handles traffic between the CKTP SCADA nodes, historian server, and all CKTP PLCs. All data exchange that will eventually occur between CKTP and the other Sewer Utility WWTPs would also traverse this switch, given the current network topology. This switch is a single point of failure for the CKTP OT network.







Being unmanaged, this switch introduces additional risks to the OT network. Among other shortcomings, unmanaged switches provide no means of filtering broadcast and multicast packets and will propagate these packets to all connected nodes, creating the potential for flooding events that can take down the network. The Microsoft Windows operating system, which is running on all personal computers (PCs) connected to this switch, is notorious for generating a high volume of needless broadcast and multicast packets because of the large number of processes that are set to run by default within the operating system. Having managed switches handle network traffic to and from PCs and servers would, among other benefits, allow the Sewer Utility to filter undesirable packets and preserve OT network bandwidth for its intended use.

Though much of the CKTP OT network topology is typical of industrial networks that evolve organically throughout multiple capital improvement program (CIP) projects, the network arrangement in panel (PNL) 8580A within the SPB control room deserves attention. Several of the CKTP building access switches for the OT network are connected to one of two modular access switches located in PNL 8580A (see Figure 2-3). These modular switches are networked via a fiber-optic patch cable, but only one of these switches has a connection to a network switch that provides connectivity to the CKTP SCADA nodes, which are the endpoints for most of the traffic traversing these switches from the various PLCs throughout CKTP. This arrangement effectively forces traffic from one of the modular switches to traverse the other modular switch. All traffic from both modular switches is then consolidated onto one fiber-optic pair between one of the modular switches and the unmanaged switch (discussed above) that serves as the access switch for the SCADA PCs, historian server, and other ICS IP nodes within the SPB. This arrangement creates multiple single points of failure (e.g., the fiber patch cord, the switch ports at either end, the modular switch processor, etc.) for communications between the plant SCADA PCs and most of the PLCs at CKTP.





The KWWTP OT network is configured in an extended-star topology, as shown in the Kingston WWTP Physical Network Diagram in Appendix B, Figure B2. This relatively small network consists of industrial access switches installed within control panels in the operations building, process building, and headworks area. These switches provide access to the KWWTP OT network for the various IP nodes within these buildings and process areas.

#### 2.2.3 Manchester Wastewater Treatment Plant

The MWWTP OT network is configured in an extended-star topology, as shown in the Manchester WWTP Physical Network Diagram in Appendix B, Figure B3. This relatively small network consists of industrial access switches installed within control panels in the operations building, blower building, and headworks building. These switches provide access to the MWWTP OT network for the few IP nodes within these buildings.

#### 2.2.4 Suquamish Wastewater Treatment Plant


The SWWTP OT network is configured in an extended-star topology, as shown in the Suquamish WWTP Physical Network Diagram in Appendix B, Figure B4. This relatively small network consists of industrial access switches installed within control panels in the process building. These switches provide access to the SWWTP OT network for the few IP nodes within the building.



## 2.2.5 Resilience Considerations

As shown in the WWTP physical network diagrams in Appendix B, the Sewer Utility's WWTP OT networks have no N+1 redundancy. Without switch-level and/or cable path redundancy for connected devices, failure of an access switch would result in loss of communications for all connected IP nodes. Similarly, with all connections between access switches consisting of single copper and/or fiber-optic cable segments, the WWTP OT networks have no resilience against damage or disconnection of one of these cables or failure of one of the switch ports to which the cable connects on either side. Figure 2-4 illustrates how a single cable or switch port failure would impact devices on a non-redundant network topology versus a network topology with path redundancy. The screened back devices shown in the star topology portion of the figure are the devices that would lose communication under the depicted failure scenario. The ring topology, on the other hand, is tolerant of single path failures and preserves communications for all devices shown in the figure.

Figure 2-4. Consequences of cable path or switch port failure in star versus ring topology

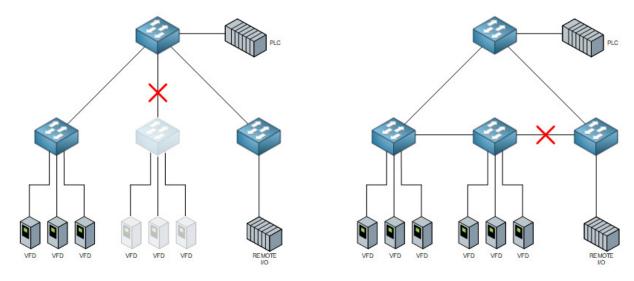

STAR TOPOLOGY (NO REDUNDANCY)

RING TOPOLOGY (PATH REDUNDANCY)

Though non-resilient network topologies like the ones deployed at the Sewer Utility's WWTPs are common within the water/wastewater industry, a general best practice is for the OT network segments and components to adopt the same level of redundancy inherent in the plant processes that they serve, at a minimum. This practice prevents the OT network from inadvertently reducing or eliminating the actual redundancy of plant processes in the event of a single network component and/or cable failure.

## Central Kitsap Treatment Plant

At CKTP, many of the plant processes consist of parallel trains and equipment systems designed to provide some degree of redundancy. The plant electrical distribution system has also been designed with redundancy in mind. Electrical loads for parallel and/or redundant processes have been split between "A" bus and "B" bus throughout the CKTP

electrical distribution system so that loss of either the "A" or "B" bus may reduce process capacity but will not result in a total loss of the process. By configuring main-tie-main breakers, the Sewer Utility can also quickly re-establish utility power to CKTP loads in the event of a feeder fault or circuit breaker failure.

Given the inherent redundancy of the process design and the electrical distribution system serving the process electrical loads, there are instances where the resilience of the CKTP OT network could be improved so that the redundancy of the process is not undermined by a singular network component or cable failure. Even where the approach taken at CKTP to distribute process control among PLCs local to the processes themselves has significantly reduced the number of potential network failures that could impact a PLC's ability to govern the process(es) it controls, improved OT network resilience could preserve Sewer Utility staff's ability to monitor and control the various plant processes from SCADA and prevent gaps in historical data in the event of singular network component or cable failures.

Kingston, Manchester, and Suquamish Wastewater Treatment Plants

In the case of KWWTP, MWWTP, and SWWTP, many of the process trains have no redundancy. These WWTPs are also much smaller than CKTP and are more manageable for Sewer Utility operations staff to run manually in the event of an OT network outage. However, if OT network redundancy were to reflect process redundancy, the liquid stream at KWWTP branches into two parallel trains for the oxidation ditches and secondary clarifiers. The network components and cable segments that establish communications between the KWWTP PLC and RIO racks in the process building, where I/O associated with these processes are received, could be candidates for redundancy considerations. The liquid stream at MWWTP also splits into two parallel trains, but the plant has only one RIO rack dedicated to the liquid stream processes. An investment in OT network resilience at MWWTP without a more redundant control system design would not fully complement the redundancy of the process.

- \* Given the current network arrangement, the most critical network switch in the CKTP OT network is a single point of failure for the network.
- \* The access switch serving the CKTP SCADA PCs and historian server is an unmanaged switch, which propagates undesirable broadcast and multicast packets generated by the operating systems on those machines throughout the network.
- \* CKTP OT network arrangement in PNL 8580A has created multiple single points of failure for communication between plant SCADA nodes and all of the plant PLCs.
- \* CKTP OT network has no resilience because of a lack of access switch and cable path redundancy, and there are instances where lack of OT network redundancy may undermine process redundancy.

- \* Improving CKTP OT network resilience could prevent loss of SCADA monitoring and control functionality and continue logging of historical SCADA data in the event of singular network component or cable failure.
- \* KWWTP OT network has no resilience because of a lack of access switch and cable path redundancy, and this lack of OT network redundancy may undermine liquid stream process redundancy.


## 2.3 Wide-area Network Architecture Overview

This subsection provides an overview of the WANs that maintain communications between the WWTPs and pump stations.

## 2.3.1 WWTP WAN

In 2019 the Sewer Utility hired QCC to establish network connectivity between the OT networks at the remote WWTPs and the CKTP OT network. QCC implemented a solution from Tempered Networks that is founded on Host Identity Protocol (HIP) and proprietary software. The Tempered Networks Airwall system implemented for the Sewer Utility consists of hardware security appliances called HIPswitches that are installed at each WWTP, software agents installed on County laptops and tablets, a virtual security appliance called a HIPrelay that is hosted in a Microsoft Azure cloud instance, and the Tempered Networks Conductor software, which is also cloud-hosted. Figure 2-5 depicts a general overview of the core Tempered Networks Airwall system components. A high-level network diagram of the Tempered Networks Airwall system implemented for the Sewer Utility is depicted on QCC drawing N-00 in Appendix C.

Figure 2-5. Tempered Networks Airwall system general overview diagram

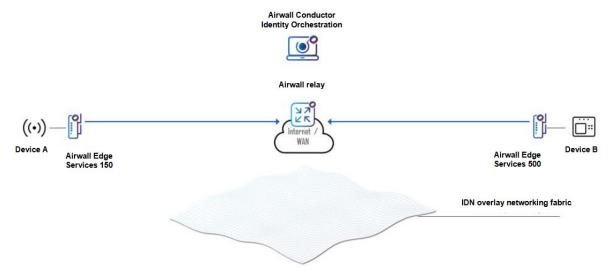

Source: Tempered Networks.

The Tempered Networks Airwall system is configured to deny all communications by default. Through the use of HIP and proprietary software, the technology is designed to

"cloak" network devices behind Airwall edge services (e.g., HIPswitches, software agents, and server agents) so that they are not discoverable by untrusted external devices using network scans, ping requests, and other traditional enumeration methods. The technology also functions as an overlay to existing network switch and router hardware infrastructure and can effectively bypass active configurations at these hardware instances that might otherwise prevent communication between remote devices. This feature can simplify management of the WAN, greatly reduce commissioning efforts when implementing within existing networks, and allow for microsegmentation (i.e., the practice of logically dividing the network into several small segments based on workload or intended communication groups) that would otherwise require a significant network configuration and management effort to establish and maintain.

The Tempered Networks Conductor provides a web-based user interface for network managers to add trusted devices to user-defined groups, each of which can have specific security policies and permissions defined. Once security policies and permissions are in place, devices belonging to a group may communicate over an encrypted data plane that spans between Airwall edge services. Because the data plane spans the public Internet and typically involves two devices belonging to separate private networks, the HIPrelay is required to overcome this double Network Address Translation (NAT) scenario and to provide secure routing between the Airwall edge services. The HIPrelay does not decrypt the packets sent over the data plane, so the encryption remains intact between endpoints. The Airwall edge services are responsible for enforcing the security policies defined in the Conductor using an authenticated key exchange. They also manage encryption and decryption of outgoing and incoming packets, respectively.

At the time of this writing, the WWTP WAN is used by QCC only to provide remote programming and configuration services and by County staff to provide periodic remote monitoring of CKTP SCADA alarm screens. Data exchange between the SCADA systems at remote WWTPs and CKTP has yet to be implemented. Currently, Sewer Utility staff do not have a central location where all WWTP SCADA systems can be monitored and controlled. Sewer Utility staff must call the on-duty operator at the remote WWTPs to obtain plant process operation status and near real-time process values.

#### 2.3.2 Pump Station VHF Licensed Radio WAN

This subsection describes the existing configuration, historical performance, and planned modifications of the Sewer Utility's very high frequency (VHF) licensed radio WAN for the wastewater pump stations.

## **Existing Configuration**

Most of the Sewer Utility's pump stations within the wastewater conveyance system communicate with a master telemetry unit (MTU) at CKTP via VHF licensed radio. The MTU polls the pump station in a set round-robin sequence where each station is polled one at a time until the last station in the sequence is polled, then the sequence starts over from the beginning of the sequence. High-level network diagrams depicting the VHF licensed radio WAN and the repeaters involved in some of the radio paths are shown in QCC drawings N-02, N-03, N-04, and N-05 in Appendix C. These QCC drawings also depict some of the planned work between the Sewer Utility and QCC to move additional



pump stations onto the cellular network and to modify the radio paths of the Manchester area pump stations to communicate with MWWTP instead of CKTP.

The Sewer Utility has standardized on CalAmp Viper SC 100 (depicted in Figure 2-6) and SC+ 100 radios for the pump station VHF licensed radio WAN. The radios have been configured to communicate using a frequency of 173.3125 megahertz (MHz) and a 6.25-kilohertz (kHz) channel bandwidth. The County has an active license with the Federal Communications Commission (FCC) for this frequency, which is set to expire in July 2024.

Figure 2-6. CalAmp Viper SC 100 VHF radio



Source: CalAmp.

Some of the benefits of VHF include longer range and better penetration of trees and other foliage when compared to higher frequency ranges. Given that FCC restrictions on antenna mounting heights likely rule out line-of-sight radio paths for most, if not all, of the pump stations, VHF is likely to be more tolerant of the non-ideal radio paths within the Sewer Utility's licensed radio WAN than higher-frequency range alternatives. In theory, the licensed frequency should also eliminate noise resulting from competing signals produced by other entities operating within the same frequency range.

One of the significant limitations of VHF and lower frequency ranges, in general, is lower bandwidth. This means that the VHF radio paths within the Sewer Utility's licensed radio WAN take considerably longer than higher frequency alternatives to communicate the same amount of data. While the current volume of data exchange occurring over the Sewer Utility's licensed radio WAN is limited, the lower bandwidth contributes to longer polling cycle times (i.e., the time it takes for the MTU to complete one round of transmitting and receiving data to and from each pump station). Sewer Utility staff have indicated that it can take the MTU roughly 8 minutes to complete a polling cycle, which means that the CKTP SCADA system is receiving updates for pump station statuses and alarms only every 8 minutes or so, assuming that all communication attempts are successful. If communication attempts are unsuccessful, then updates for a given pump station may occur at intervals greater than 16 minutes. These delays in communication of pump station statuses and alarms have presented challenges to County staff in providing timely responses to critical pump station alarms and accurate calculations of accumulated equipment runtimes.

The Sewer Utility has expressed a desire to move toward more real-time monitoring and alarming for the pump stations. Furthermore, the recommendations that are anticipated

to come from the ongoing Sewer Utility SCADA Master Plan will likely include increasing the amount of data exchanged between the pump stations and the CKTP SCADA system. Decreasing polling cycle times while supporting increased data exchange over the Sewer Utility's pump station WAN will likely not be achievable using VHF-based telemetry.

The Sewer Utility has also indicated that some pump stations experience poor communications on the VHF licensed radio WAN. The County considers improving the communications for these sites a high priority so that status and alarms are communicated more frequently and communication loss alarms have significance and are not a nuisance for staff.

#### Historical Performance

To better quantify the performance of the pump station VHF licensed radio WAN, HDR obtained 2 years' worth of communication data from the CKTP historian for the period between August 24, 2018, and August 24, 2020. During this period, the median polling cycle time was 8 minutes and 41 seconds, which aligns with information obtained from Sewer Utility staff. Uptime percentages were calculated for each pump station radio path based on the ratio of successful versus attempted data exchanges between the MTU and pump station PLCs. The radio path uptime percentages for each station are presented in Figure 2-7.



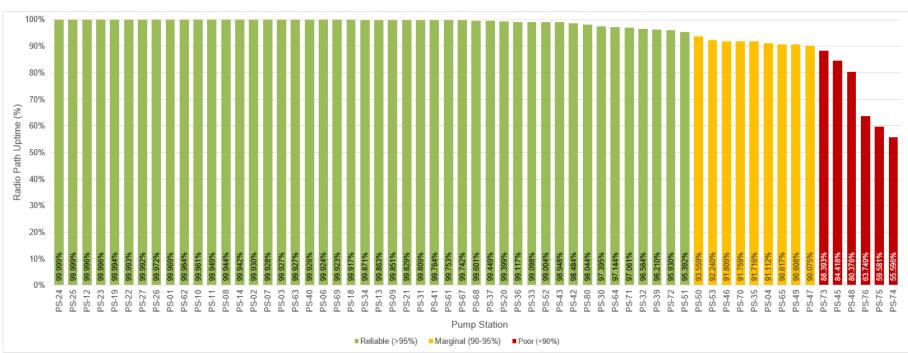


Figure 2-7. Pump station VHF licensed radio WAN radio path uptime percentages

#### Notes:

- a. Radio path uptime calculations are based on historical data obtained between 8/24/2018 and 8/24/2020.
- b. PS-17 has been on the cellular WAN for more than half of this period and is excluded from the figure.

As depicted in Figure 2-7, six of the pump stations were found to have poor communications. Two of these pump stations (PS-75 and PS-76) have already been added to the pump station cellular WAN described in the following subsection. PS-04 has also been added to the pump station cellular WAN. Based on discussions with Sewer Utility staff, the upgrade to cellular communications has greatly improved the reliability of communications with these pump stations.

The PLC that serves as the MTU for the VHF licensed radio WAN is programmed to generate a new value for a "watchdog" parameter for each pump station on every polling cycle. These "watchdog" parameter values, which are logged in the CKTP historian, were used to determine the timing of the polling cycles for Figure 2-7. The MTU PLC is also programmed to update a communication efficiency parameter for each pump station based on the outcome of the data exchange between the MTU PLC and the PLC at the pump station during each polling cycle. If the data exchange is successful, 0.1 is added to the communication efficiency parameter value (with the value restricted to an upper bound of 100.0), while 0.1 is subtracted from the communication efficiency parameter value when the data exchange fails. The pump station communication efficiency parameter values are displayed at the CKTP SCADA HMI and logged in the CKTP historian.

While these values are helpful for locating failed communication attempts when reviewing historical data, the values themselves do not accurately represent "communication efficiency" and may be misrepresenting the performance of the various radio paths to Sewer Utility staff. Consider a scenario where there are 20 successful and 20 unsuccessful data exchange attempts within a given period. At the end of this period, the communication efficiency parameter value may have returned to the same value it had at the beginning of the period. If that value was 75.0, for example, staff may be led to believe that 75.0 percent of data exchange attempts have been successful.

#### Planned Modifications

Historically, communications for Manchester area pump stations have been poor because of the surrounding terrain and dependence on multiple repeaters along the communication paths. Currently, these stations communicate with the CKTP MTU radio. QCC has installed an industrial VHF radio within the MWWTP operations building electrical room and an omnidirectional antenna near the southwest corner of the building. The radio was not connected to the MWWTP OT network during HDR's site visit. The new radio and antenna are in preparation for modifying the VHF radio paths of the Manchester area pump stations to communicate with this new radio at MWWTP. QCC and the Sewer Utility are planning to have the MWWTP PLC handle data exchange for the Manchester area pump stations and to relay that data exchange to CKTP over the Tempered Networks WWTP WAN.

## 2.3.3 Pump Station Cellular WAN

The Sewer Utility has subscribed to Verizon Wireless's Private Network service and contracted with QCC to implement a 4G Long-Term Evolution (LTE) cellular WAN for the Sewer Utility's wastewater pump stations. A high-level network diagram depicting the cellular WAN is presented in QCC drawing N-01 in Appendix C. As shown in QCC's



network diagram, QCC has cut over four of the Sewer Utility's pump stations to use the new cellular WAN as a primary communications path and there are plans to cut over seven additional pump stations in the near future. The Sewer Utility is leaving the VHF licensed radio equipment in place at the pump stations that are added to the cellular WAN so that the pump stations can fail over to the VHF licensed radio WAN in the event of a prolonged cellular communications outage.

The Sewer Utility has standardized on Cradlepoint IBR600C Series cellular routers for the pump station cellular WAN (see Figure 2-8). These routers are equipped with a 1-gigabit Ethernet (GbE) local area network (LAN) port, support virtual private network (VPN) tunnels, and have 75-megabit per second (Mbps) throughput capability. The routers also have a rugged enclosure and an extended operating temperature range, making them suitable for installation within the industrial control panel environments found at the Sewer Utility's pump stations.

Figure 2-8. Cradlepoint IBR600C Series cellular router



Source: Cradlepoint.

The Sewer Utility's cellular WAN has a dedicated MTU PLC that manages data exchange between the pump stations and the CKTP SCADA system. A cursory review of the PLC's programming suggests that QCC and the Sewer Utility are implementing a report-by-exception telemetry scheme for the pump stations on the cellular WAN. Under this scheme, the pump stations initiate data exchange based on a change in status or process values with the MTU PLC programmed to poll any pump station that has not initiated data exchange within a set period. The report-by-exception scheme can significantly reduce the volume of data traversing the WAN, which also reduces the data usage charges on the Sewer Utility's monthly bill(s) from Verizon Wireless. The scheme can also reduce CKTP historian workload by filtering out static status and process values at the WAN periphery.

Unlike the VHF licensed radio WAN, the CKTP SCADA system does not appear to be accurately recording communication status data for the pump stations on the cellular WAN. Historical SCADA data reviewed by HDR showed static values for communication efficiency and "watchdog" parameters at the four pump stations communicating via the cellular WAN. Tracking parameters related to the quality of communications for pump

stations on the cellular WAN is recommended so that the County has historical reference for communications at all sites.

Given the data throughput capabilities of the Sewer Utility's cellular routers, and 4G LTE cellular technology in general, the Sewer Utility's pump station cellular WAN provides a means of tightening the data gaps and eliminating the long polling cycle times that hinder the Sewer Utility's VHF licensed radio WAN. The cellular WAN should also be capable of supporting the increased data exchange anticipated from recommendations to come in subsequent phases of the Sewer Utility SCADA Master Plan. It should be noted that cellular reception may not be sufficient at every pump station to make the pump station's inclusion in the cellular WAN viable. In general, cellular signal strength surveys should be performed at pump stations to gauge the feasibility of cellular communications prior to implementation.

- \* Currently, Sewer Utility staff do not have a central location where all WWTP SCADA systems can be monitored and controlled.
- \* Pump stations on the VHF licensed radio WAN experience long delays in communication of pump station statuses and alarms, which have presented challenges to County staff in providing timely responses to critical pump station alarms and accurate calculations of accumulated equipment runtimes.
- \* The lower bandwidth inherent in VHF-based telemetry is ill-suited for increased data exchange between the pump stations and the CKTP SCADA system and would constrain the Sewer Utility's objective of near real-time monitoring and alarming for wastewater pump stations.
- \* Four of the six pump stations with historically poor VHF communications remain on the VHF licensed radio WAN. Planned modifications for the Manchester area pump stations may improve communications for those pump stations.
- \* The pump station communication efficiency parameter values displayed at the CKTP SCADA HMI and logged in the CKTP historian may be misrepresenting actual VHF licensed radio WAN radio path performance because of the calculations used in the MTU PLC programming.
- \* The CKTP SCADA system does not appear to be accurately recording communication status data for the pump stations on the cellular WAN.

# 2.4 Network Cabling

This subsection describes the network cabling installed at the Sewer Utility's WWTPs and wastewater pump stations.



## 2.4.1 Central Kitsap Treatment Plant

Ethernet cabling within the CKTP OT network consists of multi-mode fiber-optic cables and a variety of copper Category cables. Among the fiber-optic cables, a mix of 62.5/125-micron (µm) (Optical Multi-mode 1 [OM1]) multi-mode fiber and laser-optimized, 50/125 µm (Optical Multi-mode 3 [OM3]) multi-mode fiber is installed at CKTP and the Sewer Utility has standardized on straight-tip (ST) connectors for fiber-optic cable terminations at fiber-optic patch panels. OM1 and OM3 fiber have a distance limitation of 275 meters and 550 meters, respectively, for 1 GbE throughput. GbE has replaced fast Ethernet (with a theoretical throughput of 100 Mbps) as the default base speed provided for modern PC and server network interface cards (NICs). Industrial automation manufacturers are following suit, and GbE network interfaces are becoming more common throughout the automation industry. As data volumes increase because of the proliferation of IP-based communications in industrial networks, it will become critical that fiber-optic networks can support GbE throughput, at a minimum, in the coming years.

Fortunately, the distances of the multi-mode fiber-optic cables observed at CKTP appear to be well below the GbE distance limitation thresholds. Assuming that the fiber-optic strands within these cables have not been damaged, the existing cables should support near-term modifications and upgrades to the OT network that affect their respective endpoints. However, it should be noted that OM1 fiber-optic cable has a distance limitation of 33 meters for 10 GbE throughput (the next higher Institute of Electrical and Electronics Engineers [IEEE] standard for Ethernet speed), so the existing OM1 cables will not support future 10 GbE network connections, if and when the CKTP OT network requires them.

During its site visits, HDR noticed that an OM1 patch cord (the orange patch cord shown in Figure 2-9) was used to connect two OM3 cables at the fiber-optic patch panel within PNL 2920 in the power/blower building. Mixing OM1 and OM3 fiber-optic cables can result in severe losses at the connection points because of mismatches in the core sizes of the two fiber strands (50  $\mu$ m versus 62.5  $\mu$ m). This OM1 patch cable should be replaced with a suitable OM3 patch cable.


Figure 2-9. OM1 patch cord used to patch OM3 cables in PNL 2920



Most of the copper Ethernet cabling at CKTP is unshielded twisted pair (UTP) Category cable. There are instances where shielded, 600-volt (V)-rated Category 6 cable is used to connect IP nodes installed within motor control centers (MCCs) or other 480-volt alternating current (VAC)-rated equipment enclosures, but this best practice has not been adhered to in all cases. Figure 2-10 presents an example from PNL 6000 in the digester control building, where the control panel's network switch receives two UTP Category cables from VFDs located within an adjacent electrical enclosure. These cables are most likely rated for 300 V and installing them within an enclosure that houses electrical equipment powered from a higher voltage than the cables' insulation rating without proper separation is a National Electrical Code (NEC) violation. Shielding of copper Ethernet cables is important, when run in parallel with power cables or within power equipment enclosures, to mitigate outside interference (particularly from VFDs) that may impact data integrity and to prevent induced voltage on the cable's conductors that could damage sensitive electronics and create personnel and fire safety issues.







## 2.4.2 Kingston Wastewater Treatment Plant

Ethernet cabling within KWWTP is exclusively copper cable. Shielded Category 6 cable is used for network connections between buildings and to connect IP nodes installed within MCCs. The remainder of the Ethernet cabling is UTP Category cable. Aside from the incoming fiber-optic Internet service from Kitsap Public Utility District (KPUD), described in Section 2.8 below, no fiber-optic cable is installed at KWWTP.

#### 2.4.3 Manchester Wastewater Treatment Plant

Ethernet cabling within MWWTP is exclusively copper, UTP Category cable. Aside from the incoming fiber-optic Internet service from KPUD, described in Section 2.8 below, no fiber-optic cable is installed at MWWTP.

## 2.4.4 Suquamish Wastewater Treatment Plant

Ethernet cabling within SWWTP is exclusively copper cable. Shielded Category 5e cable is used for network connections between the three sludge pump VFDs and the network switch in CP-01. HDR did not confirm the insulation rating of these cables. Aside from the incoming fiber-optic Internet service from KPUD, described in Section 2.8 below, no fiber-optic cable is installed at SWWTP.

## 2.4.5 Pump Stations

Ethernet cabling at the pump stations is limited and, where found, appears to be exclusively copper, UTP Category cable. HDR observed UTP Category cable connecting

the VFDs for PS-67 pumps to the network switch in the station's control panel. HDR did not confirm the insulation rating of these cables. As previously mentioned, copper Ethernet cables routed near power cables and/or connecting IP nodes within 480 VAC equipment enclosures should be shielded and have a 600 V insulation rating. No fiber-optic cable appears to be installed at the pump stations visited by HDR.


- \* An OM1 fiber-optic patch cable has been used to patch two OM3 fiber-optic cables at the fiber-optic patch panel within PNL 2920 in the CKTP power/blower building. This patch cable should be replaced with a suitable OM3 patch cable.
- \* There are instances of UTP Category cables with insufficient voltage insulation ratings connecting IP nodes within 480 VAC equipment enclosures at CKTP and PS-67.

## 2.5 Network Switches

A variety of managed (Layer 2) and unmanaged network switches exist throughout the Sewer Utility OT networks. For reference, Layer 2 refers to a specific layer within the Open Systems Interconnection (OSI) Model (see Figure 2-11), which was developed to help establish order through the use of standard protocols in a wildly diverse technological marketplace. Unlike Layer 3 or multilayer switches, Layer 2 switches deal only with the Data Link and Physical layers and do not recognize IP addressing or other packet headers within the frames they traffic. In basic terms, this means that they are incapable of routing. However, their Layer 2 management functionality provides several benefits when compared to unmanaged switches, as discussed in the following paragraphs.



Figure 2-11. OSI Model summary

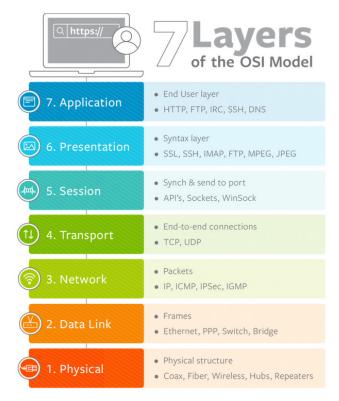

Source: BMC Software, Inc.

Most of the unmanaged switches are installed in vendor control panels, which is a fairly common practice because vendors often default to unmanaged switches to reduce costs and simplify integration of their systems with existing industrial networks. However, there are a few instances where unmanaged switches have been installed at more critical locations within the OT networks—an example of this being the unmanaged switch serving the CKTP SCADA PCs discussed in Section 2.2 above.

In addition to the filtering of broadcast and multicast packets mentioned previously, managed switches provide several other benefits, including the following:

- Means of segmenting the network to avoid exposing devices to traffic from other devices they were never intended to communicate with
- Monitoring of network traffic to help troubleshoot network upsets
- Implementation of more resilient network architectures like ring and redundant star topologies
- Prioritization of specific traffic over other network traffic when bandwidth capacity is reached
- The ability to disable unused ports
- Mitigation of several common network security risks

A list of unmanaged switches that are recommended for replacement with managed switches is included in Table 2-1.

Table 2-1. Unmanaged switches recommended for replacement

Facility	Location	Panel	Manufacturer	Model
CKTP	Administration and lab building network closet	N/A	N-Tron	112FX4
CKTP	SPB control room	Master station CTU	N-Tron	108TX
CKTP	SPB control room	Network cabinet	N-Tron	526FX2
CKTP	Trailer 103 I&C technician office	N/A	Netgear	ProSAFE GS105E
CKTP	Headworks electrical room	PNL 1050	N-Tron	526FX2

For most network switches within its OT networks, the Sewer Utility appears to have standardized on N-Tron (acquired by Red Lion in 2010) industrial DIN-rail-mountable switches. N-Tron 700 Series switches appear to be the most prevalent product line of the manufacturer's offerings found at Sewer Utility facilities, though there does not appear to be standardization on a specific model within that product line. An example of one of the switches within the 700 Series product line found at Sewer Utility facilities is depicted in Figure 2-12.

Figure 2-12. N-Tron 716TX industrial managed Ethernet switch



Source: Red Lion.

The N-Tron 700 Series switches are managed (Layer 2) switches that have rugged enclosures and support a broader operating temperature range than more conventional network switches designed for office, server room, or communications closet environments. Among the management features available with these switches are Quality of Service (QoS), Internet Group Management Protocol (IGMP) snooping (a critical feature for filtering undesirable multicast traffic, as discussed previously), per-port virtual local area network (VLAN) configuration, and support for Simple Network Management Protocol (SNMP) management and monitoring. All ports on these switches are 10/100BaseTX or 100BaseFX ports, so the existing IP nodes at Sewer Utility facilities with GbE NICs have their potential throughput effectively capped at the theoretical 100 Mbps limit inherent in the 700 Series switch ports. As data volumes increase with the anticipated proliferation of IP nodes within the Sewer Utility's OT networks in the coming years, the port speeds supported by these switches may become a limiting factor.



Another notable network switch product within the CKTP OT network is the N-Tron 7900 Series switches installed within PNL 8580A in the SPB control room (see Figure 2-13). Like the 700 Series switches, these network switches are managed (Layer 2), DIN-rail-mountable, have rugged enclosures, and support a relatively broad operating temperature range. The switches also benefit from the same management features included with 700 Series switches. Where the 7900 Series switches differ is in their modular design, which allows for customizable fiber-optic or copper switch port arrangements. The 7900 Series switches also feature two 1 GbE fiber-optic ports on the processor module.

Figure 2-13. N-Tron 7900 Series modular, industrial, managed Ethernet switch



Source: Red Lion.

As part of its condition assessment site work, HDR was able to obtain access to the web-browser-based management interface for several of these Ethernet switches using the manufacturer's default username and password. Because default usernames and passwords are easily discoverable on the Internet, information security industry standard practice for hardening network devices includes changing device login credentials to disable access via default username and password combinations. HDR recommends establishing new login credentials for theses switches and disabling access via the manufacturer's default username and password.

- \* Several unmanaged switches at CKTP are recommended for replacement with managed switches to mitigate risks to network stability and security.
- \* The Sewer Utility has not standardized on a specific managed switch, which can lead to stocking of additional spare switches to facilitate rapid switch replacement in the event of switch failure.
- \* All ports on most switches throughout the Sewer Utility OT networks are capping connected devices at the theoretical 100 Mbps limit inherent in the switch ports. As data volumes increase within the Sewer Utility's OT networks in the coming years, the port speeds supported by these switches may become a limiting factor.

\* Several managed switches on Sewer Utility OT networks are accessible via manufacturer default username and password.

## 2.6 On-Premises Wireless Access to OT Networks

At CKTP, the Sewer Utility has implemented a wireless extension of the OT network using a 5-gigahertz (GHz) Wi-Fi base station and access points from Ubiquiti. The base station installed within the SPB control room (see Figure 2-14) has been configured for point to multi-point communications with two access points installed at trailer 103 and the operations facilities building at the north end of CKTP. This wireless application appears to be solely for the purpose of providing OT network connectivity for three SCADA PCs located in trailer 103 and the operations facilities building. HDR does not believe that the Sewer Utility is currently using the installed access points to provide Wi-Fi access to Sewer Utility staff mobile devices. The Ubiquiti base station and access points also do not appear to be broadcasting Service Set Identifiers (SSIDs), which increases the network's security by not advertising its existence to nearby Wi-Fi cable devices.



Figure 2-14. Ubiquiti Rocket Prism 5AC Gen 2 5 GHz access point

Source: Ubiquiti Networks.

Without OT network access via mobile devices while on-site, operators can access CKTP OT network IP nodes only via SCADA PCs and available ports at OT network access switches. Operators can also access SCADA HMI screens via HMI thick client panel PCs installed in the enclosure doors of control panels in the headworks building, power/blower building, aeration basin electrical building, reclaimed-water building, and waste activated sludge (WAS) thickening building. Though not implementing wireless



access to the OT networks for mobile devices eliminates some common potential attack vectors that can be exploited by malicious actors, it also eliminates one method of implementing tablet-based workflows for Sewer Utility staff, which can improve workforce efficiency and increase staff engagement with ICS software.

Wireless access to the OT networks via Wi-Fi technology has not been implemented at KWWTP, MWWTP, or SWWTP. At these WWTPs, Sewer Utility staff must use the SCADA PC in the plant control room or physically connect to an available port at one of the OT network access switches to interact with IP nodes on the plant OT network.

\* The Sewer Utility has not implemented on-site tablet-based workflows for Sewer Utility staff, which can improve workforce efficiency and increase staff engagement with ICS software.

# 2.7 Network Segmentation and Segregation

This subsection describes the network segmentation and segregation practices within the Sewer Utility OT networks.

## 2.7.1 Segmentation

This subsection describes the network segmentation practices within the Sewer Utility OT networks.

### Central Kitsap Treatment Plant

The CKTP OT network is configured as a single /24 subnet allocated from the County's public IP address range. No further segmentation of the network was observed. Though the IP nodes within the CKTP OT network should not be directly reachable from the public Internet, having IP addresses that are routable from the public Internet is a significant security risk. Misconfiguration of a switch or security appliance or inadvertent connection of the OT network to an Internet-facing network like the CKTP business LAN could potentially expose devices on the OT network to the public Internet, making them reachable by anyone in the world with an Internet connection. Standard practice for securing ICS networks includes assigning ICS IP nodes private IP addresses, which are not routable from the public Internet.

The size of the CKTP OT subnet presents another concern in terms of future growth and development of the network. As a /24 subnet, the CKTP OT network is restricted to 254 usable IP addresses, which limits the number of IP-capable devices communicating on the network to 254. Though the Sewer Utility has yet to reach this number of connected devices, the number of devices on the CKTP OT network is expected to grow considerably in the coming years. The industrial automation industry has embraced IP-based communications, and demand for more robust data exchange between ICS devices and software platforms is driving a proliferation of IP devices in ICS networks. The Sewer Utility will require a larger pool of IP addresses to support this industry trend and benefit from the data that newer IP-based technologies can provide.

#### Suquamish Wastewater Treatment Plant

The SWWTP OT network is also configured as a single /24 subnet allocated from the County's public IP address range. No further segmentation of the network was observed. Though the IP nodes within the SWWTP OT network should not be directly reachable from the public Internet, the same security risk introduced by assigning public IP addresses to ICS devices that was discussed for the CKTP OT network also applies to the SWWTP OT network.

Because of the small size of SWWTP, the connected device limitation of a /24 subnet is not likely to constrain near-term potential growth of the plant's OT network. Because the current network is small in scale and all IP nodes on the network are part of the ICS, further segmentation of the OT network is not recommended at this time. Segmenting an already small network of closely related devices would introduce complexity and maintenance requirements that would likely outweigh any security or performance enhancements that could be achieved from separating the IP nodes into different broadcast domains.

#### Kingston and Manchester Wastewater Treatment Plants

The KWWTP and MWWTP OT networks are configured as single Class C networks using a private IP address range. No further segmentation of the networks was observed. The assignment of private IP addresses to devices within these OT networks adds a layer of security and is consistent with standard practice for securing ICS networks.

Because of the small size of KWWTP and MWWTP, the connected device limitation of a /24 subnet is not likely to constrain near-term potential growth of the plants' OT networks. Because the current networks are small in scale and all IP nodes on the networks are part of the ICS, further segmentation of the OT networks is not recommended at this time. Segmenting an already small network of closely related devices would introduce complexity and maintenance requirements that would likely outweigh any security or performance enhancements that could be achieved from separating the IP nodes into different broadcast domains.

#### Pump Station VHF Licensed Radio Network

Each pump station has been allocated a single /24 subnet using a private IP address range. At CKTP, a separate /24 subnet also using private IP addresses has been assigned for the devices involved in the pump station telemetry. This CKTP subnet is distinct from the subnet used for the remainder of the CKTP OT network. Finally, a separate /24 subnet has been assigned to the VHF licensed radio network, also using a private IP address range. All of these subnets share the same first two octets in their IP addresses, which was most likely done to simplify the subnet scheme and its documentation.

Under this subnet scheme, IP devices within the pump stations are assigned IP addresses from the station's subnet, while the external-facing interface on the VHF radios is assigned an IP address from the radio network subnet. Similarly, at CKTP, the MTU PLCs and dedicated interfaces at the SCADA PCs have been assigned IP addresses from CKTP's pump station telemetry subnet, while the external-facing



interface on the CKTP VHF radio is assigned an IP address from the radio network subnet. The VHF radios have been configured to handle routing between the various subnets via entries made within the radio routing tables. In this way, the Sewer Utility can restrict communication between devices in different subnets to the devices that need to communicate only. Based on the few VHF radio configurations reviewed during HDR's site visits, HDR believes that the VHF radio routing tables have been configured to limit communication over the VHF licensed radio network to communication between the VHF radio MTU PLC at CKTP and each pump station remote telemetry unit (RTU). Communication between devices at different pump stations, for example, does not appear to be permitted given current routing table configurations.

#### Pump Station Cellular Network

The LAN interfaces of the cellular routers installed at Sewer Utility pump stations and CKTP are assigned IP addresses belonging to the same subnets used for the pump station VHF licensed radio network. The MTU PLC responsible for the cellular telemetry at CKTP has also been assigned an IP address within the CKTP pump station telemetry subnet. The actual cellular communications between the cellular routers occur over the Sewer Utility's cellular provider's network. The cellular carrier's management of this communication is discussed in more detail under Section 2.7.3 below.

#### Tempered Networks WWTP WAN

The LAN interfaces of the Tempered Networks HIPswitches installed at Sewer Utility WWTPs are assigned IP addresses belonging to the same subnets used for the WWTP OT networks. The external-facing interfaces on the HIPswitches are assigned public IP addresses. All trusted devices situated behind the HIPswitches at the Sewer Utility WWTPs are part of the OT network for that WWTP and have been assigned IP addresses from the WWTP OT network subnets. As discussed in Section 2.3 above, the Sewer Utility's HIPrelay handles routing between devices within the various subnets.

#### 2.7.2 Unused Access Ports

During its site visits, HDR performed a cursory review of the configurations for a selection of the managed network switches found within the Sewer Utility's WWTPs. All managed Ethernet switch ports reviewed are currently enabled and assigned to default VLAN 1. As an example, the port configuration screen for the managed switch in the MWWTP influent pump station control panel is shown in Figure 2-15. Under the Admin Status column (boxed in red), all ports are shown as enabled though only ports 1 and 8 are in use, as indicated by the adjacent Link Status column. Information security industry standard practice and National Institute of Standards and Technology (NIST) recommendations for ICSs include disabling unused ports as part of recommended network device hardening measures (NIST 2015). Though disabling unused ports is the primary means of securing unused switch ports, assigning unused switch ports to an unused VLAN (i.e., black hole VLAN) can provide an additional layer of security from inadvertent connection errors and unauthorized network access.

Figure 2-15. Example managed switch port configuration screen

**Port Configuration View** 

Port No	Port Name	Admin Status	Link Status	Auto Nego	Port Speed	Duplex Mode	Cross Over	Flow Control	Port State	PVID	Usage Alarm Low [%]	Usage Alarm High [%]
<u>01</u>	TX1	Enabled	Up	Enabled	100	Full	Auto	Disabled	Forwarding	1	0	100
<u>02</u>	TX2	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
03	TX3	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
04	TX4	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
<u>05</u>	TX5	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
<u>06</u>	TX6	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
<u>07</u>	TX7	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
08	TX8	Enabled	Up	Enabled	100	Full	Auto	Disabled	Forwarding	1	0	100

Refresh

## 2.7.3 Segregation

This subsection describes the network segregation practices within the Sewer Utility OT networks.

#### Central Kitsap Treatment Plant

During its site visits, HDR observed that the unmanaged access switch serving the SPB SCADA PCs, CKTP historian, and other OT network devices is connected to a managed switch used by the CKTP business LAN. Both switches are located in the SPB control room network cabinet. Depending on how the business LAN switch is configured, the CKTP OT network may be exposed to PCs and other devices on the business LAN that have Internet access and can present a security risk to the OT network if given direct access. HDR did not review the configuration of this managed switch, but considers a direct connection between the business LAN and OT network a significant security risk for the OT network that should be remedied.

HDR also observed a cellular router connected to the same OT network unmanaged access switch in the SPB control room network cabinet (see Figure 2-16). Based on discussions with Sewer Utility I&C technicians, the purpose of this cellular router is unknown and the router is believed to have been left behind by an equipment vendor or past systems integrator. Sewer Utility staff do not recall having granted permission for the router to be installed on the OT network. The cellular router presents a significant risk to the CKTP OT network as it can serve as a backdoor into the network, bypassing security measures implemented by the CKTP HIPswitch and other security appliances that may be in place within KPUD's Carrier Ethernet network. The Sewer Utility also has no control over the security of the device or devices that may be connecting to the CKTP OT network via this cellular router, so any vulnerabilities inherent with those devices or any malware present on the devices could easily be shared with the Sewer Utility's network. After a discussion of the potential security risks presented by the cellular router, Sewer Utility staff powered down the device and disconnected it from the network.







#### Suquamish Wastewater Treatment Plant

During its site visits, HDR observed that the secure gateway used to provide Internet connectivity to a wireless access point on the SWWTP business LAN is also connected to a managed switch on the SWWTP OT network. This managed switch, located in CP-01, is "behind" the Tempered Networks HIPswitch in the SWWTP OT network architecture. HDR did not review the configuration of the secure gateway to determine the level of segregation between the two networks provided by the gateway's firewall functionality. However, allowing connection from the public Internet to the OT network through the secure gateway would effectively bypass any security controls implemented via the Tempered Networks WAN. Eliminating an unnecessary external access method to the SWWTP OT network would reduce the network's attack surface by eliminating a potential entry point, allowing the Sewer Utility and its contractors to focus on maintaining the security of a single data conduit between the SWWTP OT network and external permissioned devices.

#### Kingston and Manchester Wastewater Treatment Plants

HDR did not observe instances of the OT networks and business LANs sharing physical network devices at KWWTP or MWWTP, nor were multi-homed PCs observed. The KWWTP and MWWTP OT networks appear to be physically and logically separated from the plant business LANs, which is consistent with information security industry recommended practices for ICSs.

#### Pump Station Cellular Network

The Sewer Utility's cellular provider is Verizon Wireless and the Sewer Utility has subscribed to the Verizon Wireless Private Network service, which has been deployed as a zero-tunnel configuration for machine-to-machine (M2M) applications. This service provides the Sewer Utility with a private cellular WAN for devices within the Sewer Utility's IP pool. The cellular WAN is segregated from the public Internet and the rest of the cellular carrier's network. Though this approach effectively outsources much of the WAN security to Verizon Wireless and requires trust in the cellular carrier's ability to maintain the segregation it advertises, it does provide a low-maintenance, economical means of establishing communication between CKTP and the remote pump stations with significantly higher data throughput than the VHF licensed radio network can offer.

- Public IP addresses are assigned to IP nodes within the CKTP and SWWTP OT networks.
- \* The subnet assigned to the CKTP OT network effectively limits the network to 254 connected devices. The Sewer Utility will require a larger pool of IP addresses to support additional devices in the future and adapt to the proliferation of IP devices that is becoming the norm in the industrial automation industry.
- ★ Unused network switch ports are enabled and assigned to active VLANs throughout the Sewer Utility's OT networks.
- \* There is a direct connection between CKTP business LAN and OT network switches in the SPB control room network cabinet. This direct connection between the business LAN and OT network presents a significant security risk for the OT network.
- \* A cellular router was found connected to the unmanaged OT network switch in the SPB control room network cabinet. The device could provide a backdoor into the CKTP OT network for external devices that the Sewer Utility has no control over, bypassing security measures in place for the network. Sewer Utility staff have since disconnected the cellular router from the network.
- \* There appear to be parallel entry points to the SWWTP OT network from external networks: one via the plant's Tempered Networks HIPswitch and one via a secure gateway used for the plant business LAN wireless access point.

## 2.8 Internet Service

This subsection describes the Internet service for the Sewer Utility's wastewater facilities.



## 2.8.1 Central Kitsap Treatment Plant

CKTP receives Internet service from KPUD via a fiber-optic connection to KPUD's Carrier Ethernet network. This connection consists of a single strand of single-mode (Optical Single-mode 2 [OS2]) fiber. To facilitate the Sewer Utility's connection to its network, KPUD has installed a fiber-optic patch panel and a Carrier Ethernet access switch within the administration and lab building communications room. The patch panel receives the incoming fiber-optic cable from KPUD's network, which is patched to KPUD's Cisco ME 3400E Series Carrier Ethernet access switch that serves as the point of demarcation between the KPUD and Sewer Utility networks. The KPUD Internet service connection serves ingress and egress traffic from both the CKTP business LAN and OT network.

## 2.8.2 Kingston Wastewater Treatment Plant

To establish network connectivity between the KWWTP OT network and the CKTP OT network, the Sewer Utility contracted with KPUD for the installation of fiber-optic cable to KWWTP. KWWTP now receives Internet service from KPUD over this fiber-optic connection, which consists of a single strand of single-mode (OS2) fiber. To facilitate the Sewer Utility's connection to its network, KPUD has installed a fiber-optic patch panel and a Carrier Ethernet access switch within the operations building electrical room (see Figure 2-17). The patch panel receives the incoming fiber-optic cable from KPUD's network, which is patched to KPUD's Cisco ME 3400E Series Carrier Ethernet access switch that serves as the point of demarcation between KPUD and Sewer Utility networks.



Figure 2-17. KWWTP operations building electrical room communications backboard

The Sewer Utility has implemented a separate Internet service for the KWWTP business LAN, which consists primarily of a PC located in the operations building control room. Internet access for the business LAN is achieved via a Peplink PEPWAVE MAX BR1 mini-cellular router. HDR did not review configuration or security settings for this device.

#### 2.8.3 Manchester Wastewater Treatment Plant

To establish network connectivity between the MWWTP OT network and the CKTP OT network, the Sewer Utility contracted with KPUD for the installation of fiber-optic cable to MWWTP. MWWTP now receives Internet service from KPUD over this fiber-optic connection, which consists of a single strand of single-mode (OS2) fiber. To facilitate the Sewer Utility's connection to its network, KPUD has installed a fiber-optic patch panel and a Carrier Ethernet access switch within the operations building electrical room (see Figure 2-18). The patch panel receives the incoming fiber-optic cable from KPUD's network, which is patched to KPUD's Cisco ME 3400E Series Carrier Ethernet access switch that serves as the point of demarcation between KPUD and Sewer Utility networks.





The Sewer Utility has implemented a separate Internet service for the MWWTP business LAN, which consists primarily of a wireless access point and a laptop located in the operations building control room. Internet access for the business LAN is achieved via a Motorola SB5120 cable modem. HDR did not review configuration or security settings for this device.


## 2.8.4 Suquamish Wastewater Treatment Plant

SWWTP receives Internet service from KPUD via a fiber-optic connection to KPUD's Carrier Ethernet network. This connection consists of a single strand of single-mode (OS2) fiber. To facilitate the Sewer Utility's connection to its network, KPUD has installed a fiber-optic patch panel and a Carrier Ethernet access switch within the process building electrical room (see Figure 2-19). The patch panel receives the incoming fiber-optic



cable from KPUD's network, which is patched to KPUD's ADVA FSP 150CC-GE114 Carrier Ethernet access switch that serves as the point of demarcation between KPUD and Sewer Utility networks. The KPUD Internet service connection serves ingress and egress traffic from both the SWWTP business LAN and OT network.

Figure 2-19. SWWTP process building electrical room communications backboard



## 2.9 Remote Access

This subsection describes the remote access methods in place for the Sewer Utility's OT networks.


## 2.9.1 Central Kitsap Treatment Plant

The Sewer Utility has implemented remote access to the CKTP OT network for QCC, County Utilities group personnel, Sewer Utility I&C technicians, on-call operators, and the on-call supervisor. Currently, County Utilities group personnel and Sewer Utility on-call staff use County-issued tablets to access CKTP SCADA system alarm screens for review and acknowledgment of active alarms, the Utilities group personnel focusing on alarms pertaining to the pump stations. Sewer Utility I&C technicians use a County-issued laptop to access CKTP SCADA system screens for remote monitoring of the plant and to support troubleshooting efforts. QCC uses one of its programming laptops to access the CKTP OT network for online PLC programming modification, modifications to Wonderware screens and historian configuration, and other device configuration and maintenance services.

All remote access to the CKTP OT network occurs over the Tempered Networks WWTP WAN from trusted devices that have been added to the appropriate Airwall overlay

network. Users on a trusted device initiate the remote access sessions by opening a Virtual Network Computing (VNC) application called UltraVNC Viewer on the trusted device and selecting the desired VNC Server over which to assume control (see screenshot in Figure 2-20). Typically, users select from one of the three SCADA PCs located in trailer 103 and the operations facilities building, but UltraVNC Server is installed on all SCADA PCs at CKTP so no measures are in place to prevent users from also taking control of those machines. After the user has selected a VNC Server, the user is then prompted for a common password shared by all users before remote control of the SCADA PC is granted. Once the VNC session is established, users must log onto Wonderware with their unique username and password to obtain the control and alarm acknowledgment permissions that have been established for them.

Figure 2-20. UltraVNC Viewer screenshot

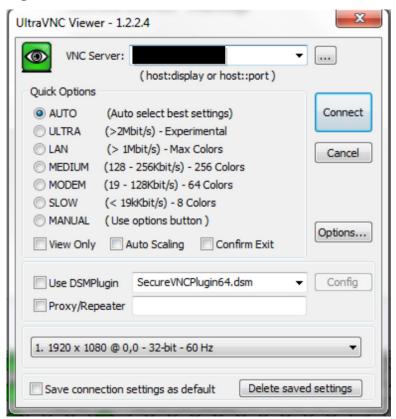

VNC is founded on the Remote Frame Buffer (RFB) protocol, which is not a secure protocol. In the absence of encrypted tunnels, passwords exchanged over an unsecure network can be easily cracked by malicious actors. UltraVNC has an encryption plugin that strengthens the security of the application by providing encryption for the VNC sessions. HDR observed that this plugin has not been enabled for the UltraVNC Servers within the CKTP OT network (see the unchecked Use DSMPlugin box in Figure 2-20). Though the VNC sessions occurring over the Sewer Utility's Tempered Networks WWTP WAN benefit from the encryption inherent in the Tempered Networks Airwall system, enabling encryption of the VNC session itself within the UltraVNC application would provide another layer of security for the CKTP OT network.



However, the security risks inherent with VNC-based applications are rarely worth the benefit of the simplified approach to remote access that they offer. HDR recommends transitioning away from VNC sessions for remote access to the Sewer Utility's OT networks.

The practice of having one common password for all users to establish remote access sessions presents a security risk for the CKTP OT network. Common username and password scenarios do not allow for user authentication, authorization, or accounting (AAA). This means that the Sewer Utility has no means of positively identifying who is assuming remote control of a PC on the CKTP OT network. When users are not required to identify themselves (i.e., authentication), there is no means of limiting their permissions and access to network resources (i.e., authorization) or keeping track of their activity while on the network (i.e., accounting). Though the Sewer Utility requires user authentication for the CKTP Wonderware platform, remote users have full access to several other network resources once given control over a CKTP SCADA PC.

Though requiring unique username and password entry to establish remote access to the CKTP OT network would provide a significant boost to network security, this measure, alone, still leaves the CKTP OT network vulnerable to some common security risks like the loss or theft of tablets and laptops that are designated as trusted devices. Information security industry best practice is to require multi-factor authentication (MFA) prior to establishing a remote connection to ICS networks. For remote access applications, MFA requires the user to authenticate using two or more of the following:

- Something the user knows (e.g., a password)
- Something the user has (e.g., a mobile phone)
- Something the user is (e.g., retinal scan)

A common and effective MFA approach is the one taken by County Information Services for VPN connections to the County SharePoint site, which requires users to enter a unique username and password and then successfully enter a code they receive on their mobile phone via text message (i.e., something the user knows and something the user has).

# 2.9.2 Kingston, Manchester, and Suquamish Wastewater Treatment Plants

Sewer Utility staff do not currently access the KWWTP, MWWTP, and SWWTP OT networks remotely. However, the Tempered Networks Airwall system provides the necessary infrastructure for remote access to occur, as described previously for CKTP. Based on review of the Tempered Networks Conductor configuration, HDR believes that County and contractor tablets and laptops already have access to specific devices within the KWWTP, MWWTP, and SWWTP OT networks. The same security risks identified for remote access sessions to the CKTP OT networks also apply to the other WWTP OT networks.

## 2.9.3 Pump Stations

Aside from the remote ICS monitoring occurring via the VHF licensed radio and cellular WANs, Sewer Utility staff do not currently access the pump station OT networks remotely.

- \* UltraVNC encryption plugin is not enabled. Security of VNC sessions used to establish remote access to WWTP OT networks could be increased by enabling encryption at the VNC application layer.
- \* Because of inherent security risks with VNC-based applications, HDR recommends transitioning away from VNC sessions for remote access to the Sewer Utility's OT networks.
- Users accessing the WWTP OT networks remotely share a common password, which means that no AAA measures are in place for remote access to the WWTP OT networks.
- MFA for remote access sessions to the WWTP OT networks would provide additional security for the network in conjunction with the adoption of AAA measures.

# 2.10 Network Security Hardware and Software


This subsection describes the network security hardware currently enforcing security controls for Sewer Utility OT network ingress and egress traffic.

## 2.10.1 Tempered Networks Conductor

The Tempered Networks Conductor is a cloud-hosted, web-based user interface for network managers to add trusted devices to user-defined groups, called overlay networks, within their Tempered Networks Airwall system deployment. Security policies and permissions for each overlay network can be defined so that any trusted device added to the overlay network inherits those policies and permissions. Security settings can also be configured at the device level, and permissions for specific devices can be enabled and disabled manually or via timed or scheduled sessions.

Modifications to security policies and settings are pushed out from the Conductor to the Airwall edge services over the Tempered Networks control plane, which is distinct from the encrypted data plane over which the overlay network data exchange occurs. Once modifications to security policies and settings are registered by the Airwall edge services, they will be retained by the HIPswitches, HIPrelays, and software and server agents within the Airwall system. In this way, the Airwall edge services are not reliant on the Conductor to implement security and the system can remain online, enforcing the most recently registered security policies and settings, even if the Conductor is taken offline. Figure 2-21 depicts the Conductor's role within the Airwall system and the separation of the control and data planes.

Figure 2-21. Tempered Networks Conductor diagram

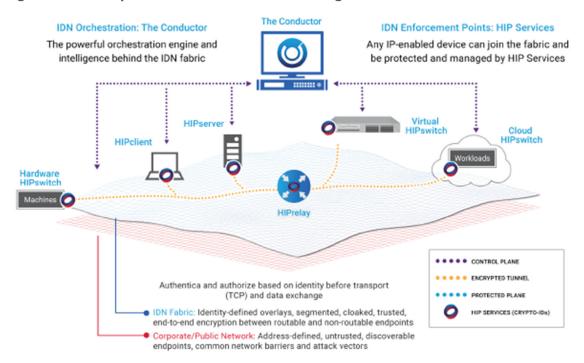

Source: Tempered Networks.

Though the Tempered Networks Airwall system has many benefits, its simplicity and convenience come with some tradeoffs. The benefit of having one "pane of glass," the Conductor, to establish and manage communication between devices also presents a potential vulnerability in that the security of the communication links is consolidated into a single software platform. Inadvertent modifications to settings or inclusion of a device in the wrong overlay network could potentially expose the Sewer Utility's OT networks to considerable risk.

Because any user given access to the Sewer Utility's Conductor instance essentially holds the "keys to the kingdom," in terms of Sewer Utility OT network cybersecurity, it is essential that access to the Conductor be restricted to a minimum number of trained and trusted individuals. Authentication of these individuals should also be required to improve security and allow for meaningful accounting of which modifications are made by whom. Currently, the only two user accounts that are active for the Conductor are QCC and Local Administrator. In addition, no MFA measures are in place, so users are required to enter only one of these usernames and the corresponding password. Creating unique user accounts that are each attributable to a single individual and implementing MFA for access to the Conductor would significantly improve the security of the Sewer Utility's Conductor instance.

Currently, QCC and the Sewer Utility have established three overlay networks involving various devices on the Sewer Utility's OT networks. The Remote Support overlay network appears to be a work in progress and has no trusted devices or Airwall edge services assigned to it. The Kitsap Telemetry overlay network consists of all County-issued tablets and laptops, a QCC laptop, SCADA PCs and HIPswitches at all four of the Sewer Utility WWTPs, the PLCs at the remote WWTPs, the MTU PLC at CKTP, and various operator interface terminals (OITs) and HMIs at the four WWTPs.

A principle in the information security industry, referred to as Least Privilege, dictates that permissions for the various user groups on an ICS network should be tightly restricted to the access needs and monitoring and control functionality use cases required by the users to perform their work. While HDR did not review the security controls implemented at the Conductor for each trusted device in the Sewer Utility's overlay networks, it appears that Sewer Utility on-call staff may have access to some of the Sewer Utility WWTP PLCs, OITs, and HMIs from their tablets. There are not likely to be any desirable use cases for Sewer Utility on-call staff to access these devices from their tablets. Though on-call staff may be denied access via device settings made within the Conductor, a more secure approach would be to establish a separate overlay network for on-call staff that includes only the tablets and the limited number of SCADA PCs they are anticipated to interact with.

Similarly, a separate overlay network (e.g., the Remote Support overlay network) should be established for QCC so that third-party access to the Sewer Utility's OT network can be more tightly managed. This would allow the Sewer Utility to easily enable and disable QCC's access, add and remove Sewer Utility resources from the overlay network that QCC has access to on an as-needed basis, and maintain a clearer view of the Sewer Utility resources accessible to QCC at any given moment.

The third overlay network is called Kitsap IC. This overlay network consists of the County-issued I&C technician laptop, SCADA PCs at all four Sewer Utility WWTPs, the KWWTP PLC, the Wonderware thick-client HMI at the reclaimed-water building control panel, and the HIPswitches at all four Sewer Utility WWTPs. HDR believes that this overlay network was established to provide the Sewer Utility's I&C technicians with mobile and remote access to the Sewer Utility WWTP SCADA systems via VNC sessions. Unless there is a current need for Sewer Utility I&C technicians to access the KWWTP PLC or the Wonderware thick-client HMI at the reclaimed-water building remotely, to better adhere to the principle of Least Privilege, HDR recommends eliminating these devices from the Kitsap IC overlay network to reduce the scope of the overlay network to the I&C technician laptop and SCADA PCs only.

The current approach of allowing remote access to all SCADA PCs at CKTP may be convenient for QCC and County staff, but this approach also spreads the risks inherent in remote access to all of the SCADA PCs. As part of the Sewer Utility SCADA Master Plan effort, HDR recommends defining the specific use cases for remote access for each type of user so that appropriate security controls can be identified and implemented. For example, if Sewer Utility on-call staff require access only to Wonderware alarm screens, allowing them to assume remote control over a SCADA PC on the CKTP OT network provides them with many more permissions and a higher level of access than that use case would require. Limiting the number of OT network resources that are accessible remotely and segmenting these resources from the rest of the OT network would also improve the security of the Sewer Utility's OT networks.

While performing a cursory review of the Sewer Utility's Conductor configuration, HDR observed that all Airwall edge services have one of a variety of non-current firmware versions installed. Technology providers use firmware updates to fix bugs and patch vulnerabilities in their software and hardware offerings. Establishing routine patch management procedures to maintain current firmware versions for its Airwall edge



services would help the Sewer Utility reduce the number of known vulnerabilities to which its OT networks are exposed.

#### 2.10.2 Firewalls

At all four of the Sewer Utility's WWTPs, the Tempered Networks HIPswitch is deployed as the sole Sewer Utility—controlled security appliance at the OT network periphery. Though the HIPswitches do have internal stateful firewalls, they provide only a single layer of defense for critical Sewer Utility OT networks. And while Tempered Networks Airwall technology has yet to achieve widespread adoption in the marketplace and may benefit from a degree of "security by obscurity," as the technology gains market penetration it will likely receive more attention from threat actors.

Because no device or technology is immune to cybersecurity vulnerabilities, the U.S. Department of Homeland Security (DHS) and several other information security organizations recommend a Defense-in-Depth strategy for securing ICS networks (DHS 2016). This approach is based on implementing layers of security controls so that the security of the ICS does not depend on a single component or security control. For example, installing a Sewer Utility—managed firewall between the KPUD Internet service demarcation appliance and the Tempered Networks HIPswitch at each WWTP would add another layer of security for the Sewer Utility OT networks. This measure would reduce the Sewer Utility's exposure to zero-day and other vulnerabilities that may exist in the Tempered Networks Airwall system or the Sewer Utility's implementation of the Airwall technology.

## 2.10.3 Central Kitsap Treatment Plant

At CKTP, a Tempered Networks HIPswitch 100g (see Figure 2-22) is installed between the plant OT network and the point of demarcation with KPUD's network, through which CKTP receives access to the Internet as described in Section 2.8 above. The HIPswitch is an industrial edge gateway that monitors inbound and outbound network traffic and provides local enforcement of security policies and permissions that are configured via the Sewer Utility's cloud-hosted Tempered Networks Conductor software service. Tempered Networks indicates that this HIPswitch model is limited to 10 Mbps of data throughput. Given the intended application for SCADA-related data exchange between CKTP and the other WWTPs, this amount of throughput will likely be inadequate for the Sewer Utility's near-term needs.

Figure 2-22. Tempered Networks HIPswitch 100g



Source: Tempered Networks.

Figure 2-22 depicts a HIPswitch 100g with a cellular antennas used to provide failover to a secondary cellular network in the event of failure of the wired network. The HIPswitch at CKTP has no cellular antennas installed and the Sewer Utility has not configured the HIPswitch for failover to a secondary cellular network. While a non-redundant communication link between these WWTPs and CKTP is not a critical issue for remote monitoring purposes, if these communication links will be used for communication of plant alarms or remote control of the plants, establishing a secondary communication link would be worth considering. Provided that cellular reception is adequate at CKTP, the secondary cellular communications capability of the HIPswitch would be a suitable means of implementing this secondary communication link.

# 2.10.4 Kingston, Manchester, and Suquamish Wastewater Treatment Plants

At KWWTP, MWWTP, and SWWTP, a Tempered Networks HIPswitch 150e (see Figure 2-23) is installed between the plant OT network and the point of demarcation with KPUD's network, through which the WWTPs receive access to the Internet as described in Section 2.8 above. The HIPswitch is an industrial edge gateway that monitors inbound and outbound network traffic and provides local enforcement of security policies and permissions that are configured via the Sewer Utility's cloud-hosted Tempered Networks Conductor software service. The HIPswitch is capable of 75 Mbps of data throughput. Given the intended application for SCADA-related data exchange between KWWTP and CKTP, this amount of throughput is likely adequate for the Sewer Utility's near-term needs.







Source: Tempered Networks.

Figure 2-23 depicts a HIPswitch 150e with an optional cellular expansion module that provides failover to a secondary cellular network in the event of failure of the wired network. This feature is not included in the HIPswitches deployed at KWWTP, MWWTP, and SWWTP. While a non-redundant communication link between these WWTPs and CKTP is not a critical issue for remote monitoring purposes, if these communication links are to be used for communication of plant alarms or remote control of the plants, establishing a secondary communication link would be worth considering. Provided that cellular reception is adequate at KWWTP, MWWTP, and SWWTP, the optional cellular expansion module for the HIPswitch would be a suitable means of implementing this secondary communication link.

## 2.10.5 Pump Stations

Because the Sewer Utility's wastewater pump stations have no Internet service, the exposure to cyber threats at the stations is greatly reduced. With no Internet access and limited IP infrastructure, the Sewer Utility has not deployed network security appliances at the pump stations. As discussed in Section 2.7 above, the security of the pump station cellular WAN is largely dependent on Verizon Wireless. HDR did not review the configuration of the pump station cellular routers, but hardening of the cellular routers could provide an additional layer of security.

The only means of securing the VHF licensed radio communications at the pump stations is via configuration of the radios themselves. HDR's review of the configurations for a selection of the VHF radios showed that Advanced Encryption Standard (AES) encryption has not been enabled. Encryption of the data streams between the pump

stations and the MTU at CKTP is highly recommended to prevent eavesdropping and to mitigate potential security risks from malicious actors intruding on the radio network to modify radio configuration or otherwise disrupt communications. Enabling the VHF radios' inherent 128-bit AES encryption feature would provide a significant layer of security for a relatively minor configuration effort.

- \* The Sewer Utility's Tempered Networks Conductor instance has generic user accounts that do not allow for adequate user authentication or attributing of any security modifications made to a specific individual.
- \* No MFA measures are in place to secure access to the Sewer Utility's Tempered Networks Conductor instance.
- \* On-call staff, QCC, and I&C technicians all share access to the Tempered Networks Kitsap Telemetry overlay network. This may be allowing access to PLCs and other OT network resources that on-call staff do not require access to and complicates management of third-party access to the Sewer Utility's OT network.
- \* Devices are included in the Tempered Networks Kitsap IC overlay network that County staff may not need to access remotely. If remote access is not required for these devices, they should be removed from the overlay network as a security precaution.
- Multiple user types are allowed to assume remote control over SCADA PCs on the Sewer Utility's OT networks, which may be providing some users with more permissions and access to OT network resources than they require. Sewer Utility OT network remote access use cases need to be defined so that appropriate security controls can be identified and implemented.
- \* The Sewer Utility's Airwall edge services do not have current firmware versions installed.
- \* HIPswitches are providing a single layer of defense at the periphery of the Sewer Utility's OT networks, which does not adhere to Defense-in-Depth strategies recommended by DHS and other information security organizations.
- \* The HIPswitch 100g installed at CKTP appears to be limited to 5 Mbps of data throughput. Given the intended application for SCADA-related data exchange between CKTP and the other WWTPs, this amount of throughput will likely be inadequate for the Sewer Utility's near-term needs.
- \* Communication links between KWWTP, MWWTP, and SWWTP and CKTP have no redundancy.

\* Pump station and CKTP MTU VHF radios have AES encryption disabled, which exposes the pump station VHF licensed radio WAN to eavesdropping and security risks.

# 2.11 Servers and Personal Computers

This subsection describes the servers and PCs deployed within the WWTP OT networks.

## 2.11.1 Central Kitsap Treatment Plant

CKTP has a variety of PCs and one tower server in the OT network inventory. A summary of the manufacturer, model, operating system, and release date for these machines is found in Table 2-2. Microsoft discontinued support for the Windows 7 operating system in January 2020, which means that security patches are no longer provided for the operating system on three of the CKTP SCADA PCs and the PC dedicated to the GE EnerVista Viewpoint power monitoring software platform. Windows 10 is the most current version of the Windows operating system for PCs and is currently supported by Microsoft. Microsoft has announced an extension of its support for Windows Server 2012 R2 through October 10, 2023.

Given the release dates for the various PCs, some of the PCs have most likely been in service for 5 to 7 years. Depending on the warranty period for the PCs, a general best practice is to replace business-grade PCs and servers, like the Dell PCs and server in the CKTP OT network inventory, every 3 to 5 years. Because the Sewer Utility plans to upgrade the Wonderware implementation at CKTP, HDR recommends that the replacement of the older PCs and server be aligned with the Wonderware upgrade to ensure that PCs and servers are selected to meet Wonderware's recommended hardware specifications. The replacement of these PCs would also resolve the lack of manufacturer support for the operating system running on these older PCs.

Table 2-2. CKTP OT network PC and server summary

PC name	Location	Manufacturer	Model	Operating system	PC release date
CKTPHISTORIAN	SPB control room	Dell	PowerEdge T130	Windows Server 2012 R2 Standard	2015
SCADA1	SPB ground floor	Dell	Precision T1700	Windows 7 Pro SP1	2013
SCADA2	SPB control room	Dell	Precision T1700	Windows 7 Pro SP1	2013
SCADA3	Administration and lab building office	Dell	Precision T1700	Windows 7 Pro SP1	2013
VIEWPOINTKITSAP	SPB control room	Dell	Inspiron 3647	Windows 7 Pro SP1	2014
N/A	Operations facilities building	Dell	Inspiron 3670	Windows 10 Pro	2019
N/A	I&C tech office	Dell	Inspiron 3670	Windows 10 Pro	2019

Table 2-2. CKTP OT network PC and server summary

PC name	Location	Manufacturer	Model	Operating system	PC release date
N/A	M&O supervisor office	Dell	Inspiron 3670	Windows 10 Pro	2019

The CKTP OT network has been set up as a workgroup. This implementation establishes all PCs and servers on the network as peers and requires that they remain in the same subnet to maintain the ability to share resources. It also requires that any user accounts that the Sewer Utility wishes to create for the PCs and servers be established on every PC and server in the workgroup, which can quickly become a burden for those maintaining the network as the number of PCs, servers, and users increases. Implementing a domain for the OT network, on the other hand, would allow the Sewer Utility to manage all user accounts and permissions on a single server and enable segmentation of the OT network to increase security and optimize network performance.

In terms of user access, the PCs that HDR observed have been configured to maintain the operating system user login sessions and do not automatically log out the user based on inactivity. Unlike the PCs, the historian server does log the user out on inactivity. For the PCs that HDR observed, a generic Operator username is used for the maintained login sessions on the PCs. While the practice of leaving the login sessions active is much more convenient for operators needing to occasionally glance at real-time process values or review and acknowledge alarms than if they were required to continually log in throughout their shift, it does prevent the Sewer Utility from implementing accounting measures that could attribute actions and events occurring on the network to specific individuals.

When it comes to managing user login sessions, there is a tradeoff between network security and workforce efficiency. Making the process of accessing ICS software too cumbersome can reduce operator engagement with the software, while leaving the machines running the software open to anyone can expose the organization to additional risks from unauthorized users and internal malicious actors. Whether to prioritize network security or user experience and efficiency is something each organization must decide for itself.

# 2.11.2 Kingston, Manchester, and Suquamish Wastewater Treatment Plants

The KWWTP and MWWTP SCADA PCs are Dell Optiplex 5050s running the Windows 10 Professional operating system. The SWWTP SCADA PC is a Dell XPS 8910 also running the Windows 10 Professional operating system. Windows 10 is the most current version of the Windows operating system and is currently supported by Microsoft. Given the 2017 release date for the KWWTP and MWWTP PCs, the machines have most likely been in service for less than 3 years. The SWWTP PC has a release date in 2016. Depending on the warranty period for the PCs, a general best practice is to replace business-grade PCs, like the Dell Optiplex 5050, every 3 to 5 years. Because the Sewer Utility plans to upgrade the Wonderware implementation at KWWTP, MWWTP, and



SWWTP, HDR recommends that the replacement of these PCs be aligned with the Wonderware upgrade to ensure that a PC is selected to meet Wonderware's recommended hardware specifications.

The username and password credentials used to log into the operating system on the SCADA PCs at these WWTPs are the same as those used for the CKTP SCADA PCs. The operating system login sessions are also persistent and the user is not logged out on inactivity. Because there is ordinarily only one operator at these WWTPs, attributing network activity to a specific individual becomes much easier and it is less likely for an unauthorized user to gain access to the PCs unnoticed.

No other servers, workstations, PCs, or tablets in use at KWWTP, MWWTP, and SWWTP are associated with the OT network.

- \* Some of the PCs on the CKTP OT network have likely been in service for 5 to 7 years and should be replaced as part of the Sewer Utility's planned Wonderware upgrade at CKTP.
- \* CKTP OT network has been set up as a workgroup. Implementing a domain for the OT network would allow the Sewer Utility to manage all user accounts and permissions on a single server and enable segmentation of the OT network to increase security and optimize network performance.
- \* Operating system login sessions are maintained on CKTP OT network PCs and a common username and password is shared by all users.
- \* KWWTP, MWWTP, and SWWTP SCADA have likely been in service for 3 to 4 years and should be replaced as part of the Sewer Utility's planned Wonderware upgrade at the WWTPs.

# 2.12 Network Infrastructure Physical Security, Environmental Conditions, and Power Supply

This subsection describes the physical security, environmental conditions, and power supply where the Sewer Utility OT network infrastructure is installed.

# 2.12.1 Physical Security

This subsection describes the physical security where the Sewer Utility OT network infrastructure is installed.

### Central Kitsap Treatment Plant

CKTP is at least partially surrounded by a chain-link fence. HDR did not walk the CKTP perimeter to confirm that the fencing is continuous. The two gated entrances for vehicle entry are secured with padlocks. CKTP buildings are secured with keyed locks on man doors but, with the exception of the administration and lab building, the doors are not monitored with intrusion switches. Based on discussions with Sewer Utility staff, HDR

believes that the administration and lab building doors are monitored by a third-party alarm system. HDR did not observe motion detectors or security cameras installed at CKTP.

#### Kingston Wastewater Treatment Plant

KWWTP is surrounded by a chain-link fence with three-line barbed wire. The one gated entrance for vehicle entry is secured with a padlock. KWWTP buildings are secured with keyed locks on man doors and intrusion switches on the operation building and process building doors generate an alarm via the SCADA system during hours when KWWTP is not attended. The operations building also has a motion detector that generates an alarm via the SCADA system after hours. No security cameras are installed at KWWTP.

#### Manchester Wastewater Treatment Plant

MWWTP is surrounded by a chain-link fence with three-line barbed wire. The two gated entrances for vehicle entry are secured with padlocks. MWWTP buildings are secured with keyed locks on man doors but the doors are not monitored with intrusion switches. A motion detector installed in the operations building control room generates an alarm via the SCADA system during hours when MWWTP is not attended. No security cameras are installed at MWWTP.

#### Suquamish Wastewater Treatment Plant

SWWTP is surrounded by a chain-link fence with three-line barbed wire. The one gated entrance for vehicle entry is secured with a padlock. SWWTP buildings are secured with keyed locks on man doors but the doors are not monitored with intrusion switches. No motion detectors or security cameras are installed at SWWTP.

#### WWTP Network Equipment Panels

The only enclosed network equipment racks, panels, or cabinets dedicated to OT network components found within the Sewer Utility's facilities are the network cabinet and network panel (PNL 8580A) in the SPB control room. Both of these panels are left unlocked and are, therefore, dependent on the security of the building itself to prevent unauthorized access. Because Sewer Utility staff are not anticipated to require frequent access to these enclosures, establishing the practice of keeping the enclosures locked at all hours would help protect the OT network components from unauthorized access and inadvertent disruptions caused by untrained staff.

### 2.12.2 Environmental Conditions

Network components are installed at all four WWTPs outside of enclosures on communications backboards and/or open communication racks in electrical rooms. At CKTP, exposed plumbing passes next to OT network components (see Figure 2-24) in the administration and lab building electrical room. In addition to exposed water and air piping, the small room is shared by an air compressor and other mechanical equipment. Ideally, sensitive network components are kept away from mechanical equipment and plumbing, especially when those components are not housed within a protective



enclosure. Rupture of a pipe or failure of the mechanical equipment in this electrical room could easily destroy the OT network and business LAN components therein.

Figure 2-24. Exposed plumbing next to network components in CKTP administration and lab building electrical room



At KWWTP, the KPUD Carrier Ethernet switch is installed low to the ground on a communications backboard (see Figure 2-17). The ongoing construction activities at KWWTP have generated a significant amount of dust, which can be seen collected on the floor in the figure. It appears that staff have covered the building entrance terminals for the plant telephone system in a plastic bag to protect the equipment from dust. However, the KPUD Carrier Ethernet access switch that serves as KWWTP's Internet service demarcation appliance has been left exposed to the dust. Significant and/or prolonged exposure to dust can cause unprotected network components without rugged enclosures to fail prematurely.

Most of the remaining network components at the Sewer Utility's facilities are installed within industrial control panels. Environmental conditions for the Sewer Utility's industrial control panels are discussed in Section 3.

## 2.12.3 Network Infrastructure Battery Backup Power

The SCADA PCs, CKTP historian server, and CKTP control room network cabinet have been provided with uninterruptible power supply (UPS) battery backup power to ride through brownouts and keep components powered until the plant or pump station transitions to standby generator power. These UPSs are line-interactive type, which provide an intermediate level of surge protection and noise filtering compared to other UPS technologies. The installed UPSs are not monitored by the facility SCADA system,

so Sewer Utility staff have no indication of whether the SCADA PCs and servers and network equipment are on utility or battery power and do not receive notification of UPS low battery or fault conditions. Furthermore, the installed line-interactive UPSs have no remote monitoring capability in the form of relay contacts or Ethernet communications. Monitoring UPS health and status points at SCADA can alert Sewer Utility staff to issues that UPSs might be experiencing prior to a power outage event, which can avoid discovering these issues when the Sewer Utility is dependent on the UPSs to provide power to critical loads during emergency scenarios.

HDR observed that the KPUD-owned Carrier Ethernet access switches at KWWTP, MWWTP, and SWWTP are plugged into standard wall receptacles and are not receiving UPS power. Any brownouts experienced at these WWTPs have the potential to suspend communications occurring through these switches while the switches recover from the brownout, power up, and go through their boot cycle. Loss of power to these WWTPs also results in loss of communications until the WWTPs transition to generator power and the switches complete their boot cycle. Providing these switches with UPS power would eliminate unnecessary power-related communication losses and avoid delaying the communication of KWWTP, MWWTP, and SWWTP power-related alarms to CKTP.

A typical battery life for UPSs of the type found at Sewer Utility facilities is between 3 and 5 years, while the useful service life for the UPS itself typically ranges between 6 and 8 years. HDR did not review the Sewer Utility's battery replacement practices or obtain installation dates for the various UPSs in the Sewer Utility's inventory.

HDR also did not review or perform electrical load calculations for the Sewer Utility's UPS inventory. The UPS size along with the total electrical load that a UPS will need to power during loss of utility power determine how long the UPS batteries can support the connected electrical loads. Figure 2-25 shows the battery runtime graph for the APC Back-UPS 1500 UPS, which the Sewer Utility has provided for its SCADA PCs and CKTP historian server and installed in several of its industrial control panels. As indicated in the figure, UPSs of this size are not intended to support loads for extended periods and are typically provided as a buffer to carry the loads through brownouts or until standby generators come online for blackout scenarios.




Figure 2-25. Battery runtime graph for APC Back-UPS 1500

Source: APC (Schneider Electric 2020).

Sewer Utility staff indicated that during a recent power outage in August 2020, the standby generator feeding the low-voltage switchgear (SWGR) in the SPB failed to come online because of improper controller settings at the switchgear. This resulted in loss of the Sewer Utility's SCADA PCs and historian shortly thereafter, which could be an indicator of an improperly sized or faulty UPS. If the Sewer Utility wishes to maintain power for OT network servers, PCs, and other critical loads during emergency scenarios where the standby generator(s) fail to come online in a matter of minutes after utility power is lost, a more robust UPS strategy will be required.

### 2.12.4 Power Supply Redundancy

HDR observed that, in general, the network switches within the Sewer Utility's OT networks accept a single power input. Where switches accept two power supply inputs, like the unmanaged switch in the CKTP SPB control room network cabinet, only one power supply input has been wired. There are also several network switches that are powered with 24 volts direct current (VDC) in enclosures that have no 24 VDC power supply redundancy. Specific enclosures with a lack of 24 VDC power supply redundancy are discussed in Section 3.3. Providing power supply redundancy for critical network switches would help prevent OT network outages because of single power supply failures.

- \* Physical security at the Sewer Utility WWTPs could be improved by introducing camera systems and providing monitoring and alarming of more of the building entrances during hours when the WWTPs are unattended.
- Network cabinet and network panel PNL-8580A are routinely left unlocked.

- \* Unprotected OT network components share space with exposed plumbing and mechanical equipment in the CTKP administration and lab building electrical room.
- \* Construction activity at KWWTP is generating a significant amount of dust in the space occupied by KWWTP's Internet service demarcation appliance.
- \* Status and alarms are not monitored for UPSs that provide power to SCADA PCs and servers and OT network equipment. The installed UPSs also have no remote monitoring capability.
- \* KPUD-owned Carrier Ethernet access switches that provide communication between KWWTP, MWWTP, and SWWTP and CKTP are not on UPS power.
- \* The Sewer Utility's current strategy of allocating small, dedicated UPSs for OT network PCs, servers, and other critical loads provides very limited battery backup times for this equipment, leaving the Sewer Utility reliant on the proper functioning of the standby generators to keep the equipment online during power outages.
- In general, the network switches within the Sewer Utility's OT network have no onboard power supply or external 24 VDC power supply redundancy.

### 2.13 Backup Procedures and Disaster Recovery

This subsection describes the Sewer Utility's current backup procedures and general disaster recovery preparedness for its OT network resources.

### 2.13.1 Backup Procedures

At CKTP, ICS software programming and configuration files for the Sewer Utility PLCs, HMIs, and OITs appear to be manually backed up on the CKTP historian server. The folder containing the CKTP PLC programming files that HDR observed contained several versions for many of the PLCs, making it difficult to ascertain which version was the most current in some cases. In terms of historical SCADA data, HDR does not believe that the Sewer Utility has procedures for backing up the CKTP historian data. Unless QCC or another contracted systems integrator obtains periodic backups of the historian data, failure of the CKTP historian server could result in loss of CKTP's historical SCADA data.

At KWWTP, MWWTP, and SWWTP, the WWTP's Wonderware configuration files are stored on an external hard drive resting on top of the SCADA PC (see Figure 2-26). The LGH files containing the WWTPs' historical SCADA data are also automatically saved on this external hard drive. HDR did not find copies of these LGH files at CKTP, and if there are copies they would have had to have been obtained manually. Given that the SCADA PCs and external hard drives reside in the same physical location, a catastrophic event



at the location of the SCADA PC would likely result in loss of all available historical SCADA data for that WWTP. External hard drives also have a typical useful service life of 3 to 5 years, but are often overlooked in asset management programs and left in service until someone observes that data have been corrupted. Any off-site backups of the SCADA PC, ICS software configuration and programming files, and historical SCADA data that exist are likely to be held by the systems integrator(s) that last upgraded or worked on the KWWTP, MWWTP, and SWWTP ICS.





Other than what contracted systems integrators may have stored on their networks, HDR does not believe that the Sewer Utility has placed backups of ICS programming and configuration files or historical data in off-site or cloud storage. HDR also believes that backing up the OT network PCs and servers themselves is not a current Sewer Utility practice.

### 2.13.2 Disaster Recovery

All SCADA PCs and servers observed within the Sewer Utility OT networks are also running ICS software installed on the host operating system. Aside from one instance of Rockwell's Studio 5000 running on a virtual machine (VM) hosted on the SWWTP SCADA PC, HDR did not observe any ICS software running within a virtualized environment. There are several advantages to virtualization when compared with installing services directly on host operating systems. The greatest advantage, given the relatively small scale of the Sewer Utility's OT networks, is the ability to quickly recover from loss of the physical host machine. With hypervisor software, purpose-built VMs running SCADA system services like the HMI software and historian can be easily cloned

and transferred to other physical machines. As long as regularly scheduled backups occur, virtualization would allow the Sewer Utility to quickly recover from disaster or server equipment failure and avoid having to manually reinstall and configure software, which would likely require contracting a systems integrator for support. Other advantages of virtualization include the following:

- Easier backup procedures
- Ability to dedicate VMs to specific services so that an issue with one service does not result in a single point of failure for the rest of the services
- Ability to test patches and software upgrades in a controlled environment
- Potentially some cost savings in server hardware and energy consumption due to fewer physical servers
  - \* Backups of PLC programming project files could be better organized to improve version control.
  - No automated or manual backup procedures appear to be in place for the historical SCADA data contained on the CKTP historian. Failure of the CKTP historian server could result in loss of CKTP's historical SCADA data.
  - No automated or manual procedures are in place for establishing off-site backups of Sewer Utility WWTP SCADA data or ICS configuration and programming files.
  - \* Historical SCADA data for KWWTP, MWWTP, and SWWTP may exist only on external hard drives connected to the SCADA PCs at the WWTPs. Failure of the external hard drive or a catastrophic event that impacts the SCADA PC and external hard drive may result in loss of the WWTP's historical SCADA data.
  - \* No automated or manual backup procedures appear to be in place for backing up the Sewer Utility OT network PCs and servers.
  - \* The Sewer Utility is not leveraging virtualization for the PCs and servers in its OT networks. Recovering from loss of one of these physical machines or a disaster would require significantly more time and effort than a scenario where the Sewer Utility's ICS software is installed in a virtualized environment.

### 2.14 Network Management

This subsection describes the Sewer Utility's network management practices for the WWTP OT networks.



#### 2.14.1 Central Kitsap Treatment Plant

Aside from the Tempered Networks Conductor described previously, HDR does not believe that the Sewer Utility is currently using other software to monitor and manage the performance of the CKTP OT network. Many of the managed switches have web-based interfaces where basic switch configuration and status information may be obtained and firmware may be upgraded, but the Sewer Utility has no other means of observing the network. The Sewer Utility also does not have a syslog server or other central repository for collecting device logs and network event data. With no logging practices in place and no software tools to provide visibility into current and historical network status and performance, abnormal events within the CKTP OT network likely go undetected until they begin disrupting communications between devices. Without a baseline against which to compare current network activity, and with no software tools, it is also likely that Sewer Utility staff face significant challenges when attempting to troubleshoot network disruptions.

Aside from simplifying network maintenance and troubleshooting, monitoring and logging of network events and activity could also improve the Sewer Utility's ability to respond to a cybersecurity event. Early detection of unauthorized access to the CKTP OT network could allow the Sewer Utility to contain the threat before significant harm is done. Good logging practices can be helpful in determining how malicious actors gained access to the network so that exploited vulnerabilities can be mitigated. The information contained in network logs can also be crucial to helping federal authorities prosecute malicious actors.

Current configuration files for the Sewer Utility's VHF radios appear to be stored on the CKTP historian server. HDR was unable to locate configuration file backups for the managed switches and cellular routers within the Sewer Utility's OT networks. It is likely that QCC has current configuration files for some of these devices, but having more immediate access to the files would enable Sewer Utility staff to recover more quickly from a failure of one of these devices. Maintaining backup configuration files for the managed switches and cellular routers within the OT networks is recommended, if not already included in the Sewer Utility's network management practices.

# 2.14.2 Kingston, Manchester, and Suquamish Wastewater Treatment Plants

Because of the small scale of the KWWTP, MWWTP, and SWWTP OT networks, the Sewer Utility does not use software tools to manage and monitor the networks. Because the OT networks are isolated from the public Internet, Windows and other potentially disruptive software updates and hotfixes are prevented from happening automatically and must be performed manually. HDR does not believe that the Sewer Utility maintains backups of managed switch configuration files. Backups of these configuration files, if they exist, are most likely held by the system integrator that last worked on these devices.

\* The Sewer Utility does not have software tools to monitor the CKTP OT network and manage its performance.

- \* The Sewer Utility does not have a syslog server or other central repository for collecting CKTP OT network device logs and network event data.
- \* The Sewer Utility does not maintain an organized system of easily accessible network device configuration file backups for managed switches and cellular routers within its OT networks.

# 2.15 Network Documentation and Tagging

This subsection describes the network documentation and tagging practices observed at Sewer Utility WWTPs and pump stations along with their level of completeness.

### 2.15.1 Network Architecture Diagrams

The Sewer Utility does not have a complete and accurate set of network architecture diagrams for the WWTPs. Several partial ICS network diagrams from a variety of past construction projects along with high-level block diagrams show general physical connections between ICS components available on the County's electronic operation and maintenance (eO&M) SharePoint site. Some of the network diagrams available are no longer current or do not provide a complete representation of the current network implementation in the areas or buildings covered by the diagrams.

#### 2.15.2 Fiber-Optic Patch Panels and Fiber-Optic Cabling

The Sewer Utility has high-level block diagrams that document the fiber-optic cable runs between various buildings, but these diagrams do not indicate fiber count or the uses of the various fiber runs (e.g., whether the fiber is used for the business LAN or the OT network). Fiber-optic patch panels at CKTP do not have printed schedules noting destination of fiber pairs and Sewer Utility staff do not maintain detailed fiber-optic patch cable schedules that identify fiber connections between buildings along with individual fiber pair connections to end devices.

A fiber-optic cable and fiber-optic patch panel tagging system does not appear to be in practice at CKTP. Many of the fiber-optic patch panels observed and several of the fiber-optic cables entering fiber-optic patch panels at the various buildings and process areas are not labeled. Those cables that are labeled indicate the equipment tags of the control panels or equipment enclosures in which terminations are made at both ends of the cable. Without additional documentation, someone unfamiliar with CKTP must follow fiber patch cables and as-build the connections to identify end devices for each fiber pair.

### 2.15.3 Copper Ethernet Cabling

Documentation for IP network connections occurring via copper Ethernet cables consists of what was described in Section 2.15.1. Where Category cables connect PCs or other network hardware to network switches, there are very few cases where the cables are labeled at either end. Within control panel enclosures, there are some instances where cables are labeled at either end, but there are several cases where labels have not been applied or have fallen off. This lack of cable labeling makes documenting the installed



network very difficult and can present challenges for network maintenance and troubleshooting efforts.

- \* Sewer Utility has high-level network block diagrams for the WWTPs, but does not maintain comprehensive network architecture diagrams.
- \* Sewer Utility does not maintain detailed fiber-optic patch panel schedules or have a consistently applied tagging system for fiber-optic patch panels and cables.
- \* Sewer Utility practices for tagging copper Ethernet cables at both ends could be improved.

## 2.16 Cybersecurity Incident Response Program

Though the County Information Services department may have protocols in place for the County, in general, the Sewer Utility does not have a formal cybersecurity incident response program for the OT networks it manages. These programs establish procedures to prepare for cybersecurity threats, identify when cybersecurity incidents occur, how to respond to the incidents, which individuals and agencies to contact, and how to adequately document any cybersecurity incidents and resolutions. Having a cybersecurity incident response program in place that is practiced and updated at regular intervals can greatly improve an organization's ability to respond effectively if and when an incident occurs. Effective responses can minimize the impact and duration of attacks and allow staff to collect valuable information that can help federal agencies identify and prosecute attackers.

\* The Sewer Utility does not have a formal cybersecurity incident response program for the OT networks it manages.

This page intentionally left blank.



#### 3 Industrial Control System Hardware

This section describes the current ICS hardware at Sewer Utility WWTPs and pump stations. It includes a description of the major hardware elements, along with their power supply and environmental conditions. The section also includes a summary of the WWTP control room equipment.

#### 3.1 Programmable Logic Controllers

This subsection describes the major PLC hardware elements at Sewer Utility WWTPs and pump stations.

#### 3.1.1 Controller Hardware

The Sewer Utility has standardized on Allen-Bradley PLCs throughout its wastewater infrastructure. Table 3-1 provides a list of PLCs installed at the WWTPs and pump stations visited by HDR during its site assessments. In addition to model and catalog number information, the table lists the manufacturer life-cycle status and installation year for each PLC.

Table 3-1. WWTP and pump station PLC summary

Facility	Panel tag	Panel description	Manufacturer	Model	Catalog	Life-cycle	Year installed
		•			number	status	
CKTP	PNL 1021	Influent screen 1 main control panel	Allen-Bradley	SLC 5/05	1747-L552	Active mature	2010
CKTP	PNL 1023	Influent screen 3 main control panel	Allen-Bradley	SLC 5/05	1747-L552	Active mature	2010
CKTP	PNL 1026	Screwpactor main control panel	Allen-Bradley	SLC 5/05	1747-L552	Active mature	2010
CKTP	PNL 1050	Headworks control panel	Allen-Bradley	SLC 5/05	1747-L552	Active mature	2010
CKTP	PNL 1111	Grit washer 1 control panel	Allen-Bradley	SLC 5/05	1747-L551	Active mature	2010
CKTP	PNL 1112	Grit washer 2 control panel	Allen-Bradley	SLC 5/05	1747-L551	Active mature	2010
CKTP	PNL 2920	Power/blower building control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2014
CKTP	PNL 2939	Aeration basins electrical building control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2014
CKTP	PNL 2990	Power/blower building I/O panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2014
CKTP	SCC 3100	UV system control center	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2018
CKTP	PNL 4012	RDT control panel	Allen-Bradley	CompactLogix 5370	1769-L30ER/A	Active	2014
CKTP	PNL 4050	Polymer blending system control panel	Allen-Bradley	CompactLogix L3x	1769-L32E	End of life	2014
CKTP	PNL 4080	Polymer feed system control panel	Allen-Bradley	CompactLogix L3x	1769-L32E	End of life	2014
CKTP	PNL 4905	WAS thickening building control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2014
CKTP	N/A	RACS operator interface control panel	Allen-Bradley	MicroLogix 1100	1763-L16BWA	Active mature	2010
CKTP	PNL 5010	Raptor septage acceptance plant control panel	Allen-Bradley	MicroLogix 1100	1763-L16AWA	Active mature	2010
CKTP	PNL 6000	Digester building control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2014
CKTP	PNL 7105	PLC 7105 I/O rack	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2014
CKTP	PNL 7110	Centrifuge 1 control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2019
CKTP	PNL 7120	Centrifuge 2 control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2019



Table 3-1. WWTP and pump station PLC summary

Facility	Panel tag	Panel description	Manufacturer	Model	Catalog number	Life-cycle status	Year installed
СКТР	PNL 7225	Dewatering polymer panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2019
CKTP	PNL 8200	Filter system control panel	Allen-Bradley	CompactLogix L3x	1769-L32E	End of life	2014
CKTP	PNL 8905	Reclaimed-water control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2014
CKTP	PNL 9201	Digester gas treatment control panel	Allen-Bradley	CompactLogix L3x	1769-L32E	End of life	2014
CKTP	N/A	Master station CTU (radio)	Allen-Bradley	CompactLogix L3x	1769-L35E	End of life	2017
CKTP	N/A	Master station CTU (cell)	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2019
KWWTP	CP-200	Operations building control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2020
KWWTP	FCP-201	Mechanical fine screen control panel	Allen-Bradley	MicroLogix 1400	1766-L32AWA	Active	2020
MWWTP	PCP	Plant control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2018
PS-1	N/A	Main control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2016
PS-1	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2016
PS-4	N/A	Main control panel	Allen-Bradley	MicroLogix 1500	1764-24BWA	Discontinued	2004
PS-4	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-6	N/A	Main control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2016
PS-6	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2016
PS-7	N/A	Main control panel	Allen-Bradley	MicroLogix 1500	1764-24AWA	Discontinued	2007
PS-7	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-12	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-17	N/A	Main control panel	Allen-Bradley	MicroLogix 1500	1764-24BWA	Discontinued	2004

Table 3-1. WWTP and pump station PLC summary

Facility	Panel tag	Panel description	Manufacturer	Model	Catalog number	Life-cycle status	Year installed
PS-17	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-24	N/A	Main control panel	Allen-Bradley	SLC 5/03	1747-L532	Active mature	2000
PS-24	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-32	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-34	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-41	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-67	N/A	Main control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2016
PS-67	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2017
PS-71	N/A	Main control panel	Allen-Bradley	SLC 5/05	1747-L552	Active mature	2004
PS-71	N/A	Telemetry control panel	Allen-Bradley	MicroLogix 1400	1766- L32BXBA	Active	2016
SWWTP	CP-01	Main control panel	Allen-Bradley	CompactLogix 5370	1769-L33ER/A	Active	2016
SWWTP	CP-15	RDT control panel	Allen-Bradley	CompactLogix 5370	1769-L30ER/A	Active	2016



#### Current PLC Standard for Process Control Applications

Though a variety of PLC models are installed throughout the WWTPs and pump stations, in recent years, the Sewer Utility has standardized on Allen-Bradley 1769-L33ER CompactLogix 5370 L3 controllers and Bulletin 1769 Compact I/O modules (see Figure 3-1) for WWTP and pump station industrial control panels. These controllers have 2 megabytes (MB) of user memory and two 10/100 Mbps EtherNet/IP communication ports that support ring network topologies. They also support up to 16 connected I/O modules and are capable of integrating up to 32 EtherNet/IP nodes via installed PLC programming logic. Given that the Sewer Utility has installed these PLCs to handle controls for pump stations, small WWTPs, and dedicated processes at the larger CKTP, HDR believes that the CompactLogix PLC is well-suited and right-sized for its current applications within the Sewer Utility's wastewater infrastructure. The next processor tier above the CompactLogix series in the Allen-Bradley product line is the ControlLogix series, which is better suited for larger and/or more centralized control applications or where process criticality demands a hot-standby redundancy solution.

Figure 3-1. Allen-Bradley CompactLogix PLC with 1769-L33ER controller and Bulletin 1769 Compact I/O modules



Source: Rockwell Automation.

Rockwell has released a newer generation of the CompactLogix controller line (CompactLogix 5380), which has options for greater controller user memory and supports 1 GbE EtherNet/IP communication and an increased number of EtherNet/IP nodes. However, the CompactLogix 5370 PLCs and the Bulletin 1769 Compact I/O modules are still in the active phase of the manufacturer's life cycle, which indicates that they are considered a current product offering and are fully supported by the manufacturer.

#### Current PLC Standard for Telemetry Applications

For the pump station RTU control panels, the Sewer Utility has standardized on Allen-Bradley 1766-L32BXBA MicroLogix 1400 controllers (see Figure 3-2). These compact controllers have 10 kilobytes (kB) of user memory, 32 onboard hardwired I/O points, one serial port that can be configured for a variety of serial-based protocols, and one 10/100 Mbps EtherNet/IP communication port for EtherNet/IP peer-to-peer messaging. These

PLCs are well-suited and right-sized for managing the telemetry controls for the Sewer Utility's wastewater pump stations.

Figure 3-2. Allen-Bradley 1766-L32BXBA MicroLogix 1400 PLC



Source: Rockwell Automation.

#### Discontinued PLCs

As shown in Table 3-1, the Sewer Utility has some PLCs in its inventory that have been discontinued by the manufacturer. According to information available on the Allen-Bradley website, MicroLogix 1500 PLCs are no longer manufactured or available for sale and the manufacturer is encouraging migration to MicroLogix 1400 or CompactLogix 5370 PLC platforms (Rockwell Automation 2020a). Replacement parts for these PLCs are anticipated to become increasingly difficult to procure in the coming years. The MicroLogix 1500 PLCs in the Sewer Utility's inventory have also been in service for roughly 13 to 16 years. Depending on the environmental conditions to which PLCs are subjected throughout their service life, the typical useful service life for PLCs is roughly 15 years. These discontinued PLCs are nearing the end of their useful service life and will soon be operating in their wear-out period.

#### End-of-Life Announcements and Active Mature Products

Table 3-1 also indicates that the Sewer Utility has five Allen-Bradley CompactLogix L3x PLCs in its inventory. The manufacturer has made an end-of-life announcement for these PLCs, warning that the components will no longer be manufactured or available for sale as of December 2020 (Rockwell Automation 2020b). Allen-Bradley is encouraging migration of these PLCs to the CompactLogix 5380 platform. In the meantime, a small window remains for the Sewer Utility to make last-time purchases of spare components for these PLCs, if there is interest in doing so.

The Sewer Utility also has several Allen-Bradley SLC 500 Series and MicroLogix 1100 PLCs installed throughout its WWTPs and pump stations. Both of these PLC platforms are in the active mature phase of the manufacturer's life cycle, which indicates that the products are still fully supported by the manufacturer but that migration to a newer PLC platform is encouraged (Rockwell Automation 2020c). Though an end-of-life



announcement has yet to be released for these PLCs, the Sewer Utility may wish to consider near-term upgrades of the PS-24 and PS-71 PLCs because they have been in service for roughly 20 years and 16 years, respectively, and are nearing the end of their useful service life.

#### Miscellaneous Observations

During its site visits, HDR observed that the PLC controller battery alarm light was illuminated at the bar screen 1023 main control panel in the CKTP headworks electrical room (see Figure 3-3). This could indicate that the battery voltage has fallen below a threshold level, or the battery is missing or not connected. Because the PLC memory where the programming is stored is backed up by the PLC's internal battery, loss of power to this PLC could result in loss of the programming and a prolonged equipment outage to enable Sewer Utility staff to re-download programming to the controller.

Figure 3-3. CKTP bar screen 1023 main control panel PLC controller battery alarm light illuminated



Another observation is that the RIO control panel in the MWWTP blower building is installed above the old SBR control panel and is not readily accessible. Figure 3-4 shows this panel with its door open above the SBR control panel. Sewer Utility staff would need a ladder to perform modifications to the panel or troubleshoot its wiring.

Figure 3-4. MWWTP blower building RIO control panel installation



#### 3.1.2 DeviceNet Networks

At CKTP, several of the MCCs have been furnished with a DeviceNet network connecting the various overload relays and VFDs within the MCC to a DeviceNet scanner module in the PLC rack within the industrial control panel that provides control for the building or process area. Figure 3-5 shows the DeviceNet scanners dedicated to MCC 2935 and MCC 2936 in the aeration basins 3 and 4 electrical building. These and most other DeviceNet MCCs at CKTP were commissioned in 2014 as part of the CKTP Resource Recovery project. The DeviceNet MCCs in the headworks building were commissioned in 2010 as part of the Headworks Upgrade project.







DeviceNet technology, originally developed by Allen-Bradley, features a bus topology consisting of a common trunk line to which devices are connected via taps and dedicated drop lines. Device power and communication occur over the same physical cables used in this topology and terminating resistors are required at either end of the bus. The DeviceNet network data rate is configurable and selection of an appropriate data rate needs to take into consideration the overall trunk and drop line cable lengths and cable type used. With a maximum data rate of 500 kilobits per second (kbps), DeviceNet has become a dated technology that falls well below the bandwidths achievable with today's Ethernet-based technologies. Furthermore, with several design and implementation considerations and more components involved, the physical layer of DeviceNet networks is also relatively complex when compared to Ethernet networks. This complexity can often lead to maintenance and troubleshooting challenges for the end user. Sewer Utility staff have reported experiencing difficulties working with DeviceNet technology at CKTP. The challenges Sewer Utility staff are having with the maintenance and troubleshooting of the DeviceNet networks have the potential to increase downtime for equipment connected to the DeviceNet networks.

Like Ethernet, DeviceNet allows for an increased volume of data exchange between the ICS and networked devices that would not be possible via hardwired I/O alone. Currently, data derived from DeviceNet-connected devices represents a significant portion of the overall unique I/O points received from and sent to field devices by the CKTP ICS.

### 3.1.3 Hardwired Input/Output

When it comes to data exchange between the Sewer Utility's PLCs and process equipment and instrumentation, much of this control and monitoring is hardwired. For analog signals, the Sewer Utility has standardized on 4–20-milliampere (mA) current-based I/O. The Sewer Utility facilities have a mix of isolated and non-isolated analog I/O modules at the PLCs and RIO racks. Hardwired discrete I/O was observed to be a mix of 120 VAC and 24 VDC I/O, depending on the connected equipment. A summary of the

I/O modules types and quantities installed in the various PLC and RIO racks throughout the WWTPs is provided in Appendix D.

Though the Sewer Utility has succeeded in standardizing on one manufacturer for all PLCs in its inventory, there is some diversity when it comes to the I/O modules that systems integrators and/or consulting engineers have selected for Sewer Utility industrial control panels over the years. The Sewer Utility may be able to reduce its spare-parts inventory and enforce its preferences by standardizing on specific I/O modules for future projects. For example, for most analog signal applications, an industry best practice is to select isolated analog I/O modules to mitigate noise issues on analog signals and to prevent faults on one signal from impacting other inputs or outputs on the same I/O module. If the Sewer Utility wished to establish a preference for isolated analog I/O modules, this requirement could be introduced to Sewer Utility standards documentation and used to guide consulting engineers and systems integrators in the design and fabrication of future industrial control panels.

#### 3.1.4 IP Network Input/Output

CKTP, KWWTP, and SWWTP all have a few Allen-Bradley VFDs that communicate with plant PLCs via EtherNet/IP. The overload relays for the new oxidation ditch mixers at KWWTP also communicate with the plant PLC via EtherNet/IP. At CKTP, power monitors installed within several of the MCCs and switchgear lineups communicate with GE controllers in the SWGR 2961 control stack via Modbus Transmission Control Protocol (TCP)/IP as part of the CKTP energy management system (EMS) described in Section 6 below. Aside from these cases, HDR observed relatively little IP network–based data exchange occurring between Sewer Utility PLCs and field equipment and instrumentation.

- \* The Allen-Bradley MicroLogix 1500 PLCs installed at PS-4, PS-7, and PS-17 have been discontinued by the manufacturer and are nearing the end of their useful service life.
- \* Allen-Bradley has made an end-of-life announcement for the CompactLogix L3x PLCs installed in various panels at CKTP. These PLCs will be discontinued by the manufacturer as of December 2020.
- \* The Allen-Bradley SLC 500 PLCs installed at PS-24 and PS-71 are in the active mature phase of the manufacturer's product life cycle and are nearing the end of their useful service life.
- \* HDR observed that the PLC controller battery alarm light was illuminated at the bar screen 1023 main control panel in the CKTP headworks building electrical room.
- \* The MWWTP blower building RIO control panel is installed above another control panel in a location that is not easily accessible by Sewer Utility staff.



- \* Sewer Utility staff have difficulty maintaining MCC DeviceNet networks at CKTP, which has the potential to increase downtime for equipment connected to the DeviceNet networks.
- \* The Sewer Utility does not appear to have standardized on PLC platform I/O module types. I/O module standardization could help the Sewer Utility reduce spare-parts inventory and enforce its preferences.

### 3.2 Human-Machine Interfaces

This subsection describes the HMI hardware by which Sewer Utility staff interact with the ICS at the various Sewer Utility facilities.

#### 3.2.1 Wonderware Thick Clients

The Sewer Utility has standardized on Wonderware InTouch 2014 R2 for the SCADA HMIs at its WWTPs. The software and its configuration and implementation are discussed in Section 4. In terms of HMI hardware, the Sewer Utility has installed a Wonderware InTouch runtime license on each control room operator SCADA PC for KWWTP, MWWTP, and SWWTP. Throughout CKTP, the Sewer Utility has installed several Wonderware InTouch thick clients. These thick clients consist of several SCADA PCs and industrial panel PCs (see Figure 3-6) installed in various buildings throughout CKTP, as depicted in the Central Kitsap Treatment Plant Physical Network Diagram included in Appendix B (Figure B1).

Figure 3-6. Headworks building electrical room Wonderware InTouch thick client



The Sewer Utility has standardized on National Electrical Manufacturers Association (NEMA) 4X, touchscreen hardware for its industrial panel PCs at CKTP. Table 3-2 provides a summary of manufacturer, model, size, and year of manufacture information for the industrial panel PCs installed throughout CKTP. Depending on the environmental conditions to which industrial panel PCs are subjected throughout their service life, the typical useful service life for industrial panel PCs is roughly 5 to 7 years. Based on this information, the CKTP industrial panel PCs are expected to have most of their useful service life remaining.

Table 3-2. CKTP industrial panel PC summary

Panel tag	Panel description	Manufacturer	Model	Size (in)	Year manufactured
PNL 1050	Headworks control panel	Arista	ARP-1715AP-108	15.0	2017
PNL 2920	Power/blower building control panel	Arista	ADM-1821AP	21.5	2019
PNL 2939	Aeration basin control panel	Arista	ADM-1821AP	21.5	2020
PNL 4905	WAS thickening building control panel	Arista	ADM-1821AP	21.5	2019
PNL 8905	Reclaimed-water control panel	Arista	ADM-1821AP	21.5	2019

The SCADA PCs used for the Wonderware InTouch thick clients at the Sewer Utility WWTPs are described in Section 2.

### 3.2.2 Control Panel Operator Interface Terminals

In addition to the WWTP Wonderware InTouch thick clients, several OITs are installed throughout the Sewer Utility's WWTPs and pump stations. These OITs are dedicated to the PLC within their respective industrial control panels and do not provide visibility into other systems within the Sewer Utility's ICS. Table 3-3 provides a summary of manufacturer, model, size, and year of manufacture information for the OITs installed throughout the Sewer Utility WWTPs and pump stations. The table also lists the current manufacturer life-cycle status for each of the OITs, where life-cycle status information is readily available from the manufacturer.



Table 3-3. WWTP and pump station OIT summary

Facility	Panel tag	Panel description	Manufacturer	Model	Size (in)	Life-cycle status	Year manufactured
CKTP	PNL 4012	RDT control panel	Maple Systems	HMI5070TH	7.0	Legacy	2013
CKTP	PNL 4050	Polymer blending control panel	Allen-Bradley	PanelView Plus 600	5.7	End of life	2013
CKTP	PNL 4080	Polymer feed control panel	Allen-Bradley	PanelView Plus 600	5.7	End of life	2013
CKTP	PNL 7110	Centrifuge 1 control panel	Allen-Bradley	PanelView Plus 7	15.0	Active	2018
CKTP	PNL 7120	Centrifuge 2 control panel	Allen-Bradley	PanelView Plus 7	15.0	Active	2018
CKTP	PNL 7225	Dewatering polymer panel	Allen-Bradley	PanelView Plus 700	6.5	End of life	2018
CKTP	PNL 8200	Filter system control panel	Siemens	SIMATIC MP 277	8.0	Phase out	2013
CKTP	PNL 9201	Digester gas treatment control panel	Pro-face	GP-4601T	12.1	Unknown	2013
CKTP	SCC 3100	UV system control panel	Allen-Bradley	PanelView Plus 7	15.0	Active	2018
CKTP	N/A	Master station CTU	Allen-Bradley	PanelView Plus 1000	10.4	End of life	2012
CKTP	N/A	RACS operator interface control panel	Maple Systems	HMI6060T	6.0	Legacy	2010
CKTP	N/A	SWGR 2961	VarTech Systems	VTPC150P	15.0	Unknown	2013
CKTP	N/A	SWGR 2961 control stack	VarTech Systems	VTPC150P	15.0	Unknown	2013
KWWTP	CP-300	Process building control panel	Allen-Bradley	PanelView 600	5.7	Discontinued	2004
KWWTP	N/A	Mechanical fine screen control panel	Allen-Bradley	PanelView 800	7.0	Active	2020
PS-01	N/A	Main control panel	Allen-Bradley	PanelView Plus 700	7.0	End of life	2016
PS-04	N/A	Main control panel	Allen-Bradley	PanelView Plus 700	7.0	Discontinued	2004
PS-06	N/A	Main control panel	Allen-Bradley	PanelView Plus 700	7.0	End of life	2016
PS-07	N/A	Main control panel	Allen-Bradley	PanelView Plus 1000	10.4	End of life	2014
PS-17	N/A	Main control panel	Allen-Bradley	PanelView Plus 700	7.0	Discontinued	2004
PS-24	N/A	Main control panel	Allen-Bradley	PanelView Plus 600	5.7	Discontinued	2000

Table 3-3. WWTP and pump station OIT summary

Facility	Panel tag	Panel description	Manufacturer	Model	Size (in)	Life-cycle status	Year manufactured
PS-67	N/A	Main control panel	Allen-Bradley	PanelView Plus 700	7.0	End of life	2015
PS-71	CP-100	Main control panel	Allen-Bradley	PanelView Plus 600	5.7	Discontinued	2004
SWWTP	CP-15	RDT control panel	Maple Systems	HMI5097XL	9.7	Active	2016



Unlike industrial panel PCs where SCADA software is installed on a base operating system, OITs run proprietary software developed by the OIT manufacturer that is distinct from the Sewer Utility's Wonderware InTouch software. The distinct software platforms require additional configuration and development effort to implement and maintain graphical content and functionality for these OITs.

Depending on the environmental conditions to which OITs are subjected throughout their service life, the typical useful service life for OITs is roughly 7 to 10 years. However, it is not uncommon for OITs that receive infrequent use to remain in service for significantly longer than this. As Table 3-3 suggests, a few OITs in the Sewer Utility's inventory are likely nearing the end of their useful service life, particularly at some of the Sewer Utility's pump stations and CP-300 at KWWTP.

During its site visit at KWWTP, HDR observed that a communication error was displayed at the CP-300 OIT, indicating it could not communicate with a specific IP address. This issue may be due to the ongoing construction effort at KWWTP and will likely be resolved as the ICS upgrade implementation at KWWTP is finalized. HDR also observed that the OIT at the master station central telemetry unit (CTU) control panel in the SPB control room at CKTP has been disconnected from the network switch in that panel and appeared to be powered down. This OIT may be permanently out of service. However, given its proximity to a SCADA PC with Wonderware InTouch screens dedicated to the various pump stations, replacement of this OIT may not provide much value to Sewer Utility staff.

- \* The OITs installed at PS-4, PS-17, PS-24, PS-71, and CP-300 at KWWTP are nearing the end of their useful service life.
- \* The CP-300 OIT at KWWTP was experiencing a communication error during HDR's site visit.
- \* The OIT at the master station CTU control panel in the SPB control room at CKTP appears to be out of service.

## 3.3 Power Supply and Environmental Conditions

This subsection describes the power supply measures provided for the industrial control panels containing ICS components, control panel National Fire Protection Association (NFPA) 70E considerations, and the environmental conditions to which these control panels are subjected.

### 3.3.1 ICS Battery Backup Power

Several of the industrial control panels containing OT network and ICS components within the Sewer Utility WWTPs and pump stations have a dedicated UPS installed within the panel enclosure that provides the control system, instrumentation, and network components with battery backup power to ride through brownouts and keep components powered until the WWTP or pump station transitions to standby generator power. In general, the UPSs installed at Sewer Utility facilities are line-interactive type. However, in most cases, the UPSs are not monitored by the facility SCADA system, so Sewer Utility

staff have no indication of whether the control panels are on utility or battery power and do not receive notification of UPS low battery or fault conditions. Furthermore, many of the installed line-interactive UPSs have no remote monitoring capability in the form of relay contacts or Ethernet communications. Monitoring UPS health and status points at SCADA can alert Sewer Utility staff to issues that UPSs might be experiencing prior to a power outage event, which can avoid discovering these issues when the Sewer Utility is dependent on the UPSs to provide power to critical loads during emergency scenarios.

Industrial control panels containing OT network and ICS components without UPS or other form of battery backup power are listed in Table 3-4. The control system, instrumentation, and OT network components housed within or powered from these panels immediately lose power during loss of utility power and may drop offline during voltage dips and power fluctuations experienced at the plant. The components without UPS battery backup power also do not benefit from the surge protection and noise filtering that line-interactive or online, double-conversion UPSs provide. Note, PNL 1050, included in Table 3-4 below, does have a line-interactive UPS installed within its enclosure, but the UPS was found unplugged during HDR's site visit. Note, also, that Table 3-4 is limited to Sewer Utility industrial control panels containing OT network components and/or major ICS components, like PLCs, and does not apply to all industrial control panels within the Sewer Utility's infrastructure.

Table 3-4. Industrial control panels containing OT network and ICS components with no battery backup power

Facility	Location	Panel	Panel description
CKTP	Digester control building	PNL 6000	Digester control building control panel
CKTP	Headworks building	PNL 1026	Screwpactor main control panel
CKTP	Headworks building	PNL 1027	Grit washer 1 control panel
CKTP	Headworks building	PNL 1028	Grit washer 2 control panel
CKTP	Headworks building	PNL 1050	Headworks control panel
CKTP	Power/blower building	PNL 2920	Power/blower building control panel
CKTP	Power/blower building	PNL 2990	Power/blower building I/O panel
CKTP	SPB	PNL 7105	PLC 7105 I/O rack
CKTP	WAS thickening building	PNL 4050	Polymer blending control panel
CKTP	WAS thickening building	PNL 4080	Polymer feed control panel
KWWTP	Headworks area	N/A	Mechanical fine screen control panel
MWWTP	Blower building	SBR-CP	Blower building control panel
MWWTP	Headworks building	LP-225	Influent pump station control panel
MWWTP	Operations building	PCP	Plant control panel
PS-07	Pump station 7	N/A	PS-07 control panel
PS-17	Pump station 17	N/A	PS-17 control panel
PS-34	Pump station 34	N/A	PS-34 control panel



#### 3.3.2 24 VDC Power Supplies

Providing UPS battery backup power is a means of establishing a degree of power source redundancy and fault tolerance for critical ICS and OT network components. However, many of these ICS and OT network components are powered from 24 VDC power supplies that are typically downstream from utility and UPS power sources within the industrial control panel electrical distribution. If there is no redundancy in the 24 VDC power supply, as well, the power supply redundancy and fault tolerance measures introduced by the UPS do not carry all the way through to the critical components.

During its site visits, HDR observed that several Sewer Utility industrial control panels containing OT network and ICS components do not have 24 VDC power supply redundancy. Industrial control panels containing OT network and ICS components without 24 VDC power supply redundancy are listed in Table 3-5. The 24 VDC control system, instrumentation, and OT network components housed within or powered from these panels immediately lose power upon failure of the control panel's 24 VDC power supply. Control panels that have 24 VDC UPS systems or 24 VDC battery power, like the telemetry control panels, are not included in the table. Failure of the single 24 VDC power supply in these control panels would still leave the OT network and ICS components with a buffer of backup battery power and would not result in an immediate loss of power for the 24 VDC–powered components.

Table 3-5. Industrial control panels containing OT network and ICS components without 24 VDC power supply redundancy

Facility	Location	Panel	Panel description
CKTP	Digester control building	PNL 6000	Digester control building control panel
CKTP	Digester gas conditioning facility	PNL 9201	Digester gas treatment control panel
CKTP	Headworks building	PNL 1021	Influent screen 1 west channel
CKTP	Headworks building	PNL 1023	Influent screen 3 east channel
CKTP	Headworks building	PNL 1026	Screwpactor main control panel
CKTP	Headworks building	PNL 1027	Grit washer 1 control panel
CKTP	Headworks building	PNL 1028	Grit washer 2 control panel
CKTP	Headworks building	PNL 1050	Headworks control panel
CKTP	Power/blower building	PNL 2990	Power/blower building I/O panel
CKTP	Reclaimed-water building	PNL 8200	Filter system control panel
CKTP	Septage receiving	N/A	RACS operator interface control panel
CKTP	Septage receiving	PNL 5010	Raptor septage acceptance plant control panel
CKTP	SPB	N/A	Master station CTU
CKTP	SPB	MCC 2984	MCC 2984 control section
CKTP	WAS thickening building	PNL 4012	RDT control panel
CKTP	WAS thickening building	PNL 4050	Polymer blending control panel
CKTP	WAS thickening building	PNL 4080	Polymer feed control panel

Table 3-5. Industrial control panels containing OT network and ICS components without 24 VDC power supply redundancy

Facility	Location	Panel	Panel description
KWWTP	Headworks area	N/A	Mechanical fine screen control panel
MWWTP	Blower building	SBR-CP	Blower building control panel
MWWTP	Headworks building	LP-225	Influent pump station control panel
MWWTP	Operations building	PCP	Plant control panel
PS-04	Pump station 4	N/A	PS-04 control panel
PS-07	Pump station 7	N/A	PS-07 control panel
PS-17	Pump station 17	N/A	PS-17 control panel
PS-24	Pump station 24	N/A	PS-24 control panel
PS-67	Pump station 67	N/A	PS-67 control panel
PS-71	Pump station 71	N/A	PS-71 control panel
SWWTP	Process building	CP-01	Main control panel
SWWTP	Process building	CP-15	RDT control panel

#### 3.3.3 NFPA 70E Considerations

As discussed in Section 3.1, HDR observed a mix of 120 VAC and 24 VDC controls in the various Sewer Utility industrial control panels. In many cases, the power and control voltages were not readily apparent and required closer inspection of the components to identify. According to NFPA 70E: Standard for Electrical Safety in the Workplace, all voltages 50 V and greater are considered to present a shock hazard under most circumstances (NFPA 2021). To reduce or eliminate shock hazards for personnel, a common practice is to standardize on 24 VDC controls and power distribution, to the extent possible, within industrial control panels and for field instrumentation. Where 120 VAC power or controls are required to enter control panel enclosures (e.g., incoming 120 VAC power supply from a nearby panelboard), these circuits can be consolidated within a designated region of the control panel. The use of color-coded, covered wireways can also help alert staff to the presence of different voltages within control panel enclosures.

Though converting existing 120 VAC control system wiring to 24 VDC would be infeasible, the Sewer Utility may wish to consider standardizing on 24 VDC power and controls for industrial control panels introduced by future CIP projects.


#### 3.3.4 Environmental Conditions

Several of the industrial control panels observed during HDR's site visits are installed in indoor, temperature-controlled environments with enclosures that prevent dust ingress. The control panels housing network and ICS components located in process areas or outdoors generally have NEMA 4X enclosures. Given the rugged design and extended operating temperature ranges of the industrial network and ICS components installed in these control panels, HDR did not observe severe environmental conditions that would significantly jeopardize the functionality of these components.



One notable exception to this observation is the CKTP digester control building control panel (PNL 6000), which is subjected to significant levels of hydrogen sulfide (H<sub>2</sub>S) and high ambient temperatures. Evidence of this H<sub>2</sub>S exposure can be seen in the blackening of the control panel's copper ground bar shown in Figure 3-7. H<sub>2</sub>S is a corrosive gas, particularly to copper and silver, which are prevalent in network components, ICS hardware, and other sensitive electronics. Prolonged exposure to H<sub>2</sub>S and high ambient temperatures can lead to premature failure of these components. County electricians have reported that H<sub>2</sub>S corrosion has been a significant maintenance issue with control wiring at the MCC installed near this control panel in the digester control building. During HDR's site visit, the ambient temperature in the ground floor of the digester control building was easily above 90 degrees Fahrenheit. The digester control building also has a hazardous-area classification for which the PNL 6000 enclosure and many of its internal components are not rated, which is a NEC violation.

Figure 3-7. H₂S corrosion on digester control building control panel (PNL 6000) copper ground bar



Staff have also reported that microprocessor-based HVAC control panels installed to control temperatures within some of the CKTP electrical rooms are overly complicated and ultimately fail to adequately control the electrical room temperature. The HVAC control panels within the WAS thickening building and SPB electrical rooms are two examples of failed temperature control implementations. HDR also observed that the HVAC system for the headworks building electrical room was incapable of maintaining the temperature set point entered at the thermostat, resulting in an undesirably high ambient temperature in the electrical room (see Figure 3-8).

Figure 3-8. Headworks building electrical room thermostat



HDR observed a similar electrical room climate control issue at the MWWTP operations building. On the day of HDR's site visit to MWWTP, Sewer Utility staff had propped open the operations building electrical room door and temporarily placed a fan in the doorway to try to reduce the electrical room temperature (see Figure 3-9). During summer months, it is likely that the control system and network components within the room are regularly exposed to ambient temperatures above desirable ranges.

Figure 3-9. Temporary ventilation measure for MWWTP electrical room





- \* OT network and ICS components within the CKTP digester control building control panel (PNL 6000) are exposed to significant levels of H<sub>2</sub>S and high ambient temperatures. Installation of this panel in an area with a hazardous-area classification is an NEC violation. County electricians also indicated that H<sub>2</sub>S corrosion has been a significant maintenance issue for control wiring at the nearby MCC within the building.
- Status and alarms are not monitored for UPSs that provide power to ICS and instrumentation equipment. Many of the installed UPSs have no remote monitoring capability.
- Several control panels at Sewer Utility facilities do not have battery backup power.
- Several control panels at Sewer Utility facilities do not have 24 VDC power supply redundancy.
- \* A mix of 120 VAC and 24 VDC control and power circuits are installed within the Sewer Utility's industrial control panels and the voltages present are not always readily apparent without closer inspection of the components. To eliminate or reduce shock hazards for personnel, the Sewer Utility may wish to consider standardizing on 24 VDC power and controls and/or improved voltage segregation and identification for control panels introduced by future CIP projects.
- \* The Sewer Utility is having difficulty maintaining desirable ambient temperatures within the MWWTP electrical room and some of the CKTP electrical rooms.

### 3.4 Control Room

The Sewer Utility has stated that one of its near-term goals for the Sewer Utility SCADA system is to establish a central location where Sewer Utility staff can monitor and control all WWTPs and pump stations managed by the Sewer Utility. At CKTP, a control room on the second floor of the SPB provides office space for the CKTP Plant Operations Supervisor and other operations staff (see Figure 3-10). With exterior windows running nearly the entire length of two sides of the room and its position on the second floor of a centrally located building within CKTP, the control room provides a good vantage point from which to monitor plant activity. In addition to operations staff PCs and printers, the control room is equipped with a SCADA PC, the CKTP historian server, and the CKTP EMS PC. The network cabinet and network panel in the control room serve as the central hub for the CKTP OT network, and the master station CTU control panel housing the master PLCs for the Sewer Utility's wastewater pump station VHF licensed radio and cellular WANs is also installed within the room.

Figure 3-10. CKTP SPB control room




Given its location at CKTP and proximity to central connection points for the CKTP OT network and pump station WANs, the existing SPB control room is an obvious choice for a space in which to implement a control center for the Sewer Utility. The room is also an architecturally finished, climate-controlled space, which would provide suitable environmental conditions for PCs, workstations, displays, and other sensitive electronics introduced as part of the Sewer Utility control center implementation. Furthermore, the room's drop ceiling would simplify installation of new data communications cabling between future control center equipment.

Though the control room has a SCADA PC, the PC is equipped with only two standardsize monitors (see Figure 3-11). This arrangement may be suitable for an individual, but is not an ideal solution for control center scenarios where multiple staff members need to engage with the SCADA screens and discuss current status, alarms, and/or events. The Sewer Utility would benefit from having large-format displays so that SCADA screens are discernible from a greater distance and could be referenced more easily during staff discussions. Having additional displays would also allow Sewer Utility staff to leave specific commonly used screens on display at all times to avoid having to constantly navigate back and forth between screens because only two monitors are available.







Currently, Sewer Utility staff have no means of monitoring or controlling KWWTP, MWWTP, and SWWTP from the existing CKTP SCADA PCs. The Sewer Utility is working with QCC to establish data exchange between CKTP and the remote WWTPs, and this will be a critical step toward the future control center that the Sewer Utility wishes to implement. The Sewer Utility's ability to monitor its pump stations from CKTP is also significantly limited by the data refresh rate caused by the long polling cycle times discussed in Section 2. Because the information displayed on pump station SCADA screens is nowhere near real-time, Sewer Utility staff have indicated that they typically only make use of alarm information reported through the SCADA system for the pump stations.

Depending on spatial requirements and the quantity of servers and network appliances required by future CKTP ICS upgrades, the Sewer Utility may benefit from establishing a secure, dedicated space for ICS servers and critical network equipment. A potential candidate for such a space in the SPB would be a combination of the filing room and adjacent storage space in the ground floor of the SPB annex (proposed space shown enclosed in a red box in Figure 3-12). Though work would be required to properly prepare the space for use as a server room, this location would keep the ICS servers and critical network equipment in close proximity to the Sewer Utility control center and current incoming fiber-optic and copper cable network connections from other buildings at CKTP. Some of the work involved with converting this space into an appropriate server room environment would include combining the filing room and storage space; filling in existing windows; installing heating, ventilation, and air conditioning (HVAC) equipment to provide adequate cooling for the space; and providing new power and data communications circuits to the space.

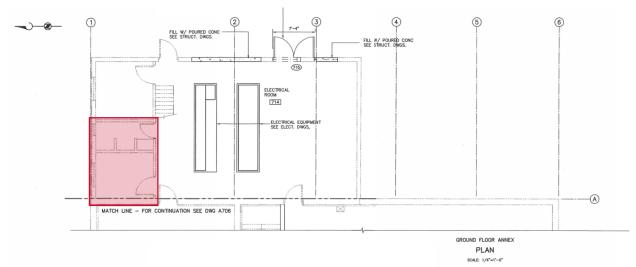


Figure 3-12. SPB annex, ground floor: potential location for future server room

- \* The CKTP SPB control room has only two standard-size monitors where SCADA screens can be displayed. Having large-format displays would make it so that SCADA screens are discernible from a greater distance and could be referenced more easily during staff discussions. Additional monitors/displays would allow staff to leave commonly referenced screens on display at all times.
- Sewer Utility staff have no means of monitoring or controlling KWWTP, MWWTP, and SWWTP from the existing CKTP SCADA PCs.
- \* Sewer Utility staff do not have access to near real-time status and alarm information for wastewater pump stations at CKTP.
- \* The Sewer Utility may benefit from establishing a secure, dedicated space for ICS servers and critical network equipment.

### 3.5 Instrumentation

HDR site assessments did not include assessment of individual field instrumentation. However, HDR has included some general observations made during its site assessments and discussions with Sewer Utility staff that pertain to instrumentation and controls in the following paragraphs. The ideal time to perform a condition assessment survey of current instrumentation associated with a certain process or equipment is when that process or equipment is being evaluated for increased levels of automation and performance optimization. This way, the existing instruments are assessed based on identified future needs for the process or equipment to meet automation and performance optimization goals.



### 3.5.1 Instrumentation Calibration and Maintenance Program

Based on discussions with Sewer Utility I&C technicians, HDR believes that the Sewer Utility does not have a formal calibration and maintenance program for field instrumentation and associated control loops. Typically, I&C technicians are notified by maintenance or operations staff when instrumentation issues are encountered, at which time they investigate and troubleshoot. The Sewer Utility has hired Branom Instrument Co. (Branom) to perform field calibrations of select field instruments in the past, but does not have a service contract in place with Branom for scheduled routine calibration services.

Implementing regularly scheduled calibration and maintenance practices in accordance with manufacturer recommendations is critical to maintaining the accuracy, reliability, and repeatability of the I&C loops on which the Sewer Utility's process control and standard operating procedures (SOPs) depend. Furthermore, if the Sewer Utility wishes to pursue more data-centric operational strategies, the integrity of the historical data becomes increasingly important. Without a formal instrumentation calibration and maintenance program, instruments are often allowed to drift until inaccuracies become so great that they become noticeable to the staff who rely on the instruments to perform their work. This may result in long periods where the historian is logging inaccurate measurements. Regular calibration is especially important for instrument technologies that have a tendency to drift more significantly than others—technologies like analyzers (e.g., chlorine residual, dissolved oxygen [DO], turbidity, pH, and lower explosive limit [LEL]) and pressure instrumentation with diaphragm seals, for example.

### 3.5.2 Central Kitsap Treatment Plant

This subsection describes HDR's general observations pertaining to field instrumentation and controls at CKTP.

#### Plant Effluent Flow Monitoring

The Sewer Utility has no means of direct measurement for CKTP effluent flow. Sewer Utility staff have installed various flow measurement technologies (including laser-based) at the effluent manhole where the effluent sampler draws its samples, but have been unsuccessful in establishing reliable flow readings. The effluent pipe connecting the discharge from the UV basins and tertiary treatment to the effluent manhole is buried deep and runs beneath the roadway, which has made more traditional flow measurement approaches, like installation of a magmeter, infeasible. Currently, CKTP's Trojan UV system calculates plant effluent flow by means of a level-based flow-over-weir calculation. However, these plant effluent flow calculations have typically been found to be anywhere from 6 to 16 percent higher than effluent flow values derived from an accounting of flow measurements recorded elsewhere within CKTP. This discrepancy can be seen in several historical values displayed on the CKTP Wonderware InTouch flow balance screen shown in Figure 3-13.

**Flow Balance** A Raw Influent **Process Water** Plant Flow Total Plant Effluent Effluent vs Influent Effluent vs Influent Total Total (b-AD) Days Ago (a) (d) (AD) [a+d] (b) (1-(b/AD)) Today 614849 Ga 3419104 Ga 3930763 Gal 511659 Gal 15.0 % 2832411 Gal 596871 Gal 3429282 Gal 3858248 Gal 428967 Gal -12.5 % 2 2803307 Gal 649075 Gal 4011267 Gal 558885 Gal -16.2 % 3 3452381 Gal 718684 Gal 3539979 Gal 3947986 Gal 408007 Gal -11.5 % 2821295 Gal 4 -11.5 % 5 2760193 Gal 740938 Ga 3501131 Ga 3903434 Gal 402303 Gal 4122084 Gal 15.6 % 2803028 Gal 3564502 Gal 557582 Gal 6 761475 Gal 2788313 Ga 771616 Ga 498604 Gal -14.0 % Current 7-Day Per. -13.8 % Current Month 14021460 Gal 19651696 Gal -13.3 % 17341878 Gal Previous Month 13.6 %

PLANT FLOWS

Figure 3-13. CKTP flow balance SCADA screen

#### Biofilter Sprinkler Control

The SJE Rhombus biofilter sprinkler control panel (see Figure 3-14) for the headworks odor control biofilter is no longer in service. Sewer Utility staff currently water the headworks odor control biofilter via a hose connected to sprinklers positioned over the biofilter. Replacing and/or introducing instrumentation to maintain desirable moisture levels in the biofilter via automation could improve Sewer Utility workforce efficiency and the effectiveness of the biofilter.

RECYCLED STREAM







Headworks Odor Control LEL Measurement

During its site visit, HDR observed that the LEL transmitter for the headworks odor control fan ductwork is registering an infrared (IR) source fault (see Figure 3-15). This is preventing the sensor and transmitter from measuring the concentration of combustible gas in the odor control system.

Figure 3-15. CKTP headworks odor control fan ductwork LEL transmitter in fault



### Biological Nutrient Removal Control

Sewer Utility staff have indicated that the control of the biological nutrient removal (BNR) process at CKTP is currently the most significant operational challenge and frustration at the plant. According to Sewer Utility staff, the aeration blowers are controlled off of pressure but aeration control valves are responding too quickly to DO measurements in the basins, which has caused the blowers to go into surge. Because automated controls have proved to be unstable, the aeration control valves are currently positioned manually and operators have to frequently adjust blower header pressure set points based on process demand. Murraysmith and HDR are scoped to address BNR optimization at CKTP as part of a separate task.

### Aeration Basin 1 DO Monitoring

Unlike the other three CKTP aeration basins, aeration basin 1 has no DO probes installed. DO measurement is critical input to the feedback loop governing aeration control strategies. Without DO measurement, the Sewer Utility has had to infer DO values in aeration basin 1 from DO values measured in other basis. This is one of the deficiencies frustrating the Sewer Utility's BNR efforts at CKTP.

#### Aeration Basin Ammonium and Nitrate Monitoring

Currently, aeration basin 4 is the only basin with ammonium and nitrate probes installed. Ammonium and nitrate values for aeration basins 1 through 3 are being derived from measurements read from the probes installed in aeration basin 4. Without probes to measure these values in aeration basins 1 through 3, the Sewer Utility has no means of



monitoring the nitrogen removal occurring via the nitrification and denitrification process in these basins.

### Reclaimed-Water Chlorine Residual and Turbidity Monitoring

During its site visits, HDR observed that the chlorine residual and turbidity analyzers associated with the reclaimed-water filtration system were both powered down (see Figure 3-16 and Figure 3-17). HDR did not confirm whether these instruments were still functional, but in their powered-down state no chlorine residual or turbidity measurement is occurring for the reclaimed-water filtration system.

Figure 3-16. CKTP reclaimed-water filtration system chlorine residual analyzer powered down



Figure 3-17. CKTP reclaimed-water filtration system turbidity analyzer powered down



### Thickened Sludge Blending Tank Low-Level Interlock

Sewer Utility staff indicated that the low-level switch for the thickened sludge blending tank has failed. This switch provides low-level shutdown of the thickened sludge blending tank circulation pump and digester feed pumps via PLC software interlock. Sewer Utility staff have plans to eliminate this switch and to provide low-level shutdown of these pumps based on level measurement from the tank's pressure-based level transmitter. Until the proposed alternate controls are implemented, these pumps are likely operating with no low-level shutdown interlock.

#### Aerated Grit Tank 1 Stage 2 Airflow Monitoring

HDR observed that the thermal dispersion flowmeter installed on the aeration line to the aerated grit tank 1 stage 2 diffuser is measuring zero flow (see Figure 3-18), while the positions of manual valves on either side of the instrument suggest that flow should be occurring. Comparing the totalized flow on the flowmeter's display with the other three flowmeters on the grit tank aeration lines, it appears that this instrument has been measuring zero flow for a significant amount of time. HDR did not investigate the root cause of the zero flow reading, but the matter should be investigated to confirm that the grit tank is being properly aerated (e.g., a zero flow reading could be due to a plugged diffuser).







### Cogeneration System

According to Sewer Utility staff, the CKTP cogeneration system has been offline for roughly a year. The cogeneration system was installed only a little more than 4 years ago and the Sewer Utility has already had to pay to have local mechanics rebuild the engine. The engine has since failed again and would require substantial maintenance to repair. There have been several other maintenance issues with the cogeneration system and the digester gas conditioning system, and Sewer Utility staff have come to believe that the maintenance and material costs associated with keeping the infrastructure in operation would exceed any energy savings CKTP may receive from the cogeneration system.

Another operational challenge for the cogeneration system has been the limited digester level range that the Sewer Utility has to operate within. According to Sewer Utility staff, this level range is about 1 foot. This narrow operating level range has limited how much digester gas could be supplied to the cogeneration system, which resulted in the system running at well below its rated output when it was in operation, limiting the system's potential to deliver energy savings. Even if the digester operating level constraints were resolved, the Sewer Utility has indicated that the digesters may not produce enough gas for the cogeneration system to run continually at its rated output.

Because the cogeneration system has been effectively abandoned in place, HDR did not perform a site assessment of its ICS components.

### 3.5.3 Kingston Wastewater Treatment Plant

HDR did not make significant observations pertaining to instrumentation and controls at KWWTP. Because the new instrumentation and controls associated with ongoing construction activities at KWWTP have yet to be commissioned, HDR did not assess the conditions of this new infrastructure.

#### 3.5.4 Manchester Wastewater Treatment Plant

This subsection describes HDR's general observations pertaining to field instrumentation and controls at MWWTP.

### Plant Influent Flow Monitoring

The Sewer Utility has no means of direct measurement for plant influent flow. Incoming flows are received in the influent pump station wet well and there is not a convenient onsite location for installing flow measurement equipment upstream from the wet well. Based on discussions with Sewer Utility staff, HDR believes that the Sewer Utility is deriving MWWTP influent flow from measurements of plant effluent and return activated sludge (RAS) flows. Plant influent flow is a critical parameter for laboratory measurements and plant process performance metrics. Therefore, direct measurement of plant influent flow would be preferable to derivation from other plant flows.

### Headworks Odor Control and Associated Chemical System Instrumentation

HDR observed that some of the instrumentation related to the MWWTP headworks odor control system and its associated chemical system either is non-functional or has been removed. For example, the sodium hypochlorite storage tank appears to have no level measurement instrumentation. Though a level value for this tank is displayed at the plant SCADA screens, historical SCADA data reviewed by HDR show a constant zero value for this parameter. The odor control system control panel also appears to have a non-functional analyzer, an analyzer with an active warning, and another analyzer displaying a potentially inaccurate negative pH value (see Figure 3-19). Based on observations and discussions with Sewer Utility staff, HDR believes that the odor control system is no longer functioning per its original design.







Gravity Belt Thickener Flow Monitoring

During its site visit, HDR observed that the magmeter on the sludge line feeding the MWWTP GBT was severely corroded (see Figure 3-20). As the meter continues to deteriorate, failure of the instrument will become more likely.

Figure 3-20. Corroded magmeter on sludge line to MWWTP gravity belt thickener




Aeration Basin Dissolved Oxygen Monitoring

The MWWTP aeration basins have no DO probes or other analytical instruments for monitoring the BNR process. Sewer Utility staff indicated that DO probes previously installed in the basins had presented maintenance challenges and were removed. Without DO measurement, control of the constant-speed aeration blowers has become more of a manual process.

### **LEL Monitoring**

During its site visit, HDR observed that several of the MWWTP LEL gas monitors and transmitters were non-functional (see Figure 3-21 for an example). Non-functional LEL gas monitors were found in the operations building sludge pumping gallery, at the headworks odor control system, and at the WAS tank. Without functional gas monitoring equipment, the Sewer Utility is not measuring the concentration of combustible gas in these areas.





### **W3** Flow Monitoring

During its review of MWWTP HMI screens and historical SCADA data, HDR observed that a flow signal is not being received from the flow transmitter and totalizer on the MWWTP service water (W3) pump discharge piping (see Figure 3-22). HDR observed that the MWWTP W3 pumps HMI screen displayed zero flow while one of the W3 pumps was running. Historical data obtained for the last 2 years also show a constant zero value for W3 flow.







#### **UV Disinfection Controls**

Sewer Utility operations staff indicated that a recent fecal-coliform issue at MWWTP is believed to have been caused by a sensor within the Trojan UV system reporting false readings, which led to under-dosing of UV. After County electricians cleaned and serviced the sensor, the Trojan UV system performance has improved. However, operations staff still suspect there are some inaccuracies in the sensor readings and have reduced confidence in the equipment.

## 3.5.5 Suguamish Wastewater Treatment Plant

This subsection describes HDR's general observations pertaining to field instrumentation and controls at SWWTP.

### Odor Control System

Based on nameplate information, HDR believes that the SWWTP odor control system has been in operation for at least 23 years. Sewer Utility operations staff indicated that they have had to resort to manual procedures like manually dosing the system with sodium hypochlorite to keep the equipment in operation. During its site visit, HDR observed that one of the analytical probes associated with the odor control system appears to have a splice in the probe's manufacturer cable (see Figure 3-23). Field splices are not a recommended practice for analog signals and this splice may be degrading the accuracy of the probe's measurement or disrupting the signal entirely.

Figure 3-23. SWWTP odor control system analytical probe with splice in manufacturer cable



Process Building Upper-Floor Process Room LEL Monitoring

During its site visit, HDR observed that the LEL gas monitor in the process building upper-floor process room is non-functional (see Figure 3-24). Without functional gas monitoring equipment, the Sewer Utility is not measuring the concentration of combustible gas in this area.

Figure 3-24. Non-functional LEL gas monitor in the SWWTP process building upper-floor process room



Plant Effluent Flow Control Valve Control

Sewer Utility staff have indicated that the SWWTP effluent flow control valve is unable to maintain its position when commanded to close. The valve tries to maintain a closed position but eventually begins opening. SWWTP has no bypass piping around this valve,



so SWWTP would need to shut down in order for the control valve to be serviced or replaced.

### Rotary-Drum Thickener Control

Sewer Utility operations staff indicated that the RDT operation is a highly manual process that requires operators to watch the sludge and manually modulate the spray bar, polymer dosing, and drum drainage to control sludge thickness. Because the sludge piping between the thickened sludge pump and the sludge storage tank is reported to be too small (3 or 4 inches), the thickened sludge pump, which is a progressing-cavity pump, shuts down on high pressure if the sludge is too thick. Operators must make sure that sludge thickness is below a certain threshold to avoid high pressures in the pump discharge piping. However, this workaround is reducing the efficacy of the RDT because the equipment is not dewatering sludge to the extent that it could.

### Thickened Sludge Storage Tank Level Measurement

According to Sewer Utility operations staff, the level transmitter for the thickened sludge storage tank is reporting level measurements that do not align with actual tank levels. Operations staff indicated that it provides them with a ballpark estimate of tank level, but when low levels are reached during drawdown activities they have to resort to visual confirmation of tank levels to complete the drawdown. Based on record drawings from the SWWTP Thickening project under which the tank was installed, the tank level is measured by a pressure transmitter that was specified to be installed on a dedicated tank nozzle. HDR observed that the instrument was instead installed on the suction piping for the truck loadout pump within a few feet of the pump's inlet flange (see Figure 3-25). Installing the pressure-based level instrument on the suction piping for the progressing-cavity pump may be impacting stable and accurate level measurements when the pump is in operation.

Figure 3-25. SWWTP thickened sludge tank level transmitter on truck loadout pump suction piping



### Sludge Storage Tank Level Measurement

The Sewer Utility is not monitoring sludge storage tank level. Operations staff report that they have tried multiple level measurement technologies, but all transmitters have failed. Operators have resorted to relying on a float switch installed on a string (see Figure 3-26) for high-level alarm indication and shutdown of sludge supply to the tank. To control tank level, operators use a flowmeter to gauge tank fill rate. However, this approach requires operators to be vigilant about when to stop flow to the tank because the remaining sludge in the tank sludge supply piping when the valve closes will continue to gravity-drain to the tank. The current approach to controlling sludge storage tank level introduces significant risk of operator error, has no backup level instrumentation, and relies on a level switch with a non-ideal installation.





### Process Building Fire Alarm System

Sewer Utility staff indicated that the process building fire alarm dialer is no longer functional, so the fire alarm system was tied into SCADA for alarm callouts. However, the fire alarm panel (see Figure 3-27) itself has since failed so SWWTP is not currently monitoring or alarming for fires. Per NFPA 820 Table 6.2.2(a), Row 12, a fire alarm system is required due to the presence of dewatering equipment (e.g., the RDT) in the upper floor process area (NFPA 2020).







### SBR Dissolved Oxygen Monitoring

The SWWTP SBRs have no DO probes or other analytical instruments for monitoring the BNR process. Sewer Utility staff indicated that DO probes previously installed in the SBRs had presented maintenance challenges and were removed. Without DO measurement, control of the constant-speed aeration blowers is based on operator-entered set points derived from institutional knowledge and not based on measured conditions within the SBRs.

### Damaged RDT Spray Water Flow Switch

The thermal dispersion flow switch on the RDT spray water supply line has been damaged (see Figure 3-28). This may result in a shorter than expected useful service life for the switch.

Figure 3-28. Damaged flow switch on SWWTP RDT spray water supply line



# 3.5.6 Pump Stations

This subsection describes HDR's general observations pertaining to field instrumentation and controls at the wastewater pump stations.

### PS-24 Pumps Short Cycling


During HDR's site visit, one of PS-24's pumps turned on and off multiple times, running for about 30 seconds each time before turning off. Sewer Utility staff indicated that short cycling of the pumps is a common occurrence at this pump station. However, PS-24 can receive sudden high flows, so staff have been reluctant to tinker with the existing pump controls.

### PS-24 Wet Well LEL Monitoring

During HDR's site visit, a CAL FAULT indication was observed at the wet well LEL gas monitor (see Figure 3-29). This typically indicates that the last calibration attempted was either incomplete or unsuccessful. The fault may be impairing the instrument's ability to accurately measure the concentration of combustible gas in the pump station wet well. Per NFPA 820 Table 4.2.2, Row 14, combustible gas detectors are required for wastewater pumping stations that are mechanically ventilated, which includes odor control, or that open into a building interior (NFPA 2020). Because the PS-24 wet well has an odor control system with mechanical ventilation, HDR believes that the NFPA 820 requirement for combustible gas detection at the station wet well applies to PS-24.



Figure 3-29. Faulted PS-24 wet well gas monitor



PS-24 Wet Well Level Measurement

During HDR's site visit, the ultrasonic level transducer measuring wet well level was observed to be coated with grime and dried scum (see Figure 3-30). The condition of the transducer may be degrading the accuracy of the level measurement.

Figure 3-30. PS-24 wet well ultrasonic level transducer coated with grime and dried scum



#### PS-34 Wet Well Level Control

PS-34 has no PLC and the pump station's wet well level appears to be controlled by a Precision Digital level indicator and controller that monitors the wet well's radar level transmitter. The remainder of PS-34's controls are hardwired. The pump station used to be controlled via a bubbler and its control panel (see Figure 3-31) includes several components associated with bubbler-based level control along with a handwritten note documenting procedures for reverting back to bubbler control in the event of radar level transmitter failure. Because of the age and condition of the control panel components, its undocumented modifications, and lack of PLC, PS-34 would be a good candidate for a control panel upgrade.






### PS-71 BIOXIDE Storage Tank Level Monitoring

Sewer Utility staff indicated that the ultrasonic probe on the old sodium hypochlorite tank failed after 2 weeks because of exposure to the chemical. The tank has since been converted to a BIOXIDE storage tank, but the level instrument still remains hanging off of an old flange and is no longer connected to the tank (see Figure 3-32). The Sewer Utility is not currently monitoring BIOXIDE storage tank level.







### PS-71 Wet Well LEL Monitoring

During its site visit, HDR observed that the LEL gas monitor for the PS-71 wet well is registering a fault and is not currently functioning (see Figure 3-33). Without functional gas monitoring equipment, the Sewer Utility is not measuring the concentration of combustible gas in the pump station wet well. Because the PS-71 wet well has an odor control system with mechanical ventilation, HDR believes that the NFPA 820 requirement for combustible gas detection at the station wet well applies to PS-71.

Figure 3-33. PS-71 wet well LEL monitor in alarm



- \* Based on discussions with Sewer Utility I&C technicians, HDR believes that the Sewer Utility does not have a formal calibration and maintenance program for field instrumentation and associated control loops.
- \* A condition assessment survey of existing instrumentation has yet to be performed. This effort would provide the most value if done on a process-by-process basis as part of process and equipment level-of-automation and performance optimization evaluations.
- \* The Sewer Utility has no means of direct measurement for CKTP effluent flow.
- \* Current CKTP effluent flow calculations provided by the Trojan UV system are resulting in higher flows than those derived from an accounting of other CKTP flow measurements.
- \* The CKTP headworks odor control biofilter sprinkler control panel is out of service and watering of the biofilter is now a manual process for Sewer Utility staff. Replacing and/or introducing instrumentation to maintain desirable moisture levels in the biofilter via automation could improve Sewer Utility workforce efficiency and the effectiveness of the biofilter.
- \* The LEL transmitter on the CKTP headworks odor control fan ductwork is registering an IR source fault and is not monitoring combustible-gas concentration in the odor control system.
- \* Automated control of the CKTP BNR process has proved to be unstable. Operators currently position the aeration control valves manually and have to frequently adjust blower header pressure set points based on process demand.
- Unlike the other three CKTP aeration basins, aeration basin 1 has no DO probes installed. This is one of the deficiencies frustrating the Sewer Utility's BNR efforts at CKTP.
- \* Only CKTP aeration basin 4 has ammonium and nitrate probes installed to monitor nitrogen removal occurring in the basin.
- The chlorine residual and turbidity analyzers associated with the CKTP reclaimed-water filtration system were found powered down during HDR's site visit.
- \* The low-level switch for the CKTP thickened sludge blending tank has failed and the tank's circulation pump and digester feed pumps are likely operating without a low-level shutdown interlock.
- \* HDR observed that the thermal dispersion flowmeter installed on the aeration line for the CKTP aerated grit tank 1 stage 2 diffuser is



measuring zero flow, while the positions of manual valves on either side of the instrument suggest that flow should be occurring.

- The CKTP cogeneration system and digester gas conditioning system have been abandoned in place because of high material and maintenance costs and limited digester gas production.
- The Sewer Utility has no means of direct measurement for plant influent flow at MWWTP.
- Some of the instrumentation related to the MWWTP headworks odor control system and its associated chemical system either is nonfunctional or has been removed. Systems are no longer operating per their original design.
- The magmeter on the sludge line feeding the MWWTP GBT is severely corroded.
- The MWWTP aeration basins have no DO probes or other analytical instruments for monitoring the BNR process.
- Combustible-gas monitoring equipment at the MWWTP sludge pumping gallery, headworks odor control system, and WAS tank is non-functional.
- The MWWTP SCADA system is not receiving a flow signal from the flow transmitter and totalizer on the plant W3 pump discharge piping.
- Instrumentation within the MWWTP Trojan UV system has had recent issues and operations staff have reduced confidence in the system's UV dosing control.
- One of the analytical probes associated with the SWWTP odor control system appears to have a splice in the probe's manufacturer cable, which may be degrading the accuracy of the probe's measurement or disrupting the signal entirely.
- Combustible-gas monitoring equipment at the SWWTP process building upper-floor process room is non-functional.
- The SWWTP effluent flow control valve is unable to maintain its position when commanded to close. The valve tries to maintain a closed position but eventually begins opening. SWWTP has no bypass piping around this valve, so the plant would need to shut down in order for the control valve to be serviced or replaced.
- Operation of the SWWTP RDT is a highly manual process where operations staff have to target a reduced sludge thickness to avoid shutting down the thickened sludge pump on high discharge pressure because of reportedly undersized sludge discharge piping. This

- workaround is reducing the efficacy of the RDT because the equipment is not dewatering sludge to the extent that it could.
- \* Sewer Utility staff indicated that the level transmitter for the SWWTP thickened sludge storage tank is reporting level measurements that do not align with actual tank levels.
- \* The SWWTP sludge storage tank level is not monitored. Operations staff have resorted to a manual method of controlling tank level that introduces significant risk of operator error and relies on a high-level switch with a non-ideal installation for alarming and shutdown of the sludge supply to the tank.
- \* The SWWTP process building fire alarm panel has failed so the plant is not currently monitoring or alarming for fires.
- \* The SWWTP SBRs have no DO probes or other analytical instruments for monitoring the BNR process.
- \* The thermal dispersion flow switch on the SWWTP RDT spray water supply line has been damaged. This may result in a shorter than expected useful service life for the switch.
- \* Short cycling of the pumps is a common occurrence at PS-24.
- \* Combustible-gas monitoring equipment at the PS-24 wet well is faulted.
- \* The ultrasonic level transducer measuring the PS-24 wet well level was observed to be coated with grime and dried scum. The condition of the transducer may be degrading the accuracy of the level measurement.
- \* PS-34 has no PLC and the pump station's wet well level appears to be controlled by a level indicator and controller that monitors the wet well's radar level transmitter. Because of the age and condition of the control panel components, its undocumented modifications, and lack of PLC, PS-34 would be a good candidate for a control panel upgrade.
- \* The Sewer Utility is not currently monitoring BIOXIDE storage tank level at PS-71.
- \* Combustible-gas monitoring equipment at the PS-71 wet well is non-functional.



#### Industrial Control System Software 4

This section describes the Sewer Utility's current ICS software, including an overview of the PLC programming, HMI, historian, and alarm notification software packages in use at the WWTPs and wastewater pump stations. It also describes the SCADA system functionality that has been implemented with this software.

#### PLC Programming Software 4.1

This subsection describes the PLC programming environments, firmware and software versions, and methods used in the development and maintenance of Sewer Utility PLCs.

#### 4.1.1 **Programming Environments**

The various Allen-Bradley PLCs installed throughout the Sewer Utility's wastewater infrastructure are programmed via one of two separate Rockwell Automation software applications. Programming project files for the Allen-Bradley MicroLogix and SLC 500 series PLCs are developed with RSLogix 500, while programming files for the CompactLogix PLCs are developed within the Studio 5000 Logix Designer programming environment. Programming logic developed in the two programming environments is not interchangeable, which prevents standard programming templates or blocks developed in one environment from being used in the other. Because Rockwell Automation does not provide a single programming environment for all of its controllers, the consumer is left with the choice of standardizing on one controller that may be oversized for some applications or investing in additional effort to develop and maintain programming files in multiple programming environments. The Sewer Utility has opted for the latter scenario.

#### 4.1.2 Firmware and Software Versions

Both RSLogix 500 and Studio 5000 Logix Designer are frequently updated by the manufacturer, along with firmware updates to the processors themselves, to fix bugs and mitigate security vulnerabilities. This has resulted in several versions of the firmware and software over the years. Keeping up with these firmware and software updates can be a challenge for any organization and it is not uncommon for firmware updates to yield unexpected results that require tweaks to programming files, which can result in unanticipated downtime. Another maintenance challenge is that the firmware and software versions need to be aligned, so programmers cannot simply install the most recent version of the programming environment and have the ability to work on programming files created in previous versions or make online revisions to programs downloaded to controllers running previous firmware versions.

Because of the manufacturer's approach to firmware and software versioning, many organizations adopt the practice of developing programming files with the latest software version available at the time the PLC is installed and avoiding firmware and software updates thereafter. Judging from the various software versions used to develop the Sewer Utility's PLC programming project files, it appears that the Sewer Utility has adopted this practice. For example, versions of Studio 5000 Logix Designer (and its

predecessor RSLogix 5000) used for the development of Sewer Utility PLC programming project files reviewed by HDR range from versions 19.01.00 to 30.02.00. While avoiding firmware updates can provide some cost savings in terms of ICS maintenance and eliminates the chance of hiccups while controller firmware is updated, it leaves PLCs running without the advantages of current security patches and optimized controller features. Having a variety of firmware versions throughout the Sewer Utility's ICS also requires the Sewer Utility and contracted systems integrators to have several programming environment software versions installed on the machines used to work on the PLCs.

## 4.1.3 Programming Methods

With few exceptions, the Sewer Utility's PLCs are programmed using ladder logic. In general, the various systems integrators that have developed the Sewer Utility's programming project files have leveraged object-oriented programming (OOP) concepts to apply a degree of standardization to the programming project files and to make them more efficient and easier to maintain. For example, the Sewer Utility's programming project files that were developed in the Studio 5000 Logix Designer programming environment make extensive use of Add-on Instructions (AOIs) and User-defined Data Types (UDTs), which significantly reduces the amount of repetitive ladder logic rungs and manual tag creation.

Though OOP-based best practices appear to have been applied to several of the Sewer Utility's PLC programs, at least three systems integrators have independently applied these best practices over the years. This has resulted in an overall lack of standardization when it comes to organization, tag naming convention, annotation practices, and the AOIs and UDTs used throughout the Sewer Utility's PLC programming project files. Establishing PLC programming standards based on OOP principles would help the Sewer Utility implement a uniform approach to how its assets are managed within the ICS, which would simplify ICS programming maintenance and help guide future programming efforts by Sewer Utility staff and contracted systems integrators.

- ★ Sewer Utility PLCs are running a variety of firmware versions.
- \* The Sewer Utility does not have PLC programming standards in place and its PLC programming project files reflect a variety of conventions and programming objects implemented by multiple systems integrators.

# 4.2 Human-Machine Interface Software

This subsection describes the Sewer Utility's HMI software as well as its configuration and implementation.

#### 4.2.1 Wonderware InTouch

The Sewer Utility is currently standardized on Wonderware InTouch 2014 R2 Service Pack 1 (SP1) for CKTP and SWWTP. This software is currently in the mature support phase of the software developer's product life cycle. Mature support is the final phase in the product life cycle, during which limited support is offered and users are encouraged



to upgrade licensing to current software versions. The Wonderware InTouch version at KWWTP and MWWTP has been recently upgraded to Wonderware InTouch 2017. This software is currently in the extended support phase of the software developer's product life cycle, but will soon reach the mature support phase in November 2020. Based on information provided by the Sewer Utility, HDR believes that the Wonderware InTouch licenses at CKTP are 60,000-tag licenses, while the licenses at the other WWTPSs are 3,000-tag licenses. Note, Wonderware has been rebranded as AVEVA as part of a recent reverse merger between Schneider Electric and AVEVA. However, this TM refers to the software as Wonderware, the name under which it has been marketed for several years.

The Sewer Utility's Wonderware InTouch software has been implemented in its standalone variant and not as part of a Wonderware System Platform deployment that incorporates Wonderware's ArchestrA Framework. Though this approach avoids much of the complexity introduced by the ArchestrA Framework, it provides none of the efficiencies and other benefits that come from a more centralized approach to managing ICS device data and SCADA visualizations. This lack of centralized management has resulted in non-standardized programming objects and visualizations at the various WWTPs. At CKTP, where there is more than one SCADA PC for the plant, the lack of a centralized server-client model for the HMIs has also presented some operational challenges such as alarm acknowledgments made at one HMI thick client not being registered by other HMI thick clients.

Based on discussions with the Sewer Utility and QCC, HDR believes that the Sewer Utility and QCC are planning to upgrade the Sewer Utility's Wonderware licensing at CKTP to a more current version. As part of the upgrade, QCC will implement an ArchestrA Framework—based Wonderware System Platform deployment consisting of redundant Wonderware Application Servers; an ArchestrA Galaxy Repository; two Wonderware InTouch runtime thick client PCs; and configuration of several Wonderware InTouch runtime thin clients for existing industrial panel PCs, SCADA PCs, and County-issued tablets. HDR's understanding is that the existing CKTP SCADA screens will be preserved as part of this upgrade and that modifications to the screens' graphics and functionality are not included in QCC's current scope of work.

#### 4.2.2 Human-Machine Interface Screens

This subsection summarizes current Sewer Utility practices for HMI organization, color, overview screens, process screens, pump station screens, equipment pop-up screens, trend screens, and alarming.

### Organization

The Sewer Utility WWTP HMI screens are generally arranged in a three-level hierarchy that begins with an overview screen (level 1) and provides more information and detail to operators as they progress through process-specific screens (level 2) to equipment-specific pop-up windows/screens and trend screens (level 3). The HMI screen composition differs depending on the WWTP, but all WWTPs have standardized on a top or bottom horizontal navigation banner with most of the screen dedicated to the screen-specific content. CKTP and SWWTP also include a bottom horizontal alarm summary banner on each screen, which is meant to display the most recent SCADA alarms.

However, the alarm summary banner at SWWTP may be non-functional because it was displaying a single alarm from more than 4 months prior to HDR's site visit and did not include more current alarms found on the alarm summary screen. At CKTP, several plant flow values and select equipment operational statuses are also displayed in a vertical column at the right of each screen.

Operators can navigate through the WWTP HMI screens by means of the navigation banner, clickable screen content on the various screens, and, in some cases, by clicking on arrows that advance through the process screens. MWWTP and KWWTP also have a directory screen that allows operators to select the plant process or equipment group they would like to view.

#### Color

Throughout the HMI screens, color is often the sole means of differentiating important condition, status, or alarm state. For example, the secondary clarifiers and UV disinfection HMI screen at KWWTP shown in Figure 4-1 communicates clarifier, scum pump, and UV bank running status with color only. Because of the prevalence of color-detection deficiencies among the population, modern HMI graphics development best practices call for indication of condition, status, and alarm state to be accompanied by text and/or shapes.

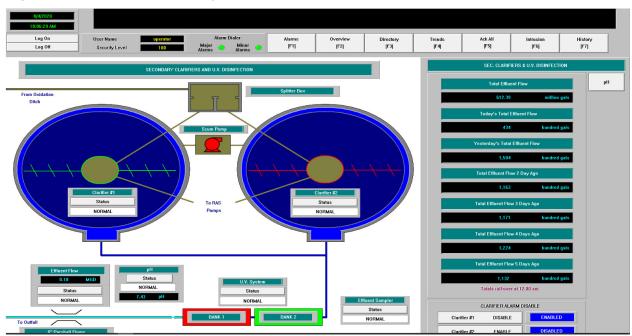



Figure 4-1. KWWTP secondary clarifiers and UV disinfection HMI screen

Relying solely on color to communicate status, condition, and alarm state can also create confusion for operators (particularly recent hires) because institutional knowledge is required to decipher color significance. For example, an individual looking at the screen depicted in Figure 4-1 would have to know that red means "off" at KWWTP to understand that the scum pump shown on the screen is not running. The potential for confusion and operator error can increase significantly when "on/off" and "open/closed" color schemes are not consistently applied throughout an organization's infrastructure, as is the case



with the Sewer Utility's HMI screens. At CKTP, for example, the on/off, open/closed color scheme appears to be reversed from the scheme adopted at KWWTP. As shown in the CKTP aeration basin 2 HMI screen depicted in Figure 4-2, running blowers, mixers, and pumps are shown in red. The color scheme inconsistency was also observed at the Sewer Utility's wastewater pump station OIT screens.

Figure 4-2. CKTP aeration basin 2 HMI screen

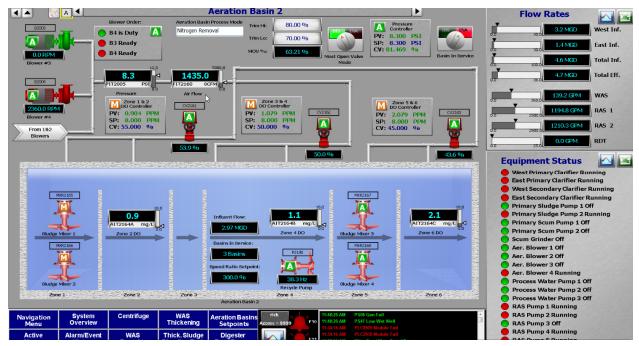


In many cases throughout the Sewer Utility's HMI screens, binary-type statuses like on and off are distinguished with equally vivid colors. Static portions of the CKTP and SWWTP HMI screens, like the piping and equipment graphics, are often displayed with colors that are brighter than the HMI screen background color. The background color for KWWTP and MWWTP HMI screens is white, which renders all other colors used to convey status, condition, or alarm state darker than the background. A general best practice is to show equipment that is running with a brighter color than the background and equipment that is off with a darker color than the background. Equipment and other elements that are not controlled via the ICS but are shown for other purposes would be shown filled with the same color as the background.

#### **Overview Screens**


The CKTP overview HMI screen is displayed in Figure 4-3. Aside from displaying primary and secondary clarifier status and some emergency eyewash alarm status indications, the HMI screen functions more as a directory for operators to navigate to specific process screens than an overview of current CKTP operational status. It appears that process screens with active alarms and/or warnings are displayed with yellow outlines to draw operator attention. Beyond these elements and the plant flow and equipment status information displayed on all CKTP HMI screens, no additional information can be obtained from the screen.

Figure 4-3. CKTP overview HMI screen

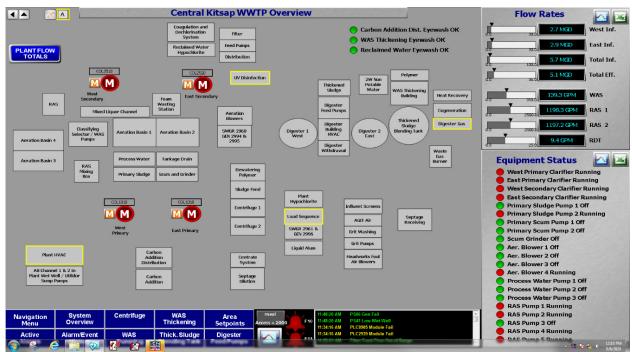

The KWWTP overview HMI screen is displayed in Figure 4-4. This screen provides a general process flow overview for KWWTP with running status for major plant equipment communicated by the plant's red and green color scheme. Several process parameters like level, flow, and pH are displayed on the overview screen along with current utility and generator power statuses.

Figure 4-4. KWWTP overview HMI screen

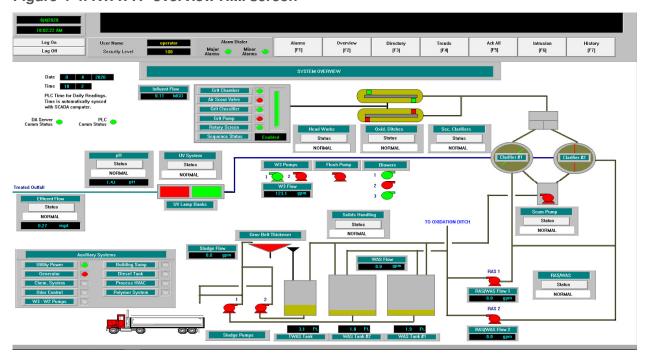



The MWWTP overview HMI screen is displayed in Figure 4-5. This screen provides a general process flow overview for MWWTP with running status for major plant equipment communicated by the plant's magenta and green color scheme. MWWTP influent pump station level and effluent flow values are displayed on the overview screen along with current utility and generator power statuses. Sludge tank levels are represented as proportional fill of their respective cylinders, but no level values are displayed.

SAZONO

SECURITY LOUGH Alarms

Log On

Log Off

USEr Name

Security Level

[F1]

Operate

[F2]

Test Alarm

Ack All

Intrusion

[F3]

Test Alarm

Ack All

Intrusion

[F3]

Flow Splitte

Normal

Norm

Figure 4-5. MWWTP overview HMI screen

The SWWTP overview HMI screen is displayed in Figure 4-6. This screen provides no process flow overview and instead presents major equipment running status and SWWTP alarm information in table format using the plant's red and green color scheme. One confusing aspect of the overview screen is that the text associated with the equipment and alarm statuses does not appear to change along with the color. For example, the word "RUNNING" appears in both red and green cells. In addition to process-related on/off and alarm status information, several level and flow values for SWWTP processes are displayed on the overview screen along with current utility and generator power statuses.

Figure 4-6. SWWTP overview HMI screen



Despite the information displayed on the Sewer Utility's WWTP overview HMI screens, the screens do not provide much in the way of context that can aid situational awareness. For example, it would be difficult to relate the quantities of equipment in operation and displayed process values to percentage of plant/process operating capacity without the support of institutional knowledge. Normal operating ranges, target performance set points and ratios, and other key performance indicators (KPIs) are also absent. As currently configured, the overview screens rely on operator knowledge and experience to put the displayed process values in context and arrive at judgments related to current plant conditions.

#### Process Screens

The various Sewer Utility process-specific HMI screens typically show a piping and instrumentation diagram (P&ID)-like, not-to-scale representation of the process with major equipment and vessels interconnected via pipelines with arrows showing flow direction. Process equipment and actuated valves are typically labeled with a descriptive name to help operators associate the graphics with the actual equipment, and, in some cases, the equipment tags are also included. Equipment running status and valve open/close position status are generally communicated via a green and red or green and magenta color scheme. Motor speed is also displayed, where applicable, though engineering units for speed vary between hertz (Hz) and percent speed depending on the equipment. Sewer Utility staff have indicated that there are cases throughout the WWTP HMI process screens where the wrong engineering units are being displayed for speed values (e.g., percent speed is displayed for values that represent hertz). Manual and auto status of equipment is also typically presented on the process screens.

In general, process parameters displayed on the HMI screens are shown with engineering units. Where HMI screens cover processes that include proportional-



integral-derivative (PID) controllers, the screens provide some valuable context in terms of current process value versus target set point for the PID controller. However, HDR did not provide an in-depth comparison of PLC programming logic with HMI screens to determine the extent to which PID target set points are displayed alongside current process values.

As with the overview screens, the process screens lack some context that would provide greater insight into recent and present conditions. When levels are displayed, it is either just a value or a value with a bar or proportional fill that provides a visual gauge of how the current value relates to the capacity of the vessel. Though the bar and proportional fill gauges are an improvement over a simple value display, they could be further improved by including normal operating range, low- and high-level alarm set points, deadband, overflow, and/or equipment shutdown set point overlays. This type of information provides operators with obvious and immediate context when interpreting current level values. Adding sparklines to the level displays can expand on this context by showing the recent trending of the level signal, without operators having to leave the screen to open a separate trend screen.

Figure 4-7 depicts an example SCADA HMI graphics visualization that includes sparklines and vertical bars with normal operating ranges (light blue regions), low- and high-level alarm set points (borders of gray and black regions), and deadband (gray regions). The same approach could be applied to the various level, flow, pressure, temperature, and analytical measurements, which are currently displayed as values only or with limited context on the HMI screens.

Coils Jacket Reactor M4 Agitator ON Analysis: Purity % 40.0 32.0 -an 2 Hrs Analysis: Inhibitor Concentration % 6.0 4.0 -90 -60 -30 2 Hrs 75.8 Backup Lvl %

Figure 4-7. Example HMI graphics content providing additional context and situational awareness

Source: PAS Global LLC.

### **Pump Station Screens**

At CKTP, a pump station alarm screen displays the states of all monitored alarms for each pump station along with information pertaining to the current pump station being polled, the polling time, and current and previous polling cycle times (see Figure 4-8). As shown in the figure, the screen provides an intuitive overview of current alarm activity for the pump station that is conducive to quick assessment and location of pertinent information. Though the screen is effective at presenting alarm information, Sewer Utility staff have no means of remotely resetting pump station alarms from this or any other HMI screen at CKTP. The lack of remote alarm reset requires County staff to physically visit the pump stations to reset alarms.

Station Alarms

| Section | Control | Control

Figure 4-8. Pump station alarm HMI screen

From a separate map HMI screen, operators can select individual pump stations by number, which brings up a pop-up screen dedicated to the pump station. An example pump station pop-up screen is shown in Figure 4-9. These pump station pop-up screens are derived from a common template, which has resulted in some fields and alarms being displayed for which data may not be available at the selected pump station.







HDR also observed that there are issues with communication of analog parameters for some of the pump stations. Evidence of this can be seen in several of the pump station pop-up screens. For example, from the pump colors in Figure 4-9, it would appear that one of the station's pumps is running. However, the flow value is reading 0 gallons per minute (gpm). Historical data reviewed by HDR also indicate that constant, out-of-range values are being logged for several pump station analog parameters.

Even where communication of pump station analog parameters appears to be functional, the analog parameters included in the Sewer Utility's remote monitoring capabilities that HDR observed are limited to discharge flow. The Sewer Utility does not appear to be monitoring wet well level, force main pressure, pump speed, LEL, BIOXIDE/chemical storage tank level, power and energy parameters, or other analog parameters for the pump stations.

### Equipment Pop-up Windows/Screens

While the HMI process screens typically communicate only equipment running status, manual/auto status, and speed (where applicable), in many cases operators can click on individual equipment to view an equipment-specific pop-up window or separate HMI screen. An example pop-up screen is depicted in Figure 4-10. These pop-up windows and screens provide additional information about the equipment that can include local Hand-Off-Auto (HOA) selector switch position, SCADA Manual-Off-Auto setting, ready status, accumulated runtime, and total starts or cycles. For equipment with DeviceNet or EtherNet/IP networked overload relays or VFDs, electrical parameters like voltage, current, power, and power factor are also displayed. Depending on login credentials, equipment start and stop control or open and close control, in the case of valves and gates, and SCADA manual and automatic control selection can be accessed through these pop-up windows/screens.



Figure 4-10. CKTP HRR pump 1 equipment pop-up window

As a troubleshooting tool, the equipment pop-up windows/screens reviewed by HDR could be further developed to provide additional value. Currently, they do not appear to be capable of providing information on active alarms or conditions external to the equipment that are inhibiting the equipment from running. Motor starts per last 1 hour and last 24 hours could also be valuable to operators and maintenance staff. With the data available from DeviceNet and EtherNet/IP networked overload relays and VFDs within the Sewer Utility's infrastructure, there are also opportunities to embed additional electrical, diagnostic, and performance data into the equipment pop-up windows/screens.

#### **Trend Screens**

The HMI trend screens reviewed by HDR consisted of preconfigured screens dedicated to specific process values (see Figure 4-11 for an example). Operators can interact with the trend screens to dynamically adjust the time axis and adjust vertical scroll bars to obtain process value information for specific time stamps. However, there appears to be no functionality for adding and removing plot lines or other means of customizing trend screens within the HMI environment. Furthermore, none of the trend screens observed indicated normal operation range, alarm set points, deadband ranges, interlock points, or other elements to improve situational awareness.

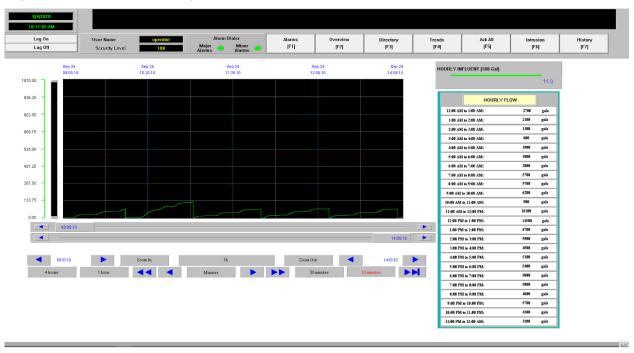


Figure 4-11. KWWTP hourly influent trend HMI screen

#### Alarm Screens

Historical alarm information is displayed on dedicated alarm summary or alarm history HMI screens at each WWTP. The Sewer Utility standard for these table-based alarm screens appears to include generation of a unique row with a time stamp for each change in alarm state, the sequence of which is typically as follows:

- 1. Alarm active and unacknowledged (displayed as UNACK ALM)
- 2. Alarm active and acknowledged (displayed as ACK ALM or ACK)
- 3. Alarm acknowledged and initiating state/value returned to normal (displayed as ACK RTN)

Separate colors are used to distinguish the various alarm states, as shown in Figure 4-12, but the colors in use differ between the WWTPs. Although there is some variation in alarm table formatting between the WWTPs, along with the time stamp and alarm state information, each row typically includes the Wonderware tag associated with the alarm, a description of the alarm, and the username of the operator who acknowledged the alarm or "None" if the alarm is unacknowledged. At CKTP, there is also an active alarm HMI screen that shows a filtered list of all current active alarms, acknowledged and unacknowledged.

Time State Tay Name Comment Co

Figure 4-12. CKTP alarm history HMI screen

During HDR's site visit to SWWTP, Sewer Utility staff explained that the alarm summary and alarm history HMI screens at the plant SCADA PC do not automatically update. HDR confirmed that the user must right-click the screen and select "Refresh" for the screens to update with current alarm information. Requiring the operator to manually refresh alarm information runs counter to the intent of providing alarm screens as a means of alerting operators to new alarms.

When alarms first become active at CKTP, an audible notification is sounded at the SCADA PC in the SPB control room. There are two distinct audible notifications for plant-based and telemetry-based alarms. Both audible notifications continue to sound until the alarm is acknowledged. Unacknowledged alarms are also displayed as flashing text in the horizontal alarm banner at the bottom of the CKTP HMI screens. Upon alarm acknowledgement, the audible notification is silenced and the flashing alarm text in the horizontal alarm banner changes to green text until the alarm becomes inactive, at which point it is removed from the banner.

At CKTP, the volume of alarm activity appears to be considerable. During its site visits, HDR observed frequent alarm annunciations at the SCADA PC in the SPB control room with Sewer Utility staff having to repeatedly stop what they are doing to acknowledge the alarms. Much of this alarm activity is caused by recurrences of the same alarms, but it appears that Sewer Utility staff do not have a way of shelving alarms to filter out nuisance alarms or alarms associated with known issues or elements of the control system requiring maintenance. Providing select, suitably credentialed Sewer Utility staff with the ability to shelve alarms could significantly reduce unnecessary distractions for Sewer Utility staff and help prevent alarm fatigue.

One typical element that appears to be missing from the alarm information presented at the HMI screens is alarm priority or criticality. All alarms seem to be presented as equally important and there does not appear to be a means for operators to quickly sort or filter



alarms by priority. Alarm priority information is crucial for operators to be able to focus their attention on the most urgent alarms. International Society of Automation (ISA)-18.2, an industry standard for alarm management (ANSI/ISA 2016), includes alarm priority as an attribute for all alarms and proposes sorting and filtering by alarm priority, along with an alarm priority color code for displaying alarms, as functional requirements of HMI design.

Based on site visit observations and discussions with Sewer Utility staff, HDR believes that the WWTP HMI systems have not been developed to include root-cause analysis and alarm suppression functionality to avoid alarm overload during process upsets. The HMI screens also do not include troubleshooting text prompts or decision tree aids, which could help operators navigate alarm conditions more efficiently.

Sewer Utility staff indicated that there was a recent Sewer Utility initiative to develop an alarm management program for the Sewer Utility with assistance from QCC, but this effort has been stalled by other priorities. Implementing an alarm management program based on the ISA-18.2 standard would improve the effectiveness of the Sewer Utility's HMI and alarm notification systems.

- \* The Sewer Utility's Wonderware InTouch software at its WWTPs is in, or will soon be entering, the mature support phase of the software developer's product life cycle, during which limited support is offered.
- \* Lack of centralized management for ICS device data and SCADA visualizations has resulted in non-standardized programming objects and visualizations at the Sewer Utility's WWTPs.
- \* At CKTP, alarm acknowledgments made at one HMI thick client are not being registered by other HMI thick clients.
- \* Horizontal alarm banner at the bottom of SWWTP HMI screens may be non-functional.
- \* Color is often the sole means of distinguishing among condition, status, and alarm state, putting operators with color blindness at a disadvantage.
- \* Red and green on/off, open/closed color schemes are not consistently applied throughout the Sewer Utility's HMI and OIT screens.
- \* Vivid colors are used for static HMI graphics elements as well as both on and off states, making it more difficult for operators to notice and focus on dynamic HMI screen elements that deserve more attention.
- \* HMI overview and process screens could be updated to include more contextual information to facilitate operator situational awareness.
- \* Sewer Utility staff have indicated that there are cases throughout the WWTP HMI process screens where the wrong engineering units are being displayed for equipment speed values.

- \* Sewer Utility staff have no means of remotely resetting pump station alarms from CKTP HMI screens. The lack of remote alarm reset requires County staff to physically visit the pump stations to reset alarms.
- \* HDR observed that there are issues with communication of analog parameters between several pump stations and CKTP. Several pump station pop-up HMI screens appear to constantly display zero values for analog parameters and historian data are also logging constant, out-of-range values for these pump station parameters.
- \* The Sewer Utility does not appear to have pump station remote monitoring capabilities for wet well level, force main pressure, pump speed, LEL, BIOXIDE/chemical storage tank level, power and energy parameters, or other analog parameters for the pump stations.
- \* Equipment pop-up windows/screens do not appear to have functionality to provide information on active alarms or conditions, not internal to the equipment, that are inhibiting the equipment from running.
- \* Equipment pop-up windows/screens could be developed to include additional electrical, diagnostic, and performance data as well as expanded motor start count information.
- \* Trend screens display current values against time only and do not provide meaningful situational awareness.
- \* Alarm summary and alarm history HMI screens at SWWTP are not automatically updated to display current alarm information.
- \* The CKTP Wonderware implementation is generating considerable alarm activity, much of which is caused by the same alarms.
- \* Sewer Utility staff do not appear to have a means of shelving nuisance alarms or alarms associated with known issues.
- \* Sewer Utility WWTP HMI screens do not appear to provide alarm priority information or allow for sorting and filtering of alarms by alarm priority.
- \* Root-cause analysis and alarm suppression functionality have not been developed for the Sewer Utility's WWTP HMI systems.
- \* HMI screens do not have troubleshooting text prompts or decision tree aids to help operators react to alarm conditions.

# 4.3 Historian

This subsection describes the Sewer Utility's historian software as well as its configuration and implementation.



### 4.3.1 Central Kitsap Treatment Plant

The Sewer Utility has Wonderware Historian 2014 R2 SP1 installed on a server in the SPB control room. This is the only historian for the Sewer Utility's wastewater infrastructure and the software is currently licensed for 5,000 tags. Wonderware Historian Client 2014 R2 SP1 software is installed on the historian server and the SCADA PC in the SPB control room. As with the 2014 R2 version of Wonderware InTouch, the 2014 R2 version of Wonderware Historian and Historian Client are also in the mature support phase of the software developer's product life cycle. Mature support is the final phase in the product life cycle, during which limited support is offered and users are encouraged to upgrade licensing to current software versions.

The CKTP historian logs SCADA data for CKTP and the Sewer Utility's pump stations. Of the Wonderware tags included in the historian's historical data, just over half of the tags are related to the pump stations.

# 4.3.2 Kingston, Manchester, and Suquamish Wastewater Treatment Plants

No historian software is installed at KWWTP, MWWTP, and SWWTP. Instead, historical SCADA data are logged once per day as an LGH file on external hard drives by the Wonderware InTouch software at the WWTPs. The historical SCADA data for each WWTP are accessible only via each WWTP's SCADA PC and have not been imported to the Sewer Utility's historian at CKTP.

### 4.3.3 Historical SCADA Data

To better quantify the Sewer Utility's historical SCADA data collection practices, HDR obtained recent Wonderware tag database export files along with samples of historical data available from each of the WWTPs. Figure 4-13 compares the quantity of Wonderware I/O tags included in the Sewer Utility's historical data to the quantity of I/O tags for which no historical data are available at each WWTP. Not all tags within the Sewer Utility's Wonderware systems merit recording of their historical values, and HDR did not perform a tag-by-tag review to determine the number of tags with values that may be worth recording. However, as the figure indicates, the Sewer Utility has no historical data for the overwhelming majority of its SCADA tags. This indicates that the Sewer Utility is not capturing data for several processes and equipment.

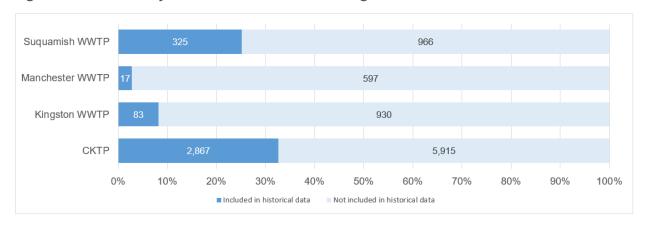


Figure 4-13. Summary of available Wonderware tags included in historical data

Note: Tag counts reflect Wonderware I/O tags only and do not include other Wonderware tag types (e.g., memory tags).

Historical data are the foundation for process and equipment performance evaluation, predictive maintenance, process control optimization, and several other modern, datacentric technologies and infrastructure management practices. Identifying these and other specific use cases for data derived from its SCADA system would help the Sewer Utility assess which data are required to obtain the information it desires. After determining its historical data requirements, the Sewer Utility would then have to augment its data collection practices by recording historical data for more of the available Wonderware tags and, most likely, integrating new data sources into its Wonderware system.

## 4.3.4 Sewer Utility Use of Historical SCADA Data

Sewer Utility staff have indicated that accessing historical SCADA data is cumbersome. At CKTP, staff can use the Wonderware add-in for Excel to obtain historical data for selected tags based on a user-defined period and frequency. At the other WWTPs where there is no historian, staff must use a third-party software application called LGH File Inspector to obtain historical data from the LGH files stored on the plant's SCADA PC external hard drive. Though both of these methods are capable of serving historical data, they are time-consuming, are ill-suited for handling large queries, and present a barrier to ad hoc data exploration.

Currently, the Sewer Utility is not using data visualization tools to access and derive meaning from its historical SCADA data. HDR is also not aware of any dashboards that have been developed for the Sewer Utility to contextualize real-time or historical SCADA data. Data visualization tools could greatly improve the Sewer Utility's ability to leverage its historical SCADA data.

Given the cumbersome access and manipulation requirements and lack of data visualization tools, finding applications for historical SCADA data can be challenging. Unsurprisingly, Sewer Utility staff have reported that SCADA data are not being leveraged beyond data required for mandatory reporting. HDR believes that the SCADA data used for reporting are collected via a manual process involving Excel spreadsheets and that the Sewer Utility has not implemented automated reports for SCADA data at any of the WWTPs.



- \* The Sewer Utility's Wonderware Historian and Historian Client software at CKTP is in the mature support phase of the software developer's product life cycle, during which limited support is offered.
- \* The historical SCADA data for KWWTP, MWWTP, and SWWTP are accessible only via the SCADA PC at each WWTP and have not been imported to the Sewer Utility's historian at CKTP.
- \* The Sewer Utility has no historical data for the overwhelming majority of its SCADA tags, and the Sewer Utility is not capturing data for several processes and equipment.
- \* The Sewer Utility's means of accessing its historical SCADA data are time-consuming, are ill-suited for handling large queries, and present a barrier to ad hoc data exploration.
- SCADA data are not being leveraged beyond data required for mandatory reporting.
- \* The Sewer Utility has not implemented automated reports for SCADA data at any of the WWTPs.
- \* The Sewer Utility is not using data visualization tools to access and derive meaning from its historical SCADA data.

## 4.4 Alarm Notification Software

The Sewer Utility uses WIN-911 for its alarm notification software at all of its WWTPs. At KWWTP, MWWTP, and SWWTP, WIN-911 software is configured to send voice messages over the public switched telephone network (PSTN) via a Dialogic analog telephony card installed in the plant SCADA PC. These remote alarm notification voice messages are sent during hours when the WWTPs are unattended. Sewer Utility staff indicated that the software is configured to first dial operations staff at CKTP, then the on-call operator, followed by the on-call supervisor, advancing to the next number on the roster when acknowledgment has not been received within a set period. The software continues to cycle through the roster until the alarm is acknowledged.

Voice message call-out via PSTN is the only means of remote alarm notification for KWWTP, MWWTP, and SWWTP. There is no redundant alarm notification method, such as Short Message Service (SMS) text messages, at these WWTPs. Failure of the analog telephony card or disruption of telephone service to the WWTP would result in loss of remote alarm notification for the WWTP.

At CKTP, the WIN-911 software installed on the SCADA PCs in the SPB control room and management office has been configured to send both voice messages and SMS text messages simultaneously. Alarm notifications are typically sent out at all hours of the day, but can be enabled or disabled via the SCADA PC HMI screens. Voice messages are communicated over PSTN via Universal Serial Bus (USB) analog modems connected to the two SCADA PCs. SMS text messages are communicated via cellular

modems connected to the SCADA PCs' Recommended Standard (RS)-232 serial interface. The redundant alarm notification methodology in place for CKTP and pump station alarms is consistent with industry best practices.

Sewer Utility staff indicated that individuals receiving alarm notification voice messages or SMS text messages are prompted to enter a code to acknowledge the alarm. However, if operators call in to the WIN-911 system to request a listing of active alarms, the system always reports that there are no active alarms. HDR did not investigate the issue to determine a root cause.

HDR did not review listings of WWTP and pump station alarms for which remote alarm notification is provided. Determination of which alarms to include in remote alarm notification should be included in the Sewer Utility's alarm management program initiative referenced previously.

- \* There is no redundant alarm notification method for KWWTP, MWWTP, and SWWTP. Failure of the SCADA PC's analog telephony card or disruption of telephone service to the WWTP would result in loss of remote alarm notification for the WWTP.
- \* Sewer Utility staff indicate that an unresolved issue with the Sewer Utility's WIN-911 implementation prevents operators from obtaining a listing of active alarms when calling in to the WIN-911 system.



### Industrial Control System Documentation 5

This section summarizes documentation associated with the Sewer Utility's ICS. It describes the type of documents that the Sewer Utility has available along with a general description of how they are organized and maintained.

#### 5.1 Piping and Instrumentation Diagrams

A collection of design and record drawings from past projects at its WWTPs and pump stations is hosted on the County's eO&M SharePoint site. Some P&IDs can be found throughout these documents, but the relevant record P&IDs for all WWTP or pump station processes are not maintained in consolidated P&ID drawing sets or located in one location. To navigate through the P&IDs between connected processes that were installed or modified under separate projects, the user must browse through different drawing sets.

HDR did not confirm how accurately record P&IDs reflect current conditions or the level of completion of the P&ID record documentation. However, a few general comments can be made. The most recent P&IDs found for MWWTP are from 1996 and observations made during HDR's site visit suggest that they are in need of updating. Based on the revisions to the MWWTP chemical system, abandonment of the WAS system, and revisions to the former SBRs, MWWTP will likely require an in-depth field survey to adequately document as-built conditions. Also, the available P&IDs for SWWTP are very limited. Aside from P&IDs developed for the plant's sludge thickening processes during the recent SWWTP Thickening project, no detailed P&IDs appear to be available for SWWTP.

- Record P&IDs are not maintained in consolidated drawing sets or located in one location.
- Record P&IDs for MWWTP are out of date.
- Aside from P&IDs recently developed for the SWWTP sludge thickening processes, no detailed P&IDs appear to be available for SWWTP.

#### 5.2 Control Strategies

The County's eO&M SharePoint site includes narratives documenting general control descriptions for the major CKTP processes. However, the Sewer Utility has yet to add similar narratives for the processes at the other WWTPs or the wastewater pump stations. HDR understands that the County's eO&M SharePoint site is a work in progress and that the Sewer Utility is working on adding content for some of its wastewater infrastructure.

Aside from the CKTP narratives, the Sewer Utility does not maintain control strategies in electronic format that document how the WWTP and pump station processes and equipment are currently controlled locally and via SCADA. These documents are critical for understanding how WWTP and pump station processes are operating, and for

evaluating their performance based on data obtained through SCADA. In the absence of record control strategy documentation, modifications to PLC programming, instrumentation, equipment configuration, and set points may go undocumented and can lead to disparities in understanding among management, operations, and other technical personnel over time. SOP documentation can also fall out of alignment with how equipment is being operated.

Sewer Utility staff indicated that operators currently log process control changes in log books kept at the WWTPs. Physical records do not provide an efficient means of reviewing past process control iterations and comparing previous settings with historical SCADA data. Also, if the log books were lost or damaged, the Sewer Utility would lose all information contained therein.

HDR observed that some of the Sewer Utility's pump stations have hand-drawn sketches taped to control panel enclosures that document the station's level set points for pump control and alarms (see Figure 5-1). HDR believes that these sketches are the most current documentation for pump control and level alarms at these stations.




Figure 5-1. PS-17 level set point documentation

- \* General control descriptions have yet to be added to the County's eO&M SharePoint site for the major processes at KWWTP, MWWTP, and SWWTP and wastewater pump stations.
- ★ The Sewer Utility does not maintain as-implemented control strategies for its WWTPs and pump stations.



- \* The Sewer Utility is currently logging process control changes in physical operator log books and not in a more readily accessible, electronic format that can be backed up to prevent loss of information.
- \* PLC programming modifications may be occurring without documentation of changes made to process controls.

## 5.3 Control Panel Drawings and Loop Diagrams

Several sets of control panel drawings and loop diagrams can be found on the County's eO&M SharePoint site. The most useful of these drawings are the systems integrator shop drawings included in the O&M folders for the various WWTPs and pump stations. Though these shop drawings are not maintained in consolidated drawing sets, they are relatively easy to locate.

In general, documentation for recent control system additions and modifications appears to be fairly complete. One notable exception to this observation is the 2018 control system upgrade at MWWTP. Record drawings for this work were not available on the County's eO&M SharePoint site, and HDR had to request record drawings for this upgrade from QCC. Documentation for control system work executed on older projects is limited.

In addition to the electronic record drawing collection hosted on the County's eO&M SharePoint site, a hard-copy set of the control panel drawings and loop diagrams associated with a control panel can be found in most control panels.

The County eO&M SharePoint site is missing record drawings from 2018 control system upgrade at MWWTP.

## 5.4 O&M Documentation

The Sewer Utility has documentation for several WWTP and pump station processes, equipment, and control system components available on its eO&M SharePoint site. Aside from control system drawings and documentation previously discussed in this section, HDR did not review this documentation in detail as part of its site assessment work.

## 5.5 ICS Standards and Governance Documentation

In its review of available documentation on the County's eO&M SharePoint site, HDR was unable to locate any ICS standards and governance documentation. Based on discussions with Sewer Utility staff, HDR believes that the Sewer Utility does not have formal documents to guide third-party design and implementation efforts. When an organization's standards are well-developed and documented, expectations for quality, work approach, and results are easily ascertainable from the standards documents. This helps an organization ensure that work is performed in a consistent and desirable manner throughout the ICS and establishes a basis for effectively managing the performance of internal and contracted staff.

In recent years, the Sewer Utility has been managing the quality of ICS implementation work at its facilities by restricting the pool of systems integrators eligible to perform the work to two local, trusted firms that are familiar with the Sewer Utility's infrastructure. Though cultivating a healthy relationship with one or two local competent systems integrators is highly recommended, it is important to take into consideration that systems integrators' workload can fluctuate and these trusted firms may not always be immediately available to perform work for the Sewer Utility. Good ICS standards documentation becomes especially important at times like these when an organization must entrust ICS work to contractors or systems integrators that may be less skilled and/or familiar with the Sewer Utility's infrastructure and preferences. ICS standards documentation can also communicate the Sewer Utility's requirements and preferences to consulting engineers so that their designs adequately capture these elements in the contract documents.

The Sewer Utility does not have formal ICS standards documentation to guide third-party design and implementation efforts.



### 6 Other Software Packages

This section provides an overview of the non-ICS software packages at the Sewer Utility's WWTPs that bear a relationship to the Sewer Utility SCADA system and/or the assets with which it interacts. It includes a description of the software tools and provides a general summary of their current uses at Sewer Utility facilities.

#### 6.1 Computerized Maintenance Management System

The Sewer Utility has selected LLumin for its computerized maintenance management system (CMMS) software. LLumin software is a web browser-based application that provides management and tracking of assets, work orders, spare-parts inventory, and asset financials. The software can be extended with modular licensing to unlock additional functionality such as asset condition assessment tracking and integration with SCADA software platforms.

Sewer Utility staff are in the process of entering assets and their attributes into the LLumin database. Current focuses are adding critical assets and entering installation date and expected useful life data for assets that have already been added to the database. As part of the data entry process, the Sewer Utility is revising its asset tagging convention to establish a new tagging system that will be applied consistently throughout Sewer Utility infrastructure. At the time of HDR's site assessment visits, electrical, control, and instrumentation assets had yet to be entered for MWWTP and SWWTP. HDR also could not find any OT network equipment assets in the LLumin asset database.

The Sewer Utility is now using LLumin for scheduling and tracking reactive and preventive maintenance work orders for assets already entered into the database. Figure 6-1 shows a visualization summarizing open work orders in the LLumin system taken from a screenshot obtained by HDR during its site assessment visits. The Sewer Utility has not integrated the LLumin software with its SCADA system and CMMS and SCADA data remain siloed. Because no data exchange has been established, there are no SCADA-generated work orders based on accumulated runtime, alarms, or other events.



Figure 6-1. Open work orders visualization from LLumin home page

Sewer Utility staff indicated that the Sewer Utility has purchased the LLumin Data Collection and Condition Assessment module but that staff have yet to begin using its features. Among other things, the module will allow staff to log measurements, observations, photos, and other data via mobile devices during equipment inspections. The data collected during inspections can then be automatically compared with preset rules that trigger additional maintenance steps when field data fall outside of normal conditions. Currently, Sewer Utility O&M staff work from PCs and do not have tablets, which presents a barrier to incorporating this software tool into existing workflows.

- Data entry of WWTP and pump station assets and their attributes into the LLumin database has yet to be completed.
- The Sewer Utility's CMMS and SCADA data remain siloed and the Sewer Utility has not implemented automated work orders based on accumulated runtimes, alarms, and other events registered at the SCADA system.

#### 6.2 **Energy Management System**

At CKTP, an EMS was installed under the Resource Recovery project. This EMS consists of a dedicated EMS PC running GE's EnerVista Viewpoint software, GE Multilin EPM 6000 power monitors installed in several of the CKTP MCCs and switchgear SWGR-2960 (see Figure 6-2), a GE Multilin EPM 9650 power quality meter in CKTP's medium-voltage service entrance switchgear (SWGR-2940), and the GE Entellysis lowvoltage switchgear (SWGR-2961) installed in the SPB. CKTP's EnerVista Viewpoint oneline diagram screen in Figure 6-3 depicts an overview of this EMS infrastructure.

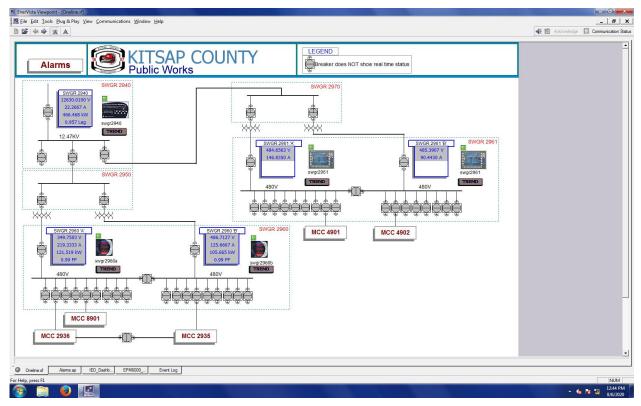


Figure 6-2. GE EPM 6000 power monitor



Source: GE.

Figure 6-3. CKTP GE EnerVista Viewpoint one-line diagram screen



As Figure 6-3 indicates, CKTP's standby generators and large electrical loads, like the aeration blowers, have not been integrated into the EMS. Several of the CKTP MCCs and some of the power monitors installed at CKTP are also absent from the EMS. Power monitors have not been installed in the MCCs located in the digester control building (MCC 2), power/blower building (MCC 2971, MCC 2972, MCC 2973, and MCC 2974), headworks building (MCC 2975 and MCC 2976), or SPB (MCC 2981, MCC 2982, MCC 2983, and MCC 2984), so no power data are monitored by the EMS for these MCCs. The two power monitors located in the UV disinfection facility (JIT 3101 and JIT 3102)

have also not been integrated into the EMS. Instead, the CKTP SCADA system monitors limited power data from the UV disinfection power monitors, of which it appears that only kilowatt (kW) values are recorded in the CKTP historian.

For the electrical distribution system buses that are included in the EMS, the EnerVista Viewpoint software has been configured to display real-time, minimum, maximum, and average values for several parameters, including phase current, line and phase voltage, power factor, real power, reactive power, apparent power, and total harmonic distortion (THD) (current and voltage). The software has also been configured to monitor several additional status and alarm parameters associated with the Entellysis low-voltage switchgear and its individual breakers. However, despite monitoring the requisite data, the various one-line diagram screens in the EnerVista Viewpoint software have not been configured to display breaker statuses for SWGR-2961. Because the EMS does not monitor breaker or switch statuses for any of the other electrical distribution system buses, the one-line diagram screens do not indicate those statuses either.

During its site visits, HDR observed that the Ethernet cable connecting the CKTP EMS PC to the network switch in the SPB control room network cabinet was not fully connected and the EnerVista Viewpoint software was not displaying real-time values. After Sewer Utility staff connected the PC to the switch, the software began displaying real-time values. However, HDR observed that the EnerVista Viewpoint software had never been set to record any of the real-time power data that it is monitoring. Unfortunately, it appears that the Sewer Utility has not generated any historical EMS data since the EMS was installed. HDR initiated the trending process within the software so that the EMS PC is now recording real-time data at a default of 1-minute intervals.

Even if historical EMS data were available, the CKTP EMS and SCADA system have not been integrated and their respective data sets remain separate. Furthermore, the Sewer Utility is not currently using power or energy data at the bus level (as monitored by the EMS) or load level (as monitored by SCADA via network VFDs and overload relays) to establish plant, process, or asset baselines or to evaluate process and equipment performance. Power and energy data are central to several KPIs used for individual equipment assets, plant processes, and WWTPs as a whole. If the Sewer Utility wishes to leverage energy-based KPIs to establish operational and/or maintenance goals and to then measure progress toward those goals, it will need to develop a strategy for collecting and managing the power and energy data that those KPIs require.

This strategy should also include the Sewer Utility's other WWTPs and wastewater pump stations. Currently, the Sewer Utility does not have EMS software installed at KWWTP, MWWTP, or SWWTP. It also appears that the power monitors installed at the KWWTP and MWWTP MCCs are not networked to the WWTP PLCs or SCADA PCs. The CKTP EMS and SCADA system are also not monitoring power and energy data that may be available from power monitors and other electrical equipment at the Sewer Utility's pump stations. Aside from Puget Sound Energy billing data and a few load-level power parameters recorded by the CKTP historian, HDR believes that the Sewer Utility has little to no historical power and energy data for its WWTP and wastewater pump station infrastructure.



- CKTP standby generators and large electrical loads (e.g., aeration blowers) have not been integrated into the CKTP EMS.
- Several MCCs at CKTP have no power monitor installed, which prevents them from being included in the CKTP EMS.
- Power monitors installed at the CKTP UV disinfection facility have not been integrated into the CKTP EMS.
- With the exception of SWGR-2961, the CKTP EMS is not monitoring switch and breaker statuses for the major electrical distribution system buses at CKTP.
- The CKTP EMS one-line diagram screens have not been configured to display current breaker statuses for SWGR-2961.
- It appears that the Sewer Utility has not generated any historical EMS data since the CKTP EMS was installed because the EMS software was never set to record any of the real-time power data that it monitors.
- The Sewer Utility is not currently using power or energy data at the bus level or load level to establish plant, process, or asset baselines or to evaluate process and equipment performance.
- Power monitors installed at the KWWTP and MWWTP MCCs are not networked to the WWTP PLCs or SCADA PCs.
- The CKTP EMS and SCADA system are not monitoring power and energy data that may be available from power monitors and other electrical equipment at the Sewer Utility's pump stations.
- Aside from Puget Sound Energy billing data and a few load-level power parameters recorded by the CKTP historian, HDR believes that the Sewer Utility has little to no historical power and energy data for its WWTP and wastewater pump station infrastructure.

#### 6.3 Laboratory Information Management System

Currently, the Sewer Utility is recording laboratory data with Excel spreadsheets and HDR believes that much, if not all, of the associated data entry and processing is manual. Monthly lab reports for the Sewer Utility's four WWTPs are available on the County eO&M SharePoint site. If the laboratory data included in these monthly reports also reside in a Sewer Utility database, HDR is not aware of it. Without a database for laboratory data or laboratory information management system (LIMS) software, working with the Sewer Utility's historical laboratory data is likely to be labor-intensive. Because WWTP laboratory data factor into several plant and process KPIs, it is critical that these data be easily accessible to Sewer Utility staff and available to other Sewer Utility software platforms.

At the time of this writing, HDR believes that the Sewer Utility is negotiating contract terms and conditions with Hach for the installation and licensing of Hach Water Information Management Solution (WIMS) software, which would serve as the Sewer Utility's LIMS. The Sewer Utility has already purchased server and client hardware on which to install the software and Sewer Utility staff intend to add the machines to the WWTP OT networks. Based on review of Hach's scope of work, HDR believes that Hach WIMS client software will be installed on three PCs at CKTP and one PC each at KWWTP, MWWTP, and SWWTP. Hach LAB Cal software will also be installed on one of the three PCs at CKTP. The Hach WIMS server and database software will be installed on a server located at CKTP. The Sewer Utility also intends to purchase Hach WIMS SCADA Interface software for Wonderware InTouch to enable data exchange between the two software platforms.

\* HDR believes that the Sewer Utility laboratory data are recorded in Excel spreadsheets and do not currently reside on a database, which makes working with the data labor-intensive.

# 6.4 Data Analytics and Visualization Software

The Sewer Utility is not currently using data analytics or visualization software to work with its CMMS, EMS, laboratory, SCADA, and other data sets outside of their respective software environments. Data analytics and visualization software tools are often highly customizable and can be used to combine data from multiple sources to derive insights that may be difficult or impossible to achieve within the constraints of separate, purposebuilt software packages that were developed to serve specific data sets. Many of these tools are also designed with large data sets in mind and can handle manipulations of large blocks of historical data that may cause performance degradation if attempted within some of the Sewer Utility's other software platforms. If the Sewer Utility wishes to pursue a more data-centric approach to the operation and maintenance of its wastewater infrastructure, data analytics and visualization software will become an essential addition to the Sewer Utility's tool set.

\* The Sewer Utility is not currently using data analytics or visualization software to derive insights from its CMMS, EMS, laboratory, SCADA, and other data sets outside of their respective software environments.



# 7 Organizational Improvement Categories

This section presents five organizational improvement categories that apply to utility control systems and how they will be applied within the Sewer Utility SCADA Master Plan to relate risks, deficiencies, and proposed improvements to facets of the Sewer Utility's organizational health.

# 7.1 Organizational Improvement Categories

Not all stakeholders involved with CIP investments in SCADA technologies or who interact with and/or rely on ICS infrastructure have the same degree of familiarity and experience with the associated hardware, software, and technical nuances. It can therefore be beneficial to correlate current risks and deficiencies, as well as proposed investments in specific technological improvements, with more widely understood facets of organizational health. These correlations can help provide context for identified shortcomings and vulnerabilities that may be rooted in technologies outside of some stakeholders' areas of expertise. They can also emphasize the organizational gains that are anticipated from a particular upgrade in a way that may be understood more readily than the technical description of the upgrade alone.

HDR presented five organizational improvement categories that apply to utility control systems during the Sewer Utility SCADA Master Plan kickoff meeting held on July 22, 2020. These organizational improvement categories, depicted in Figure 7-1, are described in the following subsections. The framework provided by these organizational improvement categories will be carried through the various Sewer Utility SCADA Master Plan TMs, contextualizing risks and deficiencies identified in TM-1, guiding development of objectives and technology selection, and relating proposed implementation plan projects to improvements in the Sewer Utility's organizational health.

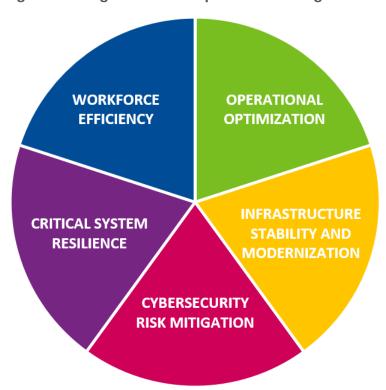


Figure 7-1. Organizational improvement categories

## 7.1.1 Operational Optimization

This category covers deficiencies and improvements related to an organization's processes, control strategies, and procedures. Deficiencies that fall under this category might include labor-intensive data management practices, manual operation of equipment that could be automated, and unrefined control loops that result in unnecessary energy consumption (e.g., over-aeration). Operational optimization improvements may consist of equipment and instrumentation upgrades to WWTP processes, improved or increased automation, streamlined workflows, and other enhancements that lower operating costs and/or improve product quality (e.g., effluent, dewatered solids, etc.).

## 7.1.2 Infrastructure Stability and Modernization

This category focuses on the health and reliability of the organization's assets. Typical organizational efforts within this category include predicting and avoiding failure scenarios, replacing assets that are near the end of their useful lives, asset management initiatives, and ensuring the availability of manufacturer support for the organization's assets. Deficiencies that fall under this category might include failed instrumentation and reliance on discontinued products that are no longer supported by the manufacturer. Improvements in this category can include replacement of legacy hardware, software and firmware upgrades, and upgrading the organization's technology to obtain the benefits from enhanced functionality available in current market offerings.



### 7.1.3 Cybersecurity Risk Mitigation

According to DHS, critical infrastructure like wastewater facilities is facing increasing risks from cybersecurity threats. Where the technological barrier once limited the number of threat actors to individuals and organizations with intermediate to advanced skills and knowledge, several sophisticated tools have been developed and made accessible to anyone with an Internet connection. These tools have lowered the barrier to entry and increased the effectiveness of less skilled individuals, and, along with their proliferation, cyber-attacks on water and wastewater infrastructure are becoming more common.

The cybersecurity risk mitigation category is focused on improving the organization's cybersecurity posture. Deficiencies that fall under this category might include exposure of critical ICS infrastructure to the public Internet, poor password practices, and unpatched network appliances with known vulnerabilities. Improvements in this category can include modifications to network architecture, hardening of components, device configuration, and preparing for an effective response to a cybersecurity incident.

## 7.1.4 Critical System Resilience

Even when best practices are adopted, equipment and software can fail. Organizations can prepare for these failures by incorporating redundancy into ICS designs and establishing scripted procedures to guide staff response after failures occur. However, it is impossible for an organization to prepare for every failure scenario. Unexpected events happen and these events can disrupt ICS functionality.

The critical system resilience category is focused on identification and mitigation of potential failure scenarios before they happen as well as developing the organization's ability to recover from unplanned disruptions. Deficiencies that fall under this category might include critical ICS infrastructure without UPS battery backup power, poor data backup practices, and lack of redundancy in critical network infrastructure. Improvements in this category can include establishing redundancy for critical ICS components, revisions to network topologies, and implementing measures to protect against irrecoverable data loss.

## 7.1.5 Workforce Efficiency

The workforce efficiency category focuses on empowering an organization's staff and eliminating barriers to workforce performance. Many of the improvements related to this category have to do with providing staff with the information they need, when and where they need it, and introducing technologies that deepen insight and enable increased efficiency. Other enhancements in this category seek to capture institutional knowledge in the tools, documentation, and technologies used by an organization's staff to streamline knowledge transfer for new hires, accelerate the development of junior staff, and efficiently communicate organizational standards and expectations to contracted parties. Deficiencies that fall under this category might include cumbersome access to real-time and historical SCADA data, poor documentation practices, and ineffective HMI screen design that provides little situational awareness to operators.

This page intentionally left blank.



### Risk and Deficiency Summary 8

Table 8-2 compiles the risks and deficiencies associated with the Sewer Utility's OT networks, SCADA system components, and associated infrastructure that were identified in previous sections of TM-1. The table includes subsection references to assist readers in locating the specific subsections where each risk and deficiency is described in more detail. The table also correlates each risk and deficiency to one or more of the organizational improvement categories introduced in Section 7. Applicable organizational improvement categories are denoted with one or more "\*" symbols in their respective columns.

To help communicate the significance of various risks and deficiencies, a ranking system has been applied based on the quantity of "∗" symbols shown for a given organizational improvement category. The ranking system is defined in Table 8-1. Risks and deficiencies from each TM-1 section are sorted in Table 8-2 so that the most significant risks and deficiencies from each section appear first.

Table 8-1. Risk and deficiency ranking system description

Ranking	Description
***	<b>Major</b> risk or deficiency. Immediate corrective measures are recommended and/or major organizational health benefit(s) to be gained from related improvements.
**	<b>Moderate</b> risk or deficiency. Near-term corrective measures are recommended and/or significant organizational health benefit(s) to be gained from related improvements.
*	<b>Minor</b> risk or deficiency. Corrective measures are recommended, but likelihood and/or impact of failure/event may be low. Some organizational health benefit(s) to be gained from related improvements.

Table 8-2. WWTP and pump station PLC summary

	_						
Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.7	There is a direct connection between CKTP business LAN and OT network switches in the SPB control room network cabinet. This direct connection between the business LAN and OT network presents a significant security risk for the OT network.			***		
Network Architecture	2.7	A cellular router was found connected to the unmanaged OT network switch in the SPB control room network cabinet. The device could provide a backdoor into the CKTP OT network for external devices that the Sewer Utility has no control over, bypassing security measures in place for the network. Sewer Utility staff have since disconnected the cellular router from the network.			***		
Network Architecture	2.13	No automated or manual backup procedures appear to be in place for the historical SCADA data contained on the CKTP historian. Failure of the CKTP historian server could result in loss of CKTP's historical SCADA data.				***	
Network Architecture	2.13	Historical SCADA data for KWWTP, MWWTP, and SWWTP may exist only on external hard drives connected to the SCADA PCs at the WWTPs. Failure of the external hard drive or a catastrophic event that impacts the SCADA PC and external hard drive may result in loss of the WWTP's historical SCADA data.				***	
Network Architecture	2.3	Pump stations on the VHF licensed radio WAN experience long delays in communication of pump station statuses and alarms, which have presented challenges to County staff in providing timely responses to critical pump station alarms and accurate calculations of accumulated equipment runtimes.	**				*
Network Architecture	2.2	Given the current network arrangement, the most critical network switch in the CKTP OT network is a single point of failure for the network.				**	



Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.2	CKTP OT network arrangement in PNL 8580A has created multiple single points of failure for communication between CKTP SCADA nodes and all of the plant PLCs.				**	
Network Architecture	2.2	CKTP OT network has no resilience because of a lack of access switch and cable path redundancy, and there are instances where lack of OT network redundancy may undermine process redundancy.				**	
Network Architecture	2.2	Improving CKTP OT network resilience could prevent loss of SCADA monitoring and control functionality and continue logging of historical SCADA data in the event of singular network component or cable failure.				**	
Network Architecture	2.3	Currently, Sewer Utility staff do not have a central location where all WWTP SCADA systems can be monitored and controlled.					**
Network Architecture	2.3	The lower bandwidth inherent in VHF-based telemetry is ill-suited for increased data exchange between the pump stations and the CKTP SCADA system and would constrain the Sewer Utility's objective of near real-time monitoring and alarming for wastewater pump stations.		**			
Network Architecture	2.3	Four of the six pump stations with historically poor VHF communications remain on the VHF licensed radio WAN. Planned modifications for the Manchester area pump stations may improve communications for those pump stations.		**			
Network Architecture	2.3	The CKTP SCADA system does not appear to be accurately recording communication status data for the pump stations on the cellular WAN.		**			
Network Architecture	2.7	Public IP addresses are assigned to IP nodes within the CKTP and SWWTP OT networks.			**		

Table 8-2. WWTP and pump station PLC summary

		<u> </u>					
Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.7	There appear to be parallel entry points to the SWWTP OT network from external networks: one via SWWTP's Tempered Networks HIPswitch and one via a secure gateway used for the SWWTP business LAN wireless access point.			**		
Network Architecture	2.9	Because of inherent security risks with VNC-based applications, HDR recommends transitioning away from VNC sessions for remote access to the Sewer Utility's OT networks.			**		
Network Architecture	2.9	Users accessing the WWTP OT networks remotely share a common password, which means that no AAA measures are in place for remote access to the WWTP OT networks.			**		
Network Architecture	2.9	MFA for remote access sessions to the WWTP OT networks would provide additional security for the network in conjunction with the adoption of AAA measures.			**		
Network Architecture	2.10	The Sewer Utility's Tempered Networks Conductor instance has generic user accounts that do not allow for adequate user authentication or attributing of any security modifications made to a specific individual.			**		
Network Architecture	2.10	No MFA measures are in place to secure access to the Sewer Utility's Tempered Networks Conductor instance.			**		
Network Architecture	2.10	Multiple user types are allowed to assume remote control over SCADA PCs on the Sewer Utility's OT networks, which may be providing some users with more permissions and access to OT network resources than they require. Sewer Utility OT network remote access use cases need to be defined so that appropriate security controls can be identified and implemented.			**		
Network Architecture	2.10	The Sewer Utility's Airwall edge services do not have current firmware versions installed.			**		



Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.10	The HIPswitch 100g installed at CKTP appears to be limited to 5 Mbps of data throughput. Given the intended application for SCADA-related data exchange between CKTP and the other WWTPs, this amount of throughput will likely be inadequate for the Sewer Utility's near-term needs.		**			
Network Architecture	2.11	Some of the PCs on the CKTP OT network have likely been in service for 5 to 7 years and should be replaced as part of the Sewer Utility's planned Wonderware upgrade at CKTP.		**			
Network Architecture	2.11	Operating system login sessions are maintained on CKTP OT network PCs and a common username and password is shared by all users.			**		
Network Architecture	2.12	Unprotected OT network components share space with exposed plumbing and mechanical equipment in the CTKP administration and lab building electrical room.				**	
Network Architecture	2.12	Status and alarms are not monitored for UPSs that provide power to SCADA PCs and servers and OT network equipment. The installed UPSs also have no remote monitoring capability.				**	
Network Architecture	2.12	KPUD-owned Carrier Ethernet access switches that provide communication between KWWTP, MWWTP, and SWWTP and CKTP are not on UPS power.				**	
Network Architecture	2.12	The Sewer Utility's current strategy of allocating small, dedicated UPSs for OT network PCs, servers, and other critical loads provides very limited battery backup times for this equipment, leaving the Sewer Utility reliant on the proper functioning of the standby generators to keep the equipment online during power outages.				**	
Network Architecture	2.13	No automated or manual procedures are in place for establishing off- site backups of Sewer Utility WWTP SCADA data or ICS configuration and programming files.				**	

Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.13	No automated or manual backup procedures appear to be in place for backing up the Sewer Utility OT network PCs and servers.				**	
Network Architecture	2.16	The Sewer Utility does not have a formal cybersecurity incident response program for the OT networks it manages.			**		
Network Architecture	2.11	CKTP OT network has been set up as a workgroup. Implementing a domain for the OT network would allow the Sewer Utility to manage all user accounts and permissions on a single server and enable segmentation of the OT network to increase security and optimize network performance.	*		*		*
Network Architecture	2.14	The Sewer Utility does not have software tools to monitor the CKTP OT network and manage its performance.	*		*		*
Network Architecture	2.5	Several unmanaged switches at CKTP are recommended for replacement with managed switches to mitigate risks to network stability and security.		*	*		
Network Architecture	2.14	The Sewer Utility does not have a syslog server or other central repository for collecting CKTP OT network device logs and network event data.			*		*
Network Architecture	2.2	The access switch serving the CKTP SCADA PCs and historian server is an unmanaged switch, which propagates undesirable broadcast and multicast packets generated by the operating systems on those machines throughout the network.		*			
Network Architecture	2.2	KWWTP OT network has no resilience because of a lack of access switch and cable path redundancy, and this lack of OT network redundancy may undermine liquid stream process redundancy.				*	



Table 8-2. WWTP and pump station PLC summary

			Operational optimization	nfrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	orce
Section	Sub- section	Risk or deficiency	Opera optim	Infras stabili mode	Cyber risk m	Critica	Workforce efficiency
Network Architecture	2.3	The pump station communication efficiency parameter values displayed at the CKTP SCADA HMI and logged in the CKTP historian may be misrepresenting actual VHF licensed radio WAN radio path performance because of the calculations used in the MTU PLC programming.	*				
Network Architecture	2.4	An OM1 fiber-optic patch cable has been used to patch two OM3 fiber-optic cables at the fiber-optic patch panel within PNL 2920 in the CKTP power/blower building. This patch cable should be replaced with a suitable OM3 patch cable.		*			
Network Architecture	2.4	There are instances of UTP Category cables with insufficient voltage insulation ratings connecting IP nodes within 480 VAC equipment enclosures at CKTP and PS-67.		*			
Network Architecture	2.5	The Sewer Utility has not standardized on a specific managed switch, which can lead to stocking of additional spare switches to facilitate rapid switch replacement in the event of switch failure.	*				
Network Architecture	2.5	All ports on most switches throughout the Sewer Utility OT networks are capping connected devices at the theoretical 100 Mbps limit inherent in the switch ports. As data volumes increase within the Sewer Utility's OT networks in the coming years, the port speeds supported by these switches may become a limiting factor.		*			
Network Architecture	2.5	Several managed switches on Sewer Utility OT networks are accessible via manufacturer default username and password.			*		
Network Architecture	2.6	The Sewer Utility has not implemented on-site tablet-based workflows for Sewer Utility staff, which can improve workforce efficiency and increase staff engagement with ICS software.					*

Table 8-2. WWTP and pump station PLC summary

		·					
Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.7	The subnet assigned to the CKTP OT network effectively limits the network to 254 connected devices. The Sewer Utility will require a larger pool of IP addresses to support additional devices in the future and adapt to the proliferation of IP devices that is becoming the norm in the industrial automation industry.		*			
Network Architecture	2.7	Unused network switch ports are enabled and assigned to active VLANs throughout the Sewer Utility's OT networks.			*		
Network Architecture	2.9	UltraVNC encryption plugin is not enabled. Security of VNC sessions used to establish remote access to WWTP OT networks could be increased by enabling encryption at the VNC application layer.			*		
Network Architecture	2.10	On-call staff, QCC, and I&C technicians all share access to the Tempered Networks Kitsap Telemetry overlay network. This may be allowing access to PLCs and other OT network resources that on-call staff do not require access to and complicates management of third-party access to the Sewer Utility's OT network.			*		
Network Architecture	2.10	Devices are included in the Tempered Networks Kitsap IC overlay network that County staff may not need to access remotely. If remote access is not required for these devices, they should be removed from the overlay network as a security precaution.			*		
Network Architecture	2.10	HIPswitches are providing a single layer of defense at the periphery of the Sewer Utility's OT networks, which does not adhere to Defense-in-Depth strategies recommended by DHS and other information security organizations.			*		
Network Architecture	2.10	Communication links between KWWTP, MWWTP, and SWWTP and CKTP have no redundancy.				*	
Network Architecture	2.10	Pump station and CKTP MTU VHF radios have AES encryption disabled, which exposes the pump station VHF licensed radio WAN to eavesdropping and security risks.			*		



Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.11	KWWTP, MWWTP, and SWWTP SCADA have likely been in service for 3 to 4 years and should be replaced as part of the Sewer Utility's planned Wonderware upgrade at the plants.		*			
Network Architecture	2.12	Physical security at the Sewer Utility WWTPs could be improved by introducing camera systems and providing monitoring and alarming of more of the building entrances during hours when the WWTPs are unattended.			*		
Network Architecture	2.12	Network cabinet and network panel PNL-8580A are routinely left unlocked.			*		
Network Architecture	2.12	Construction activity at KWWTP is generating a significant amount of dust in the space occupied by KWWTP's Internet service demarcation appliance.				*	
Network Architecture	2.13	Backups of PLC programming project files could be better organized to improve version control.				*	
Network Architecture	2.13	The Sewer Utility is not leveraging virtualization for the PCs and servers in its OT networks. Recovering from loss of one of these physical machines or a disaster would require significantly more time and effort than a scenario where the Sewer Utility's ICS software is installed in a virtualized environment.				*	
Network Architecture	2.12	In general, the network switches within the Sewer Utility's OT network have no on-board power supply or external 24 VDC power supply redundancy.				*	
Network Architecture	2.14	The Sewer Utility does not maintain an organized system of easily accessible network device configuration file backups for managed switches and cellular routers within its OT networks.				*	
Network Architecture	2.15	Sewer Utility has high-level network block diagrams for the WWTPs, but does not maintain comprehensive network architecture diagrams.					*

Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Network Architecture	2.15	Sewer Utility does not maintain detailed fiber-optic patch panel schedules or have a consistently applied tagging system for fiber-optic patch panels and cables.					*
Network Architecture	2.15	Sewer Utility practices for tagging copper Ethernet cables at both ends could be improved.					*
ICS Hardware	3.5	The LEL transmitter on the CKTP headworks odor control fan ductwork is registering an IR source fault and is not monitoring combustible-gas concentration in the odor control system.		***			
ICS Hardware	3.5	HDR observed that the thermal dispersion flowmeter installed on the aeration line for the CKTP aerated grit tank 1 stage 2 diffuser is measuring zero flow, while the positions of manual valves on either side of the instrument suggest that flow should be occurring.		***			
ICS Hardware	3.5	Combustible-gas monitoring equipment at the MWWTP sludge pumping gallery, headworks odor control system, and WAS tank is non-functional.		***			
ICS Hardware	3.5	Combustible-gas monitoring equipment at the SWWTP process building upper-floor process room is non-functional.		***			
ICS Hardware	3.5	The SWWTP process building fire alarm panel has failed so SWWTP is not currently monitoring or alarming for fires.		***			
ICS Hardware	3.5	Combustible-gas monitoring equipment at the PS-24 wet well is faulted.		***			
ICS Hardware	3.5	Combustible-gas monitoring equipment at the PS-71 wet well is non-functional.		***			



Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Hardware	3.5	Operation of the SWWTP RDT is a highly manual process where operations staff have to target a reduced sludge thickness to avoid shutting down the thickened sludge pump on high discharge pressure because of reportedly undersized sludge discharge piping. This workaround is reducing the efficacy of the RDT because the equipment is not dewatering sludge to the extent that it could.		**			**
ICS Hardware	3.5	The SWWTP sludge storage tank level is not monitored. Operations staff have resorted to a manual method of controlling tank level that introduces significant risk of operator error and relies on a high-level switch with a non-ideal installation for alarming and shutdown of the sludge supply to the tank.		**			*
ICS Hardware	3.1	The Allen-Bradley MicroLogix 1500 PLCs installed at PS-4, PS-7, and PS-17 have been discontinued by the manufacturer and are nearing the end of their useful service life.		**			
ICS Hardware	3.1	The Allen-Bradley SLC 500 PLCs installed at PS-24 and PS-71 are in the active mature phase of the manufacturer's product life cycle and are nearing the end of their useful service life.		**			
ICS Hardware	3.1	HDR observed that the PLC controller battery alarm light was illuminated at the bar screen 1023 main control panel in the CKTP headworks building electrical room.				**	
ICS Hardware	3.2	The OITs installed at PS-4, PS-17, PS-24, PS-71, and CP-300 at KWWTP are nearing the end of their useful service life.		**			
ICS Hardware	3.3	OT network and ICS components within the CKTP digester control building control panel (PNL 6000) are exposed to significant levels of $H_2S$ and high ambient temperatures. Installation of this panel in an area with a hazardous-area classification is an NEC violation. County electricians also indicated that $H_2S$ corrosion has been a significant maintenance issue for control wiring at the nearby MCC within the building.				**	

Table 8-2. WWTP and pump station PLC summary

	Sub-		Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Section	section	Risk or deficiency	0 0	= 0 =	0 =	0 5	> 0
ICS Hardware	3.3	Status and alarms are not monitored for UPSs that provide power to ICS and instrumentation equipment. Many of the installed UPSs have no remote monitoring capability.				**	
ICS Hardware	3.3	Several control panels at Sewer Utility facilities do not have battery backup power.				**	
ICS Hardware	3.4	Sewer Utility staff have no means of monitoring or controlling KWWTP, MWWTP, and SWWTP from the existing CKTP SCADA PCs.					**
ICS Hardware	3.4	Sewer Utility staff do not have access to near real-time status and alarm information for wastewater pump stations at CKTP.					**
ICS Hardware	3.5	Based on discussions with Sewer Utility I&C technicians, HDR believes that the Sewer Utility does not have a formal calibration and maintenance program for field instrumentation and associated control loops.		**			
ICS Hardware	3.5	Current CKTP effluent flow calculations provided by Trojan UV system are resulting in higher flows than those derived from an accounting of other CKTP flow measurements.	**				
ICS Hardware	3.5	Automated control of the CKTP BNR process has proved to be unstable. Operators currently position the aeration control valves manually and have to frequently adjust blower header pressure set points based on process demand.	**				
ICS Hardware	3.5	Unlike the other three CKTP aeration basins, aeration basin 1 has no DO probes installed. This is one of the deficiencies frustrating the Sewer Utility's BNR efforts at CKTP.	**				
ICS Hardware	3.5	The chlorine residual and turbidity analyzers associated with the CKTP reclaimed-water filtration system were found powered down during HDR's site visit.		**			



Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Hardware	3.5	The low-level switch for the CKTP thickened sludge blending tank has failed and the tank's circulation pump and digester feed pumps are likely operating without a low-level shutdown interlock.		**			
ICS Hardware	3.5	The Sewer Utility has no means of direct measurement for plant influent flow at MWWTP.	**				
ICS Hardware	3.5	Some of the instrumentation related to the MWWTP headworks odor control system and its associated chemical system either is nonfunctional or has been removed. Systems are no longer operating per their original design.		**			
ICS Hardware	3.5	The magmeter on the sludge line feeding the MWWTP GBT is severely corroded.		**			
ICS Hardware	3.5	The MWWTP aeration basins have no DO probes or other analytical instruments for monitoring the BNR process.		**			
ICS Hardware	3.5	The MWWTP SCADA system is not receiving a flow signal from the flow transmitter and totalizer on the plant W3 pump discharge piping.		**			
ICS Hardware	3.5	Instrumentation within the MWWTP Trojan UV system has had recent issues and operations staff have reduced confidence in the system's UV dosing control.		**			
ICS Hardware	3.5	The SWWTP effluent flow control valve is unable to maintain its position when commanded to close. The valve tries to maintain a closed position but eventually begins opening. SWWTP has no bypass piping around this valve, so the plant would need to shut down in order for the control valve to be serviced or replaced.		**			
ICS Hardware	3.5	The SWWTP SBRs have no DO probes or other analytical instruments for monitoring the BNR process.		**			

Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Hardware	3.5	The ultrasonic level transducer measuring the PS-24 wet well level was observed to be coated with grime and dried scum. The condition of the transducer may be degrading the accuracy of the level measurement.		**			
ICS Hardware	3.5	PS-34 has no PLC and the station's wet well level appears to be controlled by a level indicator and controller that monitors the wet well's radar level transmitter. Because of the age and condition of the control panel components, its undocumented modifications, and lack of PLC, PS-34 would be a good candidate for a control panel upgrade.		**			
ICS Hardware	3.1	Sewer Utility staff have difficulty maintaining MCC DeviceNet networks at CKTP, which has the potential to increase downtime for equipment connected to the DeviceNet networks.		*		*	
ICS Hardware	3.4	The Sewer Utility may benefit from establishing a secure, dedicated space for ICS servers and critical network equipment.			*	*	
ICS Hardware	3.5	A condition assessment survey of existing instrumentation has yet to be performed. This effort would provide the most value if done on a process-by-process basis as part of process and equipment level-of-automation and performance optimization evaluations.	*	*			
ICS Hardware	3.5	Sewer Utility staff indicated that the level transmitter for the SWWTP thickened sludge storage tank is reporting level measurements that do not align with actual tank levels.		*			*
ICS Hardware	3.5	Short cycling of the pumps is a common occurrence at PS-24.	*	*			
ICS Hardware	3.1	Allen-Bradley has made an end-of-life announcement for the CompactLogix L3x PLCs installed in various panels at CKTP. These PLCs will be discontinued by the manufacturer as of December 2020.		*			



Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Hardware	3.1	The MWWTP blower building RIO control panel is installed above another control panel in a location that is not easily accessible by Sewer Utility staff.					*
ICS Hardware	3.1	The Sewer Utility does not appear to have standardized on PLC platform I/O module types. I/O module standardization could help the Sewer Utility reduce spare-parts inventory and enforce its preferences.	*				
ICS Hardware	3.2	The CP-300 OIT at KWWTP was experiencing a communication error during HDR's site visit.		*			
ICS Hardware	3.2	The OIT at the master station CTU control panel in the SPB control room at CKTP appears to be out of service.		*			
ICS Hardware	3.3	Several control panels at Sewer Utility facilities do not have 24 VDC power supply redundancy.				*	
ICS Hardware	3.3	There is a mix of 120 VAC and 24 VDC control and power circuits within the Sewer Utility's industrial control panels and the voltages present are not always readily apparent without closer inspection of the components. To eliminate or reduce shock hazards for personnel, the Sewer Utility may wish to consider standardizing on 24 VDC power and controls and/or improved voltage segregation and identification for control panels introduced by future CIP projects.	*				
ICS Hardware	3.3	The Sewer Utility is having difficulty maintaining desirable ambient temperatures within the MWWTP electrical room and some of the CKTP electrical rooms.	*				

Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Hardware	3.4	The CKTP SPB control room has only two standard-size monitors where SCADA screens can be displayed. Having large-format displays would make it so that SCADA screens are discernible from a greater distance and could be referenced more easily during staff discussions. Additional monitors/displays would allow staff to leave commonly referenced screens on display at all times.					*
ICS Hardware	3.5	The Sewer Utility has no means of direct measurement for CKTP effluent flow.	*				
ICS Hardware	3.5	The CKTP headworks odor control biofilter sprinkler control panel is out of service and watering of the biofilter is now a manual process for Sewer Utility staff. Replacing and/or introducing instrumentation to maintain desirable moisture levels in the biofilter via automation could improve Sewer Utility workforce efficiency and the effectiveness of the biofilter.					*
ICS Hardware	3.5	Only CKTP aeration basin 4 has ammonium and nitrate probes installed to monitor nitrogen removal occurring in the basin.	*				
ICS Hardware	3.5	The CKTP cogeneration system and digester gas conditioning system have been abandoned in place because of high material and maintenance costs and limited digester gas production.		*			
ICS Hardware	3.5	One of the analytical probes associated with the SWWTP odor control system appears to have a splice in the probe's manufacturer cable, which may be degrading the accuracy of the probe's measurement or disrupting the signal entirely.		*			
ICS Hardware	3.5	The thermal dispersion flow switch on the SWWTP RDT spray water supply line has been damaged. This may result in a shorter than expected useful service life for the switch.		*			
ICS Hardware	3.5	The Sewer Utility is not currently monitoring BIOXIDE storage tank level at PS-71.		*			



Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Software	4.2	Lack of centralized management for ICS device data and SCADA visualizations has resulted in non-standardized programming objects and visualizations at the Sewer Utility's WWTPs.	***				***
ICS Software	4.2	Red and green on/off, open/closed color schemes are not consistently applied throughout the Sewer Utility's HMI and OIT screens.					***
ICS Software	4.3	SCADA data are not being leveraged beyond data required for mandatory reporting.	**	**			**
ICS Software	4.3	The Sewer Utility is not using data visualization tools to access and derive meaning from its historical SCADA data.	**	**			**
ICS Software	4.2	Sewer Utility staff do not appear to have a means of shelving nuisance alarms or alarms associated with known issues.	**				**
ICS Software	4.2	Sewer Utility WWTP HMI screens do not appear to provide alarm priority information or allow for sorting and filtering of alarms by alarm priority.	**				**
ICS Software	4.3	The Sewer Utility has no historical data for the overwhelming majority of its SCADA tags, and the Sewer Utility is not capturing data for several processes and equipment.	**				**
ICS Software	4.1	The Sewer Utility does not have PLC programming standards in place and its PLC programming project files reflect a variety of conventions and programming objects implemented by multiple systems integrators.	**				
ICS Software	4.2	The Sewer Utility's Wonderware InTouch software at its WWTPs is in, or will soon be entering, the mature support phase of the software developer's product life cycle, during which limited support is offered.		**			
ICS Software	4.2	HMI overview and process screens could be updated to include more contextual information to facilitate operator situational awareness.					**

Table 8-2. WWTP and pump station PLC summary

				e E	<u>ج</u> د	E E	
Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Software	4.2	Sewer Utility staff have no means of remotely resetting pump station alarms from CKTP HMI screens. The lack of remote alarm reset requires County staff to physically visit the pump stations to reset alarms.					**
ICS Software	4.2	HDR observed that there are issues with communication of analog parameters between several pump stations and CKTP. Several pump station pop-up HMI screens appear to constantly display zero values for analog parameters and historian data are also logging constant, out-of-range values for these pump station parameters.		**			
ICS Software	4.2	The Sewer Utility does not appear to have pump station remote monitoring capabilities for wet well level, force main pressure, pump speed, LEL, BIOXIDE/chemical storage tank level, power and energy parameters, or other analog parameters for the pump stations.	**				
ICS Software	4.2	Alarm summary and alarm history HMI screens at SWWTP are not automatically updated to display current alarm information.		**			
ICS Software	4.2	The CKTP Wonderware implementation is generating considerable alarm activity, much of which is caused by the same alarms.					**
ICS Software	4.3	The Sewer Utility's Wonderware Historian and Historian Client software at CKTP is in the mature support phase of the software developer's product life cycle, during which limited support is offered.		**			
ICS Software	4.3	The historical SCADA data for KWWTP, MWWTP, and SWWTP are accessible only via the SCADA PC at each WWTP and have not been imported to the Sewer Utility's historian at CKTP.					**
ICS Software	4.3	The Sewer Utility's means of accessing its historical SCADA data are time-consuming, are ill-suited for handling large queries, and present a barrier to ad hoc data exploration.					**



Table 8-2. WWTP and pump station PLC summary

		-					
Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Software	4.3	The Sewer Utility has not implemented automated reports for SCADA data at any of the WWTPs.					**
ICS Software	4.4	There is no redundant alarm notification method for KWWTP, MWWTP, and SWWTP. Failure of the SCADA PC's analog telephony card or disruption of telephone service to the WWTP would result in loss of remote alarm notification for the WWTP.				**	
ICS Software	4.1	Sewer Utility PLCs are running a variety of firmware versions.		*			
ICS Software	4.2	At CKTP, alarm acknowledgments made at one HMI thick client are not being registered by other HMI thick clients.					*
ICS Software	4.2	Horizontal alarm banner at the bottom of SWWTP HMI screens may be non-functional.	*				
ICS Software	4.2	Sewer Utility staff have indicated that there are cases throughout the WWTP HMI process screens where the wrong engineering units are being displayed for equipment speed values.		*			
ICS Software	4.2	Equipment pop-up windows/screens do not appear to have functionality to provide information on active alarms or conditions, not internal to the equipment, that are inhibiting the equipment from running.					*
ICS Software	4.2	Equipment pop-up windows/screens could be developed to include additional electrical, diagnostic, and performance data as well as expanded motor start count information.					*
ICS Software	4.2	Trend screens display current values against time only and do not provide meaningful situational awareness.					*
ICS Software	4.2	Root-cause analysis and alarm suppression functionality have not been developed for the Sewer Utility's WWTP HMI systems.	*				*

Table 8-2. WWTP and pump station PLC summary

	_						
Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
ICS Software	4.2	HMI screens do not have troubleshooting text prompts or decision tree aids to help operators react to alarm conditions.					*
ICS Software	4.4	Sewer Utility staff indicate that an unresolved issue with the Sewer Utility's WIN-911 implementation prevents operators from obtaining a listing of active alarms when calling in to the WIN-911 system.					*
ICS Documentation	5.2	The Sewer Utility is currently logging process control changes in physical operator log books and not in a more readily accessible, electronic format that can be backed up to prevent loss of information.	*				**
ICS Documentation	5.5	The Sewer Utility does not have formal ICS standards documentation to guide third-party design and implementation efforts.	*				*
ICS Documentation	5.1	Record P&IDs are not maintained in consolidated drawing sets or located in one location.					*
ICS Documentation	5.1	Record P&IDs for MWWTP are out of date.					*
ICS Documentation	5.1	Aside from P&IDs recently developed for the SWWTP sludge thickening processes, no detailed P&IDs appear to be available for SWWTP.					*
ICS Documentation	5.2	General control descriptions have yet to be added to the County's eO&M SharePoint site for the major processes at KWWTP, MWWTP, and SWWTP and wastewater pump stations.					*
ICS Documentation	5.2	The Sewer Utility does not maintain as-implemented control strategies for its WWTPs and pump stations.					*
ICS Documentation	5.2	PLC programming modifications may be occurring without documentation of changes made to process controls.					*



Table 8-2. WWTP and pump station PLC summary

	Sub-		Operational optimization	nfrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Section	section	Risk or deficiency	0 5	≟ to E	6.∓	. <u>0</u> ₽	e e
ICS Documentation	5.3	The County eO&M SharePoint site is missing record drawings from 2018 control system upgrade at MWWTP.					*
Other Software Packages	6.4	The Sewer Utility is not currently using data analytics or visualization software to derive insights from its CMMS, EMS, laboratory, SCADA, and other data sets outside of their respective software environments.	**	**			**
Other Software Packages	6.2	It appears that the Sewer Utility has not generated any historical EMS data since the CKTP EMS was installed because the EMS software was never set to record any of the real-time power data that it monitors.		**			**
Other Software Packages	6.2	The Sewer Utility is not currently using power or energy data at the bus level or load level to establish plant, process, or asset baselines or to evaluate process and equipment performance.		**			**
Other Software Packages	6.2	Aside from Puget Sound Energy billing data and a few load-level power parameters recorded by the CKTP historian, HDR believes that the Sewer Utility has little to no historical power and energy data for its WWTP and wastewater pump station infrastructure.		**			**
Other Software Packages	6.1	Data entry of WWTP and pump station assets and their attributes into the LLumin database has yet to be completed.		**			*
Other Software Packages	6.1	The Sewer Utility's CMMS and SCADA data remain siloed and the Sewer Utility has not implemented automated work orders based on accumulated runtimes, alarms, and other events registered at the SCADA system.		*			**
Other Software Packages	6.3	HDR believes that the Sewer Utility laboratory data are recorded in Excel spreadsheets and do not currently reside on a database, which makes working with the data labor-intensive.					**

Table 8-2. WWTP and pump station PLC summary

Section	Sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency
Other Software Packages	6.2	Several MCCs at CKTP have no power monitor installed, which prevents them from being included in the CKTP EMS.	*	*			*
Other Software Packages	6.2	Power monitors installed at the KWWTP and MWWTP MCCs are not networked to the WWTP PLCs or SCADA PCs.	*	*			*
Other Software Packages	6.2	The CKTP EMS and SCADA system are not monitoring power and energy data that may be available from power monitors and other electrical equipment at the Sewer Utility's pump stations.		*			*
Other Software Packages	6.2	CKTP standby generators and large electrical loads (e.g., aeration blowers) have not been integrated into the CKTP EMS.					*
Other Software Packages	6.2	Power monitors installed at the CKTP UV disinfection facility have not been integrated into the CKTP EMS.					*
Other Software Packages	6.2	With the exception of SWGR-2961, the CKTP EMS is not monitoring switch and breaker statuses for the major electrical distribution system buses at CKTP.					*
Other Software Packages	6.2	The CKTP EMS one-line diagram screens have not been configured to display current breaker statuses for SWGR-2961.					*



#### 9 References

ANSI/ISA (American National Standards Institute/International Society of Automation)

2016 ANSI/ISA-18.2-2016, Management of Alarm Systems for the Process Industries.

DHS (U.S. Department of Homeland Security)

2016 Recommended Practice: Improving Industrial Control System Cybersecurity with Defense-in-Depth Strategies.

#### NFPA (National Fire Protection Association)

2021 NFPA 70E: Standard for Electrical Safety in the Workplace.

2020 NFPA 820: Standard for Fire Protection in Wastewater Treatment and Collection Facilities.

#### NIST (National Institute of Standards and Technology)

2015 NIST Special Publication 800-82, Revision 2: Guide to industrial Control Systems Security.

#### **Rockwell Automation**

2020a *MicroLogix 1500 Programmable Logic Controller Systems.*https://www.rockwellautomation.com/en-us/products/hardware/allen-bradley/discontinued-products/micrologix-1500-controllers.html. Viewed on September 1, 2020.

2020b 1769 CompactLogix L3x Controllers. https://www.rockwellautomation.com/en-us/products/hardware/allen-bradley/programmable-controllers/small-controllers/compactlogix-family/compactlogix-1769-controllers.html. Viewed on September 1, 2020.

2020c *Product Lifecycle Status.* https://www.rockwellautomation.com/global/support/product-compatibility-migration/lifecycle-status/overview.page. Viewed on September 1, 2020.


#### Schneider Electric

2020 APC Power Saving Back-UPS 1500 Runtime Graph.
https://www.apc.com/products/runtimegraph/runtime\_graph.cfm?base\_sku=BR1500G&c
hartSize=large. Viewed on September 1, 2020.

This page intentionally left blank.



# Appendix A Site Maps

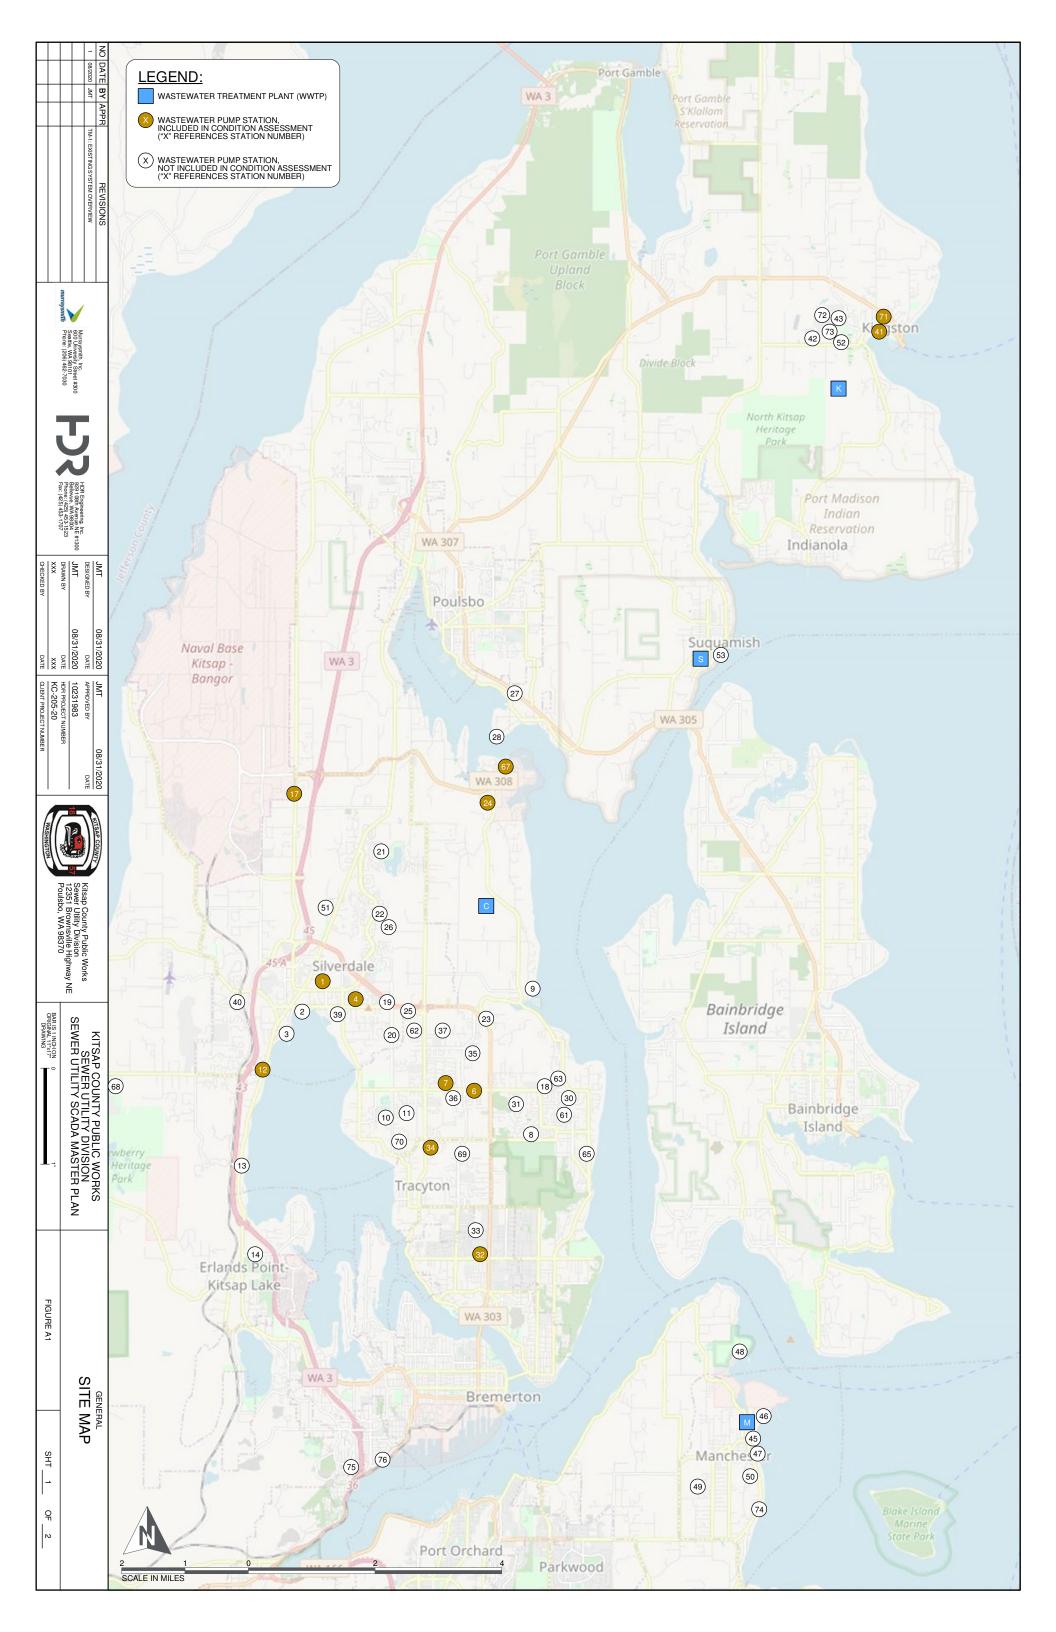



CENTRAL KITSAP TREATMENT PLANT

250 125 0 SCALE IN FEET

#### CKTP SITE REFERENCE KEY: (X)

- HEADWORKS
- 2. PRIMARY CLARIFIERS
- 3. AERATION BASINS
- 4. SECONDARY CLARIFIERS
- 5. UV DISINFECTION
- GRAVITY THICKENERS
- DIGESTERS
- 8. DIGESTER CONTROL BUILDING
- 9. WAS THICKENING BUILDING
- 10. POWER/BLOWER BUILDING

- 11. AERATION BASINS 3 & 4 ELECTRICAL BUILDING
- 12. RECLAIMED WATER BUILDING
- 13. SOLIDS PROCESSING BUILDING
- 14. CARBON ADDITION FACILITY
- 15. STORM WATER DECANT FACILITY
- 16. HEADWORKS BIOFILTER
- 17. COGEN AND DIGESTER GAS CONDITIONING FACILITY
- 18. WASTE GAS BURNER
- 19. ADMINISTRATION AND LAB BUILDING

- 20. MODULAR OFFICE (TRAILERS 103)21. OPERATIONS FACILITIES BUILDING
- 22. SHOP AND EQUIPMENT MAINTENANCE BUILDING
- 23. SEPTAGE RECEIVING

# 


## KINGSTON WASTEWATER TREATMENT PLANT

SCALE IN FEET

#### KWWTP SITE REFERENCE KEY: (X)

- 1. HEADWORKS
- 2. PROCESS BUILDING
- 3. OXIDATION DITCHES
- 4. SECONDARY CLARIFIERS

- 5. BIOFILTER
- 6. UV DISINFECTION
- 7. STORMWATER DETENTION PONDS
- 8. OPERATIONS BUILDING



### SUQUAMISH WASTEWATER TREATMENT PLANT

SCALE IN FEET

#### SWWTP SITE REFERENCE KEY: (X)

- 1. SLUDGE STORAGE
- 2. PROCESS BUILDING
- 3. SBR BASINS
- 4. THICKENED SLUDGE STORAGE TANK
- 5. SERVICE BUILDING



# MANCHESTER WASTEWATER TREATMENT PLANT

SCALE IN FEET

#### MWWTP SITE REFERENCE KEY: (X)

- 1. INFLUENT PUMP STATION
- 2. HEADWORKS
- 3. AERATION BASINS
- SECONDARY CLARIFIERS
   OPERATIONS BUILDING
- SLUDGE LOADING FACILITY
- GENERATOR BUILDING

**FACILITY LOCATIONS:** 

23055 S Kingston Road NE Kingston, WA 98346

8020 E Caraway Road Port Orchard, WA 98366

18019 Division Avenue NE Suquamish, WA 98392

**CENTRAL KITSAP TREATMENT PLANT (CKTP)** 12351 Brownsville Highway NE Poulsbo, WA 98370

KINGSTON WASTEWATER TREATMENT PLANT (KWWTP)

MANCHESTER WASTEWATER TREATMENT PLANT (MWWTP)

SUQUAMISH WASTEWATER TREATMENT PLANT (SWWTP)

- 8. BLOWER BUILDING
- 9. UV DISINFECTION
- 10. RAS/WAS SPLITTER BOX

	REVISIONS	APPR	BY	DATE	NO
	TM-1: EXISTING SYSTEM OVERVIEW		JMT	08/2020	1
n					





	JMT	08/31/2020
	DESIGNED BY	DATE
0	MH	08/31/2020
	DRAWN BY	DATE
	XXX	XXX
	CHECKED BY	DATE

)	JMT	8/31/2020
	APPROVED BY	DATE
)	10231983	
	HDR PROJECT NUMBER	
	KC-205-20	
	CLIENT PROJECT NUMBER	1




KITSAP COUNTY PUBLIC WORKS
SEWER UTILITY DIVISION
SEWER UTILITY SCADA MASTER PLAN


WWTP SITE MAPS

CHON 0 1" FIGURE A2 SHT 2 OF 2



# Appendix B Network Architecture Diagrams

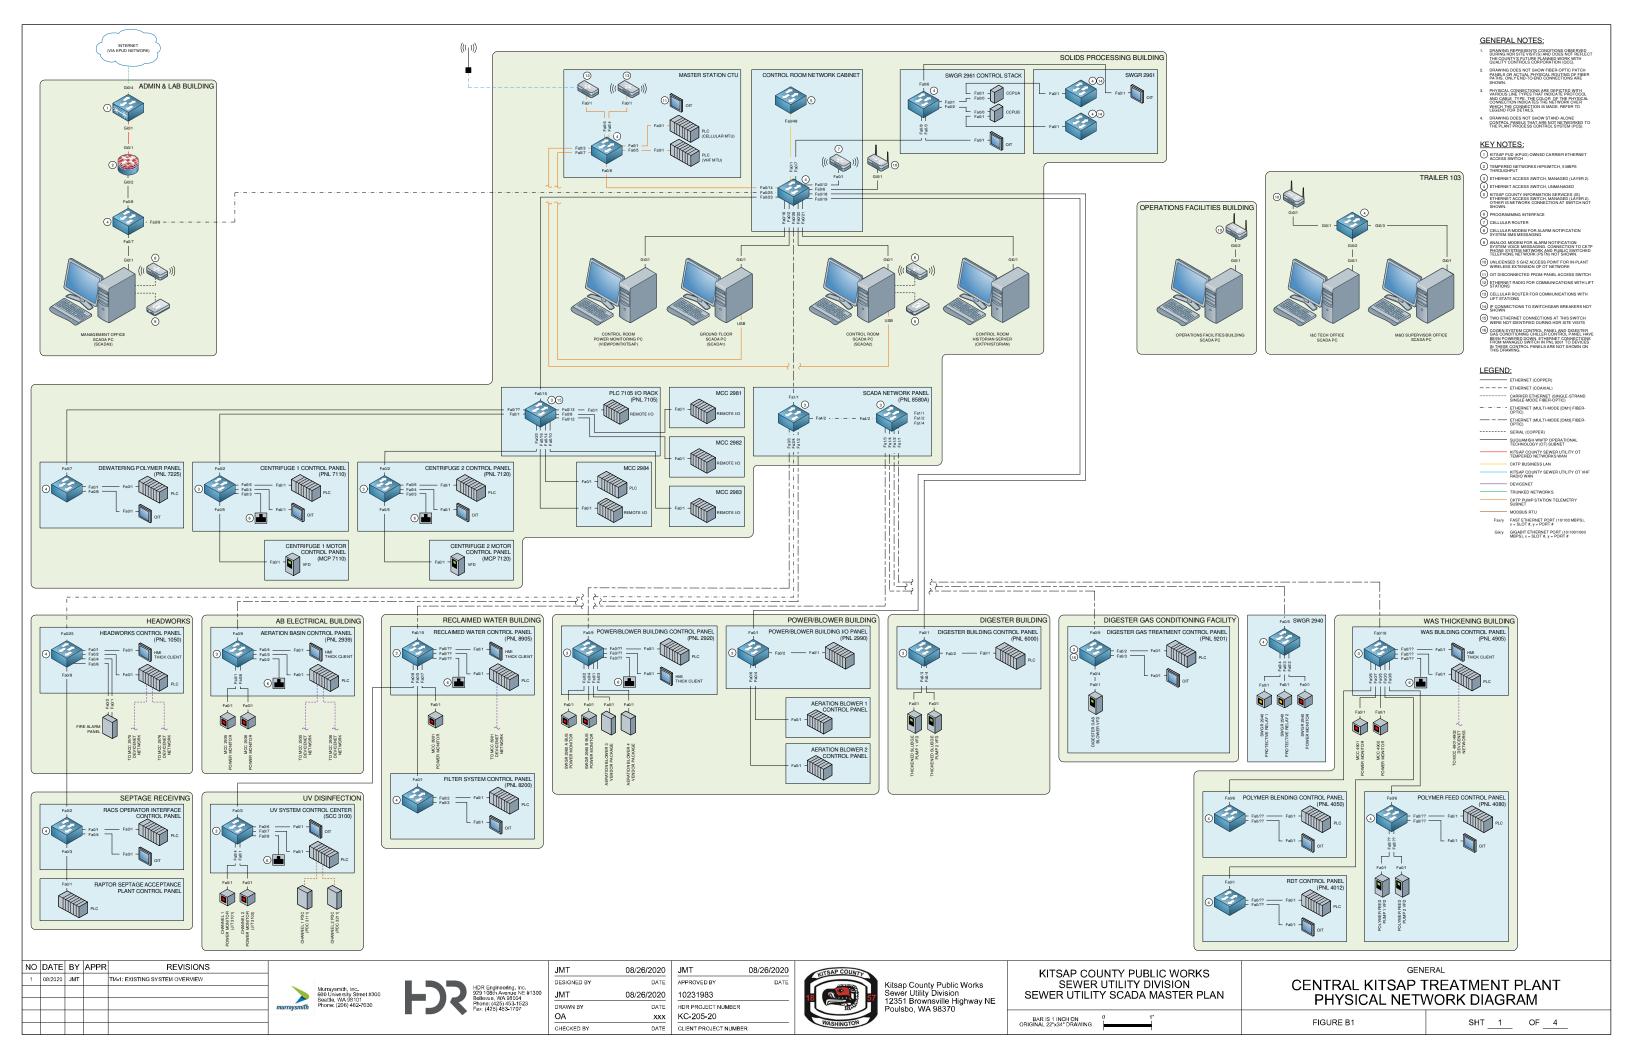

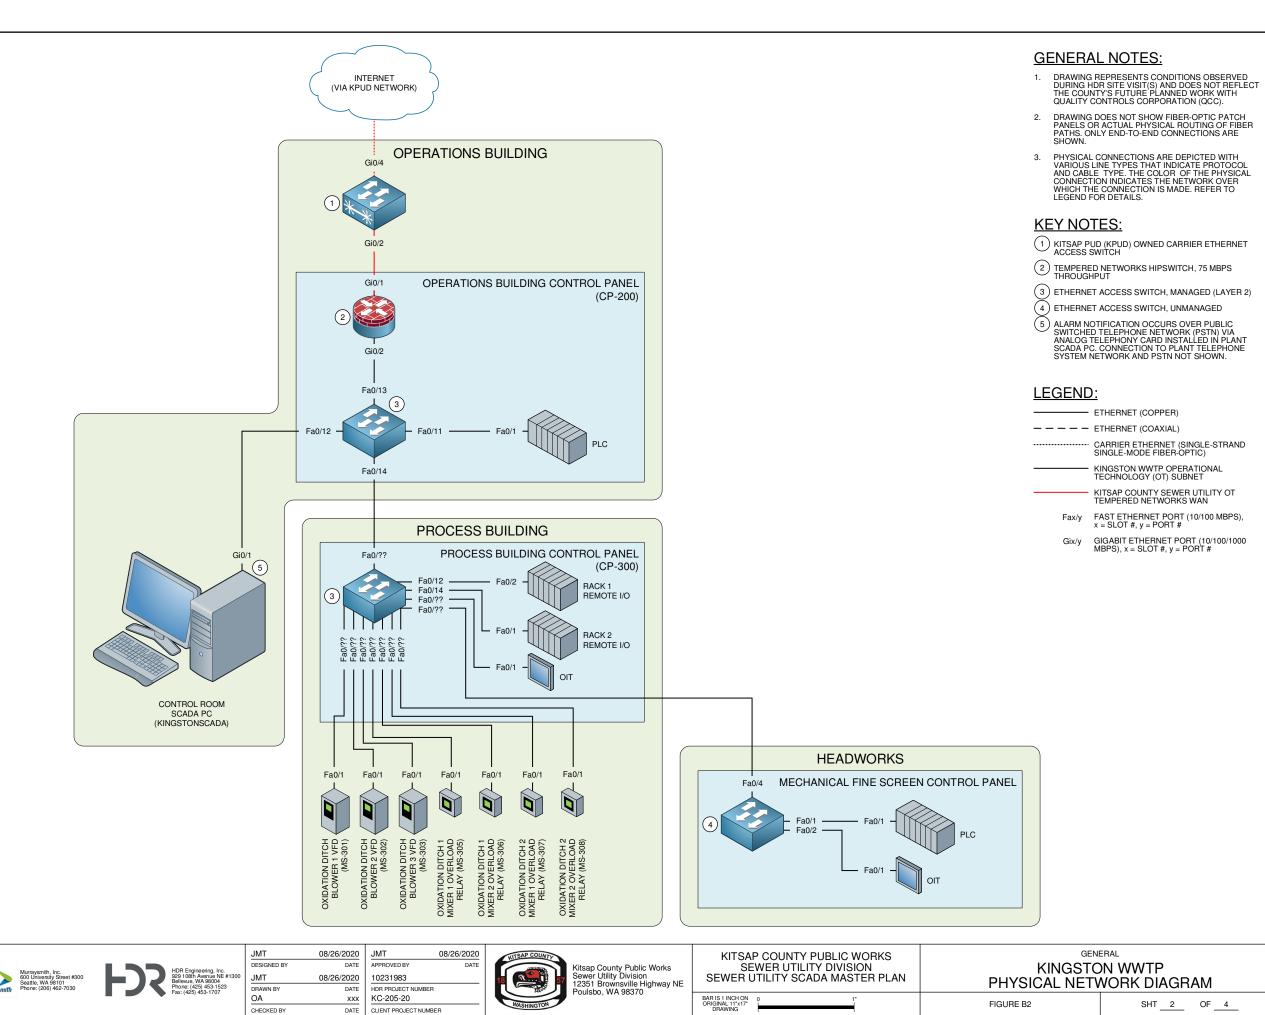


SHT 2 OF 4

NO DATE BY APPR

TM-1: EXISTING SYSTEM OVERVIEW

1 08/2020 JMT

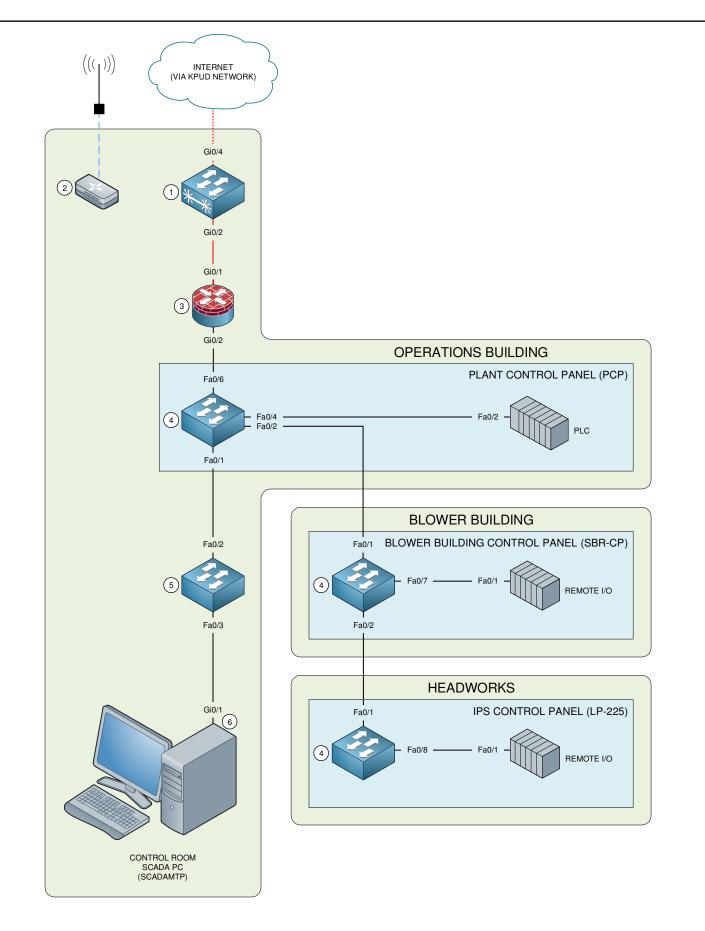

#### **GENERAL NOTES:**

- DRAWING REPRESENTS CONDITIONS OBSERVED DURING HDR SITE VISIT(S) AND DOES NOT REFLECT THE COUNTY'S FUTURE PLANNED WORK WITH QUALITY CONTROLS CORPORATION (QCC).
- DRAWING DOES NOT SHOW FIBER-OPTIC PATCH PANELS OR ACTUAL PHYSICAL ROUTING OF FIBER PATHS. ONLY END-TO-END CONNECTIONS ARE SHOWN.
- 3. PHYSICAL CONNECTIONS ARE DEPICTED WITH VARIOUS LINE TYPES THAT INDICATE PROTOCOL AND CABLE TYPE. THE COLOR OF THE PHYSICAL CONNECTION INDICATES THE NETWORK OVER WHICH THE CONNECTION IS MADE. REFER TO LEGEND FOR DETAILS.

#### **KEY NOTES:**

- (1) KITSAP PUD (KPUD) OWNED CARRIER ETHERNET ACCESS SWITCH
- 2 ETHERNET RADIO FOR FUTURE COMMUNICATIONS WITH MANCHESTER AREA LIFT STATIONS. VHF FREQUENCY TO BE DETERMINED.
- 3 TEMPERED NETWORKS HIPSWITCH, 75 MBPS THROUGHPUT
- 4 ETHERNET ACCESS SWITCH, MANAGED (LAYER 2)
- (5) ETHERNET ACCESS SWITCH, UNMANAGED
- 6 ALARM NOTIFICATION OCCURS OVER PUBLIC SWITCHED TELEPHONE NETWORK (PSTN) VIA ANALOG TELEPHONY CARD INSTALLED IN PLANT SCADA PC. CONNECTION TO PLANT TELEPHONE SYSTEM NETWORK AND PSTN NOT SHOWN.

#### LEGEND:

 ETHERNET (COPPER)
 ETHERNET (COAXIAL)
 CARRIER ETHERNET (SINGLE-STRAND SINGLE-MODE FIBER-OPTIC)
 MANCHESTER WWTP OPERATIONAL TECHNOLOGY (OT) SUBNET
 KITSAP COUNTY SEWER UTILITY OT TEMPERED NETWORKS WAN
 KITSAP COUNTY SEWER UTILITY OT VHF RADIO WAN

Fax/y FAST ETHERNET PORT (10/100 MBPS), x = SLOT #, y = PORT #

GIGABIT ETHERNET PORT (10/100/1000 MBPS), x = SLOT #, y = PORT #

NO	DATE	BY	APPR	REVISIONS
1	08/2020	JMT		TM-1: EXISTING SYSTEM OVERVIEW





	JMT	08/26/2020
	DESIGNED BY	DATE
300	JMT	08/26/2020
	DRAWN BY	DATE
	OA	XXX
	CHECKED BY	DATE

0	JMT	08/26/2020
ΓE	APPROVED BY	DATE
0	10231983	
ΓE	HDR PROJECT NUMBER	
CΧ	KC-205-20	
ΓE	CLIENT PROJECT NUMBE	R




KITSAP COUNTY PUBLIC WORKS	
SEWER UTILITY DIVISION	
SEWER UTILITY SCADA MASTER PLAN	

MANCHESTER WWTP PHYSICAL NETWORK DIAGRAM

FIGURE B3

SHT 3 OF 4

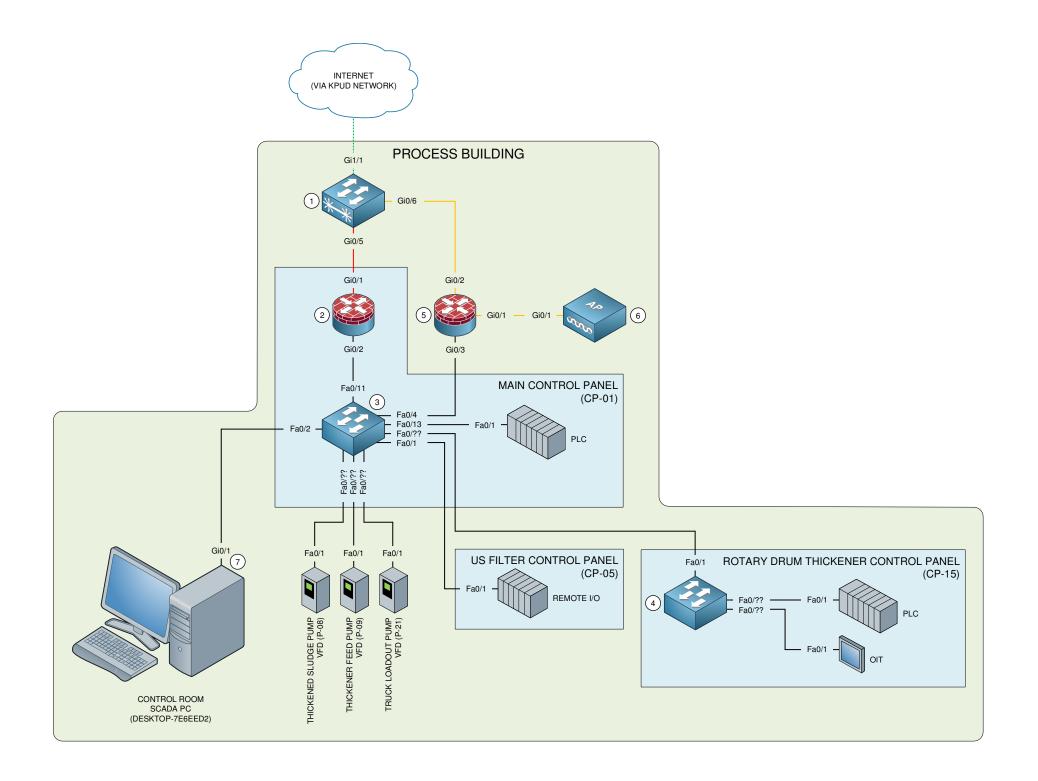

#### **GENERAL NOTES:**

- DRAWING REPRESENTS CONDITIONS OBSERVED DURING HDR SITE VISIT(S) AND DOES NOT REFLECT THE COUNTY'S FUTURE PLANNED WORK WITH
- DRAWING DOES NOT SHOW FIBER-OPTIC PATCH PANELS OR ACTUAL PHYSICAL ROUTING OF FIBER PATHS. ONLY END-TO-END CONNECTIONS ARE SHOWN.
- 3. PHYSICAL CONNECTIONS ARE DEPICTED WITH VARIOUS LINE TYPES THAT INDICATE PROTOCOL AND CABLE TYPE. THE COLOR OF THE PHYSICAL CONNECTION INDICATES THE NETWORK OVER WHICH THE CONNECTION IS MADE. REFER TO LEGEND FOR DETAILS.

#### **KEY NOTES:**


- 1 KITSAP PUD (KPUD) OWNED CARRIER ETHERNET ACCESS SWITCH
- 2 TEMPERED NETWORKS HIPSWITCH, 75 MBPS THROUGHPUT
- 3 ETHERNET ACCESS SWITCH, MANAGED (LAYER 2)
- 4 ETHERNET ACCESS SWITCH, UNMANAGED
- (IS) KITSAP COUNTY INFORMATION SERVICES (IS) SECURE GATEWAY (FIREWALL AND ROUTER)
- 6 WIRELESS ACCESS POINT
- 7) ALARM NOTIFICATION OCCURS OVER PUBLIC SWITCHED TELEPHONE NETWORK (PSTN) VIA ANALOG TELEPHONY CARD INSTALLED IN PLANT SCADA PC. CONNECTION TO PLANT TELEPHONE SYSTEM NETWORK AND PSTN NOT SHOWN.

#### **LEGEND**:

 ETHERNET (COPPER)
 ETHERNET (COAXIAL)
 CARRIER ETHERNET (SINGLE-STRAND SINGLE-MODE FIBER-OPTIC)
 SUQUAMISH WWTP OPERATIONAL TECHNOLOGY (OT) SUBNET
 KITSAP COUNTY SEWER UTILITY OT TEMPERED NETWORKS WAN
 SUQUAMISH WWTP BUSINESS LAN
 TRUNKED NETWORKS

FAST ETHERNET PORT (10/100 MBPS), x = SLOT #, y = PORT #

GIGABIT ETHERNET PORT (10/100/1000 MBPS), x = SLOT #, y = PORT #







	JMT	08/26/2020
	DESIGNED BY	DATE
00	JMT	08/26/2020
	DRAWN BY	DATE
	OA	XXX
	CHECKED BY	DATE





KITSAP COUNTY PUBLIC WORKS SEWER UTILITY DIVISION SEWER UTILITY SCADA MASTER PLAN

SUQUAMISH WWTP


FIGURE B4


PHYSICAL NETWORK DIAGRAM


SHT 4 OF 4





# Appendix C QCC Network Design Diagrams

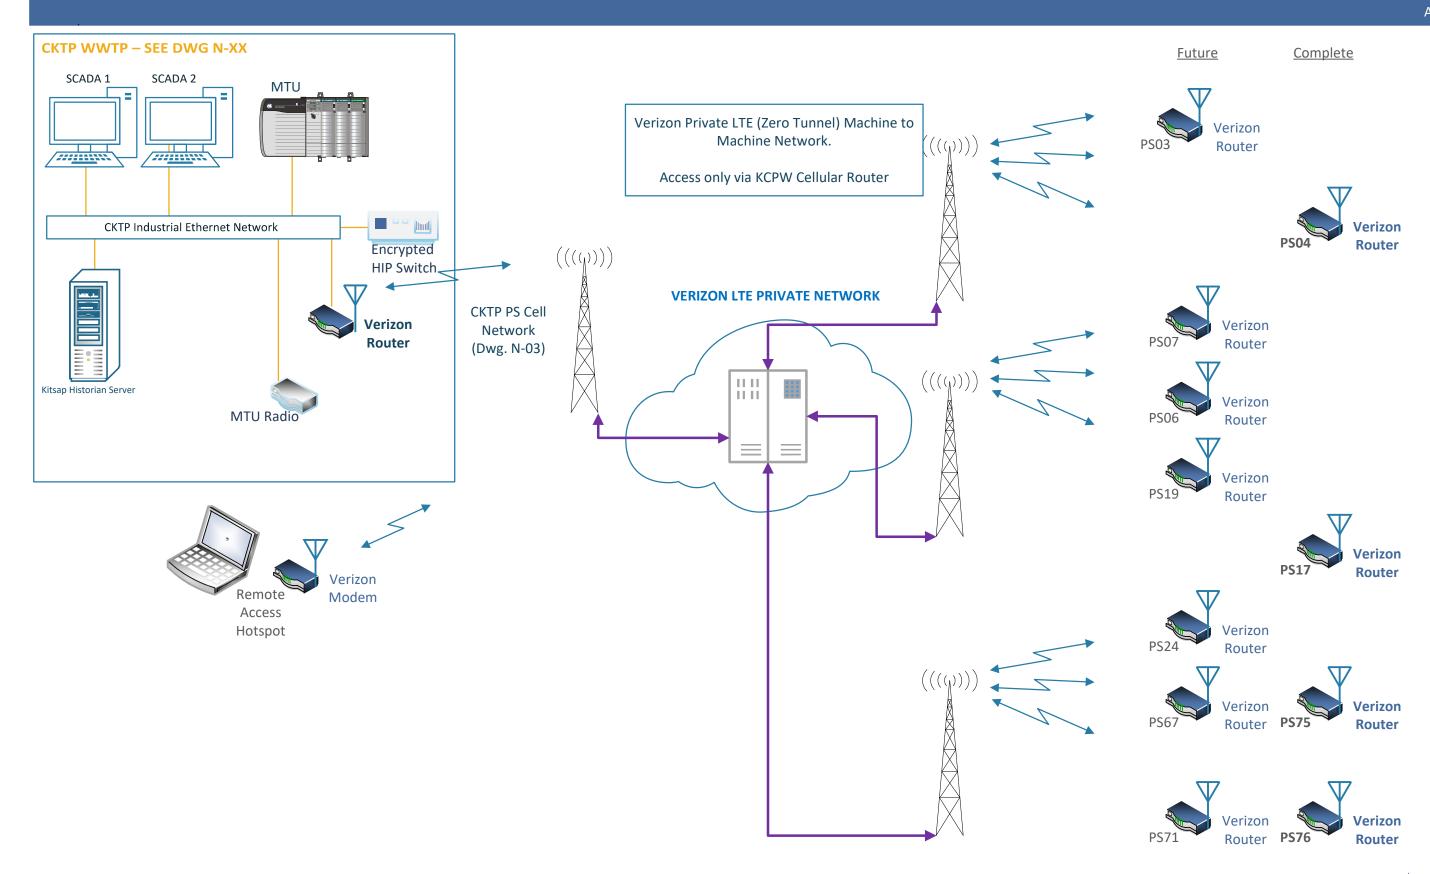


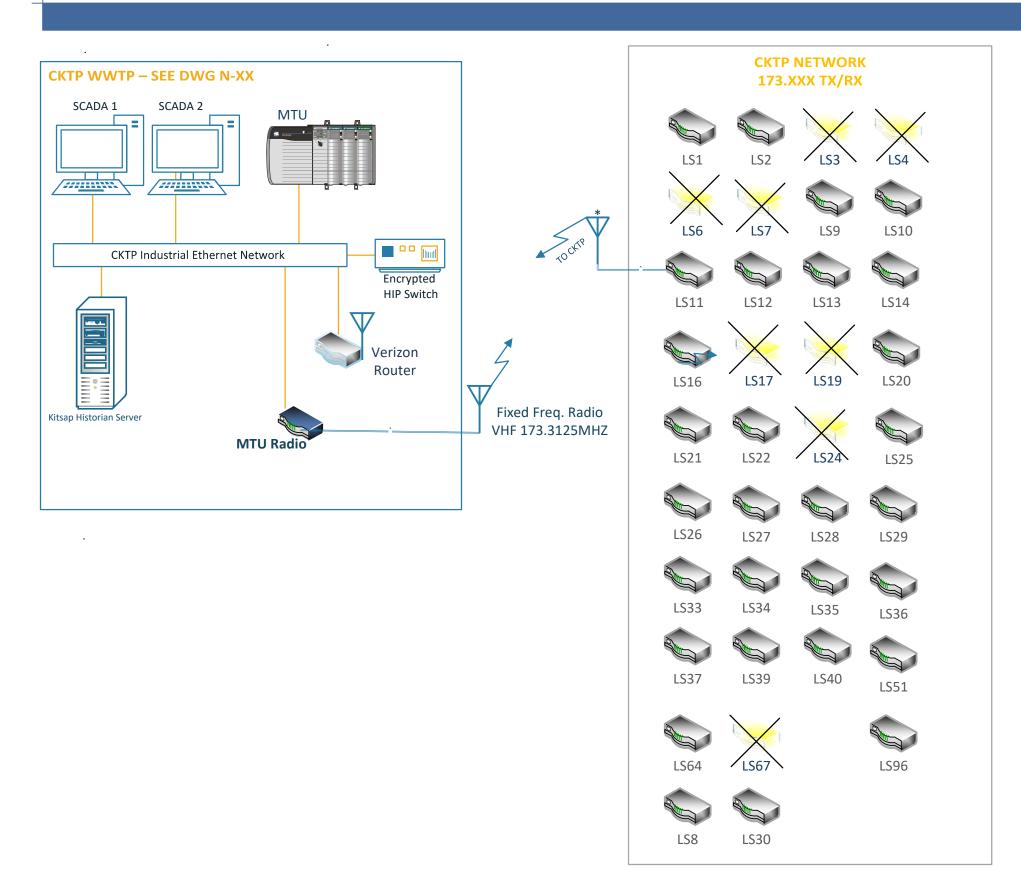





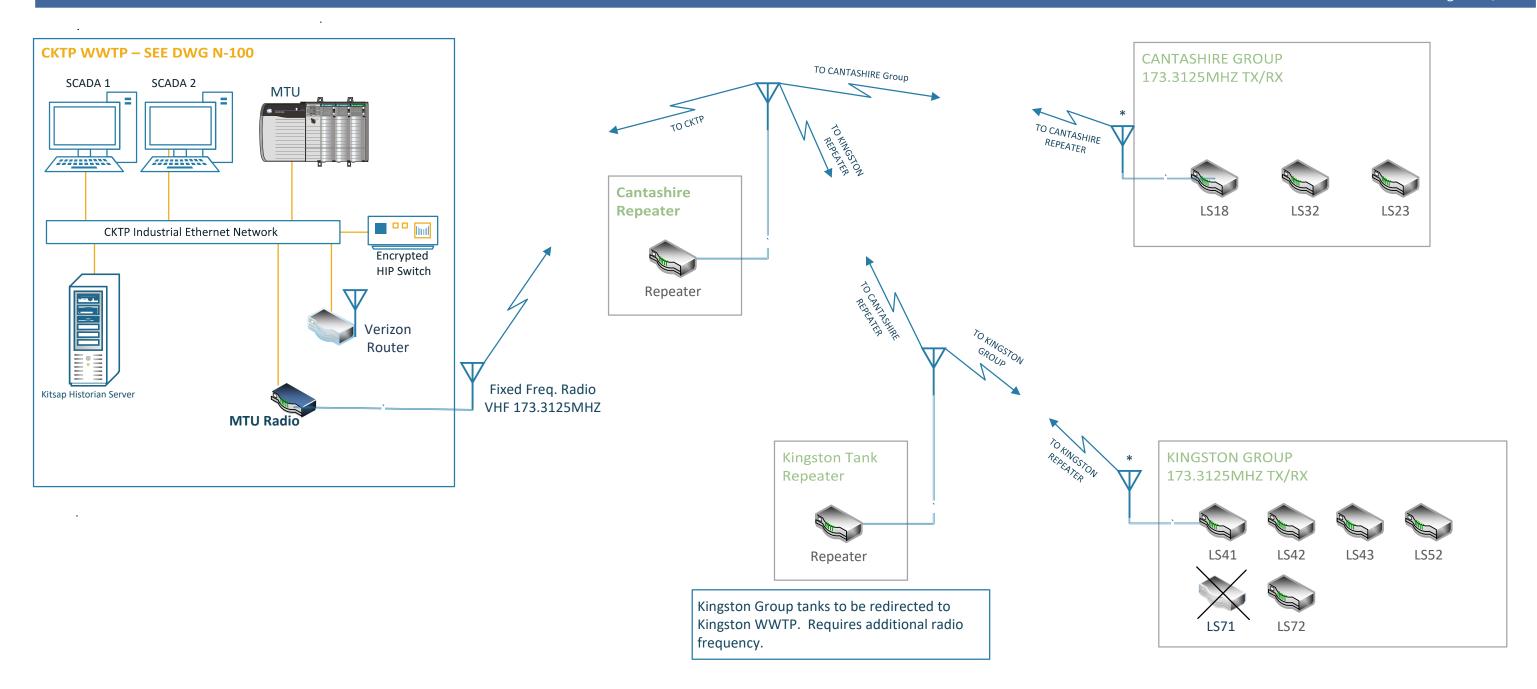




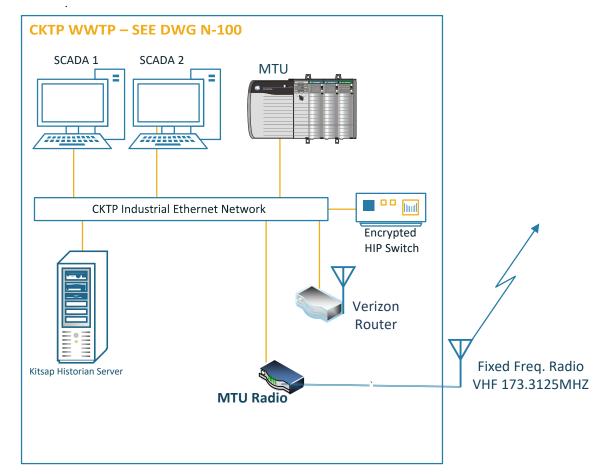








Manchester Group tanks to be redirected to Manchester WWTP. Requires additional radio frequency.




LS49 to be redirected to Manchester WWTP. Requires additional radio frequency.



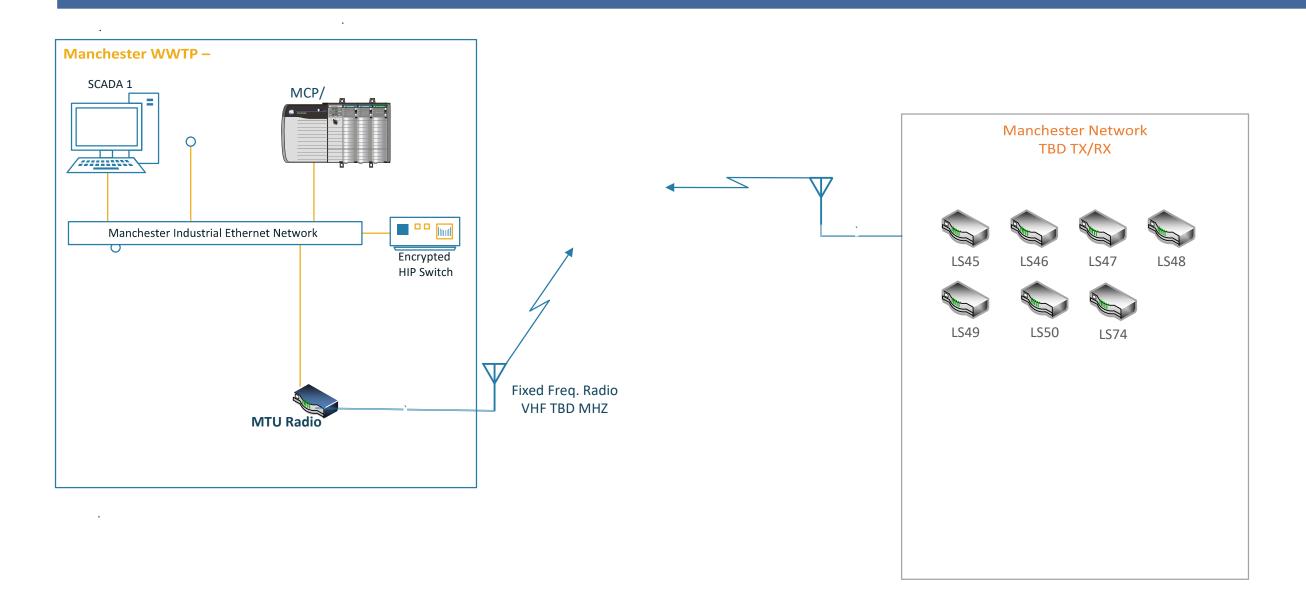



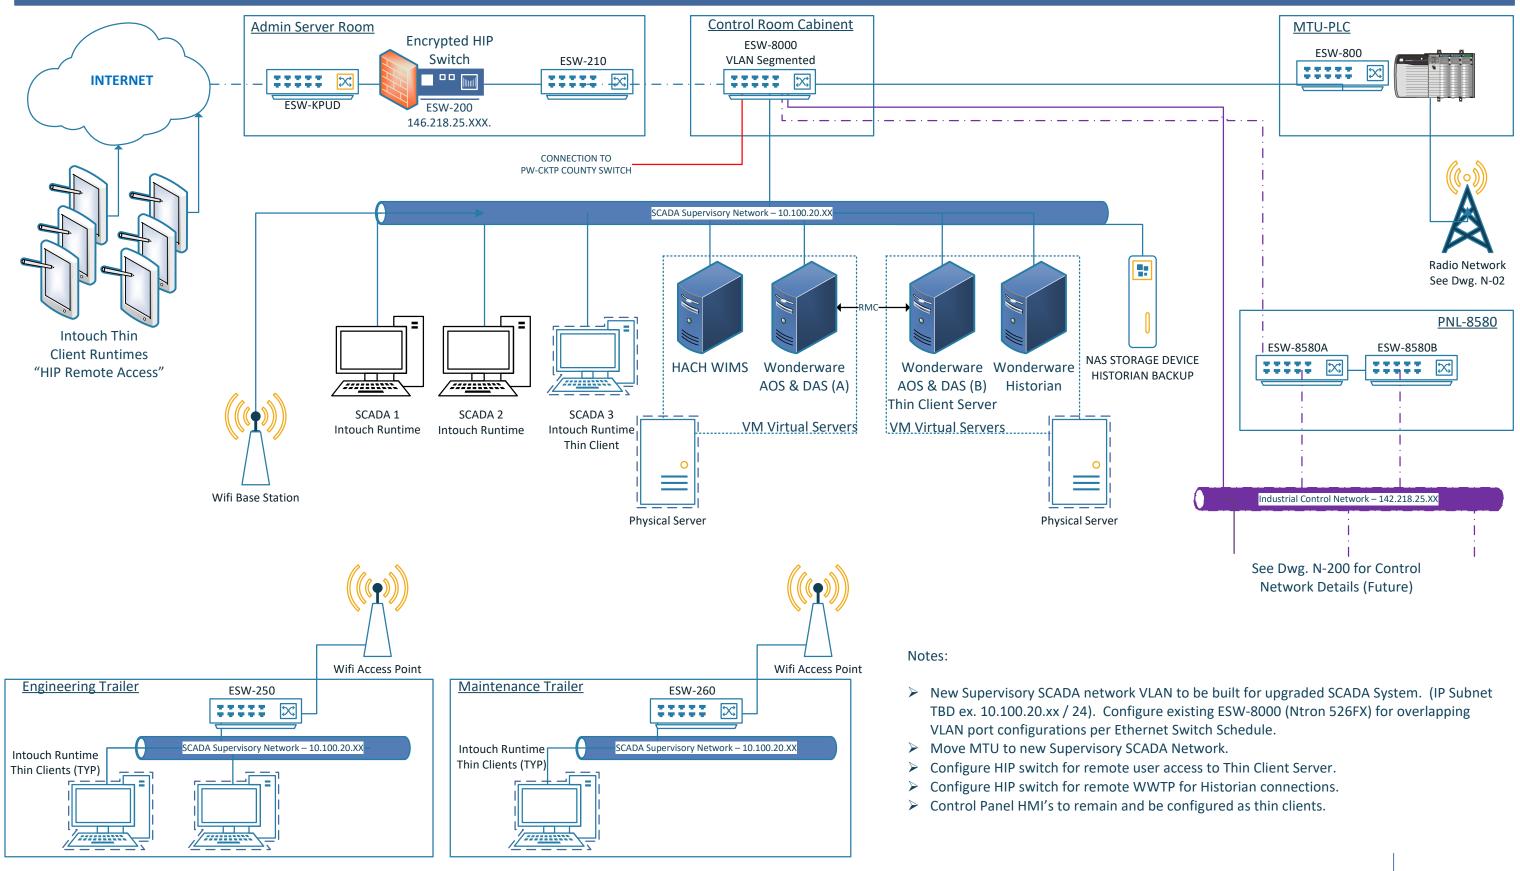



## Appendix D

# WWTP PLC I/O Summary and PLC and Remote I/O Module Summary

# WWTP PLC Hardwired I/O Summary

Data collected by: John Thomas
Dates collected: August 2020

				# of remote	Al	AO	DI	DI	DO	DO	DO	Total
Facility	Building/area	Panel tag	PLC panel description	I/O drops	(4-20 mA)	(4-20 mA)	(24 VDC)	(120 VAC)	(24 VDC)	(120 VAC)	(relay)	I/O points
CKTP	Aeration basins 3 & 4 electrical building	PNL 2939	Aeration basins 3 & 4 electrical building control panel	0	33	12	0	27	0	2	0	74
CKTP	Digester control building	PNL 6000	Digester control building control panel	0	10	0	28	0	0	12	0	50
CKTP	Digester gas conditioning facility	PNL 9201	Digester gas treatment control panel	0	11	1	17	0	0	0	8	37
CKTP	Headworks building	PNL 1050	Headworks control panel	0	11	2	0	46	0	0	5	64
CKTP	Power/blower building	PNL 2920	Power/blower building blower room control panel	0	26	9	0	35	0	9	0	79
CKTP	Power/blower building	PNL 2990	Power/blower building electrical room control panel	1	29	13	105	3	0	31	0	181
CKTP	Reclaimed water building	PNL 8200	Filter system control panel	0	13	0	5	0	0	0	13	31
CKTP	Reclaimed water building	PNL 8905	Reclaimed water control panel	0	20	6	0	42	0	5	0	73
CKTP	Septage receiving	PNL 5010	Raptor septage acceptance plant control panel	0	2	0	0	18	0	0	14	34
CKTP	Septage receiving		RACS operator interface control panel	0	1	0	2	0	0	0	1	4
CKTP	Sludge processing building	MCC 2984	MCC 2984 control section	5	29	18	30	58	8	9	29	181
CKTP	Sludge processing building	PNL 7110	Centrifuge 1 control panel	0	12	3	35	0	0	0	18	68
CKTP	Sludge processing building	PNL 7120	Centrifuge 2 control panel	0	10		32	0	0	0	18	63
CKTP	Sludge processing building	PNL 7225	Dewatering polymer panel	0	8	2	32	0	15	0	0	57
CKTP	UV disinfection	SCC 3100	UV system control center	0	7	0	15	0	11	0	0	33
CKTP	WAS thickening building	PNL 4012	Rotary drum thickener control panel	0	0	3	0	12	0	7	0	22
CKTP	WAS thickening building	PNL 4050	Polymer blending control panel	0	7	1	0	12	0	0	8	28
CKTP	WAS thickening building	PNL 4080	Polymer feed control panel	0	1	0	0	4	0	0	4	9
CKTP	WAS thickening building	PNL 4905	WAS thickening building control panel	0	22	1	0	45	0	23	0	91
			C	KTP TOTALS:	252	74	301	302	34	98	118	1,179
Kingston WWTP	Operations building	CP-200	Operations building control panel	2	23	2	109	0	92	0	0	226
			Kingston WV	WTP TOTALS:	23	2	109	0	92	0	0	226
Manchester WWTP	Operations building	PCP	Plant control panel	2	10	5	0	79	0	12	24	130
			Manchester WV	WTP TOTALS:	10	5	0	79	0	12	24	130
Suquamish WWTP		CP-01	Main control panel	1	17	6	57	42	41	0	0	163
Suquamish WWTP	Process building	CP-15	Rotary drum thickener control panel	0	3	4	0	11	0	0	6	24
			Suquamish WV	WTP TOTALS:	20	10	57	53	41	0	6	187

# WWTP PLC and Remote I/O Module Summary

Data collected by:	John Thomas
Dates collected:	August 2020

Facility	Panel tag	Panel description	PLC/RIO	Rack	( Slot	Model	Catalog #	I/O type	Voltage/current/ protocol	I/O channels used	I/O channe capacity
CKTP		MCC 2981 control section	RIO	nacr		Bulletin 1769 Compact I/O 17		Ethernet Adapter			N/A
CKIF	IVICC 2901	INCC 2961 CONTROL Section	INIO	'		Bulletin 1769 Compact I/O 17			24 VDC	12	16
						Bulletin 1769 Compact I/O 17			24 VDC	12 0	16
										7	
OLITO	1400 0000	MOO 0000	DIO		_	Bulletin 1769 Compact I/O 17			24 VDC	/ N1/A	16
CKTP	MCC 2982	MCC 2982 control section	RIO	] ]		Bulletin 1769 Compact I/O 17		Ethernet Adapter			N/A
						Bulletin 1769 Compact I/O 17		DI	120 VAC	10	16
						Bulletin 1769 Compact I/O 17			Relay (VAC/VDC)		16
CKTP	MCC 2983	MCC 2983 control section	RIO	1		Bulletin 1769 Compact I/O 17		Ethernet Adapter			N/A
						Bulletin 1769 Compact I/O 17		DI	120 VAC	15	16
						Bulletin 1769 Compact I/O 17		DI	120 VAC	14	16
						Bulletin 1769 Compact I/O 17		DI	120 VAC	4	16
					4	Bulletin 1769 Compact I/O 17	'69-OW16/A	DO	Relay (VAC/VDC)	15	16
					5	Bulletin 1769 Compact I/O 17	'69-OW16/A		Relay (VAC/VDC)	7	16
CKTP	MCC 2984	MCC 2984 control section	PLC	1	0	CompactLogix 5370 17	'69-L33ER	Controller	EtherNet/IP	N/A	N/A
					1	Bulletin 1769 Compact I/O 17	'69-IQ32/A	DI	24 VDC	12	32
					2	Bulletin 1769 Compact I/O 17	'69-OA16/A	DO	120 VAC	9	16
					3	Bulletin 1769 Compact I/O 17	'69-IF8/A	Al	4-20 mA	3	8
						Bulletin 1769 Compact I/O 17		AO	4-20 mA	4	4
			RIO	1		Bulletin 1769 Compact I/O 17		Ethernet Adapter		N/A	N/A
						Bulletin 1769 Compact I/O 17		DI	120 VAC	10	16
						Bulletin 1769 Compact I/O 17		DI	120 VAC	5	16
						Bulletin 1769 Compact I/O 17			Relay (VAC/VDC)	-	16
CKTP	PNI 1050	Headworks control panel	PLC	1	_		47-L552		EtherNet/IP		N/A
	1112 1000	Troddworks control parisi	1. 20	l			'47-SDN		DeviceNet		N/A
									DeviceNet		N/A
							'46-IA16	DI	120 VAC		16
						<u> </u>	'46-IA16	DI	120 VAC	16	16
							46-IA16	DI	120 VAC	14	16
									Relay (VAC/VDC)		16
							46-NI8	Al	4-20 mA		8
						<u> </u>			4-20 mA		
							46-NO4I	AO	4-20 mA	2	8
OVTD	DNII 0000	A systical blower O southed a size!	DIO	4						_	4 NI/A
CKTP	PNL 2002	Aeration blower 2 control panel	RIO				34-AENT/B	Ethernet Adapter		N/A	N/A
							734-OE2C/C		4-20 mA	2	2
	<b>-</b>						′34-IA4/C	DI	120 VAC	3	4
CKTP	PNL 2920	Power/blower building blower room control panel	PLC	1		' ĕ	69-L33ER		EtherNet/IP		N/A
						Bulletin 1769 Compact I/O 17		Al	4-20 mA	6	8
						Bulletin 1769 Compact I/O 17		Al	4-20 mA	/	8
						Bulletin 1769 Compact I/O 17		Al	4-20 mA	6	8
						Bulletin 1769 Compact I/O 17		Al	4-20 mA	7	8
						Bulletin 1769 Compact I/O 17		AO	4-20 mA	3	4
						Bulletin 1769 Compact I/O 17		AO	4-20 mA	3	4
						Bulletin 1769 Compact I/O 17		AO	4-20 mA	3	4
				2	9	Bulletin 1769 Compact I/O 17	'69-IA16/A	DI	120 VAC	8	16

Facility	Panel tag	Panel description	PLC/RIO	Rack	Slot	Model	Catalog #	I/O type	Voltage/current/ protocol	I/O channels used	I/O channe capacity
1 donity	T affer tag	r and description		riack	_	Bulletin 1769 Compact I/O		DI	120 VAC	9	16
					11	Bulletin 1769 Compact I/O		DI	120 VAC	9	16
					12	Bulletin 1769 Compact I/O		DI	120 VAC	9	16
						Bulletin 1769 Compact I/O		DO	120 VAC	5	16
					14	Bulletin 1769 Compact I/O		DO	120 VAC	4	16
CKTP	DNI 2030	Aeration basins 3 & 4 electrical building control panel	DI C	1		·	1769-L33ER	Controller	EtherNet/IP	N/A	N/A
	1 INC 2909	Acration basins 5 & 4 electrical building control parier		'	1	Bulletin 1769 Compact I/O		Scanner	DeviceNet	N/A	N/A
					2	Bulletin 1769 Compact I/O		Scanner	DeviceNet	N/A	N/A
						Bulletin 1769 Compact I/O		Al	4-20 mA	6	8
					4	Bulletin 1769 Compact I/O		Al	4-20 mA	7	8
					5	Bulletin 1769 Compact I/O		Al	4-20 mA	6	8
						Bulletin 1769 Compact I/O		Al	4-20 mA	7	8
					7	Bulletin 1769 Compact I/O		Al	4-20 mA	7	8
					0	Bulletin 1769 Compact I/O		AO	4-20 mA	7	0
				2	9	·		AO	4-20 mA	0	4
					10	Bulletin 1769 Compact I/O			4-20 MA	3	4
					11	Bulletin 1769 Compact I/O		AO		3	4
					12	Bulletin 1769 Compact I/O		AO	4-20 mA	3	4
						Bulletin 1769 Compact I/O		DI	120 VAC	8	16
						Bulletin 1769 Compact I/O		DI	120 VAC	10	16
						Bulletin 1769 Compact I/O		DI	120 VAC	9	16
	<b>5</b>			<u> </u>	16	Bulletin 1769 Compact I/O		DO	120 VAC	2	16
KTP	PNL 2990	Power/blower building electrical room control panel	PLC	1	0		1769-L33ER	Controller	EtherNet/IP	N/A	N/A
					1	Bulletin 1769 Compact I/O		DI	24 VDC	28	32
					2	Bulletin 1769 Compact I/O		DI	24 VDC	31	32
						Bulletin 1769 Compact I/O		DI	24 VDC	30	32
						Bulletin 1769 Compact I/O		DI	24 VDC	16	32
						Bulletin 1769 Compact I/O		DO	120 VAC	15	16
					6	Bulletin 1769 Compact I/O		DO	120 VAC	16	16
				2	7	Bulletin 1769 Compact I/O		Al	4-20 mA	8	8
						Bulletin 1769 Compact I/O		Al	4-20 mA	8	8
						Bulletin 1769 Compact I/O		Al	4-20 mA	6	8
						Bulletin 1769 Compact I/O		Al	4-20 mA	7	8
					11	Bulletin 1769 Compact I/O		AO	4-20 mA	3	4
					12	Bulletin 1769 Compact I/O		AO	4-20 mA	4	4
					13	Bulletin 1769 Compact I/O	1769-OF4CI/A	AO	4-20 mA	4	4
KTP	PNL 4012	Rotary drum thickener control panel	PLC	1	0	CompactLogix 5370	1769-L30ER	Controller	EtherNet/IP	N/A	N/A
					1	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	12	16
					2	Bulletin 1769 Compact I/O	1769-OA16/A	DO	120 VAC	7	16
					3	Bulletin 1769 Compact I/O	1769-OF8C/A	AO	4-20 mA	3	8
KTP	PNL 4050	Polymer blending control panel	PLC	1	0	CompactLogix L3x	1769-L32E	Controller	EtherNet/IP	N/A	N/A
		_ '			3	Bulletin 1769 Compact I/O	1769-IF4/B	Al	4-20 mA	4	4
					4	Bulletin 1769 Compact I/O	1769-IF4/B	Al	4-20 mA	3	4
					5	Bulletin 1769 Compact I/O		AO	4-20 mA	1	4
						Bulletin 1769 Compact I/O		DI	120 VAC	12	16
					7	Bulletin 1769 Compact I/O		DO	Relay (VAC/VDC)		16
CKTP	PNL 4080	Polymer feed control panel	PLC	1	0	·	1769-L32E	Controller	EtherNet/IP	N/A	N/A
		Signature   State   State	1	1	H	Bulletin 1769 Compact I/O		Al	4-20 mA	14	14

Facility	Panel tag	Panel description	PLC/RIO	Rack	Slat	t Model	Catalog #	I/O type	Voltage/current/ protocol	I/O channels used	capacity
1 domey	r anortag	T differ decomplicati	1 20/11/0	riadire	2	Bulletin 1769 Compact I/O		DΙ	120 VAC	4	16
					3	Bulletin 1769 Compact I/O		DO	Relay (VAC/VDC)	4	8
CKTP	PNL 4905	WAS thickening building control panel	PLC	1	0	<del>-</del>	1769-L33ER	Controller		N/A	N/A
	1.112.1000	Transferring salienty control pariet	20		1	Bulletin 1769 Compact I/O		Scanner		N/A	N/A
					3	Bulletin 1769 Compact I/O		Al	4-20 mA	8	8
					4	Bulletin 1769 Compact I/O		Al	4-20 mA	8	8
					5	Bulletin 1769 Compact I/O		Al	4-20 mA	6	8
					6	Bulletin 1769 Compact I/O		AO	4-20 mA	1	4
				2	8	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	10	16
					9	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	11	16
					10	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	15	16
					11	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	9	16
					12	Bulletin 1769 Compact I/O	1769-OA16/A	DO	120 VAC	11	16
					13	Bulletin 1769 Compact I/O	1769-OA16/A	DO	120 VAC	12	16
CKTP	PNL 5010	Raptor septage acceptance plant control panel	PLC	1	0	MicroLogix 1100	1763-L16AWA	Al	4-20 mA	2	2
								DI	120 VAC	10	10
								DO	Relay (VAC/VDC)	6	6
					1	MicroLogix I/O	1762-IA8	DI	120 VAC	8	8
					2	MicroLogix I/O	1762-OW8	DO	Relay (VAC/VDC)	8	8
KTP	PNL 6000	Digester control building control panel	PLC	1	0	CompactLogix 5370	1769-L33ER	Controller	EtherNet/IP	N/A	N/A
					1	Bulletin 1769 Compact I/O	1769-IQ32/A	DI	24 VDC	18	32
					2	Bulletin 1769 Compact I/O	1769-IQ32/A	DI	24 VDC	10	32
					3	Bulletin 1769 Compact I/O	1769-OA16/A	DO	120 VAC	12	16
					4	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	8	8
					5	Bulletin 1769 Compact I/O	1769-IF4/B	Al	4-20 mA	2	4
CKTP	PNL 7105	PLC 7105 I/O rack	RIO	1	0	Bulletin 1769 Compact I/O	1769-AENTR	Ethernet Adapter	EtherNet/IP	N/A	N/A
					1	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	6	16
					2	Bulletin 1769 Compact I/O	1769-OB16/A	DO	24 VDC	1	16
					3	Bulletin 1769 Compact I/O	1769-IF4I/A	Al	4-20 mA	4	4
					4	Bulletin 1769 Compact I/O		Al	4-20 mA	4	4
					5	Bulletin 1769 Compact I/O	1769-IF4I/A	Al	4-20 mA	4	4
					6	Bulletin 1769 Compact I/O		Al	4-20 mA	2	4
					7	Bulletin 1769 Compact I/O		Al	4-20 mA	3	4
				2	8	Bulletin 1769 Compact I/O		Al	4-20 mA	4	4
					9	Bulletin 1769 Compact I/O		Al	4-20 mA	2	4
						Bulletin 1769 Compact I/O		Al	4-20 mA	3	4
						Bulletin 1769 Compact I/O		Al	4-20 mA	0	4
						Bulletin 1769 Compact I/O		AO	4-20 mA	4	4
						Bulletin 1769 Compact I/O		AO	4-20 mA	3	4
						Bulletin 1769 Compact I/O		AO	4-20 mA	4	4
				<u> </u>	15	Bulletin 1769 Compact I/O		AO	4-20 mA	3	4
CKTP	PNL 7110	Centrifuge 1 control panel	PLC	1	0	ı Ü	1769-L33ER	Controller		N/A	N/A
					1	Bulletin 1769 Compact I/O		Al	4-20 mA	4	8
					2	Bulletin 1769 Compact I/O		Al	4-20 mA	8	8
					3	Bulletin 1769 Compact I/O		AO	4-20 mA	3	4
					4	Bulletin 1769 Compact I/O		DI	24 VDC	14	16
	1			1	5	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	8	16


Facility	Panel tag	Panel description	PLC/RIO	Rack	Slot	Model	Catalog #	I/O type	Voltage/current/ protocol	I/O channels used	I/O channe capacity
· ·					6	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	13	16
					7	Bulletin 1769 Compact I/O	1769-OW16/A	DO	Relay (VAC/VDC)	13	16
					8	Bulletin 1769 Compact I/O	1769-OW16/A	DO	Relay (VAC/VDC)	5	16
KTP	PNL 7120	Centrifuge 2 control panel	PLC	1	0	CompactLogix 5370	1769-L33ER	Controller	EtherNet/IP	N/A	N/A
					1	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	4	8
					2	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	6	8
					3	Bulletin 1769 Compact I/O	1769-OF4/A	AO	4-20 mA	3	4
					4	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	14	16
					5	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	8	16
					6	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	10	16
					7	Bulletin 1769 Compact I/O	1769-OW16/A	DO	Relay (VAC/VDC)	13	16
					8	Bulletin 1769 Compact I/O	1769-OW16/A	DO	Relay (VAC/VDC)	5	16
CKTP	PNL 7225	Dewatering polymer panel	PLC	1	0	CompactLogix 5370	1769-L33ER	Controller	EtherNet/IP	N/A	N/A
		• • • •			1	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	12	16
					2	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	12	16
					3	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	8	16
					4	Bulletin 1769 Compact I/O	1769-OB16/A	DO	24 VDC	13	16
					5	Bulletin 1769 Compact I/O	1769-OB16/A	DO	24 VDC	2	16
					6	Bulletin 1769 Compact I/O	1769-IF4I/A	Al	4-20 mA	4	4
					7	Bulletin 1769 Compact I/O	1769-IF4I/A	Al	4-20 mA	4	4
					8	Bulletin 1769 Compact I/O	1769-OF2/A	AO	4-20 mA	2	2
CKTP	PNL 8200	Filter system control panel	PLC	1	0	CompactLogix L3x	1769-L32E	Controller	EtherNet/IP	N/A	N/A
		,			1	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	5	16
					2	Bulletin 1769 Compact I/O		DO	Relay (VAC/VDC)	13	16
					3	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	5	8
					4	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	8	8
CKTP	PNL 8905	Reclaimed water control panel	PLC	1	0	CompactLogix 5370	1769-L33ER	Controller	EtherNet/IP	N/A	N/A
		•			1	Bulletin 1769 Compact I/O	1769-SDN/B	Scanner	DeviceNet	N/A	N/A
					3	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	6	8
					4	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	7	8
					5	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	7	8
					6	Bulletin 1769 Compact I/O	1769-OF4CI/A	AO	4-20 mA	3	4
					7	Bulletin 1769 Compact I/O	1769-OF4CI/A	AO	4-20 mA	3	4
				2	9	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	9	16
					10	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	12	16
					11	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	9	16
					12	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	12	16
					13	Bulletin 1769 Compact I/O	1769-OA16/A	DO	120 VAC	3	16
					14	Bulletin 1769 Compact I/O	1769-OA16/A	DO	120 VAC	2	16
KTP	PNL 9201	Digester gas treatment control panel	PLC	1	0	CompactLogix L3x	1769-L32E	Controller	EtherNet/IP	N/A	N/A
		·			1	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	15	16
					2	Bulletin 1769 Compact I/O	1769-IQ16/A	DI	24 VDC	2	16
					3	Bulletin 1769 Compact I/O		DO	Relay (VAC/VDC)	8	16
						Bulletin 1769 Compact I/O		Al	4-20 mA	8	8
						Bulletin 1769 Compact I/O		Al	4-20 mA	3	8
					6	Bulletin 1769 Compact I/O		AO	4-20 mA	1	4
CKTP	SCC 3100	UV system control center	PLC	1		-	1769-L33ER	Controller	EtherNet/IP	N/A	N/A

Facility	Panel tag	Panel description	PLC/RIO	Rack	Slot	t Model	Catalog #	I/O type	Voltage/current/ protocol	I/O channels used	capacity
1 donity	1 affer tag	T affer description	T LO/THO	Tiack	1		MV169E-MBS/A		Modbus RTU	N/A	N/A
					2	Bulletin 1769 Compact I/O		Al	4-20 mA	4	4
					3	Bulletin 1769 Compact I/O		Al	4-20 mA	3	4
					4	Bulletin 1769 Compact I/O		DO	24 VDC	11	16
					5	Bulletin 1769 Compact I/O		DI	24 VDC	15	16
KTP		Master station CTU (VHF PLC)	PLC	1	0		1769-L35E		EtherNet/IP	N/A	N/A
KTP		Master station CTU (Cellular PLC)	PLC	1	0	·	1769-L33ER	Controller	EtherNet/IP	N/A	N/A
KTP		RACS operator interface control panel	PLC	1	0	MicroLogix 1100	1763-L16BWA	Al	4-20 mA	1	2
IXII		That of operator interface control parier		Ī	ľ	WilcroLogix 1100	1703-L10DWA	DI	24 VDC	2	10
								DO	Relay (VAC/VDC)		6
ingston WWTP	CP-200	Operations building control panel	PLC	1	0	CompactLogix 5370	1769-L33ER		EtherNet/IP	N/A	N/A
ingston www.ii	01 -200	Operations building control panel	1 20	'	1	Bulletin 1769 Compact I/O			24 VDC	13	16
					2	Bulletin 1769 Compact I/O			24 VDC	6	16
					2	Bulletin 1769 Compact I/O			24 VDC	15	16
					1	Bulletin 1769 Compact I/O			24 VDC	6	16
					5	Bulletin 1769 Compact I/O		Al	4-20 mA	2	10
					5	Bulletin 1769 Compact I/O		Al	4-20 mA	0	4
ingston WWTP	CP-300	Draces building central penal	RIO	4	0	Bulletin 1769 Compact I/O		Ethernet Adapter		N/A	N/A
ingsion www.re	CP-300	Process building control panel	RIO	l I	1	Bulletin 1769 Compact I/O			24 VDC	14	16
					-			DI	24 VDC	14	16
					2	Bulletin 1769 Compact I/O			24 VDC		16
					3	Bulletin 1769 Compact I/O		DI		14	
					4	Bulletin 1769 Compact I/O			24 VDC	15	16
					5	Bulletin 1769 Compact I/O			24 VDC	14	16
					5	Bulletin 1769 Compact I/O			24 VDC	5	16
					/	Bulletin 1769 Compact I/O		DI	24 VDC	13	16
					8	Bulletin 1769 Compact I/O		DI	24 VDC	1	16
					9	Bulletin 1769 Compact I/O		Al	4-20 mA	4	4
				_	10	Bulletin 1769 Compact I/O		Al	4-20 mA	3	4
			RIO	2	0	Bulletin 1769 Compact I/O		Ethernet Adapter		N/A	N/A
					1	Bulletin 1769 Compact I/O			24 VDC	16	16
					2	Bulletin 1769 Compact I/O			24 VDC	16	16
					3	Bulletin 1769 Compact I/O			24 VDC	16	16
					4	Bulletin 1769 Compact I/O			24 VDC	9	16
					5	Bulletin 1769 Compact I/O			24 VDC	14	16
					6	Bulletin 1769 Compact I/O		Al	4-20 mA	4	4
					/	Bulletin 1769 Compact I/O		Al	4-20 mA	4	4
					8	Bulletin 1769 Compact I/O		Al	4-20 mA	4	4
					9	Bulletin 1769 Compact I/O		Al	4-20 mA	2	4
					10	Bulletin 1769 Compact I/O		AO	4-20 mA	2	4
anchester WWTF	PIPCP	Plant control panel	PLC	1	0	ı	1769-L33ER		EtherNet/IP	N/A	N/A
					1_	Bulletin 1769 Compact I/O		DI	120 VAC	7	16
					2	Bulletin 1769 Compact I/O		DI	120 VAC	6	16
					3	Bulletin 1769 Compact I/O		DI	120 VAC	9	16
					4	Bulletin 1769 Compact I/O		DI	120 VAC	3	16
					5	Bulletin 1769 Compact I/O		DI	120 VAC	12	16
					6	Bulletin 1769 Compact I/O		DI	120 VAC	8	16
					7	Bulletin 1769 Compact I/O	1769-OW8I/B	DO	Relay (VAC/VDC)	6	8

									~	I/O channels	
Facility	Panel tag	Panel description	PLC/RIO	Rack			Catalog #	I/O type	protocol	used	capacity
						Bulletin 1769 Compact I/O			Relay (VAC/VDC)		8
						Bulletin 1769 Compact I/O		DO	120 VAC	12	16
						Bulletin 1769 Compact I/O			4-20 mA	6	8
						Bulletin 1769 Compact I/O			4-20 mA	2	8
Manchester WWTP	LP-225	Influent pump station control panel	RIO	1	0	Bulletin 1769 Compact I/O		Ethernet Adapter		N/A	N/A
					1	Bulletin 1769 Compact I/O		DI	120 VAC	12	16
					2	Bulletin 1769 Compact I/O		DI	120 VAC	9	16
						Bulletin 1769 Compact I/O		DI	120 VAC	7	16
					4	Bulletin 1769 Compact I/O			Relay (VAC/VDC)		8
					5	Bulletin 1769 Compact I/O			Relay (VAC/VDC)		8
					6	Bulletin 1769 Compact I/O			Relay (VAC/VDC)	0	8
					7	Bulletin 1769 Compact I/O	1769-IF8/A		4-20 mA	3	8
					8	Bulletin 1769 Compact I/O	1769-OF8C/A		4-20 mA	3	8
lanchester WWTP	SBR-CP	Aeration basins control panel	RIO	1	0	Bulletin 1769 Compact I/O	1769-AENTR	Ethernet Adapter	EtherNet/IP	N/A	N/A
					1	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	6	16
					2	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	0	16
					3	Bulletin 1769 Compact I/O	1769-OW8I/B	DO	Relay (VAC/VDC)	3	8
					4	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	1	8
Suquamish WWTP	CP-01	Main control panel	PLC	1	0	CompactLogix 5370	1769-L33ER	Controller	EtherNet/IP	N/A	N/A
		·			1	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	8	8
					2	Bulletin 1769 Compact I/O	1769-IF8/A	Al	4-20 mA	5	8
					3	Bulletin 1769 Compact I/O	1769-OF4CI/A	AO	4-20 mA	4	4
					4	Bulletin 1769 Compact I/O	1769-OF4CI/A	AO	4-20 mA	2	4
					5	Bulletin 1769 Compact I/O	1769-IA16/A	DI	120 VAC	1	16
						Bulletin 1769 Compact I/O		DI	120 VAC	16	16
						Bulletin 1769 Compact I/O		DI	120 VAC	14	16
					8	Bulletin 1769 Compact I/O		DI	120 VAC	11	16
					9	Bulletin 1769 Compact I/O	1769-OB16/B	DO	24 VDC	4	16
uquamish WWTP	CP-05	US Filter control panel	RIO	1	0	Bulletin 1769 Compact I/O		Ethernet Adapter	EtherNet/IP	N/A	N/A
- 1					1	Bulletin 1769 Compact I/O			4-20 mA	4	8
					2	Bulletin 1769 Compact I/O				26	32
					3	Bulletin 1769 Compact I/O			24 VDC	31	32
						Bulletin 1769 Compact I/O			24 VDC	32	32
						Bulletin 1769 Compact I/O			24 VDC		32
uguamish WWTP	CP-15	Rotary drum thickener control panel	PLC	1	0		1769-L30ER			N/A	N/A
	J. 10	. istally drain unstance control parior		ļ .	1	Bulletin 1769 Compact I/O		DI	120 VAC	11	16
						Bulletin 1769 Compact I/O			Relay (VAC/VDC)	6	8
						Bulletin 1769 Compact I/O			4-20 mA	3	8
						Bulletin 1769 Compact I/O				4	4





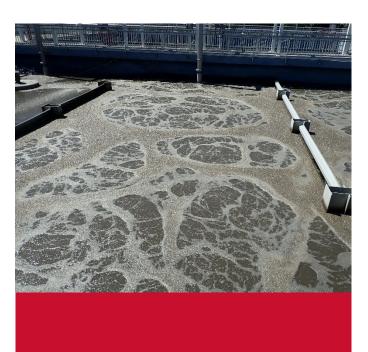


# TM-2: SCADA Use Cases and Operational Needs

Sewer Utility SCADA Master Plan

Kitsap County Public Works Sewer Utility Division

April 30, 2021



#### Kitsap County Public Works, Sewer Utility Division Sewer Utility SCADA Master Plan

#### TM-2: SCADA Use Cases and Operational Needs

April 30, 2021

Prepared by:

John M. Thomas, PE HDR Engineering, Inc. (425) 450-6240



I hereby certify that the technical memorandum was prepared under my direct supervision and that I am a duly registered Engineer under the laws of the State of Washington.



#### **Contents**

1	Intro	duction		1-1
	1.1	Approa	ıch	1-1
	1.2		cal Memorandum Organization	
		1.2.1	Structure	
		1.2.2	Means of Emphasis	1-2
2	Indu	stry Tren	ds and Core Objectives Workshop	2-1
	2.1	Industr	y Challenges	2-1
	2.2	Curren	t Technology	2-2
	2.3		ractices	
	2.4		Objectives for Future SCADA System	
	2.5		hedule and Budget Constraints/Opportunities	
	2.6		nop Findings	
2			•	
3		-	ves for Future SCADA System	
	3.1		Objectives Development	
	3.2	Core C	bjectives for Future SCADA System	3-1
4	Sew	er Utility	Staff Interviews	4-1
	4.1	Operat	ions Staff Interview	4-1
	4.2	I&C Te	chnician Staff Interview	4-3
	4.3	Constr	uction and CIP Staff Interview	4-5
	4.4	Labora	tory Staff Interview	4-5
	4.5	Mainte	nance Staff Interview	4-7
	4.6	Public	Works Management and Stormwater Division Staff Interview	4-8
5	Netw	ork Arch	nitecture: Future Needs and Recommended Improvements	5-1
	5.1		Needs	
		5.1.1	Central Monitoring Location for Sewer Utility Pump Stations and WWTPs	
		5.1.2	Secondary Monitoring Location for Sewer Utility Pump Stations and WWTPs	5-1
		5.1.3	Improved Remote Pump Station Telemetry	
		5.1.4 5.1.5	Mobile Access	
		5.1.5 5.1.6	Improved OT Network Resilience	
		5.1.7	Extend OT Network and ICS Infrastructure Battery Backup Power Duration	0-2
		0.1.7	for Critical Components	5-3
		5.1.8	Increased Network Throughput	
		5.1.9	Improved Backup Procedures and Business Continuity Preparedness	
		5.1.10		
		5.1.11	OT Network and Telemetry Monitoring Capability	
	5.2		mended Improvements	
		5.2.1	Upgrade CKTP Control Room	
		5.2.2	Extend OT Network to County Public Works Annex Facility	
		5.2.3 5.2.4	Remote Pump Station and WWTP Telemetry Improvements  CKTP OT Network Upgrades	
		5.2.4	General OT Network Upgrades	
		5.2.6	ICS and OT Network Power Supply Improvements	
		5.2.7	Secure Remote Access and Data Exchange with Business LAN	
		5.2.8	OT Network Configuration, Management, and Backup Improvements	

		5.2.9	Cybersecurity Improvements	5-27
6	ICS	Hardwar	e: Future Needs and Recommended Improvements	6-1
	6.1	Future	Needs	6-1
		6.1.1	Establish the Next PLC Platform Standard for the ICS	
		6.1.2	Motor Controllers	
		6.1.3	Establish the Next OIT Standard for the ICS	
		6.1.4	Thickened Sludge Truck Loadout Flow Monitoring at Remote WWTPs	
		6.1.5	Implement Monitoring and Alarming for Composite Samplers	
		6.1.6	Improved SCADA Monitoring of UV System at Remote WWTPs	
		6.1.7	Implement CKTP Instrumentation and Automation Improvements	
		6.1.8	Implement KWWTP Instrumentation and Automation Improvements	6-4
		6.1.9	Implement MWWTP Instrumentation and Automation Improvements	6-4
		6.1.10	Implement SWWTP Instrumentation and Automation Improvements	6-5
		6.1.11	Implement Remote Pump Station Instrumentation and Automation	
			Improvements	6-6
	6.2	Recom	mended Improvements	6-6
		6.2.1	Establish Sewer Utility PLC Platform Standard and Schedule Replacement of	
			Select WWTP and Remote Pump Station PLCs	6-6
		6.2.2	Develop a Standard Approach for Monitoring and Control of Motorized	
			Equipment	6-7
		6.2.3	Develop a Standard Approach for Monitoring Remote Pump Stations	6-8
		6.2.4	Replace CKTP MCC DeviceNet Networks with Ethernet-capable Motor	
			Controllers	6-9
		6.2.5	Establish Sewer Utility OIT Platform Standard and Schedule Replacement of	
			Select WWTP and Remote Pump Station OITs	
		6.2.6	Develop a Formal Instrument Calibration and Maintenance Program	
		6.2.7	CKTP Digester Building PNL 6000 Relocation and MCC Replacement	6-13
		6.2.8	Include Integration of Composite Sampler Alarms and Monitoring with	
			Replacement of Existing Samplers	6-14
		6.2.9	Evaluate Remaining Years of Useful Service Life for Remote WWTP UV	
			Systems to Determine Best Approach for Improved SCADA Monitoring of the	
			UV Systems	
		6.2.10	Implement CKTP Instrumentation and Automation Improvements	
		6.2.11	Implement KWWTP Instrumentation and Automation Improvements	
		6.2.12	· · · · · · · · · · · · · · · · · · ·	
		6.2.13	· · · · · · · · · · · · · · · · · · ·	
		6.2.14	Remote Pump Station Instrumentation and Automation	6-23
7	ICS	Software	e: Future Needs and Recommended Improvements	7-1
	7.1		Needs	
	7.1			/ - 1
		7.1.1	Establish Centrally Managed, Standards-based HMI and Historian Platform	7.1
		7.1.2	for the WWTPs Implement HPHMI Concepts for WWTP SCADA HMI Screens	
		7.1.3	Implement Real-time Monitoring and Historical Trending of WWTP KPIs	
		7.1.4	Improve Accessibility of Historical SCADA Data	1-2
		7.1.5	Mitigate Loss of SCADA Data from Remote WWTPs during Communication	7.0
		716	Outages	
		7.1.6 7.1.7	Migrate to Thin Client Configuration for CKTP HMIs	
		7.1.7 7.1.8	Improved Alarm Notification SystemPLC Firmware Standardization	
		7.1.9	Establish Tracking of ICS Set Point Changes  Provide Read-only Access to WWTP SCADA HMI Screens at Laboratory	
		7.1.10	•	
	7.2	Recom	mended Improvements	7-3

#### TM-2: SCADA Use Cases and Operational Needs Sewer Utility SCADA Master Plan



		7.2.1	Platform with Managed InTouch Applications and Standardized Templates		
			Based on HPHMI Concepts	7-4	
		7.2.2	Establish Access to All Sewer Utility SCADA HMI Screens at Each WWTP		
			Control Room and at the County Public Works Annex Facility		
		7.2.3	Complete Migration to Thin Client Configuration for CKTP HMIs	7-5	
		7.2.4	Determine Standard PLC Firmware Versions for the Sewer Utility and		
			Perform Firmware Upgrades	7-6	
		7.2.5	Develop PLC Programming Standards and Leverage Them to Standardize	7.0	
		7.2.6	Future PLC Programming Work Products		
		7.2.6 7.2.7	Establish a Tiered Historian Implementation at CKTP to Centralize Sewer	/ - /	
		1.2.1	Utility Historical ICS Data and Provide Secure Access to Historical ICS Data		
			from the Sewer Utility Business LAN	7 <b>-</b> 9	
		7.2.8	Broaden the Data Set Archived by the Sewer Utility Historian to Establish		
			Foundations for More Comprehensive Process- and Asset-level Health and		
			Performance Monitoring	7-10	
		7.2.9	Upgrade Alarm Notification System		
		7.2.10	Provide Read-only Access to WWTP SCADA HMI Screens at Laboratory	7-13	
8	ICS [	Documer	ntation: Future Needs and Recommended Improvements	8-1	
	8.1	Future	Needs	8-1	
		8.1.1	Develop Sewer Utility ICS Standards Documentation	8-1	
		8.1.2	Develop Control Strategy Documentation for Sewer Utility ICS Processes		
		8.1.3	SOPs and Documented Workflows for ICS Technology	8-1	
	8.2	Recom	mended Improvements	8-2	
		8.2.1	Develop Sewer Utility ICS Standards Documentation		
		8.2.2	Institute Sewer Utility ICS Standards Documentation Governance		
		8.2.3	Develop and Maintain Control Strategy Documentation		
		8.2.4	Establish Electronic Records for Operator Logs	8-4	
		8.2.5	Update WWTP and Pump Station P&IDs and Compile Current Consolidated	0.4	
		0.0.0	P&ID Sets on County eO&M SharePoint Site	8-4	
		8.2.6	Develop and Maintain OT Network Architecture Diagrams and Fiber-optic Patch Panel Schedules	0 1	
		8.2.7	Develop Policies, SOPs, and Documented Workflows for ICS Technology		
			· · · · · · · · · · · · · · · · · · ·		
9	Othe	Other Software Packages: Future Needs and Recommended Improvements			
	9.1		Needs		
			Establish Data Exchange between SCADA and LIMS		
		9.1.2	Establish Data Exchange between SCADA and CMMS	9-1	
		9.1.3	Develop Dashboards and Data Visualizations to Deepen Insight into Sewer	0.4	
			Utility Operations		
	9.2		mended Improvements	9-2	
		9.2.1	Complete Hach WIMS Implementation and Establish Data Exchange with AVEVA System Platform	0_2	
		9.2.2	Complete Asset Creation and Data Entry Required for LLumin	ə-Z	
			Implementation, Establish Automatic Importing of Asset Runtimes, and		
			Develop a Plan for Automating Work Order Generation	9-2	
		9.2.3	Select a Data Analytics and Visualization Software Platform and Develop In-		
			house Skill Sets through Creation of Initial Dashboards		
		9.2.4	Begin Leveraging the Sewer Utility's Power and Energy Data	9-4	

## TM-2: SCADA Use Cases and Operational Needs Sewer Utility SCADA Master Plan

10	Risks and Deficiencies with Recommended Improvements Summary	10-1
11	References	11-1



## **Tables**

Table 2-1. Industry trends and core objectives workshop findings summary	2-5
Table 4-1. Operations staff interview key findings summary	4-1
Table 4-2. I&C technician staff interview key findings summary	4-3
Table 4-3. Construction and CIP staff interview key findings summary	4-5
Table 4-4. Laboratory staff interview key findings summary	4-5
Table 4-5. Maintenance staff interview key findings summary	4-7
Table 4-6. Public Works management and Stormwater Division staff interview key findings summary	4-9
Table 5-1. Network topology advantages and disadvantages	
Table 6-1. PLC replacement priority	6-7
Table 6-2. OIT replacement priority	6-12
Table 7-1. Summary of available equipment and process parameters to consider including in historian	7-11
Table 7-2. Summary of additional equipment and process parameters to consider including in historian	7-13
Table 9-1. Recommended power and energy parameters for initial energy management program baselines by application	9-5
Table 9-2. Example energy-based KPIs for wastewater infrastructure	9-7
Table 10-1. Risk and deficiency ranking system description	10-1
Table 10-2. Risks and deficiencies with recommended improvements summary	10-2
Figures	
Figure 2-1. CKTP liquid stream and solids removal summary dashboard	
Figure 2-2. Pump asset health and performance dashboard	
Figure 5-1. Example four-monitor operator workstation configuration with large-format displays	
Figure 5-2. Depiction of store-and-forward functionality	
Figure 5-3. DNP3 report-by-exception functionality summary	
Figure 5-4. Cellular WAN data concentrator PLC at CKTP SPB control room	
Figure 5-5. Example four-post seismic network rack cabinet	
Figure 5-6. Excerpts from existing and proposed CKTP OT network architecture	
Figure 5-7. Proposed SFP module installation in KPUD Carrier Ethernet combination port	
Figure 5-8. Proposed location of UPS in existing administration and laboratory building network rack	5-14
Figure 5-9. Redundant star topology	5-15
Figure 5-10. Example three-phase UPS system recently installed at a local wastewater utility	5-17
Figure 5-11. Overview of power supply and distribution redundancy for network rack components	5-19
Figure 5-12. Example redundant 24 VDC power supply application	5-20
Figure 5-13. Purdue Model for Control Hierarchy	5-21
Figure 5-14. Typical AVEVA Intouch Access Anywhere network architecture	5-22
Figure 5-15. Type 1 and Type 2 hypervisor environments	5-25
Figure 5-16. Example network performance monitoring dashboard from SolarWinds	5-27
Figure 6-1. 20-COMM-E EtherNet/IP adapter and 20-750-ENETR EtherNet/IP option module	6-10
Figure 6-2. Allen-Bradley E3 Plus and E300 electronic overload relay dimensions	6-10
Figure 6-3 Troiant IV3000B Touch Smart Controller	6-15

Figure 7-1. Example AOI for VFD equipment called in CKTP PLC 2939 programming	7-7
Figure 7-2. ANSI/ISA-18.2 alarm management flow diagram	7-8
Figure 7-3. High-level tiered historian network architecture	.7-10

#### **Abbreviations**

A ampere(s)

AAA authentication, authorization, and accounting

AC alternating current access control policy

AES Advanced Encryption Standard
ANSI American National Standards Institute

AOI Add-on Instruction
AUP acceptable use policy
BI Business Intelligence
BNR biological nutrient removal
BOD biological oxygen demand
CIP capital improvement program
CKTP Central Kitsap Treatment Plant

CMMS computerized maintenance management system

CMP change management policy

CO<sub>2</sub> carbon dioxide

COD chemical oxygen demand

County Kitsap County

CTU central telemetry unit

DHS U.S. Department of Homeland Security

DLR device-level ring
DO dissolved oxygen

DMR Discharge Monitoring Report

DMZ demilitarized zone

DNP3 Distributed Network Protocol 3 EMS energy management system

eO&M electronic operation and maintenance

ERP enterprise resource planning

ft<sup>3</sup> cubic foot

full-voltage non-reversing **FVNR** full-voltage reversing FVR GbE gigabit(s) Ethernet **GBT** gravity-belt thickener GE General Electric  $H_2S$ hydrogen sulfide HDR Engineering, Inc. HDR HIM human interface module HIP Host Identity Protocol human-machine interface HMI

HOA Hand-Off-Auto

HPHMI high-performance human-machine interface

hp horsepower

HRT hydraulic retention time

HTML5 Hypertext Markup Language revision 5
HTTPS Hypertext Transfer Protocol Secure

Hz hertz

I&C instrumentation and controls

IAPP International Association of Privacy Professionals



ICS industrial control system

IDE Integrated Development Environment **IEC** International Electrotechnical Commission **IGMP** Internet Group Management Protocol

I/O input/output Internet Protocol IΡ

IR infrared

Information Services IS

ISA International Society of Automation

**ISP** information security policy ΙT Information Technology KPI key performance indicator Kitsap Public Utility District **KPUD** 

kilovolt-ampere(s) kVA

kilovolt-ampere(s) reactive kVAR

kW kilowatt(s) kilowatt-hour(s) kWh

Kingston Wastewater Treatment Plant **KWWTP** 

LAN local area network

lb pound

LEL lower explosive limit

LIMS laboratory information management system

milliampere(s) mΑ

Master Plan Sewer Utility SCADA Master Plan

Mbps megabit(s) per second **MCC** motor control center

MDM mobile device management MFA multi-factor authentication

million gallons MG

maintenance and operations M&O MQ Telemetry Transport **MQTT** master telemetry unit MTU

**MWWTP** Manchester Wastewater Treatment Plant

not applicable N/A

NAAT North American Access Technologies, Inc.

NAS network attached storage **NEC** National Electrical Code

NIST National Institute of Standards and Technology

OIT operator interface terminal O&M operation and maintenance Optical Multi-mode 1 OM1

OM3 Optical Multi-mode 3 OOP object-oriented programming

OSI Open Systems Interconnection OT

Operational Technology

phosphorus

P&ID piping and instrumentation diagram

personal computer PC PDU power distribution unit PΕ population equivalent

PF power factor

PID proportional-integral-derivative **PLC** programmable logic controller

**PNL** panel

PS pump station QCC **Quality Controls Corporation** 

QoS Quality of Service

**RACS** Raptor Acceptance Control System

RAS return activated sludge Remote Desktop Protocol **RDP** Remote Desktop Services **RDS** rotary-drum thickener RDT RIO remote input/output RTU remote telemetry unit reduced-voltage soft starter **RVSS** 

SaaS software as a service

SANS SysAdmin, Audit, Network, and Security

sequencing batch reactor SBR

supervisory control and data acquisition SCADA

Secure Digital SD

Sewer Utility Public Works Sewer Utility Division

**SFP** small form-factor pluggable subscriber identification module SIM **SNMP** Simple Network Management Protocol

SOP standard operating procedure solids processing building **SPB** solids retention time **SRT** 

SWGR switchgear

**SWWTP** Suguamish Wastewater Treatment Plant

Syslog System Logging Protocol Transmission Control Protocol **TCP** THD total harmonic distortion TM technical memorandum

ΤN total nitrogen TS total solids

total suspended solids **TSS** 

thickened waste activated sludge **TWAS** 

UDT User-defined Data Type **UPS** uninterruptible power supply **UTP** unshielded twisted pair

UV ultraviolet V volt(s)

volt-ampere(s) VA

volt(s) alternating current VAC **VDC** volt(s) direct current variable-frequency drive VFD VHF very high frequency VLAN virtual local area network

VM virtual machine

VNC Virtual Network Computing VPN virtual private network

W2 potable water W3 service water wide-area network WAN WAS waste activated sludge

Water Information Management Solution WIMS

wastewater treatment plant **WWTP** 



## 1 Introduction

This SCADA Use Cases and Operational Needs Technical Memorandum (TM)-2 documents Kitsap County (County) Public Works Sewer Utility Division's (Sewer Utility's) core objectives for its supervisory control and data acquisition (SCADA) system along with the system functionality required to meet the organization's future operational needs. TM-2 also includes recommended improvements for the SCADA system to resolve risks and deficiencies identified in TM-1 and gaps between existing functionality and the Sewer Utility's future needs. The content of TM-2 is based on information that HDR Engineering, Inc. (HDR) obtained from the County during workshops and staff interviews and field data already collected by HDR during site assessment visits conducted in August 2020.

### 1.1 Approach

TM-2 completes the second phase of the Sewer Utility SCADA Master Plan (Master Plan), assessing the future use and needs of the SCADA system with recommendations on how to fulfill identified future requirements. To begin this phase of the Master Plan, HDR facilitated an industry trends and core objectives workshop to provide a high-level overview of challenges that similar water and wastewater utilities are facing, currently available technology, and industry best practices that the Sewer Utility may wish to consider for its future SCADA system. The Sewer Utility was asked to prepare a list of core objectives for its future SCADA system prior to the workshop, and the latter half of the workshop was used to discuss these objectives and further define future system requirements.

The workshop was followed by several videoconference interviews with individuals responsible for operating and maintaining the Sewer Utility infrastructure. These interviews were used to discuss Sewer Utility staff experiences with the existing SCADA system, opportunities for increased automation, and future SCADA system functionality that they would find most valuable. The interviews also covered SCADA-derived data that are important to the various stakeholders and the information that these individuals would like to have more readily accessible in the future.

# 1.2 Technical Memorandum Organization

This subsection describes the structure of the TM and the annotation used to emphasize risks and deficiencies and recommended improvements.

### 1.2.1 Structure

TM-2 is organized into 11 sections, as described below.

**Section 1: Introduction** summarizes TM organization and the approach taken for the second phase of the Master Plan in preparation for TM-2.

**Section 2: Industry Trends and Core Objectives Workshop** includes an overview of the industry trends and core objectives workshop that HDR facilitated with Sewer Utility stakeholders along with key findings from the workshop.

**Section 3: Core Objectives for Future SCADA System** documents the core objectives for the Sewer Utility's future SCADA system.

**Section 4: Sewer Utility Staff Interviews** includes an overview of the Sewer Utility staff interviews that HDR facilitated with Sewer Utility stakeholders along with key findings from these interviews.

Section 5: Network Architecture: Future Needs and Recommended Improvements identifies the Sewer Utility's future needs related to its Operational Technology (OT) network architecture and describes the information and functionality that Sewer Utility staff would like to obtain from the OT network in the future. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for the OT network.

Section 6: ICS Hardware: Future Needs and Recommended Improvements identifies the Sewer Utility's future needs related to its industrial control system (ICS) hardware and describes the information and functionality that Sewer Utility staff would like to obtain from the ICS hardware in the future. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for the ICS hardware.

Section 7: ICS Software: Future Needs and Recommended Improvements identifies the Sewer Utility's future needs related to its ICS software and describes the information and functionality that Sewer Utility staff would like to obtain from the ICS software in the future. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for the ICS software.

Section 8: ICS Documentation: Future Needs and Recommended Improvements identifies the Sewer Utility's future needs related to its ICS documentation and describes the information that Sewer Utility staff would like to develop and maintain. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for ICS documentation.

Section 9: Other Software Packages: Future Needs and Recommended Improvements identifies the Sewer Utility's future needs related to non-ICS software packages and describes the information and functionality that Sewer Utility staff would like to obtain from the software in the future. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for non-ICS software.

Section 10: Risks and Deficiencies with Recommended Improvements Summary compiles the risks and deficiencies associated with the Sewer Utility's OT networks, SCADA system components, and associated infrastructure that were identified in TM-1 and previous sections of TM-2 and pairs them with the recommended improvement(s) that will mitigate the risk or resolve the deficiency.

**Section 11: References** lists the supporting source materials cited in TM-2.

### 1.2.2 Means of Emphasis

In any subsection where a risk or deficiency is identified, a summary risk or deficiency description is presented at the end of that subsection, as shown below, so that these risks and deficiencies are easily visible and can be quickly located.



\* Identified risks and deficiencies are shown in condensed highlighted form like this throughout the TM.

In any subsection where a recommended improvement is proposed that will address one or more identified risks and deficiencies, a summary recommended improvement description is presented at the end of that subsection, as shown below, so that these recommended improvements are easily visible and can be quickly located.

Recommended improvements are shown in condensed highlighted form like this throughout the TM.

Risks and deficiencies from TM-1 and TM-2 and the proposed recommended improvements are compiled in Section 10 in Table 10-2. The table is structured to associate the risks and deficiencies with the recommended improvements being proposed as a means of mitigating them.

This page intentionally left blank.



# 2 Industry Trends and Core Objectives Workshop

This section includes an overview of the industry trends and core objectives workshop that HDR facilitated with Sewer Utility stakeholders along with key findings from the workshop.

On November 16, 2020, HDR facilitated an industry trends and core objectives workshop with key stakeholders representing Sewer Utility management, operations, instrumentation and controls (I&C) technicians, and construction management. The goal of the workshop was to present currently available technology, applicable industry best practices, and modern approaches to SCADA system development and utility management for the Sewer Utility to consider before the SCADA master planning effort shifted to discussions that would document the future requirements of the SCADA system. The workshop was then used to discuss the Sewer Utility's core objectives for its SCADA system and further define some of the future requirements. The Sewer Utility capital improvement program (CIP) schedule was also discussed to identify established CIP projects where there may be an opportunity to implement recommended SCADA system improvements. Key presentation points from the workshop are highlighted in the following subsections.

# 2.1 Industry Challenges

The water and wastewater industry faces significant challenges including aging assets, budget constraints, stricter regulations, a workforce gap, and cybersecurity. Utilities with older programmable logic controller (PLC) technology now depend on systems that have reached the end of their useful life and/or are experiencing manufacturers phasing out technical support and replacement parts for the product line. Product life cycles for several ICS hardware and software elements are becoming shorter, requiring more frequent upgrades. The industry's migration to Internet Protocol (IP)-based networks and open operating systems (i.e., Windows) has introduced new cybersecurity risks and new skill-set requirements to mitigate them. Available technology promises to provide great value, but it is often complex and rapidly evolving. Many utilities are finding that they do not have enough staff with the necessary skill sets to keep up with current technology and address cybersecurity while continuing to operate and maintain the utility infrastructure.

To put new technology to work and modernize their control systems, utilities are also having to revisit their approach to data. Many utilities are data rich and information poor. Data are commonly trapped in silos that are difficult to access and that present barriers to combining diverse data sets to pursue the operational insights that will help the Sewer Utility improve. In the interest of raising current operational baselines, many utilities are pausing to look beyond more immediate needs so as to develop a road map toward an improved data program.

# 2.2 Current Technology

HDR presented a selection of current technology for the Sewer Utility to consider as potential elements for its future SCADA system. Because the Sewer Utility has already standardized on Allen-Bradley PLCs and Wonderware (now called AVEVA) HMI and historian software, the workshop highlighted current offerings from Rockwell Automation and AVEVA in addition to other relevant hardware and software technology. Some of these current offerings included:


- Allen-Bradley's latest ControlLogix 5580 and CompactLogix 5380 controller families
- Software elements of AVEVA System Platform 2020
- Motor controllers with Ethernet communication capability and their role in energy management and predictive maintenance programs
- Remote sensor solutions for conveyance applications
- Data analytics and visualization software platforms
- Offline and online applications of wastewater treatment plant (WWTP) models to derive operational set points

To demonstrate how data analytics and visualization software tools can combine diverse data sets to produce insightful visualizations, HDR presented two dashboards it developed using Sewer Utility historian and laboratory data obtained during the condition assessment phase of the Master Plan. Screen captures of the two dashboards are shown in Figure 2-1 and Figure 2-2. It should be noted that HDR made some broad assumptions to generate the liquid stream capacity summary portion of the dashboard depicted in Figure 2-1. The focus of the workshop's dashboard presentation was not about identifying actual process or operational deficiencies, but to provide Sewer Utility staff with the opportunity to see data analytics and visualization software in action and, hopefully, to spark some ideas for other insights staff would like to pursue in the future.



Figure 2-1. CKTP liquid stream and solids removal summary dashboard

Figure 2-2. Pump asset health and performance dashboard

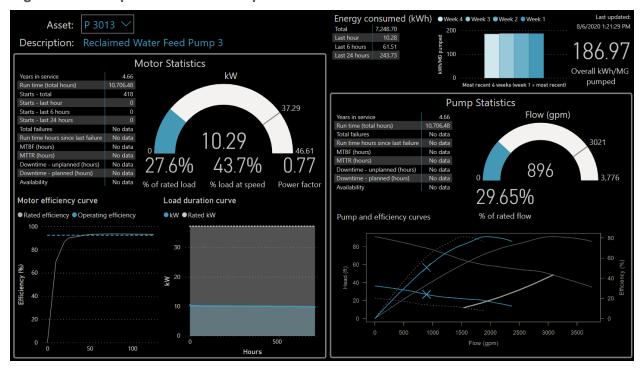

### 2.3 Best Practices

The best practices segment of the workshop focused on some of the approaches other utilities have taken to improve their operations that are considered industry best practices and would likely benefit the Sewer Utility. HDR discussed high-performance human-

machine interface (HPHMI) principles that are guiding human-machine interface (HMI) screen development throughout much of the industry and have been integrated into industry standards like International Society of Automation (ISA) 101.01 (ANSI/ISA 2015). Examples of HPHMI concepts and how they have been applied to HMI platforms at other client facilities were presented in a before-and-after fashion to illustrate the migration from traditional to HPHMI screens. HDR emphasized the benefits of virtualization for ICS servers and presented an industrial demilitarized zone (DMZ) network architecture as a secure method for bridging the Sewer Utility Operational Technology (OT) and Information Technology (IT) networks. HDR also described how store-and-forward and report-by-exception functionality inherent to communication protocols like Distributed Network Protocol 3 (DNP3) and MQ Telemetry Transport (MQTT) could eliminate data gaps and reduce delays in alarm reporting for the Sewer Utility's remote pump stations.

# 2.4 Core Objectives for Future SCADA System

Prior to the workshop, the Sewer Utility provided HDR with a draft list of core objectives for its future SCADA system. These core objectives were discussed during the workshop to allow Sewer Utility staff to describe some of the drivers behind the objectives in more detail. The workshop participants also discussed various operational constraints and requirements in order to develop quantitative goals for certain elements of the future system, such as uninterruptible power supply (UPS) battery backup time requirements. Discussing the objectives also allowed the Sewer Utility to make some preliminary decisions on how certain technologies would be applied. For example, Sewer Utility staff concluded that they would like to migrate toward HPHMI graphics screens and standardize on Ethernet motor controllers, using hardwiring for the core control and monitoring signals and Ethernet data exchange for power and energy parameters and detailed alarm and warning information.

# 2.5 CIP Schedule and Budget Constraints/Opportunities

In an effort to identify projects in the CIP schedule that may be candidates for implementing some of the improvements recommended in the Master Plan, HDR walked through several pump station and WWTP projects included in Sewer Utility planning documents. Sewer Utility staff provided project status updates and, based on staff feedback, the Sewer Utility Six-Year Capital Facilities Plan 2020–2025 was determined to be the most relevant planning document (Sewer Utility 2019). Of the established projects at remote pump stations, the pump station upgrade planned for pump station (PS)-4 was determined to be a good candidate for a pilot project or first-out initiative for the remote pump station ICS infrastructure given the project's position in the CIP schedule.

### 2.6 Workshop Findings

Key findings that came out of the industry trends and core objectives workshop helped establish some of the requirements for the future Sewer Utility SCADA system. Some of these findings re-emphasized risks and deficiencies documented in TM-1. Table 2-1 provides a summary of the industry trends and core objectives workshop findings.



Table 2-1. Industry trends and core objectives workshop findings summary

Topic	Findings
Staff technological proficiency	Advancing the Sewer Utility's ICS technology without improving the current level of technological proficiency among Sewer Utility staff members is not likely to be successful. Staff will require training on new and existing technology. Documenting preferred workflows and standard operating procedures (SOPs) for the ICS technology that staff interact with would help supplement the training and provide staff with a self-service resource when they need a refresher.
	The Master Plan should identify two tiers of training for Sewer Utility staff: in-depth training for super-users like I&C technicians, and basic training for end users of technology.
Motor controllers	The Sewer Utility would like to standardize on Ethernet motor controllers for future projects. The Sewer Utility is interested in expanding the current practice of monitoring and archiving limited data from networked motor controllers to include more robust power, energy, alarm, and warning data. Hardwired signals will still be used for the core monitoring and control of the equipment.
	The Sewer Utility wants to eliminate DeviceNet from its infrastructure.
PLCs	The Sewer Utility does not believe that there are sufficient drivers at its facilities to justify the expense and additional complexity of hot-standby redundant controllers.
Historian	Quality Controls Corporation (QCC) will be implementing store-and-forward functionality as part of the AVEVA upgrades it is performing at the Sewer Utility remote WWTPs. This will allow the AVEVA software at the remote WWTPs to buffer data during loss of communications with the Central Kitsap Treatment Plant (CKTP) and forward the buffered data to the CKTP historian after communications are restored.
	QCC will be installing AVEVA Historian Client at the Sewer Utility WWTPs to provide staff with easier static and ad hoc trending functionality and improved access to historian data.
НРНМІ	The Sewer Utility anticipates some resistance to HPHMI graphics screens from some veteran staff members but would like the Master Plan to include a migration to HPHMI concepts for the future Sewer Utility SCADA screens.
	HDR recommended that the Sewer Utility and QCC hold workshops with Sewer Utility stakeholders to develop standard color palette, symbols, color usage, screen hierarchy and layout, and other elements of the future SCADA graphics. This will help get stakeholder buy-in during the development process and guide QCC according to Sewer Utility preferences. The Sewer Utility is planning to have the first workshop with QCC in Q1 2021.
Industrial DMZ	The Sewer Utility would like the Master Plan to include an industrial DMZ approach to bridging the OT and IT networks.
	Once the Master Plan is complete, the Sewer Utility will have documentation that it can use to coordinate with the County Information Services (IS) department about required modifications to IS-managed infrastructure. Because of this coordination requirement, the County may need to find temporary solutions for remote access and other functionality through additional development of the Sewer Utility OT network.
OT network cable path redundancy	The Sewer Utility does not view network cable path redundancy as an immediate need for its WWTP OT networks, but would like it to be considered as a mid-term priority in the Master Plan.
Alarm notification system	The Sewer Utility's order of preference for on-call staff alarm notification and acknowledgment is: mobile app interface (e.g., WIN-911 Mobile), text message, and voice message.

Table 2-1. Industry trends and core objectives workshop findings summary

Topic	Findings
Sewer Utility ICS standards	The Sewer Utility would like to develop ICS standards documentation that could be handed to consultants and systems integrators to guide design and implementation. The standards would be required to be referenced in consultant specifications so that they become part of the contractor's scope.
	Sewer Utility ICS standards should include tagging conventions. Staff are challenged by lack of standard tagging conventions in existing programming.
ICS battery backup	Minimum of 15 minutes for PLC control panels at CKTP.
requirements	Minimum of 4–6 hours for CKTP ICS infrastructure required to maintain monitoring of remote pump stations and WWTPs and on-call staff alarm notification functionality.
	Minimum of 4–6 hours for ICS infrastructure at remote WWTPs that is required to maintain communication of active alarms to CKTP.
	Several hours for ICS infrastructure at critical pump stations that is required to maintain communication of wet well level and active alarms to CKTP.
	Battery backup times at less critical pump stations are not a priority for the Sewer Utility.
Remote access to SCADA screens	For the remote pump stations, the Sewer Utility would like to establish view-only remote monitoring and alarming via tablets, with the possibility of introducing control capability in the future.
	For the WWTPs, the Sewer Utility would like to establish remote monitoring and alarming via tablets, with limited control capability on a case-by-case basis.
	The Sewer Utility would like staff at all four WWTPs to have access to all Sewer Utility SCADA screens from the HMI workstations.
	The Sewer Utility would like to establish view-only monitoring and alarming of all Sewer Utility infrastructure at the County Public Works Annex facility in Bremerton.
Backup ICS servers	The Sewer Utility would like the Master Plan to consider implementing backup ICS server(s) at the County Public Works Annex facility.
Processes with high priority for automation/ICS improvements	The Sewer Utility indicated that the following processes and facilities were a higher priority for automation and/or ICS upgrades:  • Biological nutrient removal (BNR) processes  • CKTP septage receiving  • CKTP digesters  • The Suquamish WWTP, in general, because of highly manual operation  • CKTP liquid balancing  • CKTP solids balancing  • CKTP recycled water
Alignment of Master Plan implementation plan and CIP schedule	The PS-4 upgrade project in the Sewer Utility CIP would be a good candidate for a pilot project or first-out initiative for the remote pump station ICS infrastructure.



# 3 Core Objectives for Future SCADA System

This section documents the core objectives for the Sewer Utility's future SCADA system. These core objectives will guide the remainder of the SCADA master planning efforts and serve as a benchmark for follow-on implementation work.

# 3.1 Core Objectives Development

HDR requested that the Sewer Utility develop draft core objectives for its future SCADA system prior to the industry trends and core objectives workshop. The draft core objectives were discussed during the workshop and the Sewer Utility had the opportunity to refine them based on the workshop discussion and subsequent stakeholder interviews.

# 3.2 Core Objectives for Future SCADA System

The Sewer Utility's core objectives for its future SCADA system are listed below:

- 1. Design, build, and maintain a secure and stable ICS
  - 1.1. Continue development of the Sewer Utility industrial network
  - 1.2. Upgrade Wonderware and alarm monitoring/dial-out software
  - 1.3. Develop standards and naming conventions and reflect in future specifications
  - 1.4. Identify control power backup system requirements
- 2. Improve access to and use of SCADA
  - 2.1. Provide stable remote access to SCADA from all treatment plants and Public Works Annex
  - 2.2. Standardize HMI and alarm screens—programming object and visualizations
  - 2.3. Make improvements to SCADA Historian including:
    - 2.3.1. Backup procedures, tag identification and hierarchy, operator access to trending features
    - 2.3.2. Integration with business and operating software platforms (i.e., Hach WIMS, CMMS, and other Business Intelligence platforms)
  - 2.4. Implement use of SCADA remote tablets for unattended monitoring of plants and pump stations
- 3. Develop an Automation and Information Technology Plan
  - 3.1. Develop pump station (and WWTP) monitoring and control strategy: improved monitoring in the short term with potential control capability in the long term
  - 3.2. Identify near-term and long-term automation improvements to maintain treatment process control and/or provide operational resilience
  - 3.3. Incorporate energy monitoring software/hardware to support Strategic Energy Management Plan
  - 3.4. Identify opportunities to improve regulatory compliance monitoring
  - 3.5. Identify workgroup dashboards
- 4. Develop administrative program for maintaining Sewer Utility ICS

- 4.1. Staffing to support to include skill sets/abilities, roles, and responsibilities
- 4.2. Develop backup procedures for server information, programming files, etc.
- 4.3. Implement Alarm Management Philosophy procedures
- 4.4. Develop procedures for firmware management



# 4 Sewer Utility Staff Interviews

This section includes an overview of the Sewer Utility staff interviews that HDR facilitated with Sewer Utility stakeholders along with key findings from these interviews.

## 4.1 Operations Staff Interview

On November 24, 2020, HDR held an interview with Sewer Utility operations staff members to discuss their current interaction with SCADA HMI screens, known ICS deficiencies, and features and functionality that they would like to see implemented in the future SCADA system. Table 4-1 provides a summary of the key findings from the interview.

Table 4-1. Operations staff interview key findings summary

Topic	Findings
Lack of process flow measurement	Manchester Wastewater Treatment Plant (MWWTP) does not have a flowmeter for monitoring waste activated sludge (WAS) flow to the WAS tanks. Operations staff currently operate based on level in the WAS tanks and would prefer to have WAS flow information like they do at Kingston Wastewater Treatment Plant (KWWTP) and CKTP.
	None of the remote WWTPs have a flowmeter for monitoring thickened sludge flow during truck loadout activities. Lack of flow/volume measurement has led to issues where truck operators stop loading too early to avoid drawing down the thickened sludge storage tanks too far. Operating off of level or sight glass has proved challenging, particularly at the Suquamish Wastewater Treatment Plant (SWWTP), where the thickened sludge blending tank has a conical bottom. The Sewer Utility is basing CKTP incoming thickened sludge volumes from the remote WWTPs based on the assumption of full truckloads and is likely overestimating volumes if trucks are partially full.
Analytical probes for MWWTP and SWWTP	Sewer Utility operations staff expressed a desire to reintroduce analytical probes to the basins at MWWTP and SWWTP. These instruments would reduce the amount of manual probe measurements required by operations staff and would enable more automated control of the process. Lack of analytical instruments for these WWTPs was identified as a deficiency in TM-1.
Alarms	SWWTP recently had an issue where a PLC went offline and there was no alarm to alert operators that SCADA HMI screens were not being refreshed. Sewer Utility staff believe that this issue has since been corrected but believe that other WWTPs may not be receiving communication alarms for PLCs.
	Sewer Utility operations staff believe that they are not receiving signal out-of-range alarms at SCADA HMI screens for lost analog signals from some field instruments. An event occurred at MWWTP where the influent pump station level continued to report a static normal wet well level, but the wet well was actually much higher, and a manual pump down had to be initiated.
	No alarms are in place for composite samplers at all WWTPs. Power bumps have thrown off sampler performance and operators are not notified that there is a problem.
	Sewer Utility operations staff report that power bumps also cause some variable-frequency drives (VFDs) to go into an alarm state and, when VFD faults are not monitored at SCADA, operators are not notified of the problem.

Table 4-1. Operations staff interview key findings summary

Topic	Findings
	Power bumps can cause the MWWTP mixing channel blower to go into an alarm state that is indicated only locally. Operators have to regularly enter the building on their rounds to confirm that the alarm is not active.
	Sewer Utility operations staff believe that the high level alarm for MWWTP waste tanks is set at a level where both tanks need to be nearly full before the alarm activates. A baffle at roughly 9 feet is below this alarm set point. Once the level in the first waste tank exceeds baffle height, the process spills into the second tank. Operators would like to receive a warning when level reaches or nears this baffle height so that they are alerted when the second tank begins to fill. HDR reviewed SCADA HMI screens and it appears that the WAS tank high level alarm set points can be adjusted as desired via the HMI.
Improved automation	The MWWTP blowers are constant speed and operate on a fixed time sequence where they run in a 4-hour sequence, 5 days per week. During power bumps, this time sequence can be disrupted and operators have to manually place blowers in auto at noon to restore the sequence. Operations staff would like to have operator-adjustable scheduling and timer functionality at the SCADA HMI so that they could have more flexibility in operating the blowers. Operators would also like to see the constant-speed blowers changed to variable speed, which will likely happen as part of the upgrade to the plant for new total nitrogen (TN) limits.
	MWWTP is the only remote plant that does not have a SCADA-controlled sludge wasting valve. Sludge wasting is still a manual process and operators would like it to be automated.
Additional information at SCADA HMI screens	Sewer Utility operations staff would like to have more detailed information on ultraviolet (UV) systems available at the HMIs for all plants. They would like to see which bulbs are failed, UV intensities, and other parameters to help them better monitor system performance.
	Sewer Utility operations staff indicated that they would find more detailed information and alarming from vendor systems and motor controllers useful if it were made available at the HMI screens.
	Sewer Utility operations supervisors indicated that they would be very interested in monitoring process key performance indicators (KPIs) like hydraulic retention time (HRT) and solids retention time (SRT) at the SCADA HMI screens—particularly for aeration basins and clarifiers.
	In addition to alarming for composite sampler faults at the SCADA HMIs, Sewer Utility operations staff would like to be able to monitor sample counts and when samples are being taken.
CKTP control room upgrade	Sewer Utility operations staff would like to be able to see the same SCADA HMI screens that are at the remote WWTPs from the CKTP control room.
	Sewer Utility operations staff would like to have large-format displays at the CKTP control room where they can see overview screens at a glance.
Reporting	Current reporting methodology is to manually enter flow data into Excel spreadsheets to give to the lab for Discharge Monitoring Report (DMR) reporting.
	Sewer Utility operations staff indicated that having these flow data and laboratory data available in one pane of glass would be useful. They believe that Hach Water Information Management Solution (WIMS) software will provide this functionality.



- MWWTP does not have a flowmeter for monitoring WAS flow to the WAS tanks.
- \* The Sewer Utility is likely overestimating the thickened sludge volumes received at CKTP from remote WWTPs because none of the remote WWTPs have a flowmeter for monitoring thickened sludge flow during truck loadout activities.
- PLC status monitoring and alarming may not be effectively applied for all WWTP PLCs.
- \* Sewer Utility operations staff believe that they are not receiving signal out-of-range alarms at SCADA HMI screens for lost analog signals from some field instruments.
- \* There are no SCADA alarms or monitoring in place for composite samplers at all WWTPs.
- ★ Some WWTP VFDs do not have VFD fault alarms monitored at SCADA.
- \* MWWTP headworks mixing channel blower fault is not monitored at SCADA.
- ★ Operators have no means of managing the MWWTP blower operating time sequence via the SCADA HMI screens.
- \* MWWTP lacks SCADA control for the sludge wasting valve so the sludge wasting process is entirely manual.
- \* Sewer Utility operations staff would like to have more detailed information on UV systems available at the HMIs for all plants.

### 4.2 I&C Technician Staff Interview

On November 25, 2020, HDR held an interview with Sewer Utility I&C technician staff to discuss known ICS deficiencies, current challenges, and features and functionality that they would like to see implemented in the future SCADA system. Table 4-2 provides a summary of the key findings from the interview.

Table 4-2. I&C technician staff interview key findings summary

Topic	Findings
High-priority improvements	<ul> <li>I&amp;C technicians consider the following items to be high priorities for near-term improvements to the Sewer Utility ICS:</li> <li>Implement HPHMI graphics concepts at WWTP SCADA screens</li> <li>Standardize on PLC firmware versioning throughout WWTPs and pump stations</li> <li>Improve remote pump station telemetry</li> <li>Eliminate DeviceNet networks, with the CKTP headworks motor control centers (MCCs) being a high priority because of multiple past maintenance events</li> </ul>

Table 4-2. I&C technician staff interview key findings summary

Topic	Findings
Tag naming convention	The Sewer Utility needs a standardized tag naming convention for the AVEVA SCADA system. I&C technicians like descriptive tags because the association to actual equipment is more obvious. Including equipment tags in the SCADA tag has value in maintaining a link to the piping and instrumentation diagrams (P&IDs). A facility code will also need to be included in the SCADA tags to support integration of tags from all WWTPs.
	The Sewer Utility intends to develop a preferred tag naming convention internally and in coordination with QCC.
SCADA thin clients	The Sewer Utility has decided to transition to SCADA HMI thin client configuration for panel personal computers (PCs) in the electrical rooms at CKTP. Preservation of local HMI functionality during an OT network outage was discussed, and the Sewer Utility is comfortable running the plant in manual without SCADA HMIs and believes that the benefits of centralized SCADA management outweigh the ability to preserve limited local control during OT network outages.
In-house automation programming capabilities	As mentioned in TM-1, the SCADA system is currently monitoring significantly more tags than the historian is archiving. If possible, the Sewer Utility would like to handle adding select currently available tags to the historian. I&C technicians indicated that they may need some training to get them started down the right path.
	I&C technicians are less comfortable making PLC programming and HMI configuration changes to incorporate additional alarms or standardize input/output (I/O) for different assets. This work may be done in-house as a mid-term project once more training has been provided.
ICS set point management	I&C technicians would like the ability to track ICS set point changes made at the SCADA HMI and know when changes were made and by whom.
	I&C technicians would like to have appropriate set points documented somewhere so that the Sewer Utility had an authoritative document to help manage set point drift.
Training and staffing	Sewer Utility staff will require training to support the modernization of the Sewer Utility ICS and OT network. Some of the required training will be focused on improving operations staff proficiency with Windows and general technology elements, which will hopefully reduce the amount of IT help desk type issues that I&C technicians are required to respond to. Other identified training will be centered around I&C technicians, including:  Network technology and communications  Network management  AVEVA software training
	The Sewer Utility has had difficulty sourcing I&C technicians and may need to consider grooming younger operations staff who demonstrate an interest in ICS technology.
	It is likely that the Sewer Utility will eventually require a more senior resource with network experience to manage the Sewer Utility OT network.
Instrument calibration	The laboratory staff currently provides preventive maintenance on analytical instruments at the WWTPs.
	Sewer Utility preference is to keep instrument calibration responsibilities under operations and/or laboratory staff. This will leave I&C technicians free to focus on other tasks for which they have unique skill sets.



\* The Sewer Utility needs a standardized tag naming convention for the AVEVA SCADA system.

### 4.3 Construction and CIP Staff Interview

On December 3, 2020, HDR held an interview with Sewer Utility construction and CIP staff to discuss the need for Sewer Utility ICS standards, current state of control strategy documentation, and features and functionality that they would like to see implemented in the future SCADA system. Table 4-3 provides a summary of the key findings from the interview.

Table 4-3. Construction and CIP staff interview key findings summary

Topic	Findings
Sewer Utility ICS standards	Lack of Sewer Utility ICS standards has contributed to one-off implementations and recent project shortcomings. This deficiency was documented in TM-1.
	The Sewer Utility would prefer to include development of ICS standards documentation as an amendment to ongoing facilities planning efforts rather than executing a separate project.
	The Sewer Utility and QCC have scheduled workshops for January to begin fleshing out requirements for HPHMI screen development. These workshops will be the first step toward standardization of Sewer Utility SCADA HMI screens.
	Once Sewer Utility ICS standards documentation is developed, the Sewer Utility would like to establish annual reviews of the standards documentation and ICS infrastructure to keep the standards current and to identify upcoming ICS upgrade/replacement projects that need to be included in CIP planning. Monitoring for hardware and software obsolescence should be a factor in these periodic reviews.
Control strategies	In general, the Sewer Utility lacks good control strategy documentation that reflects current ICS implementation. This deficiency was documented in TM-1.
	Some documentation from recent construction projects could be used as a starting point. Some past design projects have control strategies in the design specifications, but these are unlikely to have been updated based on programming implemented during construction phases.

# 4.4 Laboratory Staff Interview

On December 3, 2020, HDR held an interview with Sewer Utility laboratory staff to discuss their current use of SCADA data, known ICS deficiencies, and features and functionality that they would like to see implemented in the future SCADA system. Table 4-4 provides a summary of the key findings from the interview.

Table 4-4. Laboratory staff interview key findings summary

Topic	Findings
Access to SCADA system for laboratory staff	Laboratory staff currently have no access to SCADA HMI screens or historical SCADA data.
	Sewer Utility operations staff enter daily WWTP flow data into Excel spreadsheets and transfer to laboratory staff via email or thumb drive.

Table 4-4. Laboratory staff interview key findings summary

Topic	Findings
	Laboratory staff would like to know what mode the WWTPs are running in. Without access to SCADA HMI screens, laboratory staff rely on operators to inform them when CKTP transitions from winter to summer operations.
	Sewer Utility staff would like to implement read-only access to SCADA HMI screens for all WWTPs at the laboratory. One or more large-format displays would be helpful in providing laboratory staff with an at-a-glance view of operating conditions and alarms for all WWTPs.
Current and future SCADA data needs at the laboratory and additional instrumentation	Flow data are and will continue to be very important information for the laboratory. The following are some of the higher-priority WWTP flow data identified:  Influent and effluent flows are required for DMR reporting  Thickened sludge flows  Blended sludge tank flows  Scum pump flows  Flow to CKTP sand filters  Flow from CKTP recycled water system  Flow from potable water (W2)/service water (W3) pumps
	<ul> <li>Laboratory staff would also like to receive data from analytical instruments, including:</li> <li>Primary parameter: dissolved oxygen (DO), pH, ammonia, nitrate, nitrite, etc.</li> <li>In addition to analog values from the probes, laboratory staff would like low and high alarms, as well as calibration and out-of-range alarms</li> <li>Turbidity on CKTP reclaimed water from existing turbidimeter</li> </ul>
	KWWTP and MWWTP currently have pH probes and data may be logged on Secure Digital (SD) cards. Integrating analog inputs from these probes to SCADA would be beneficial.
	UV transmittance data would be very beneficial for laboratory staff so that they do not need to manually obtain data.
	Laboratory staff would like to have alarms and other data from composite samplers. Laboratory staff need to know when samplers fail.
	For WWTP solid stream, flows are the most important data but gas production and carbon dioxide (CO <sub>2</sub> ) percentages could also be helpful down the road.
	Suspended solids probes in the aeration basins and return activated sludge (RAS) lines would be beneficial to the laboratory for SRT calculations and other uses.
	The Sewer Utility would like to be able to record the volume for thickened sludge that is transported from the remote WWTPs to CKTP. Currently, the Sewer Utility assumes full truck volumes, but this may not be the case. If flowmeters were installed on truck loadout stations, volume could be calculated via the flowmeter and recorded, allowing for tracking of more accurate volumes.
	The Sewer Utility would like to have a septage receiving station that records incoming septage flows. Currently, the Sewer Utility bases incoming septage volume on truck weight.
Composite samplers	The existing composite samplers at the WWTPs are reaching the end of their useful life and replacement parts are becoming unavailable. The Sewer Utility is in the process of getting quotes for samplers that they believe will be less maintenance intensive.

\* Laboratory staff currently have no access to SCADA HMI screens or historical SCADA data.



### 4.5 Maintenance Staff Interview

On December 10, 2020, HDR held an interview with Sewer Utility maintenance staff to discuss their current use of SCADA HMI screens, current and planned use of the LLumin computerized maintenance management system (CMMS), potential SCADA integration with LLumin, future predictive maintenance efforts, and features and functionality that they would like to see implemented in the future SCADA system. Table 4-5 provides a summary of the key findings from the interview.

Table 4-5. Maintenance staff interview key findings summary

Topic	Findings
Maintenance staff current interaction with SCADA HMI screens	The Public Works Facilities crew already monitors pump station SCADA screens remotely, mainly for alarms.
	The Sewer Utility maintenance and operations (M&O) supervisor and CMMS manager each have a SCADA PC at their desks. The CMMS manager currently handles monitoring of alarms and communicating alarms to maintenance and facilities staff. SCADA alarm monitoring and response coordination duties will eventually be transitioned to an individual within the Public Works Facilities crew.
Current preventive and corrective maintenance	Staff still fill out paper-based malfunction reports, which are then manually entered into LLumin.
practices	Equipment runtimes are manually collected and entered into LLumin.
	LLumin is cloud-hosted software as a service (SaaS) and maintenance staff are currently accessing via tablets, mobile phones, and PCs.
Remaining implementation effort and future goals for	The first step is to complete development of an accurate active inventory of Sewer Utility assets within LLumin. The Sewer Utility is implementing an asset hierarchy using a parent-child relationship.
LLumin system	Sewer Utility maintenance staff would like to migrate from calendar-based preventive maintenance to automated scheduling for preventive maintenance based on equipment runtimes.
	Sewer Utility staff would like to explore integrating SCADA alarms related to maintenance activity into LLumin, so that corrective maintenance work orders could be automated rather than having to rely on word-of-mouth.
	Sewer Utility staff would like to start using LLumin performance dashboards to forecast maintenance requirements, trend asset performance, and display uptime/availability statistics for assets.
	Sewer Utility staff would like to see maintenance staff start entering in log data for maintenance activity into the work orders in LLumin so that other staff can keep abreast of status and findings. This functionality is already built into LLumin.
	Sewer Utility staff would also like to start using the inventory management functionality within LLumin to manage spare-parts inventory.
SCADA integration with LLumin	The Sewer Utility has already purchased the SCADA integration module for LLumin, but has not deployed it because of County IS department challenges and security concerns. This lack of SCADA integration has prevented the Sewer Utility from leveraging many of LLumin's advanced features.
Future predictive maintenance use cases	The Sewer Utility does not currently have staff for a full-fledged predictive maintenance program, including oil sample analysis.
	Sewer Utility staff are interested in force main pressure monitoring as a predictive maintenance input in the future.

Table 4-5. Maintenance staff interview key findings summary

Topic	Findings
	Future predictive maintenance initiatives would begin with the most critical assets. Also, the cogeneration system at CKTP, if the Sewer Utility is required to bring that system back online someday.
Dashboarding and data visualization	Sewer Utility management staff would like to have a heat map dedicated to each of the four drainages and the WWTPs and pump stations associated with them. These heat maps would provide an at-a-glance, color-based indication of capacity and current maintenance issues. For example, a lead/lag pump station that is down one pump might be displayed in yellow, while a station that is offline for maintenance might be displayed in red.
	Discussed how dashboarding/data visualization software tool may be the best option for customizing heat maps and visualizations for runtimes, availability, and other asset performance data. This would enable more flexibility and control over the outcome.  • LLumin may be able to offer some valuable visualizations, but will likely not meet all of the Sewer Utility's needs  • It would be expensive and more difficult for Sewer Utility staff to maintain if visualizations were done in SCADA  • Hach WIMS is not likely to have much native functionality to support this type of content
Future SCADA access requirements for maintenance staff	The CMMS manager will not require access to SCADA HMI screens after alarm monitoring and response coordination duties are transitioned to Public Works Facilities staff.
	The Sewer Utility M&O supervisor will still require a SCADA PC in his office.
	There should be a common SCADA PC in the new modular offices that will be shared by various staff.
	The Sewer Utility operations manager does not need a SCADA PC in his office and could use one in a common area within the administration and laboratory building at CKTP.
	The lead mechanic specialist at CKTP and the lead maintenance technician in the Public Works Facilities group responsible for Sewer Utility infrastructure will both need SCADA PCs.

\* Equipment runtimes are manually collected and entered into Sewer Utility CMMS.

# 4.6 Public Works Management and Stormwater Division Staff Interview

On December 10, 2020, HDR held an interview with Public Works management and Stormwater Division staff to provide a project status update, share some of the technology presented in the industry trends and core objectives workshop that may be of interest to the Stormwater Division, and discuss information that management staff would find valuable if SCADA data were made more readily available. Table 4-6 provides a summary of the key findings from the interview.



Table 4-6. Public Works management and Stormwater Division staff interview key findings summary

Topic	Findings
Management access to SCADA data	Sewer Utility management staff would like to have access to real-time flow data and other engineering-focused data.
	Sewer Utility management staff would be interested in getting email notifications when certain parameters exceed or fall below set thresholds.
	Public Works management staff would be very interested in integrating financial data with SCADA and other data sets. Having financially based metrics for forecasting operating costs would be a big benefit.
Remote field instrumentation and telemetry for Stormwater Division	Stormwater Division staff are interested in further discussions of how they might implement field instrumentation monitoring.
Current Sewer Utility management dashboarding and visualization practices	Sewer Utility management currently uses dashboards native to ArcGIS software.
Other potential data unification use cases at Public Works	Public Works management discussed how integrating customer metering into SCADA infrastructure or other County-maintained networks would eliminate manual data collection for meter readings.
Public Works ERP software	Public Works will be implementing Workday ERP for its enterprise resource planning (ERP) software most likely in late summer 2021. The Workday ERP system would be the source for Sewer Utility financial data.

This page intentionally left blank.



# 5 Network Architecture: Future Needs and Recommended Improvements

This section identifies the Sewer Utility's future needs related to its OT network architecture and describes the information and functionality that Sewer Utility staff would like to obtain from the OT network in the future. The future needs presented are derived from information obtained from Sewer Utility staff during site assessment visits, workshops, and staff interviews. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for the OT network.

### 5.1 Future Needs

This subsection describes the Sewer Utility's future needs as they relate to the OT network.

# 5.1.1 Central Monitoring Location for Sewer Utility Pump Stations and WWTPs

The Sewer Utility wants to establish a central monitoring location at the Central Kitsap Treatment Plant (CKTP) where staff can monitor all conveyance system pump stations and WWTPs. This central hub will enable utility-wide visibility and eliminate key technical barriers that have prevented the organization from operating as a unified utility rather than separate, distributed operational groups. To establish this central monitoring location, the Sewer Utility will need secure and reliable communications between CKTP and the remote pump stations and WWTPs. The central monitoring location will also require improvements to the existing CKTP control room to incorporate workstations, large-format displays, network components, and other functional requirements.

# 5.1.2 Secondary Monitoring Location for Sewer Utility Pump Stations and WWTPs

The Sewer Utility wants to establish a secondary monitoring location at the County Public Works Annex facility in Bremerton. This facility will provide the Sewer Utility with another location for monitoring all pump stations and WWTPs and viewing active alarms. Access to the Sewer Utility SCADA screens from this facility should be view-only.

# 5.1.3 Improved Remote Pump Station Telemetry

A significantly improved telemetry solution is necessary to establish near-real-time monitoring and alarming for the remote pump stations. The Sewer Utility requires more immediate notification of critical pump station alarms (e.g., high wet well level) than the current approach of round-robin polling via VHF licensed radio telemetry can provide, with current polling cycle times of around 8 minutes. To improve visibility into remote pump station operations and performance, the Sewer Utility also needs a means of closing the data gaps that come from traditional round-robin polling, where the CKTP

SCADA system receives a snapshot of current pump station statuses each time the pump station is polled but is left with no data for the time between polls.

#### 5.1.4 Mobile Access

The Sewer Utility would like to establish secure remote access to WWTP and pump station SCADA screens for on-call operators from County-issued tablets. Initially, remote access for operations staff would be view-only monitoring for the pump stations and WWTPs, with some case-by-case exceptions for limited control capability at the WWTPs. However, the Sewer Utility would like the ability to expand the control capabilities of operations staff in the future.

Sewer Utility I&C technicians will also require a secure means of accessing the OT network from County-issued laptops so that they can assess conditions and assist with troubleshooting remotely. This remote access would enable I&C technicians to better diagnose ICS conditions remotely and determine whether an immediate response is necessary, potentially reducing the number of after-hours site visits for I&C technicians.

In the coming years, the Sewer Utility would also like to implement tablet-based workflows for on-site staff that involve other software applications, such as the Sewer Utility's CMMS, LLumin.

### 5.1.5 Secure Access to ICS Data from the Business LAN

To leverage ICS data fully, they must be made more accessible. Several Sewer Utility staff members on the Sewer Utility business local area network (LAN) base decisions on ICS data but do not require direct access to SCADA screens or other ICS software applications. These users will need a means of accessing ICS data stores securely from personal computers (PCs) and laptops that also provide them with access to the Internet. ICS data may also need to be available to software applications hosted on the business LAN to enable merging of ICS data with financial information and other organizational data stores hosted on the business LAN.

### 5.1.6 Improved OT Network Resilience

As the Sewer Utility becomes more reliant on ICS and other data for day-to-day operations, decision making, and planning, the network architecture serving these data will need to be highly available. With the expansion of the Sewer Utility's remote monitoring capabilities, the network components that establish the Sewer Utility's ability to monitor remote pump stations and WWTPs from CKTP will become critical. Revisions to the CKTP OT network topology will be required to reduce single points of failure and to provide redundancy for certain critical network components, servers, and cable paths. Unmanaged switches at critical locations within the OT network will need to be replaced with managed switches to support segmentation, packet filtering, and other means of establishing a more fault-tolerant network. The migration to physical redundancy for some of the more critical elements will also require software and component configuration.

The Sewer Utility has indicated that establishing cable path redundancy is not considered an immediate need, especially for the remote WWTPs. Furthermore, the



funding required for a standalone project to establish a more resilient network topology, in terms of cable path redundancy, would be difficult to justify. Instead, the Sewer Utility would like to take advantage of opportunities presented by other CIP projects to install redundant cable paths in the future. Most likely, cable path redundancy for critical network segments will be achieved in phases, and the Master Plan will prioritize redundant cable paths that can be achieved with minimal cost and effort.

# 5.1.7 Extend OT Network and ICS Infrastructure Battery Backup Power Duration for Critical Components

The Sewer Utility would like to establish a minimum of 4 to 6 hours of UPS battery backup power for ICS servers and all network components involved in the communication of alarms from remote WWTPs to CKTP and from CKTP out to on-call staff. The Sewer Utility would also like to maintain several hours of battery backup power for wet well high level and other alarms at critical remote pump stations. For individual PLC control panels at CKTP, the Sewer Utility would like to maintain a minimum of 15 minutes of UPS battery backup power.

### 5.1.8 Increased Network Throughput

The industrial automation industry is migrating away from Fast Ethernet (100 megabits per second [Mbps]) port speeds and is establishing 1-gigabit Ethernet (GbE) as the new standard for Ethernet ports on many new PLCs, panel PCs, and industrial Ethernet switches. Currently, nearly all Ethernet switches within the Sewer Utility OT network are capping connected devices at the theoretical 100 Mbps limit inherent in the switch ports. As the Sewer Utility modernizes its SCADA system, additional devices will be added to the OT network, data flow between servers and clients will increase, and, as new software tools make data repositories more accessible, staff interaction with the SCADA system will increase. These and other factors will contribute to an increase in OT network traffic. The Sewer Utility will need to increase throughput at some locations within the OT network to avoid performance degradations in the coming years and to take advantage of the higher port speeds that come with modern devices. Communication paths for the remote WWTPs will also require sufficient throughput to support the necessary data exchange between facilities.

# 5.1.9 Improved Backup Procedures and Business Continuity Preparedness

The Sewer Utility needs to implement routine backup procedures for its ICS servers. This will prevent significant loss of ICS historical data, configuration files, and programming files in the event of a server failure. The ICS server backup solution should include backing up ICS data and files to a cloud or off-site location to guard against a catastrophic event at CKTP where both production and backup servers are impacted. As an off-site backup location, the Sewer Utility would like to implement a backup server at the County Public Works Annex facility in Bremerton.

The Sewer Utility also needs to improve its business continuity and emergency response planning and adopt an approach for its ICS servers that will limit the time and effort required to replace the physical hardware, install and configure the software, and restore

the device to full functionality. If the Sewer Utility has formal emergency response plan and/or business continuity plan documentation, at a minimum, these documents should identify ICS stakeholders and the individuals who should be contacted to assess and restore the ICS during an emergency.

### 5.1.10 Improved Cybersecurity Measures

The Sewer Utility would like to apply cybersecurity mitigations within its existing OT network to lessen risks to an acceptable tolerance by implementing a more secure foundation for the OT network's expansion in the future. The future OT network architecture needs to be consistent with information security industry best practices and recommendations of industry authorities like the U.S. Department of Homeland Security (DHS), ISA, and National Institute of Standards and Technology (NIST). Part of improving the Sewer Utility's cybersecurity posture will require having adequately trained staff and established procedures. Staff will need to be trained in the identification of cybersecurity incidents and will need to have a documented program for responding to these events.

### 5.1.11 OT Network and Telemetry Monitoring Capability

With an increased reliance on the OT network, the Sewer Utility will need a means of monitoring OT network activity and performance to alert staff to abnormalities, inform network troubleshooting efforts, and establish accounting of individual user activities. Monitoring network performance will allow the Sewer Utility to establish baselines for bandwidth usage at critical network appliances, typical telemetry uptime for the remote sites, and typical traffic patterns of connected devices. These baselines will enable the Sewer Utility to respond when conditions diverge from normal, potentially preempting network outages and other significant performance degradations.

Accounting of user activity will enable the Sewer Utility to attribute ICS set point adjustments, file modifications, and other changes to specific users. Accounting information can help the Sewer Utility ensure that established operational procedures are being followed, identify authors of changes who may have more information for why the changes were made, and determine where additional staff education may be required. Accounting and auditing are also critical cybersecurity measures.

In addition to network performance monitoring and accounting of user activity, the Sewer Utility's OT network monitoring capability will need to include monitoring of critical OT network devices. This includes alarms and warnings related to communication status for critical OT network devices like PLCs and servers as well as alarms for the UPSs and 24-volt direct current (VDC) power supplies that keep these critical devices powered.

# 5.2 Recommended Improvements

This subsection describes the recommended improvements related to the OT network. Note, the recommended improvements related to cybersecurity are based on current information security industry best practices and recognized standards. However, the Sewer Utility will still need to evaluate them against its risk tolerance. Also, the cyber threat landscape is continually changing and new vulnerabilities and tactics are emerging constantly. HDR recommends that the Sewer Utility re-review the recommended



improvements shortly before design and/or implementation efforts to ensure that they remain consistent with changes to cyber threats, recognized mitigations, industry-recognized standards, and the Sewer Utility's risk tolerance.

### 5.2.1 Upgrade CKTP Control Room

An upgrade to the existing control room in the solids processing building (SPB) at CKTP will be required to convert the space into a suitable centralized monitoring location for all Sewer Utility pump stations and WWTPs. Large-format displays are recommended for both static display of overview screens for the remote pump station and WWTPs and for ad hoc display of operator-selected screens to support group discussion and decision making. A minimum of two SCADA PCs with access to HMI screens and historian client and data visualization and dashboarding software applications are also recommended. Four monitors are recommended for each PC to enable simultaneous display of multiple software application screens and to provide operators with the flexibility to customize display content according to their preferences. An example of one possible configuration for a control room operator workstation with four monitors and large-format displays is depicted in Figure 5-1.

Figure 5-1. Example four-monitor operator workstation configuration with large-format displays



Source: HydroLogic Research (2021).

To meet the Sewer Utility's goal for maintaining remote pump station and WWTP monitoring and alarm capability during power outages at CKTP, a minimum of 4 hours of battery backup power should be provided for the control room workstations and large-format display hardware. The same duration of battery backup power should also be provided for the servers and network components serving the HMI screen content.

### 5.2.2 Extend OT Network to County Public Works Annex Facility

To support the Sewer Utility's goal of establishing a secondary monitoring location for its WWTPs and remote pump stations at the County Public Works Annex facility in Bremerton, the OT network will need to be extended to incorporate dedicated hardware

at that facility. HDR recommends that the Sewer Utility install a Host Identity Protocol (HIP)switch at the facility and include a dedicated SCADA PC at that facility within the Sewer Utility's Tempered Networks Airwall system deployment. If the Sewer Utility decides to install backup ICS server(s) at the facility, this hardware would also be included in the Tempered Networks Airwall system to enable backups to occur between CKTP and the facility.

### 5.2.3 Remote Pump Station and WWTP Telemetry Improvements

### Migrate Pump Stations from VHF Licensed Radio WAN to Cellular WAN

To help reduce long polling times for its remote pump stations, the Sewer Utility will need to transition to a wireless communication technology with higher bandwidth. Given the lack of clear line-of-sight between most pump stations and the nearest WWTP and the high costs of installing fiber-optic cable to the remote stations, HDR recommends that the Sewer Utility continue the work it began with Quality Controls Corporation (QCC) to migrate its remote pump stations to the cellular wide-area network (WAN). Critical pump stations and those with historically poor communications should be prioritized for near-term migration, while less critical pump stations could be transitioned over a longer period as time and funding allow. Prior to planning the cutover for each site, a site survey should be performed to assess the signal strength of the Verizon Wireless network at the pump station location. Sites with poor signal strength may require outdoor and/or directional antennas to establish acceptable signal strength for a pump station telemetry application.

Latency with cellular networks is difficult to predict because of several variables that are beyond the end user's control, many of which have to do with the cellular service provider's infrastructure. As the number of pump stations introduced to the cellular WAN increases, the Sewer Utility may find that a second cellular router at CKTP will be required to mitigate latency and performance issues encountered with all remote pump stations communicating through one cellular router. A second cellular router would also provide a layer of redundancy for the communication links between the remote pump stations and CKTP. If a second cellular router is implemented, the idea would be to split the remote pump stations between the two routers so that remote pump station telemetry is divided into two parallel channels handling half of the remote pump station communication traffic. The Sewer Utility would also configure to two cellular routers at CKTP for redundancy so that pump stations communicating through one of the routers fail over to the other router during sustained loss of communications through their primary router.

HDR recommends leaving the very high frequency (VHF) licensed radios in place for the more critical stations and implementing routing and communication driver configuration so that the stations revert to the VHF licensed radio WAN when communications over the cellular WAN are lost.

Implement Store-and-Forward and Exception Reporting for Remote Pump Station Telemetry and Eliminate PLC Data Concentrator for Cellular WAN


Migrating the remote pump stations to the cellular WAN will certainly improve polling times, but this measure alone will not be sufficient to achieve the Sewer Utility's goal of



near-real-time monitoring and alarming for its remote pump stations. Even with the higher bandwidth of cellular communications, round-robin polling for the 62 pump stations could take up to 2 or 3 minutes to complete a polling cycle. This approach would still leave the utility with sporadic snapshots of each pump station's status and no means of monitoring continuous analog values or determining time stamps of when events and state changes actually occur. Similarly, the Sewer Utility would have no way of backfilling pump station data in the event of communications outages.

To resolve this issue, HDR recommends that the Sewer Utility implement a remote pump station telemetry solution that incorporates store-and-forward functionality. As depicted in Figure 5-2, store-and-forward eliminates data loss due to polling cycle times and communication outages. Real-time data are time-stamped and stored in a PLC, gateway, or software buffer to be forwarded when data communications are available. Two common open protocols that support this functionality are DNP3 and MQTT. The existing Allen-Bradley MicroLogix 1400 PLCs installed in the remote telemetry unit (RTU) panels at the pump stations support DNP3, which makes this protocol an attractive option because the Sewer Utility's investment in the existing hardware could be preserved.

Figure 5-2. Depiction of store-and-forward functionality



Source: Schneider Electric.

In addition to implementing store and forward, HDR recommends that the Sewer Utility replace round-robin polling with a report-by-exception telemetry solution. This would transition the remote pump station telemetry to event-based communications, where data exchange is tailored to capture changes in state, alarms, and deadband traversals for analog values. Compared with round-robin polling, where the same parameters are polled every cycle regardless of whether they communicate new information, report by exception can reduce data exchange volumes significantly. This is ideal for low-bandwidth environments like cellular applications where data usage rates apply.

Report-by-exception schemes typically consist of scheduled event and integrity polls, where time-stamped events are polled at a set interval and all current values are polled at a significantly longer interval, the latter polling cycle functioning in much the same way as round-robin polling. However, typical report-by-exception implementations also include functionality to enable the remote station to initiate communications with the master to communicate high-priority events (e.g., wet well high level, in the case of a wastewater pump station application) as well as events that have resided in the event buffer without being polled for a set period. Figure 5-3 illustrates how report by exception

is handled by DNP3, one of the common open protocols designed with this functionality in mind. Again, the existing Allen-Bradley MicroLogix 1400 PLCs installed in the RTU panels at the pump stations support DNP3.

**DNP3 Slave Points Table DNP Point Type** DNP BIOO Digital Input (1) 200 mS OFF 1. Polled Static Data (Class 0) 1 1 DNP BI01 Digital Input (1) 5 S OFF DNP3 Master (SCADA Host) DNP BI02 Digital Input (1) ON DNP BI03 Digital Input (1) OFF DNP\_BI04 Digital Input (1) ON DNP\_BO00 Digital Output (10) ON DNP BO01 Digital Output (10) OFF DNP AI00 Analog Input (30) 234 678 DNP AI01 Analog Input (30)

Figure 5-3. DNP3 report-by-exception functionality summary

**DNP3 Slave Event Buffer** (Unread Events - Class 1/2/3)

DNP AOOO

The DNP3 task in the RTU monitors points in the DNP table to determine if a new event should be logged in the event buffer.

Analog Output (40)

Event reporting rules determine if event/s should be sent unsolicited, based on their age and quantity (for each event class).

With Time (Obj:02, Var:02) (0 Qualifier Field, Prefix: 1-Octet Index Prefix, Range: 8-bit Single Field Quantity Number of Items: 4 Point Number 0 (Quality: Online), Value: 1, Timestamp: Aug 10, 2018 23:37:41.9060000 Point Number 1 (Quality: Online), Value: 1, Timestamp: Aug 10, 2018 23:37:42.362000000
Point Number 2 (Quality: Online), Value: 1, Timestamp: Aug 10, 2018 23:37:43.133000000
Point Number 3 (Quality: Online), Value: 1, Timestamp: Aug 10, 2018 23:37:43.541000000 Object(s): 32-Bit Floating Point Change Event w/ Time (Obj:32, Var:07) (0x2007), 1 point Qualifier Field, Prefix: 2-Octet Index Prefix, Range: 16-bit Single Field Quantity


Point Number 204 (Quality: Online), Value: 7.26057, Timestamp: Aug 10, 2018 23:37:46.38200

Source: Brodersen (2020).

Currently, the Sewer Utility has a master telemetry unit (MTU) PLC installed at CKTP that is serving as a data concentrator for the few remote pump stations on the cellular WAN (see Figure 5-4, where data concentrator PLC is indicated by a red box with diagonal hatching). The PLC is an Allen-Bradley CompactLogix 1769-L33ER processor, which does not support DNP3 natively. QCC has implemented a form of report-byexception functionality via PLC programming logic for the sites on the cellular WAN, where the remote sites initiate communication for significant state and analog value changes and the MTU PLC polls the remote pump stations when no exception reports are received within a set time interval. This solution is a significant improvement over the round-robin polling on the VHF licensed radio WAN, but it does not provide store-andforward functionality or time-stamped events that would allow the Sewer Utility to assign accurate times to events and eliminate data loss due to communication outages.







Though third-party communication modules could be incorporated into the existing MTU PLC implementation to have the PLC serve as a DNP3 master so that the Sewer Utility could receive the benefits of the DNP3 protocol, the MTU PLC is serving only as a middleman in the data exchange between the existing Wonderware system and the remote pump stations. A much simpler approach would be to eliminate the MTU PLC and have the SCADA server at CKTP serve as the DNP3 master. AVEVA (formerly Wonderware) offers Telemetry Server software that integrates with its System Platform offering. The software is purpose-built for remote site telemetry applications, supports DNP3, and has a relatively simple user interface that would be easier for Sewer Utility staff to configure and maintain than the PLC programming logic within the MTU PLC. Furthermore, eliminating the MTU PLC would reduce the number of single points of failure in the remote pump station telemetry communication pathway and reduce overall telemetry latency by removing an additional processing step.

Improve Communication Status Monitoring and Alarming for Remote Pump Station Telemetry

The Sewer Utility needs to have an accurate picture of remote pump station communication status and performance so that alarms can be generated when communications are lost and corrective action can be taken to remedy consistently poor performance. At a minimum, uptime percentages should be calculated as a ratio of successful versus attempted polls for each pump station. HDR recommends that uptime percentages be displayed at the HMI for the previous 24 hours and all history since the last manual reset. Pump stations that retain backup VHF licensed radio links should have separate uptime percentages calculated and displayed for cellular and VHF licensed radio links. Sewer Utility staff should have the ability to configure the timer interval and/or

number of consecutive unsuccessful polls that would initiate a loss of communications alarm via the HMI.

Implement HIPswitch Cellular Failover Functionality to Establish Communication Link Redundancy for WWTPs

Currently, the Sewer Utility's HIPswitches at the WWTPs are configured only for wired communications. An outage within the Kitsap Public Utility District (KPUD) network has the potential to disrupt communications between one or more remote WWTPs and CKTP. Though store-and-forward functionality is recommended for the remote WWTP SCADA servers to avoid data loss in the event of a communication outage (discussed in Section 7), this functionality will not resolve the loss of alarm notification at CKTP for the WWTP(s) impacted by the KPUD network outage. To preserve alarm notification for the remote WWTPs in the event of a KPUD network outage, HDR recommends that the WWTP HIPswitches be configured for failover to cellular communications. This will require that the HIPswitches be provisioned with a cellular expansion module and a subscriber identification module (SIM) card activated on the Sewer Utility's cellular WAN.

### 5.2.4 CKTP OT Network Upgrades

Consolidate CKTP OT Network Servers, Distribution Switches, and Other Appliances in a Network Rack Environment within the SPB

HDR recommends standardizing on rack-mounted servers and distribution switches for the OT network and consolidating this infrastructure in one or more enclosed network racks within the CKTP SPB. Consolidating this equipment in a network rack environment will provide several benefits:

- Equipment will be located in an enclosure that can be locked to restrict access
- Rack-mounted power distribution units (PDUs) allow for a clean and simple redundant power supply solution using factory-issued power cords for the equipment
- Cable management hardware mounted to the rack will allow the Sewer Utility to establish clean and organized patch cabling between devices
- Reduces cabling that needs to be run throughout the building
- Greatly simplifies maintenance and replacement of equipment
- Results in a smaller equipment footprint compared with tower servers and having devices distributed throughout the building

Network racks should be sized for standard 19-inch equipment and have seismic testing certifying their suitability for installation in the seismic zone applicable to CKTP. The rack cabinet enclosures should also be sufficiently wide to accommodate vertical cable management hardware on either side of the rack. An example four-post network rack cabinet certified to meet Zone 4 requirements is depicted in Figure 5-5.



Figure 5-5. Example four-post seismic network rack cabinet



Source: Chatsworth (2020).

The SPB control room and the space identified in the ground floor of the SPB annex in TM-1 are the two best candidates for locating the future network racks. The SPB annex location has the benefit of providing a dedicated space for critical OT network servers and components where room access could be restricted to the few Sewer Utility staff members qualified to service the equipment by means of a key card access system. However, significant costs would be involved with repurposing the space and routing network and power cabling to that location, as described in TM-1. The SPB control room has the advantage of significantly reduced costs because the room is already climate-controlled and incoming communication cables already terminate at that location. However, servers and network equipment generate noise, which may impact the quality of the control room environment for Sewer Utility staff. Sound mitigation may be required at this location. The control room will also be accessed by several staff members, reducing the physical security measures in place for the network rack(s).

Once a better idea of spatial requirements is determined for the network rack(s) in Phase 4 of the Master Plan, the future location for this infrastructure should be discussed further with Sewer Utility stakeholders.

#### Upgrade to Stacked Layer 3 Distribution Switches at CKTP SPB


Currently, the most critical switch in the Sewer Utility OT network is an unmanaged switch in the SPB at CKTP. This switch is handling all traffic between ICS servers, SCADA clients, and PLCs at CKTP, as well as remote connections to the CKTP OT network established via the Tempered Networks WAN. To eliminate this single point of failure and to establish routing capabilities at the OT network distribution layer that will enable segmentation of the network, HDR recommends replacing the unmanaged switch with stacked Layer 3 distribution switches.

The stacking capability of these switches will provide switch-level redundancy for critical ICS servers and downstream access switches for which cable path redundancy is provided. The Layer 3 functionality of these multilayer switches allows for network traffic to be routed between subnets and virtual local area networks (VLANs). This will enable

the Sewer Utility to instate some network security best practices such as placing devices that do not need to communicate with one another in separate broadcast domains while maintaining their ability to communicate with ICS servers and other shared resources. For reference, Layer 3 refers to a specific layer within the Open Systems Interconnection (OSI) Model (see Figure 2-11 in TM-1). Layer 3 switches handle network packets and recognize IP addresses and other packet header information required to route packets between broadcast domains.

To eliminate additional single points of failure and a potential bottleneck in the CKTP OT network, HDR also recommends eliminating the two managed switches in panel (PNL) 8580A (also located in the SPB). The fiber-optic cable connections received by these switches from the various access switches throughout the plant would instead be patched directly to the proposed stacked Layer 3 distribution switches, eliminating an unnecessary hop in the OT network architecture. Figure 5-6 depicts how the relevant excerpt of the existing CKTP OT network would be modified to eliminate the existing switches discussed above (shown crossed out with red Xs in the figure) and to replace them with stacked Layer 3 distribution switches. For reference, the complete physical network diagram for the existing CKPT OT network can be found in Appendix B of TM-1.

Figure 5-6. Excerpts from existing and proposed CKTP OT network architecture

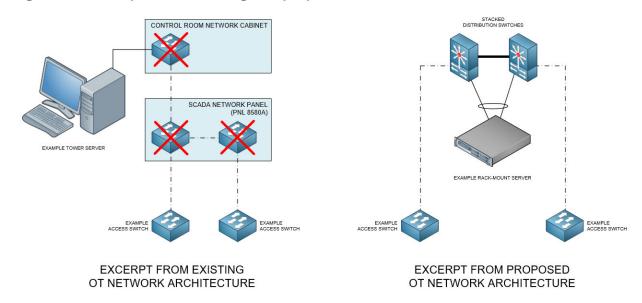

Modifications to CKTP Administration and Laboratory Building Electrical Room

The CKTP administration and laboratory building electrical room contains mechanical and electrical equipment along with network components for both the OT network and business LAN. The costs involved with relocating the mechanical equipment and rerouting the air and water lines to eliminate the impact to the electrical and network equipment because of equipment failure or a burst or leaking pipe would likely be considerable. An exploration of the work required is also beyond the scope of the Master Plan. Relocating the electrical and business LAN network rack and rerouting all new power and communications cables would also be costly and would require a significant disruption to Sewer Utility operations in the building.




Assuming that the mechanical equipment, water and air piping, and electrical and network equipment will continue to share the electrical room, HDR recommends relocating the OT network HIPswitch to the new network rack(s) location in the SPB. The HIPswitch is critical for maintaining communication with the remote WWTPs and its relocation will result in a less risk-prone environment for the device while also reducing the need for Sewer Utility staff to enter the administration and laboratory building electrical room to maintain the OT network. To facilitate the relocation in the near term, a 1 GbE, multi-mode fiber-optic small form-factor pluggable (SFP) module would be introduced to the combination port on the KPUD Carrier Ethernet switch where the existing Category cable connection to the HIPswitch is made (see Figure 5-7). The SFP module could then be patched to the existing fiber-optic patch panel mounted to the electrical room communications backboard to establish a connection to the SPB communications cabinet via the existing fiber-optic cable between the two buildings. The Category cable along with the HIPswitch, 24 VDC power supply components, and OT network switch mounted to the communications backboard would be removed.

Figure 5-7. Proposed SFP module installation in KPUD Carrier Ethernet combination port



The UPS sitting on the floor of the electrical room that is powering the 24 VDC power supply for the OT network components will no longer be necessary and is in a risk-prone location to begin with. This UPS should be removed. However, HDR recommends that UPS power be provided for the KPUD Carrier Ethernet switch located in the electrical room network rack because the device is a critical component that the OT network relies on for wired communications to endpoints outside of CKTP. One option for providing UPS power to the device would be to install a UPS in the existing electrical room network rack. There appears to be sufficient space at the bottom of the rack if the telephone equipment and cabling placed there were to be removed (see Figure 5-8). If the UPS were dedicated to the KPUD Carrier Ethernet switch and were not also used to power all of the business LAN components also installed in the network rack, a 1,500-volt-ampere (VA) UPS should be more than enough to meet the Sewer Utility's goal of 4 to 6 hours of battery backup time.

Figure 5-8. Proposed location of UPS in existing administration and laboratory building network rack



### 5.2.5 General OT Network Upgrades

Establish Standard Layer 2 Managed Access Switch with Gigabit Downlink Ports for Future OT Network Applications and Replacement of Select Unmanaged Switches

To provide Sewer Utility staff with a uniform management interface for maintaining OT network access switches and to reduce spare switch inventory requirements in the future, HDR recommends that the Sewer Utility standardize on a managed access switch for the OT network. The standard switch should support Layer 2 management functionality to allow for network segmentation, traffic filtering (Internet Group Management Protocol [IGMP] snooping, in particular), and implementation of cybersecurity controls. Full-duplex switching to mitigate packet collisions and Simple Network Management Protocol (SNMP) and port-mirroring capabilities to facilitate network monitoring and troubleshooting are additional recommended features of the standard switch. The switch should also have gigabit downlink ports to accommodate the gigabit port speeds of modern ICS devices.

Once the new standard OT network access switch is selected, HDR recommends that it be used to replace the unmanaged switches recommended for replacement in TM-1. The Sewer Utility's standard OT network access switch should also be documented in the Sewer Utility ICS standards proposed later in this TM so that future design projects incorporate the standard into their contract documents.



#### Establish Cable Path Redundancy for Critical Segments of the OT Network

The current OT network at the Sewer Utility WWTPs consists of single fiber-optic and copper Category cable connections between buildings and process areas. For increased OT network resilience, HDR recommends that the Sewer Utility establish redundant cable paths for critical OT network segments, particularly between building access switches at CKTP and the proposed distribution switch stack in the SPB. The recommended topology for this physical layer redundancy is a redundant star (as shown in Figure 5-9). The advantages and disadvantages of a redundant star topology, as compared with other common network topologies (ring, star, and linear), are provided in Table 5-1.

Figure 5-9. Redundant star topology

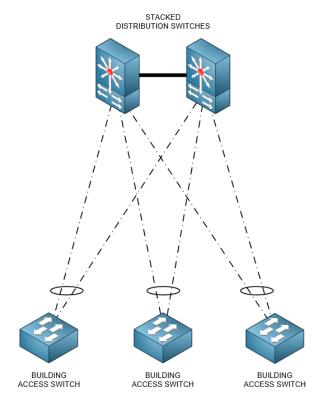


Table 5-1. Network topology advantages and disadvantages

		_
Topology	Advantages	Disadvantages
Redundant star	<ul> <li>Fast convergence in the event of connection loss.</li> <li>Predictable and consistent network performance because of consistent number of hops.</li> <li>Provides resilience for multiple connection losses.</li> <li>No inherent bottlenecks in design reduces likelihood of segment oversubscription.</li> </ul>	<ul> <li>Additional cables, conduits, and associated costs.</li> <li>Increased configuration complexity (compared to start, linear, or extended-star topologies).</li> </ul>

Table 5-1. Network topology advantages and disadvantages

Topology	Advantages	Disadvantages
Ring	<ul> <li>Fewer cables and conduits and lower associated costs.</li> <li>Provides resilience for one connection loss.</li> <li>Reduced bottleneck potential (when compared to extended-star) with two potential paths. This reduces likelihood of segment over-subscription.</li> </ul>	<ul> <li>Longer convergence times in the event of connection loss.</li> <li>Most complex configuration.</li> <li>Less predictable and consistent network performance because of variable number of hops.</li> <li>Bottlenecks can still occur on segments near distribution switches resulting in segment over-subscription.</li> </ul>
Linear, star, or extended- star	<ul> <li>Least amount of cables and conduits and lowest associated costs.</li> <li>Simple implementation.</li> </ul>	<ul> <li>No resilience. Connection loss results in communication outage.</li> <li>Inherent bottlenecks on segments near distribution switches (in the case of linear or extended-star topologies). These bottlenecks can result in segment oversubscription.</li> </ul>

Though a redundant star topology is recommended, there will be cases where the cost of implementing this topology is prohibitive. In these cases, a portion of the OT network might be broken out into a ring topology, or a non-critical access switch connected via one duct bank might be left with one fiber-optic path to the distribution switch stack. Similarly, the best practice of physically separate routes for the redundant cables must also be considered with the cost of implementation. For example, the cost of installing a new 100-foot-long duct bank to provide a completely separate physical fiber path may be hard to justify when a spare conduit exists in an existing duct bank where the other redundant fiber-optic cable is already installed.

As redundant fiber-optic cable paths are considered, HDR recommends that the Sewer Utility consider transitioning to single-mode fiber-optic cable for communication links where significant network traffic volumes are anticipated. Single-mode fiber-optic cable supports significantly increased throughput, which will allow the Sewer Utility to benefit from the multi-gigabit throughput capabilities of today's network components and be better positioned to take advantage of the throughput capabilities of future technology. In particular, the existing fiber-optic cable between the CKTP administration and laboratory building electrical room and the SPB is recommended for near-term replacement with single-mode fiber-optic cable. All traffic associated with remote WWTPs, remote access to the OT network, and access to the ICS DMZ from the Sewer Utility business LAN will occur over this fiber, and the length of the existing multi-mode (Optical Multi-mode 1 [OM1]) cable is already at or near the cable's maximum distance threshold for theoretical 1 GbE.

### 5.2.6 ICS and OT Network Power Supply Improvements

Establish Robust UPS Battery Backup Solution for ICS and OT Network Infrastructure

To meet the Sewer Utility's goals of establishing a minimum of 4 to 6 hours of battery backup power for CKTP ICS infrastructure required to maintain monitoring of remote



pump stations and WWTPs and on-call staff alarm notification functionality, the Sewer Utility will need to implement an improved UPS solution for the CKTP SPB. Though dedicated industrial-grade UPSs installed in network racks and cabinets and at critical PCs could meet the Sewer Utility's goals, a centralized approach to UPS power distribution would reduce the number of UPSs that need to be maintained and monitored while providing more flexibility for future modifications to the ICS infrastructure.

HDR recommends installing a three-phase, 120/208-volt alternating current (VAC), online double-conversion type UPS system at the CKTP SPB. The UPS system would consist of a UPS cabinet with a modular design to allow for expansion of capacity in the future, a battery cabinet, and a combination transformer/maintenance bypass cabinet to step down a three-phase 480 VAC power feed to 208 VAC and allow Sewer Utility staff to bypass the UPS system for maintenance. The UPS system would feed a downstream three-phase 120/208 VAC panelboard for distribution of UPS power to the critical ICS loads within the SPB. An example of such a system that HDR recently designed for a local wastewater utility is depicted in Figure 5-10.

Figure 5-10. Example three-phase UPS system recently installed at a local wastewater utility



Because of the significantly smaller scale of the ICS infrastructure at the remote WWTPs, it is likely that the Sewer Utility can meet its goal of establishing a minimum of 4 to 6 hours of battery backup power for ICS infrastructure required to maintain communication of active alarms to CKTP by installing one or more standalone online double-conversion UPSs with an extended runtime option and external battery packs. ICS and related infrastructure requiring UPS power at the remote WWTPs would include the HIPswitches, KPUD Carrier Ethernet switches, SCADA server(s) and PC(s), main plant PLC, telephony or cellular modems required for the alarm notification system, and

network switches involved in maintaining communication between these devices. Depending on the critical ICS loads requiring UPS power, these UPSs may be single-phase 120 VAC or three-phase 208 VAC.

The approach of a standalone online double-conversion UPS is also recommended for the Sewer Utility's PLC and remote input/output (RIO) control panels currently without battery backup power at its WWTPs and remote pump stations, as indicated in TM-1. Per Sewer Utility goals for battery backup times, PLC control panels at CKTP would need to be sized for a minimum of 15 minutes of battery backup power. Other PLCs and RIO panels at remote WWTPs and pump stations would be subject to the 4- to 6-hour battery backup requirement.


HDR recommends that all UPSs provided for Sewer Utility ICS and OT network infrastructure be monitored by the SCADA system and that UPS status, warnings, and alarms be integrated into the Sewer Utility's SCADA HMI screens and alarm notification system. This includes the dedicated UPSs installed in the WWTP PLC panels. Most of the existing UPSs in WWTP PLC panels have no status and alarm contacts or capability for remote monitoring over Ethernet. HDR recommends that these UPSs be replaced with online double conversion UPSs with status and alarm contacts and/or Ethernet communication options that support integration with SCADA software via standard industrial Ethernet protocols like Modbus Transmission Control Protocol (TCP).

Standardize on Redundant Onboard Power Supplies and 24 VDC Power Supplies for ICS and OT Network Infrastructure

To avoid a scenario where the power supply redundancy provided by a UPS is undermined by failure of a single onboard power supply or a single 24 VDC power supply downstream from the UPS, HDR recommends that the Sewer Utility standardize on carrying through power supply redundancy to the ICS and OT network devices. For rack-mounted OT network switches, servers, and other network appliances, this would mean standardizing on dual onboard power supplies. Network racks would be provisioned with two PDUs, each powered from a separate circuit in the upstream UPS panelboard. The dual onboard power supplies of each device would be split between the two PDUs. Figure 5-11 depicts a simplified overview of this approach.



Figure 5-11. Overview of power supply and distribution redundancy for network rack components

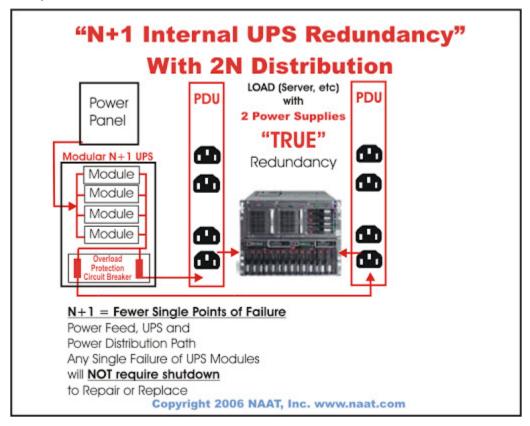

Source: NAAT (2021).

For DIN-rail mounted components, this would mean standardizing on redundant 24 VDC power supplies and a redundancy module in control panels so that a failure of one power supply does not result in loss of all ICS and OT network components served by the control panel's 24 VDC power distribution. The redundancy module is required to effectively isolate the two 24 VDC power supplies so that a fault impacting one of the supplies does not impact the other and undermine the component-level redundancy. Figure 5-12 depicts an example 24 VDC power supply implementation where two 24 VDC power supplies and a redundancy module are used.

Figure 5-12. Example redundant 24 VDC power supply application



Source: Phoenix Contact (2021).

To implement this approach, upgrades to existing control panel 24 VDC power distribution could be made as time and operation and maintenance (O&M) budget allow and/or coordinated with other recommended improvements affecting the control panels. To ensure that future control panels and OT network upgrades adhere to this standard approach, these requirements should also be documented in the Sewer Utility ICS standards proposed later in this TM so that future design projects incorporate the standard into their contract documents.

### 5.2.7 Secure Remote Access and Data Exchange with Business LAN

Establish an Industrial DMZ between Sewer Utility Business LAN and OT Network

Critical infrastructure networks like the Sewer Utility's OT network require isolation from the Internet and less trusted networks (e.g., the Sewer Utility business LAN) within the enterprise zone to protect them from external threats. However, there are many benefits to establishing controlled data exchange between enterprise zone assets and industrial zone (OT network) assets that can allow an organization to optimize its operations and increase efficiency. To securely implement data flows between these two zones, information security industry best practices dictate that all cross-zone traffic be handled by applications and services residing in an industrial DMZ. This network architecture establishes a single entry to the industrial DMZ from the enterprise zone via a firewall and a single entry to the industrial zone from the industrial DMZ via a firewall. A general depiction of the proposed industrial DMZ is shown in Figure 5-13, between Levels 3 and 4 of the Purdue Model for Control Hierarchy, an industry standard used to organize networks into functional and security zones. Because the applications and services within the industrial DMZ will be either the endpoint of all inbound traffic to the industrial DMZ or the originator of all outbound traffic from the industrial DMZ, a direct connection between enterprise zone and industrial zone assets is avoided. It is recommended that the Sewer Utility implement an industrial DMZ to handle data exchange between the industrial and enterprise zones and improve the security provided for ICS assets.



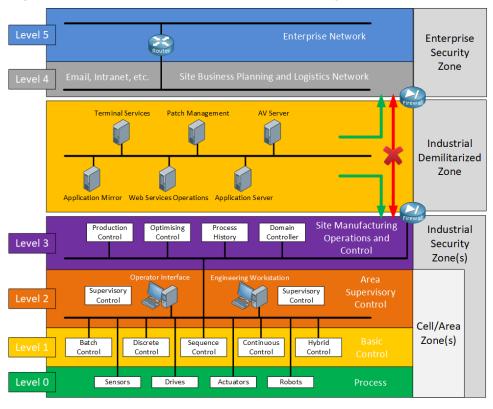


Figure 5-13. Purdue Model for Control Hierarchy

Source: NetworkLessons.com

Implement Secure Mobile Access to SCADA HMI Screens for Remote and On-site Staff

With the exception of Sewer Utility I&C technicians and third-party systems integrators, most Sewer Utility staff will not need mobile access to OT network resources beyond the SCADA HMI screens for the remote pump stations and WWTPs. To adhere to the information security industry Principle of Least Privilege, these users should be granted access only to the resources that they need to interface with to perform their job function. Read or read/write privileges should also be tailored to the specific user and his/her responsibilities.

The Sewer Utility's SCADA software platform vendor, AVEVA, offers a remote access solution developed specifically for operators, supervisory staff, and other users whose remote access to the OT network is limited to SCADA HMI screens. This software, called AVEVA InTouch Access Anywhere, is designed to work with Microsoft Remote Desktop Services (RDS) where remote connections to a Remote Desktop Server hosting the InTouch Access Anywhere software application are established via a Remote Desktop Gateway, typically located in an industrial DMZ. Figure 5-14 presents a simplified diagram of a typical AVEVA Intouch Access Anywhere deployment. This solution allows mobile users to access SCADA HMI screens via a Hypertext Markup Language revision 5 (HTML5)-compliant web browser and requires no client software installation or maintenance on the mobile device.

HMI/SCADA network

InTouch Access Anywhere Applications Running on Windows Terminal Server

HMI/SCADA DMZ

Business Network

Business Network

InTouch Access Anywhere Secure Gateway

Figure 5-14. Typical AVEVA Intouch Access Anywhere network architecture

Source: AVEVA (2020).

The use of RDS and an industrial DMZ for remote access to OT networks is a widely deployed framework endorsed by DHS, NIST, Rockwell Automation, Cisco, and several other industry organizations and manufacturers. This approach also leverages AVEVA's standard offering for remote access applications, for which support and security patches can be expected from the software vendor. For these reasons, HDR recommends that the Sewer Utility implement AVEVA InTouch Access Anywhere for mobile access to the Sewer Utility's SCADA HMI screens.

It should be noted that this approach will require mobile users to access the industrial DMZ in a secure manner that should include multi-factor authentication (MFA). The standard approach would be for users to access the industrial DMZ through the Sewer Utility business LAN via the virtual private network (VPN) service maintained by the County IS department. This approach would require coordination and involvement with the County IS department but would allow the Sewer Utility to make use of existing IT infrastructure and software licensing. Alternatively, the Sewer Utility could consider establishing mobile access to the industrial DMZ via the Tempered Networks Airwall system. This approach would involve installing Airwall client software on County-issued mobile devices and implementing a specific-use overlay network that provides the mobile devices with access only to the Remote Desktop Gateway. While this approach would reduce or eliminate County IS department involvement, it would incur the costs of additional Airwall client licenses. Because tablet-based workflows for Sewer Utility staff are anticipated to eventually involve dashboards and data visualizations served by software application(s) hosted on the Sewer Utility business LAN, HDR recommends that the Sewer Utility aim for the standard approach in the long term. However, the Sewer Utility could consider access via the Tempered Networks Airwall system as a temporary solution pending coordination with the County IS department.

An additional recommendation is that mobile device management (MDM) software be used to monitor, control, and update County-issued mobile devices, if this is not already implemented by the County IS department. This software would allow the County IS department to manage content on the devices, deploy operating system updates and software patches, monitor use, and make use of device location tracking. In the event that mobile devices are lost or stolen, MDM software can be used to remotely lock the device and/or wipe data and software from the device.



Implement Secure Remote Access to OT Network for I&C Technicians and Contracted Systems Integrators

Sewer Utility I&C technicians and contracted systems integrators will require remote access to additional OT network resources beyond the SCADA HMI screens to maintain and troubleshoot the OT network remotely. While the current Virtual Network Computing (VNC)-based remote access solution is capable of providing these users with the access they require, HDR recommends transitioning to a remote access solution without the inherent security risks of VNC. For the same reasons indicated for mobile access to the Sewer Utility SCADA HMI screens, HDR recommends that RDS be used to establish remote access for more technical users who require greater privileges and permissions on the OT network.

These users would initiate remote connections using Remote Desktop Protocol (RDP) from County-issued or whitelisted systems integrator laptops to engineering workstation(s) on the OT network where necessary applications reside. Remote sessions would be established via the same Remote Desktop Gateway in the industrial DMZ that is used by the Sewer Utility's mobile users. As with the mobile access solution proposed above, the same two methods of accessing the industrial DMZ apply (County IS department managed VPN service or Tempered Networks Airwall system) and HDR recommends that MFA also be included in the remote access for these more privileged users.

The Sewer Utility should consider the use cases for privileged remote access carefully. The ability to edit PLC programming and HMI graphics remotely can potentially reduce emergency response times and costs associated with systems integrator site visits. However, in general, the associated permissions should not be left in place indefinitely. Also, remote access to servers and network switches with administrator-level privileges is not recommended.

# 5.2.8 OT Network Configuration, Management, and Backup Improvements

Develop and Implement an Improved OT Network Segmentation Scheme

To reduce cybersecurity risks and adopt industry best practices, HDR recommends that the Sewer Utility discontinue use of public IP addresses for OT network devices. The existing subnetting scheme also needs to be modified to both accommodate additional IP devices in the future (the CKTP OT network is currently limited to 254 devices) and to establish zones and conduits consistent with ISA/International Electrotechnical Commission (IEC) 62443 recommendations to limit the network traffic to required operational functions (ISA/IEC 2020). For example, once the CKTP control panel operator interface terminals (OITs) are migrated to a thin client implementation, they will require communication with the SCADA server(s) but will not require direct communication with any of the plant PLCs. Partitioning the OITs onto a separate subnet from the plant PLCs is one example of how the OT network could be segmented. HDR will propose recommendations for OT network segmentation in Phase 4 of the Master Plan as part of the system architecture conceptual design.

#### Implement a Domain for the CKTP OT Network

HDR recommends that the Sewer Utility implement a domain for the CKTP OT network to reduce the labor involved with maintaining the network as it evolves and to enable PCs and servers on different subnets to communicate after the network is segmented. Once recommended authentication, authorization, and accounting (AAA) measures are in place, there will be several users, PCs, and servers for which security and permissions need to be managed. Having one server from which to manage all of these settings will eliminate the need to separately configure them on each PC and server and eliminate the possibility of user permissions not being universally applied to the various OT network resources. Establishing a secondary domain controller as a resilience measure should also be considered, as this would allow remote users to continue accessing the OT network and other software packages that rely on Active Directory to authenticate users to continue functioning in the event of an outage to the primary domain controller.

Because of the very small size of the OT networks at the remote plants, there would be little to no benefit of establishing a domain for each of the remote plants. HDR recommends that these plants remain as workgroups.

#### Improve AAA Measures for OT Network

HDR recommends establishing unique user accounts for each individual requiring access to the OT network PCs and servers. Shared user accounts should be eliminated. To simplify management of user accounts, security policies and permissions are best made at the group level rather than for each user account. This allows for role-based permissions to be established for each type of user (group) and then universally applied to all users added to the corresponding group. While on site at the Sewer Utility WWTPs, users should be required to log in to PCs and servers with their unique usernames and passwords and the operating systems for these devices should be configured to log the user out on inactivity. Concurrent logins should also be restricted.

HDR also recommends that the Sewer Utility begin logging and monitoring user activity on the OT network. Though login attempts, session times, and various event data can be viewed via operating system logs and Microsoft Active Directory (software that will be introduced as part of the CKTP OT network domain implementation), third-party software tools for network and user activity monitoring can provide much simpler user interfaces, which will be more approachable for Sewer Utility staff as they acquire network management experience. The selected network monitoring software should have functionality to send alerts to Sewer Utility staff tasked with administering the OT network for potential security events such as multiple failed login attempts. Maintaining user activity logs will also allow Sewer Utility staff to research specific events that occur on the network and attribute them to individual user accounts.


#### Establish Virtualized Environments for all ICS Servers

To benefit from the advantages of virtualization described in TM-1, HDR recommends that the Sewer Utility establish virtualized environments for all ICS servers. This will require selection of a Type 1 (or bare-metal) hypervisor to standardize on for the Sewer Utility OT network. A Type 1 hypervisor differs from a Type 2 hypervisor in that the software runs directly on the physical server (or host) hardware and not on a host



operating system (see Figure 5-15). This yields significant performance and stability benefits because the hypervisor has direct control over the server system resources and is not having to broker commands through an operating system or sacrifice system resources to operating system overhead. Physical servers running Type 1 hypervisors are dedicated to virtualization purposes and cannot be used for anything other than serving guest virtual machines (VMs).

Figure 5-15. Type 1 and Type 2 hypervisor environments



Source: IBM (2020).

Two widely used Type 1 hypervisors that are both supported by AVEVA System Platform 2020, the current offering of the Sewer Utility's SCADA HMI software, are Microsoft Hyper-V and VMware ESXi. Either hypervisor would be suitable for the Sewer Utility's needs. Hyper-V licensing is typically less expensive than VMware, but VMware has several software offerings to expand the functionality of its virtualization services. In HDR's opinion, a significant factor in the selection of a hypervisor should be the level of familiarity that County staff and QCC have with the two hypervisors. If the individuals likely to be supporting the virtualized infrastructure have more experience or a strong preference for one hypervisor over another, that would be good grounds for a selection to be made. QCC may have already made a determination as to which hypervisor to use as part of the ongoing AVEVA System Platform upgrade.

In general, most of the PCs on the OT network should be relatively uniform in terms of setup and configuration and should not be hosting important ICS files or applications locally. ICS files and applications should be hosted on the ICS servers. Therefore, there should not be a driver to virtualize the OT network PCs. However, the Sewer Utility I&C technicians will likely require a Type 2 hypervisor to have access to various versions of Rockwell applications and other automation software and to contain those applications in a controlled environment so that they do not bog down host machine resources. There are also several network monitoring and security applications that run more effectively in a Linux environment, so I&C technicians would benefit from the ability to host a Linux distribution on their PCs in the future.

Establish Automated Backup Procedures for ICS Servers That Includes Onpremise and Off-site Storage

HDR recommends that the Sewer Utility implement automated backup procedures for critical ICS servers to prevent significant data loss and improve the Sewer Utility's ability

to recover from hardware failures, cyberattacks, and catastrophic events. At a minimum, the Sewer Utility's backup solution should include daily image-level backups of VMs and weekly bare-metal backups (a backup procedure that allows staff to recreate the host server on a new physical machine with minimal reinstallation and configuration) for critical ICS servers at the four WWTPs. Backups should be saved to a physically separate backup server or network attached storage (NAS) device at CKTP as well as an off-site data store. For the off-site data store, the Sewer Utility could implement a dedicated backup server at the County Public Works Annex facility in Bremerton and/or lease cloud storage. The Sewer Utility should also incorporate the practice of periodic file recovery from backup testing to confirm the integrity of backups and ensure that backup procedures are occurring as intended.

Though it is possible to automate backup processes by developing scripts and scheduling backup tasks at the operating system level, this process is labor-intensive and requires a level of expertise that may take some time for the Sewer Utility to develop with in-house staff. Backups over WANs can also become challenging because of throughput limitations and can greatly benefit from WAN acceleration services provided via third-party backup software solutions. Third-party backup software providers, such as Veeam and Altaro, offer extremely simplified user interfaces that allow users with limited technical background to easily configure and schedule backups of VMs and physical servers to on-premise, off-site, and cloud data stores. HDR recommends that the Sewer Utility leverage a solution from a third-party backup software provider to simplify the associated OT network management effort for Sewer Utility staff and to optimize the backup-related data exchange occurring over the Tempered Networks WWTP WAN.

#### Implement OT Network Performance Monitoring and Logging Capabilities

Several new devices will be introduced to the OT network in the coming years that will increase the network's complexity and the maintenance burden on Sewer Utility staff. As ICS and other data trafficked by the OT network become more readily accessible to Sewer Utility staff and those data sets are made integral to decision-making and planning processes, the Sewer Utility will become more reliant on the OT network for day-to-day operations. With this in mind, the Sewer Utility will require a means of efficiently monitoring network performance and logging network events to alert staff to potential issues before they degrade into significant network outages and to support troubleshooting and root-cause analysis efforts.

There are a vast number of approaches to network performance monitoring and logging, and, not surprisingly, the opinions of systems administrators on this topic are varied. Because Sewer Utility staff do not have a background in network administration, HDR recommends that the Sewer Utility implement a solution based on licensed software that includes vendor support, high-quality documentation, and access to training for Sewer Utility staff. Many of these software offerings feature relatively intuitive, customizable dashboards to help focus the user's attention on important metrics and information. An example dashboard from one vendor offering is shown in Figure 5-16.

Figure 5-16. Example network performance monitoring dashboard from SolarWinds

Source: SolarWinds Worldwide (2021).

Included in the Sewer Utility's solution should be a System Logging Protocol (Syslog) server on the OT network that receives Syslog messages, SNMP traps, and Windows event logs from OT network switches, firewalls, servers, PCs, and other network appliances. The Syslog server will establish a central logging repository for all OT network infrastructure, which will simplify monitoring and backup efforts. The Sewer Utility will also require software running on a separate server (virtual, not necessarily physical) to provide Sewer Utility staff with an intuitive user interface for monitoring network performance, auditing logs, and troubleshooting network events.

HDR recommends that the Sewer Utility implement a separate subnet dedicated to network management. This will establish a degree of isolation between network management traffic and critical network traffic related to SCADA and PLC-to-PLC communications, and allow the Sewer Utility to prioritize the latter (e.g., leveraging Quality of Service [QoS]). By placing network management traffic out-of-band from the production environment, the Sewer Utility will increase the likelihood that staff can access OT network devices during a network disruption affecting the production environment. Establishing a separate subnet for network management will also allow the Sewer Utility to more tightly control access to the Syslog server, making it more difficult for malicious actors to modify or delete logs to cover their tracks.

### 5.2.9 Cybersecurity Improvements

Perform ICS Server, PC, and OT Network Device Hardening to Mitigate Common Cybersecurity Risks

HDR recommends that the Sewer Utility perform an initial vulnerability assessment for its ICS server, PC, and OT network device infrastructure to provide configuration changes

that will harden the devices against common cybersecurity vulnerabilities. Typical hardening procedures include, but are not limited to, changing default usernames and passwords; disabling unused network switch ports and assigning them to an unused VLAN (i.e., black hole VLAN); removal of non-essential programs on servers and PCs; upgrading to current firmware, software version, and security patches; and requiring the use of Hypertext Transfer Protocol Secure (HTTPS) when accessing web interfaces for device configuration. This effort should also include enabling Advanced Encryption Standard (AES) encryption on the radios involved in the Sewer Utility pump station VHF licensed radio WAN.

As part of the initial device hardening effort, the implemented hardening measures should be recorded in internal documentation that can be used as a reference for hardening devices added to the OT network at a later date. The internal documentation can also be used as the basis for scheduled configuration audits, where the Sewer Utility conducts a periodic review of ICS server, PC, and OT network device configurations to bring devices into compliance with standard hardening measures as well as updating the standard measures to address current firmware versions and known vulnerabilities. Non-sensitive information captured in this internal documentation should be included in the proposed Sewer Utility ICS standards so that contractors on future projects are held to minimum configuration and device hardening requirements.

Establish Unique User Accounts and Implement MFA for Tempered Networks Conductor Management

The Sewer Utility's Tempered Networks Conductor instance is cloud-hosted and requires users to authenticate over the Internet. Because the Conductor serves a critical role in establishing security policies and permissions for much of the Sewer Utility's OT network, access to the Conductor's web interface needs to be tightly controlled and changes to configurations and security policies should be attributable to specific individuals. HDR recommends that the Sewer Utility discontinue the use of generic user accounts for the Conductor and establish unique user accounts for the few individuals who require access to the Conductor. A general administrator account with full permissions should still be maintained for the purposes of creating and removing user accounts, but HDR recommends that login credentials for the administrator account not be shared with contracted systems integrators or other external parties. Once unique user accounts have been established, HDR recommends that the Sewer Utility implement MFA for accessing the Conductor web interface as an additional security control. MFA would apply to both the administrator account and unique user accounts.

Implement Role-based Overlay Networks for the Sewer Utility Tempered Networks Airwall System

HDR recommends implementing role-based overlay networks for the Sewer Utility Tempered Networks Airwall system that are configured to restrict access for member devices according to the Principle of Least Privilege. The following preliminary overlay networks are recommended. Note, these recommended overlay networks may be modified as the system architecture conceptual design is developed in Phase 4 of the Master Plan:



- KWWTP: This new overlay network would be dedicated to the data exchange between the SCADA server at the Kingston Wastewater Treatment Plant (KWWTP) and the SCADA servers at CKTP. Static membership would include the SCADA servers at the two WWTPs and any other OT network resource necessary to send real-time and buffered historical data to CKTP and for managed AVEVA InTouch HMI application updates to be pushed out to KWWTP from CKTP.
- MWWTP: This new overlay network would be dedicated to the data exchange between the SCADA server at the Manchester Wastewater Treatment Plant (MWWTP) and the SCADA servers at CKTP. Static membership would include the SCADA servers at the two WWTPs and any other OT network resource necessary to send real-time and buffered historical data to CKTP and for managed AVEVA InTouch HMI application updates to be pushed out to MWWTP from CKTP.
- SWWTP: This new overlay network would be dedicated to the data exchange between the SCADA server at the Suquamish Wastewater Treatment Plant (SWWTP) and the SCADA servers at CKTP. Static membership would include the SCADA servers at the two WWTPs and any other OT network resource necessary to send real-time and buffered historical data to CKTP and for managed AVEVA InTouch HMI application updates to be pushed out to SWWTP from CKTP.
- Remote facilities: This new overlay network would be dedicated to providing each remote WWTP and the County Public Works Annex with access to SCADA HMI screens for other WWTPs and the remote pump stations. Static membership would include a SCADA PC at each remote WWTP, a dedicated PC at the County Public Works Annex facility, and the Remote Desktop Gateway at CKTP.
- Public Works Annex: This new overlay would be dedicated to the data exchange between the CKTP SCADA servers and the backup server(s) at the County Public Works Annex facility required to support recommended off-site backup procedures. Static membership would include the CKTP SCADA servers, the County Public Works Annex facility backup server(s), and any other OT network resource necessary to support backup procedures.
  - Note, if the Sewer Utility decides not to implement backup server(s) at the County Public Works Annex facility, this overlay network would not be necessary.
- Kitsap IC: This existing overlay network would be dedicated to the Sewer Utility I&C technicians and their immediate remote access needs. Static membership would include the Sewer Utility I&C technician laptop(s) and the Remote Desktop Gateway servers at the WWTPs. The static overlay network configuration would allow I&C technicians to establish remote desktop connections to servers and PCs at the various WWTPs via the Remote Desktop Gateway servers. For scenarios where I&C technicians require direct remote access to a PLC or other OT network resource that cannot be accessed via one of the PCs at the WWTPs, I&C technicians could temporarily add the device to the Kitsap IC overlay network. Once I&C technicians are finished with remote maintenance or troubleshooting for the device, it is recommended that they remove it from the overlay network.

Note, if the Sewer Utility elects to provide I&C technicians with remote access to the WWTP Remote Desktop Gateway servers via the VPN service managed by the

County IS department, the static overlay network membership would include only the I&C technician laptop(s).

- Remote support: This existing overlay network would be dedicated to contracted systems integrators and their immediate remote access needs. Static membership would include one systems integrator laptop or PC at a time. This static overlay network configuration would not allow contracted systems integrator access to Sewer Utility OT network resources by default. When systems integrators require remote access to the OT network, the scope of their access requirements should be clearly defined so that Sewer Utility I&C technicians can add the appropriate servers, PCs, PLCs, and/or other OT network resources to the overlay network as needed. Once the systems integrator is finished with his/her work, all Sewer Utility OT network resources should be removed from the overlay network.
- Mobile SCADA: This new overlay would be dedicated to Sewer Utility staff requiring
  mobile access to the SCADA HMI screens. Static membership would include
  operations and supervisory staff tablets and/or laptops and the Remote Desktop
  Gateway server at CKTP.

Note, if the Sewer Utility elects to provide staff with remote access to the CKTP Remote Desktop Gateway server via the VPN service managed by the County IS department, this overlay network would not be necessary.

Introduce OT Network Firewall Layer Upstream from WWTP Tempered Networks HIPswitches

The HIPswitches deployed at the Sewer Utility WWTPs are providing a single layer of defense at the periphery of the WWTP OT networks. HDR recommends introducing a firewall upstream from each WWTP HIPswitch as an additional security layer. In general, these firewalls would be configured to deny all except for necessary routes, ports, and protocols. The upstream firewall will also provide the Sewer Utility with the benefit of auditable firewall logs, which can be analyzed to detect abnormal activity originated from inside or outside of the OT network. If the Sewer Utility will be responsible for auditing the firewall logs, the logs should be pushed to the proposed Syslog server on the OT network. Otherwise, the logs would be routed as directed by the County IS department according to its logging practices.

Develop a Formal Cybersecurity Incident Response Program

HDR recommends that the Sewer Utility establish a formal cybersecurity incident response program that meets the following criteria:

- Establishes procedures to prepare for cybersecurity threats
- Enables staff to identify when cybersecurity incidents occur
- Indicates which individuals and agencies to contact once a cybersecurity incident is discovered
- Guides response to cybersecurity incidents
- Identifies coordination points and dependencies involving County IS and/or thirdparty service providers (e.g., Verizon Wireless)



- Includes guidelines for adequately documenting cybersecurity incidents and their resolutions
- Defines disaster recovery procedures, including definition of recovery time and recovery point objectives

Once this program is developed, it should be updated and practiced at regular intervals so that Sewer Utility staff can respond quickly and effectively should a cybersecurity incident occur.

- Upgrade CKTP control room.
- Extend OT network to County Public Works Annex facility.
- Migrate pump stations from VHF licensed radio WAN to cellular WAN.
- Implement store-and-forward and exception reporting for remote pump station telemetry and eliminate PLC data concentrator for cellular WAN.
- Improve communication status monitoring and alarming for remote pump station telemetry.
- Implement HIPswitch cellular failover functionality to establish communication link redundancy for WWTPs.
- Consolidate CKTP OT network servers, distribution switches, and other appliances in a network rack environment within the SPB.
- Upgrade to stacked Layer 3 distribution switches at CKTP SPB.
- Modifications to CKTP administration and laboratory building electrical room.
- Sestablish standard Layer 2 managed access switch with gigabit downlink ports for future OT network applications and replacement of select unmanaged switches.
- **©** Establish cable path redundancy for critical segments of the OT network.
- ♠ Establish robust UPS battery backup solution for ICS and OT network infrastructure.
- Standardize on redundant onboard power supplies and 24 VDC power supplies for ICS and OT network infrastructure.
- Establish an industrial DMZ between Sewer Utility business LAN and OT network.
- Implement secure mobile access to SCADA HMI screens for remote and on-site staff.

- Implement secure remote access to OT network for I&C technicians and contracted systems integrators.
- Develop and implement an improved OT network segmentation scheme.
- Implement a domain for the CKTP OT network.
- Improve AAA measures for OT network.
- © Establish virtualized environments for all ICS servers.
- Establish automated backup procedures for ICS servers that include onpremise and off-site storage.
- Implement OT network performance monitoring and logging capabilities.
- Perform ICS server, PCs, and OT network device hardening to mitigate common cybersecurity risks.
- Stablish unique user accounts and implement MFA for Tempered Networks Conductor management.
- Implement role-based overlay networks for the Sewer Utility Tempered Networks Airwall system.
- Introduce OT network firewall layer upstream from WWTP Tempered Networks HIPswitches.
- Develop a formal cybersecurity incident response program.



# 6 ICS Hardware: Future Needs and Recommended Improvements

This section identifies the Sewer Utility's future needs related to its ICS hardware and describes the information and functionality that Sewer Utility staff would like to obtain from the ICS hardware in the future. The future needs presented are derived from information obtained from Sewer Utility staff during site assessment visits, workshops, and staff interviews. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for the ICS hardware.

#### 6.1 Future Needs

This subsection describes the Sewer Utility's future needs as they relate to the ICS hardware.

#### 6.1.1 Establish the Next PLC Platform Standard for the ICS

The Sewer Utility needs to select PLC technology to replace existing PLCs that are reaching the end of their useful life and to establish a new Sewer Utility standard moving forward to guide future ICS upgrades. The Sewer Utility needs to standardize on PLC platform(s) for both WWTP process control applications and for remote pump station control applications. The selected PLC platform(s) must meet the Sewer Utility's technical requirements, support integration of an increasing number of Ethernet devices, be compatible with existing PLC programming logic, and be actively supported by the manufacturer for the next 10 to 15 years. The Sewer Utility has identified that hot-standby controller redundancy is not required for any of the WWTP or pump station applications. Because the Sewer Utility has already standardized on Allen-Bradley for PLCs throughout its ICS infrastructure, the selection will be made from Allen-Bradley's most current product offerings.

Note, because the Sewer Utility has already standardized on MicroLogix 1400 PLCs for remote pump station RTU applications and has recently installed these PLCs at remote pump stations, Phase 3 of the Master Plan will focus on identifying standard applications for these PLCs and will not evaluate a replacement product.

#### 6.1.2 Motor Controllers

Standardize on Motor Controllers with Ethernet Capability and Hardwired Signals for Control and Core Monitoring

The Sewer Utility would like to standardize on Ethernet motor controllers for future projects. The Sewer Utility is also interested in expanding the current practice of monitoring and archiving limited data from networked motor controllers to include more robust power, energy, alarm, and warning data. Hardwired signals will still be used for core monitoring (e.g., running, in auto, and in hand status, motor high temperature, etc.) and control of the equipment.

#### Eliminate DeviceNet Networks at CKTP

The Sewer Utility would like to eliminate DeviceNet networks within the CKTP motor control centers (MCCs). Replacement overload relays, variable-frequency drives (VFDs), and reduced-voltage soft starters (RVSSs) will require Ethernet communication capability to conform to the Sewer Utility's desired standard for motor controllers. The Sewer Utility would like to prioritize elimination of the DeviceNet networks within the CKTP headworks MCCs because these networks have been in service the longest and have generated more maintenance issues.

#### 6.1.3 Establish the Next OIT Standard for the ICS

The Sewer Utility needs to select OIT technology to replace existing OITs that are reaching the end of their useful life and to establish a new Sewer Utility standard moving forward to guide future ICS upgrades. The Sewer Utility needs to standardize on an OIT solution that meets the Sewer Utility's technical requirements, integrates easily with Allen-Bradley PLCs, and is actively supported by the manufacturer for the next 5 to 10 years.

### 6.1.4 Thickened Sludge Truck Loadout Flow Monitoring at Remote WWTPs

The Sewer Utility would like to have a more accurate accounting of thickened sludge volumes received at CKTP from the remote WWTPs. Truck operators currently rely on thickened sludge storage tank level measurement and sight glasses to draw down the tanks and, without a means to measure actual volumes received by the trucks, the Sewer Utility is assuming full truck volumes for each trip. The Sewer Utility would like to install flowmeters for thickened sludge storage tank truck loadout stations at the remote WWTPs to establish a means for determining actual thickened sludge volumes transported to CKTP.

### 6.1.5 Implement Monitoring and Alarming for Composite Samplers

The Sewer Utility would like to implement monitoring and alarming for the composite samplers at its WWTPs. Sewer Utility staff need to be alerted to composite sampler faults via the SCADA system and would also like to view sample counts and when samples are in progress at the SCADA HMI.

### 6.1.6 Improved SCADA Monitoring of UV System at Remote WWTPs

Sewer Utility staff would like to have more detailed information on the remote WWTP ultraviolet (UV) systems available at the SCADA HMI screens. The ability to see which bulbs are failed, UV intensities, and other parameters would help them better monitor system performance. Having access to real-time and historical UV transmittance would also reduce the manual data collection effort for laboratory staff.



### 6.1.7 Implement CKTP Instrumentation and Automation Improvements

#### Establish an Improved Means of Plant Effluent Flow Monitoring

The Sewer Utility would like to improve its current approach to CKTP effluent flow monitoring described in TM-1. If implementing direct flow measurement is infeasible, the Sewer Utility would like to refine current indirect flow derivation to maximize accuracy and reduce the manual effort involved in the review and management of flow totals.

#### Automate and Optimize BNR Process Control

The Sewer Utility needs to transition from manual aeration control to automated control of the biological nutrient removal (BNR) process at CKTP. The Sewer Utility has already identified this as a high-priority initiative prior to the Master Plan and is working with Murraysmith, HDR, and QCC to develop and implement a solution as part of a separate facilities planning task.

#### Liquid Stream Flow Balance Monitoring

The Sewer Utility would like the ability to monitor a comprehensive liquid stream flow balance for CKTP. However, the Sewer Utility does not have flow measurement for the plant wastewater pump station return flow to upstream of the primary diversion channel, which is preventing a full accounting of liquid stream flows. Flow monitoring for this return flow would need to be implemented to enable a comprehensive liquid stream flow balance.

#### Solid Stream Flow Balance Monitoring

The Sewer Utility would like the ability to monitor a comprehensive solid stream flow balance for CKTP. However, the Sewer Utility does not have flow measurement for some solid stream processes, which is preventing a full accounting of solid stream flows. Flow monitoring for the following processes would need to be implemented to enable a comprehensive solid stream flow balance:

- Primary sludge flow to gravity-belt thickeners (GBTs)
- Primary and secondary scum flow to GBTs (currently primary and secondary clarifiers are served by the same scum pumps)
- Incoming septage flow received at septage receiving station
- Mixed liquor distribution channel foam wasting flow to digesters
- Thickened sludge flow from each GBT to thickened sludge blending tank (currently only combined flow is monitored)
- Hauled sludge flow to thickened sludge blending tank
- Digested sludge flow from each digester to centrifuges (currently only combined flow is monitored)

## 6.1.8 Implement KWWTP Instrumentation and Automation Improvements

#### Liquid Stream Flow Balance Monitoring

The Sewer Utility would like the ability to monitor a comprehensive liquid stream flow balance for KWWTP. However, the Sewer Utility does not have flow measurement for some liquid stream processes, which is preventing a full accounting of liquid stream flows. Flow monitoring for the following processes would need to be implemented to enable a comprehensive solid stream flow balance:

- Biofilter sump flow to oxidation ditches
- Process building sump flow to headworks
- Potable water (W2) flow to plant processes

#### Solid Stream Flow Balance Monitoring

The Sewer Utility would like the ability to monitor a comprehensive solid stream flow balance for KWWTP. However, the Sewer Utility does not have flow measurement for the secondary scum flow from the secondary scum pumps to the waste activated sludge (WAS)/thickened waste activated sludge (TWAS) tanks, which is preventing a full accounting of solid stream flows.

# 6.1.9 Implement MWWTP Instrumentation and Automation Improvements

#### Liquid Stream Flow Balance Monitoring

The Sewer Utility would like the ability to monitor a comprehensive liquid stream flow balance for MWWTP. However, the Sewer Utility does not have flow measurement for some liquid stream processes, which is preventing a full accounting of liquid stream flows. Flow monitoring for the following processes would need to be implemented to enable a comprehensive solid stream flow balance:

- Plant influent flow
- Odor control blowdown sump flow to headworks
- W2 flow to plant processes
- Service water (W3) flow to plant processes
- In-plant pump station flow to headworks

#### Solid Stream Flow Balance Monitoring

The Sewer Utility would like the ability to monitor a comprehensive solid stream flow balance for MWWTP. However, the Sewer Utility does not have flow measurement for some solid stream processes, which is preventing a full accounting of solid stream flows. Flow monitoring for the following processes would need to be implemented to enable a comprehensive solid stream flow balance:



- WAS flow to WAS tanks
- Secondary scum flow to WAS/TWAS tanks

#### **Aeration Basin Aeration Control Upgrades**

Sewer Utility staff would like to upgrade the existing constant-speed blowers to VFD-controlled blowers to reduce energy consumption and improve aeration control. Sewer Utility staff would also like to install analytical probes within the aeration basins to reduce manual probe measurement requirements and to allow for automated control of the blowers. The Sewer Utility has identified a potential CIP project to upgrade the plant to meet new total nitrogen (TN) limits and these aeration basin aeration control upgrades would be included in that effort. In the meantime, Sewer Utility staff would like to have the ability to schedule and adjust the current blower operation time sequence from the SCADA HMI.

#### Implement SCADA Control of Sludge Wasting

The WAS pump at MWWTP is no longer in service and operations staff now use the two return activated sludge (RAS) pumps for sludge wasting to the WAS tanks, similar to the configuration at KWWTP. However, unlike KWWTP, the isolation valve on the WAS line to the WAS tanks is a manual valve so operations staff must manually position the valve to send WAS flow to the WAS tanks. The Sewer Utility would like to be able to control this valve from SCADA so that the sludge wasting process can be automated.

#### Integrate Headworks Mixing Channel Blower Alarm at SCADA

Sewer Utility staff would like to receive an alarm at SCADA when the mixing channel blower at the headworks building has faulted. Currently, operations staff are required to manually check in on the equipment while conducting their rounds to confirm that the equipment is not in alarm state.

## 6.1.10 Implement SWWTP Instrumentation and Automation Improvements

#### Liquid Stream Flow Balance Monitoring

The Sewer Utility would like the ability to monitor a comprehensive liquid stream flow balance for SWWTP. However, the Sewer Utility does not have flow measurement for some liquid stream processes, which is preventing a full accounting of liquid stream flows. Flow monitoring for the following processes would need to be implemented to enable a comprehensive solid stream flow balance:

- Drain collection pump station flow to headworks equipment
- W3 flow to plant processes

#### Analytical Probe Monitoring for SBRs

Sewer Utility staff would like to install analytical probes within the sequencing batch reactors (SBRs) to reduce manual probe measurement requirements and to allow for automated control of the aeration blower speed and runtimes.

#### Improved Dewatering Performance

Sewer Utility staff would like to resolve the issue causing the thickened sludge pump to trip on high pressure at increased sludge concentrations. Resolving the issue would eliminate the need for manually operating the rotary-drum thickener (RDT) and allow the Sewer Utility to fully utilize the RDT to increase the degree of dewatering achieved at the plant.

#### Stable Effluent Control Valve Control

The Sewer Utility needs to restore stable position control for the effluent control valve so that operations staff can control the valve from SCADA and rely on it to maintain its position.

#### Sludge Storage Tank Level Measurement

The Sewer Utility needs to implement reliable level measurement for the SWWTP sludge storage tank. A more permanent installation for the backup high level float switch is also required.

#### Thickened Sludge Storage Tank Level Measurement

The Sewer Utility would like to improve the reliability of the SWWTP thickened sludge storage tank level measurement.

# 6.1.11 Implement Remote Pump Station Instrumentation and Automation Improvements

#### Force Main Pressure Monitoring

The Sewer Utility would like to standardize on force main pressure monitoring at its critical remote pump stations. With the addition of force main pressure data with already available flow data from pump station flowmeters, Sewer Utility staff will have the ability to monitor pump performance and receive advanced indicators of pump health degradation and/or potential issues within conveyance system force mains.

### 6.2 Recommended Improvements

This subsection describes the recommended improvements related to ICS hardware.

# 6.2.1 Establish Sewer Utility PLC Platform Standard and Schedule Replacement of Select WWTP and Remote Pump Station PLCs

In Phase 3 of the Master Plan, new PLC platform(s) will be identified to replace existing PLCs that are reaching the end of their useful life and to establish a new Sewer Utility standard moving forward to guide future ICS upgrades. In addition to defining the standard PLC platform(s), the Sewer Utility's preferred input/output (I/O) module types should also be determined so that appropriate model numbers can be identified in the Sewer Utility's ICS standards documentation in an effort to reduce spare-parts inventory in the future.



Once new PLC platform standards have been identified, PLC replacement projects will be identified in Phase 5 of the Master Plan to upgrade PLCs that are reaching the end of their useful life and/or are no longer supported by the manufacturer. Based on years in service, manufacturer support, and criticality of the application, HDR recommends that the Sewer Utility prioritize PLC replacement as indicated in Table 6-1.

Table 6-1. PLC replacement priority

Priority	Facility	Panel tag	Panel description	Year installed
1	PS-24	N/A	Main control panel	2000
2	PS-4	N/A	Main control panel	2004
2	PS-17	N/A	Main control panel	2004
2	PS-7	N/A	Main control panel	2007
3	PS-71	N/A	Main control panel	2004
4	CKTP	PNL 1021	Influent screen 1 main control panel	2010
4	CKTP	PNL 1023	Influent screen 3 main control panel	2010
4	CKTP	PNL 1026	Screwpactor main control panel	2010
4	CKTP	PNL 1050	Headworks control panel	2010
4	CKTP	PNL 1111	Grit washer 1 control panel	2010
4	CKTP	PNL 1112	Grit washer 2 control panel	2010
5	CKTP	N/A	Raptor Acceptance Control System (RACS) operator interface control panel	2010
5	CKTP	PNL 5010	Raptor septage acceptance plant control panel	2010
6	CKTP	PNL 4050	Polymer blending system control panel	2014
6	CKTP	PNL 4080	Polymer feed system control panel	2014
6	CKTP	PNL 8200	Filter system control panel	2014
6	CKTP	PNL 9201	Digester gas treatment control panela	2014
6	CKTP	N/A	Master station central telemetry unit (CTU) (radio)	2017

a. PLC replacement not required if cogeneration system is not returned to service.

# 6.2.2 Develop a Standard Approach for Monitoring and Control of Motorized Equipment

HDR recommends that the Sewer Utility develop a standard approach for monitoring and control of motor controllers throughout its infrastructure. The main motor controller categories needing standardization include full-voltage non-reversing (FVNR) starters, full-voltage reversing (FVR) starters, VFDs, RVSSs, electric actuators for isolation gates/valves, and electric actuators for modulating gates/valves. The standard approach should define requirements for the following, at a minimum:

 Local indication lights, selector switches, pushbuttons, runtime meter, human interface module (HIM), and other instrumentation required at the MCC unit door or motor starter/VFD enclosure (this would not apply to electric actuators)

- Hardwired I/O between the motor controller and SCADA
- Ethernet parameters communicated between the motor controller and SCADA (this would not apply to electric actuators)
- Graphical representation of motor/asset at SCADA HMI process-level and equipment-level screens and pop-up windows
- Associated alarms and alarm priorities
- Means of communicating alarms or conditions, external to the equipment, that are inhibiting the equipment from running
- Parameters to be recorded within the Sewer Utility historian

Defining standard approaches to monitoring and control of motorized equipment will enable QCC or another systems integrator to develop standard automation programming templates for each type of motorized equipment that can then be consistently applied to future ICS upgrades for the Sewer Utility and documented in the proposed Sewer Utility ICS standards documentation. Examples of standard automation programming templates include Add-on Instructions (AOIs) and User-defined Data Types (UDTs) used within Rockwell Automation Studio 5000 Logix Designer project files and AVEVA Asset Library template objects deployed within AVEVA System Platform.

HDR recommends that the standards related to motor controllers be determined prior to the replacement of DeviceNet networks in the CKTP MCCs. This will help to ensure that Sewer Utility preferences are applied to the equipment within these MCCs, which represents a significant portion of the Sewer Utility's assets.

It should be noted that vendor package equipment like aeration blowers requires special consideration and should be handled on a case-by-case basis depending on Sewer Utility preferences and vendor capabilities.

### 6.2.3 Develop a Standard Approach for Monitoring Remote Pump Stations

HDR recommends that the Sewer Utility develop a standard approach for monitoring its remote pump stations. The existing RTUs currently communicate pump runtimes and a set of bits that, with some exceptions, represent standard status and alarm states for all pump stations. A few stations also communicate flow. The proposed telemetry improvements will allow the Sewer Utility to obtain additional parameters in near real-time. HDR recommends that the Sewer Utility evaluate the information it would like to obtain from its pump stations and then standardize on the instrumentation, PLC and RTU programming, and SCADA HMI graphics representation. The standard approach should define requirements for the following, at a minimum:

- Analog process values to monitor at SCADA (e.g., wet well level, flow, force main pressure, chemical tank level).
- Process alarms (e.g., wet well high level, low flow when pumps are running, high force main pressure, low chemical tank level) and alarm priorities.
- Equipment status, alarms, and alarm priorities.



- Pump station alarms (e.g., smoke detected, flood, intrusion) and alarm priorities.
- Generator and electrical distribution system status, power and energy parameters, alarms, and alarm priorities.
- Pump power and energy parameters.
- Graphical representation of pump station at SCADA HMI process-level and
  equipment-level screens and pop-up windows. SCADA HMI pump station template(s)
  should be developed to hide or otherwise remove content and parameters that have
  not been implemented at a given pump station so that it is clear to Sewer Utility staff
  which parameters are actually being monitored.
- Parameters to be recorded within the Sewer Utility historian.

As with the monitoring and control of motorized equipment, defining standard approaches to monitoring of remote pump stations will enable QCC or another systems integrator to develop standard automation programming templates that can then be consistently applied to future ICS upgrades for the Sewer Utility and documented in the proposed Sewer Utility ICS standards documentation.


### 6.2.4 Replace CKTP MCC DeviceNet Networks with Ethernet-capable Motor Controllers

To support the Sewer Utility's goal of eliminating DeviceNet networks from its infrastructure while preserving as much of the recent investment in CKTP MCC infrastructure as possible, HDR recommends retrofitting existing CKTP MCC units rather than a complete replacement of the MCC lineups. The following paragraphs describe specific recommendations involved with the retrofit work.

#### VFD Communication Adapter/Module Replacement

Two types of Allen-Bradley VFDs are installed within the CKTP MCCs containing DeviceNet networks: PowerFlex 700 alternating-current (AC) drives (in the headworks MCCs) and PowerFlex 753 AC drives (in the MCCs installed as part of the Resource Recovery project). Allen-Bradley provides a 20-COMM-E EtherNet/IP adapter (see Figure 6-1 [left]) for the PowerFlex 700 series drives and a 20-750-ENETR EtherNet/IP option module (see Figure 6-1 [right]) for the PowerFlex 750 series drives. These components could be used to replace the DeviceNet adapters/modules in the existing VFDs to enable Ethernet communication for the drives using the EtherNet/IP protocol that the existing Allen-Bradley PLCs support natively. Both of these components are in the active support phase of the manufacturer's product life cycle and would present an opportunity for extending the life of the existing VFDs while also removing them from the DeviceNet network (Rockwell Automation 2020a).

Figure 6-1. 20-COMM-E EtherNet/IP adapter and 20-750-ENETR EtherNet/IP option module

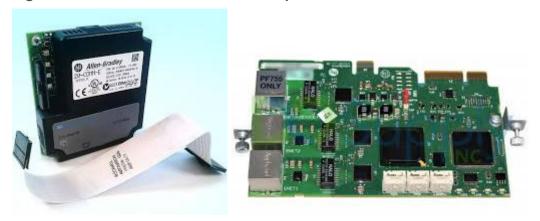


Source: Rockwell Automation.

#### Overload Relay Replacement

Allen-Bradley E3 Plus electronic overload relays are installed in the CKTP MCCs containing DeviceNet networks. The DeviceNet communication capability is integral to these relays and no module or adapter swap-out option is available. Allen-Bradley has also discontinued the E3 Plus electronic overload relay product line and is encouraging migration to its E300 electronic overload relay family, which has native EtherNet/IP communication capability (Rockwell Automation 2020a). Fortunately, the manufacturer has developed the E300 with retrofits in mind and the footprint of the two overload relays is identical (see Figure 6-2), though the E300 is a little deeper to support RJ45 connections. HDR recommends replacing the E3 Plus electronic overload relays with E300 electronic overload relays or other most current manufacturer offering at the time the DeviceNet network replacement work is implemented.

Figure 6-2. Allen-Bradley E3 Plus and E300 electronic overload relay dimensions

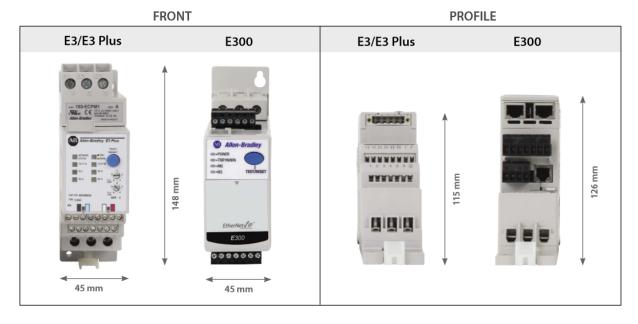

Source: Rockwell Automation (2019).



Some of the MCC units containing E3 Plus electronic overload relays also contain Allen-Bradley Point I/O or DeviceNet Starter Auxiliary components to handle additional hardwired I/O that could not be accommodated by the inputs and outputs integral to the E3 Plus relay. These components are also included in the DeviceNet network and are recommended for replacement with expansion I/O modules compatible with the new E300 relays.

#### Additional MCC Unit Modifications, Field Wiring, and PLC I/O Expansion

The DeviceNet MCCs at CKTP currently rely on the DeviceNet networks for virtually all monitoring and control between the MCC units and the PLCs. In order for the Sewer Utility to establish its preference of hardwired I/O for core monitoring and control points, additional modifications will be required at the MCC units. Currently, hardwired I/O from field devices like selector switches and motor winding thermostats are wired directly to inputs at the overload relay, VFD, or expansion I/O device. These signals will need to remain in place after the VFD and overload relay upgrades, yet some of these signals will also need to be sent to the PLC control panels in the electrical room to satisfy the Sewer Utility's preference of hardwired I/O for signals such as in auto status and motor high temperature alarm. This will likely require introducing control relays and additional field wiring terminals to the MCC units, which would in turn require that there be sufficient space in the existing MCC units to accommodate these additional components. HDR recommends that the Sewer Utility verify MCC unit sizing requirements for implementing the Sewer Utility's standards for monitoring and control of motorized equipment as part of a detailed design phase preceding the DeviceNet network replacement.

The PLC control panels within the electrical rooms housing the MCCs will also need to have additional I/O modules and field terminal blocks added to accommodate the new hardwired I/O from the MCC units. This hardwired I/O will be significant and may require the addition of RIO racks within the existing enclosures, subpanel replacement, and/or new control panels (if existing control panels have insufficient space available). New conduit and control wiring will also be required in the electrical room to establish hardwired I/O connections between the MCC units and control panel(s). The existing DeviceNet scanner modules in the PLC racks would be removed once they are no longer required.

#### New MCC Ethernet Networks

In addition to the hardwired I/O, the new VFD communication adapters/modules and overload relays will require Ethernet connections to the OT network to support monitoring of power, energy, and detailed alarm and warning parameters. HDR recommends that the Sewer Utility use shielded Category 6 cable with 600-volt (V) insulation for these Ethernet connections and that the cables be installed as homeruns from the individual MCC units to one or more managed network switches within the electrical room PLC control panel(s). Though the proposed overload relays and VFD communication modules support device-level ring (DLR), HDR does not recommend pursuing a ring architecture to reduce the Ethernet cabling requirements between the MCCs and PLC control panel(s). DLR topologies require disruptions when devices are added to or removed from the network, limit network switch options because of the requirement of DLR-capable ports, introduce additional complexity and configuration requirements to the OT network,

and are much more difficult to troubleshoot when a ring participant misbehaves and disrupts the network.

#### **PLC Programming Modifications**

PLC programming modifications will be required to realign existing AOIs, UDTs, subroutines, and communications configuration based on DeviceNet communications with a combination of hardwired I/O points and EtherNet/IP data exchange. The existing PLC programming will also need to be modified and expanded to align with the Sewer Utility's standards for monitoring and control of motorized equipment and to incorporate additional parameters related to power, energy, alarms, and warnings that are not already covered. Existing PLC programming related to process control would not likely require significant modifications.

### 6.2.5 Establish Sewer Utility OIT Platform Standard and Schedule Replacement of Select WWTP and Remote Pump Station OITs

In Phase 3 of the Master Plan, a new OIT platform will be identified to replace existing OITs that are reaching the end of their useful life and to establish a new Sewer Utility standard moving forward to guide future ICS upgrades. The following three significant factors are anticipated to contribute to the selection of the new OIT platform:

- Potential for reuse of existing OIT application files
- Licensing requirements and costs
- Potential for leveraging Sewer Utility standard template objects developed for AVEVA platform

Once new OIT platform standards have been identified, OIT replacement projects will be identified in Phase 5 of the Master Plan to upgrade OITs that are reaching the end of their useful life and/or are no longer supported by the manufacturer. Based on years in service, manufacturer support, and criticality of the application, HDR recommends that the Sewer Utility prioritize OIT replacement as indicated in Table 6-2. Other OITs identified in TM-1 as nearing the end of a typical 7- to 10-year service life in the coming years should be evaluated on a case-by-case basis and could be replaced as time and funding allow.

Table 6-2. OIT replacement priority

Priority	Facility	Panel tag	Panel description	Year installed
1	PS-24	N/A	Main control panel	2000
2	PS-4	N/A	Main control panel	2004
2	PS-17	N/A	Main control panel	2004
2	PS-71	N/A	Main control panel	2004
3	KWWTP	CP-300	Process building control panel <sup>a</sup>	2004
4	CKTP	N/A	RACS operator interface control panel	2010

a. OIT replacement may not provide much benefit with SCADA PC in nearby control room and OIT could be eliminated instead.



## 6.2.6 Develop a Formal Instrument Calibration and Maintenance Program

HDR recommends that the Sewer Utility develop a formal instrument calibration and maintenance program for its WWTPs and remote pump stations. At a minimum the program should accomplish the following objectives:

- Determine the individuals responsible for scheduling calibration events, performing calibration procedures, maintaining program documentation, and reviewing calibration records to determine when additional corrective action is required.
- Maintain an accurate inventory of installed instrumentation with manufacturer, model, and part number(s).
- Document instrument range, last calibration date, next calibration date, accuracy requirements, most recent calibrated zero and span settings for analog instruments, and most recent calibrated set point (rising or falling) and deadband settings for switches.
- Document instrument-specific calibration procedures based on instrument manufacturer recommendations. Calibration procedures should include steps to test the instrument sensor (input), instrument 4–20 milliampere (mA) output or switch contact state, and instrument loop, including verification of correct value/state being displayed at the HMI or OIT.
- Document ideal frequency of calibration activities based on manufacturer recommendations, field observations, instrument criticality, and past instrument performance.
- Schedule calibration activities and ensure that they are performed and documented.
- Maintain calibration records that document as-found settings, as-found test results, final calibration settings, final calibration test results, field observations, individual(s) who performed the calibration, and date of calibration.
- Identify instruments that require additional maintenance or replacement.

Several commercially available software options can simplify management of an instrument calibration and maintenance program. However, the Sewer Utility may be able to avoid additional software license costs by leveraging LLumin for the scheduling and tracking of calibration activities if instruments are included in the LLumin asset database. If the Sewer Utility elects to contract with a testing firm to perform calibration activities, HDR recommends that the Sewer Utility require that calibrations performed are traceable to NIST and that requirements for documentation produced by the testing firm be stipulated clearly in the contract.

# 6.2.7 CKTP Digester Building PNL 6000 Relocation and MCC Replacement

HDR recommends that the Sewer Utility relocate PNL 6000 or establish a replacement PLC control panel in a properly conditioned environment that does not have a hazardous-area classification. HDR also recommends that the Sewer Utility plan for the replacement of the digester building MCC as part of the next CIP project involving the

digesters or within the next 3 years, whichever occurs first. Because of the poor environmental conditions within the digester building, HDR recommends that the replacement MCC be installed elsewhere. Because the MCC replacement is beyond the scope of the Master Plan, it should be included in the electrical recommendations from the ongoing facilities planning effort led by Murraysmith so that it can be incorporated into the Sewer Utility's CIP budget and schedule. HDR believes that Murraysmith is already planning on making this recommendation.

# 6.2.8 Include Integration of Composite Sampler Alarms and Monitoring with Replacement of Existing Samplers

The Sewer Utility is preparing to replace the composite samplers at its WWTPs and is evaluating quotes received from vendors. Because the Sewer Utility wishes to monitor sampler alarms and status at SCADA, HDR recommends that the Sewer Utility communicate its requirements for SCADA monitoring to the vendors so that the appropriate hardwired and communication options can be considered. Once samplers are replaced, available alarms and statuses should then be incorporated into the WWTP SCADA HMI screens and alarm notification system.

# 6.2.9 Evaluate Remaining Years of Useful Service Life for Remote WWTP UV Systems to Determine Best Approach for Improved SCADA Monitoring of the UV Systems

The existing UV systems at the remote WWTPs are TrojanUV3000B systems with the basic controller option. These basic controllers provide contacts for monitoring of bank status and a common alarm, but do not support additional remote monitoring or control functionality. TrojanUV does have a Touch Smart Controller option for the TrojanUV3000B systems that could replace the existing basic controllers (see Figure 6-3). The Touch Smart Controller would provide the following limited additional monitoring and control capabilities:

- Low and high water level alarms (if optional level probes are installed)
- Remote system on/off control
- · Remote system enable/disable
- · Remote turning on of additional bank
- Common alarm is replaced with common minor alarm and common major alarm
- Low UV intensity alarm
- Bank UV intensity alarm
- Average UV intensity (4–20 mA)
- Color touchscreen display for improved operator interface







Source: TrojanUV (2018).

While the Touch Smart Controller would provide some additional remote monitoring and control capabilities, it would not provide individual lamp status, detailed alarming, and other parameters available with some of the vendor's system offerings. HDR recommends evaluating the remaining years of useful service life for the remote WWTP UV systems prior to making a decision on controls upgrades for these systems. If the UV systems will require replacement in the next 3 to 5 years, HDR would recommend waiting to implement improved monitoring and control until the system is replaced and a more complete monitoring and control solution can be specified.

Once the UV systems and/or controllers are replaced, HDR recommends providing PLC programming and SCADA HMI screen modifications to implement an equipment-level HMI screen for the UV system where more detailed status and alarm information can be monitored. Embedded trends showing UV intensity and plant effluent flow are also recommended for this screen so that the UV controller's flow-pacing control functionality can be monitored.

### 6.2.10 Implement CKTP Instrumentation and Automation Improvements

#### Instrumentation Upgrades and Replacement

The following items include HDR recommendations for additional instrumentation and servicing and replacement of failed instrumentation at CKTP. Note, these recommendations are general and, in some cases, would require further evaluation beyond the scope of the Master Plan to determine feasibility and detailed design requirements. Confirmation of appropriate instrument technology, installation location,

and specification requirements for new instruments should be determined through a more detailed design process.

- Perform an alternatives analysis for implementing a direct means of plant effluent flow measurement to assess costs and feasibility of available options.
- Provide additional analytical probes and, potentially, aeration flowmeters per recommendations from a separate BNR optimization task in the Sewer Utility facility planning program.
- Consider installing a flowmeter on the plant wastewater pump station discharge line
  to obtain a return flow measurement to upstream of the primary diversion channel.
  Based on a cursory review of record drawings, it appears that there is not adequate
  room to install a magmeter in the existing wastewater pump station valve vault. A
  magmeter could be installed in a new meter vault downstream from the valve vault
  potentially.
- Consider installing a flowmeter on the primary sludge line to GBTs to monitor primary sludge flow from the primary sludge pumps.
- Consider installing a flowmeter on the scum line to GBTs to monitor primary and secondary scum flow from the scum pumps.
- Consider installing a flowmeter on the mixed liquor line from the mixed liquor distribution channel foam wasting sump to monitor mixed liquor flow to the digesters.
- Consider installing flowmeters on the thickened sludge lines from the GBTs to the thickened sludge blending tank to monitor individual thickened sludge flows from each GBT.
- Consider installing a flowmeter on the thickened sludge line from the hauled sludge receiving station to the thickened sludge blending tank to monitor hauled sludge flows received from remote WWTPs.
- Consider installing flowmeters on the digested sludge lines from the digesters to the centrifuges to monitor individual digested sludge flows from each digester.
- During next septage receiving station upgrade, ensure that the replacement vendor package system includes incoming septage flow monitoring.
- Service or replace the lower explosive limit (LEL) transmitter on the headworks odor control fan ductwork.
- Service or replace the chlorine residual and turbidity analyzers associated with the reclaimed water system.
- Service or replace the thermal dispersion flowmeter installed on the aeration line for the aerated grit tank 1 stage 2 diffuser.
- Consider installing suspended solids probes in the aeration basins (or potentially one
  probe to represent all basins in the mixed liquor distribution channel) and WAS pump
  discharge line to support automated calculation of hydraulically determined solids
  retention time (SRT). If installation of a suspended solids probe on the WAS pumps
  discharge line is infeasible, a probe could be installed on the RAS pumps discharge
  line with the assumption that the suspended solids profile would be the same.



#### **Automation Improvements**

The following items include HDR recommendations for automation improvements at CKTP:

- Develop a SCADA HMI screen (or modify existing) for monitoring the comprehensive liquid stream flow balance for the plant along with hydraulic retention time (HRT) values for tanks, basins, and clarifiers. HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity. If the plant effluent flow monitoring alternatives analysis determines that direct flow measurement is infeasible, the liquid stream flow balance SCADA HMI screen should provide a comparison of derived effluent flow values based on UV system flow-over-the-weir calculations and calculated effluent flow from individual liquid stream flow measurements.
- Develop a SCADA HMI screen for monitoring the comprehensive solid stream flow balance for the plant along with detention time values for GBTs, digesters, and the thickened sludge blending tank. HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity.
- Provide PLC programming and SCADA HMI modifications to monitor mixed liquor suspended solids and WAS suspended solids and to calculate hydraulically determined SRT. HDR recommends that the Sewer Utility continue operating based on laboratory-determined SRT while comparing performance of the hydraulically determined SRT calculated via the SCADA system with lab data. This comparison should be used to determine ideal suspended solids probe location(s) for the aeration basins/mixed liquor distribution channel and, if SRT values calculated via the SCADA system are found to align reasonably well with laboratory-determined SRT values, to evaluate the potential for implementing automated SRT control at the plant.
- Provide PLC programming and SCADA HMI modifications to restore automated control of the BNR process per recommendations from the separate BNR optimization task in the Sewer Utility facility planning program.
- Develop a SCADA HMI screen to provide operators with situational awareness for the load shedding and emergency load sequencing during planned and unplanned transitions between utility and standby generator power. Currently, when utility power is lost and standby generator(s) are started, Sewer Utility staff must rely on institutional knowledge to determine which loads will be allowed to resume operation and in which order. There are multiple sequence levels and time delays implemented in PLC logic that are not transparent to the operators, making it difficult to understand when a load should resume operation and when to take action if it fails to do so. HDR recommends that loads governed by load sequencing are grouped according to their sequence level on the proposed SCADA HMI screen. The screen should indicate whether the loads will be called to run when their sequence level is reached, after which their running status should be displayed and alerts provided when loads fail to run. Real-time countdowns should also be displayed for each sequence level so that operators have more context for when equipment operations will be restored. The Sewer Utility could also consider displaying live power (kW) values for the

sequenced loads that have been called to run along with cumulative generator loading. This information would support analysis of how effectively the loads are allocated among the sequence levels and may inform troubleshooting efforts.

As part of the effort to develop the proposed SCADA HMI screen, HDR recommends that the PLC programming logic related to the load shedding and emergency load sequencing be reviewed. HDR's cursory review of some of this logic as part of the BNR optimization effort uncovered some errors that should be corrected. It is also possible that the emergency load sequencing logic may not have been modified to incorporate loads added by recent construction projects.

- Replace the headworks odor control biofilter sprinkler control panel and associated instrumentation to restore automated control of the biofilter sprinklers/soaker hose. As part of the control panel replacement, HDR recommends that SCADA manual controls also be implemented as an optional override of the sprinkler control panel to allow operations staff to manually initiate and schedule timer-based watering of the biofilter from SCADA HMIs.
- Provide PLC programming modifications to establish a low-level shutdown interlock
  for the thickened sludge blending tank circulation pump and digester feed pumps
  based on tank level transmitter measurement to support elimination of the thickened
  sludge blending tank low level switch. Alternatively, replace the low level switch.
- Record drawings indicate that the primary clarifier drives are not monitored for high torque warnings or alarms at SCADA. HDR recommends that the Sewer Utility establish monitoring of high torque warning and high-high torque shutdown conditions at SCADA for its primary clarifiers.

### 6.2.11 Implement KWWTP Instrumentation and Automation Improvements

Instrumentation Upgrades and Replacement

The following items include HDR recommendations for additional instrumentation and servicing and replacement of failed instrumentation at KWWTP. Note, these recommendations are general and, in some cases, would require further evaluation beyond the scope of the Master Plan to determine feasibility and detailed design requirements. Confirmation of appropriate instrument technology, installation location, and specification requirements for new instruments should be determined through a more detailed design process.

- Consider installing a flowmeter for the thickened sludge storage tank truck loadout station.
- Consider installing a flowmeter on the biofilter sump pump station discharge line to monitor biofilter drainage flow to the oxidation ditches.
- Consider installing a flowmeter on the process building sump pump station discharge line to monitor return flow to the headworks.
- Consider installing a flowmeter on the W2 line downstream from the hydropneumatic tank to monitor W2 flow to plant processes.



- Consider installing a flowmeter on the secondary scum pump discharge line to monitor secondary scum flow to the WAS/TWAS tanks.
- HDR recommends that the Sewer Utility consider installation of suspended solids
  probes in the oxidation ditches and WAS line at KWWTP based on the outcome of
  suspended solids probe and hydraulically determined SRT calculation performance
  at CKTP.

#### **Automation Improvements**

The following items include HDR recommendations for automation improvements at KWWTP:

- Develop a SCADA HMI screen for monitoring the comprehensive liquid stream flow balance for the plant along with HRT values for tanks, oxidation ditches, and clarifiers. HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity.
- Develop a SCADA HMI screen for monitoring the comprehensive solid stream flow balance for the plant along with detention time values for WAS and TWAS tanks.
   HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity.
- If the Sewer Utility experiences favorable results with the suspended solids probes and hydraulically determined SRT calculations at CKTP, provide PLC programming and SCADA HMI modifications to monitor mixed liquor suspended solids and WAS suspended solids and to calculate hydraulically determined SRT at KWWTP. HDR recommends that the Sewer Utility continue operating based on laboratory-determined SRT while comparing performance of the hydraulically determined SRT calculated via the SCADA system with lab data. This comparison should be used to determine ideal suspended solids probe location(s) for the oxidation ditches and, if SRT values calculated via the SCADA system are found to align reasonably well with laboratory-determined SRT values, to evaluate the potential for implementing automated SRT control at the plant.

# 6.2.12 Implement MWWTP Instrumentation and Automation Improvements

#### Instrumentation Upgrades and Replacement

The following items include HDR recommendations for additional instrumentation and servicing and replacement of failed instrumentation at MWWTP. Note, these recommendations are general and, in some cases, would require further evaluation beyond the scope of the Master Plan to determine feasibility and detailed design requirements. Confirmation of appropriate instrument technology, installation location, and specification requirements for new instruments should be determined through a more detailed design process.

 Consider installing a flowmeter for the thickened sludge storage tank truck loadout station.

- Provide a means of plant influent flow monitoring. HDR recommends evaluating installation of an ultrasonic or radar level instrument at the existing Parshall flume downstream from the grit chamber to obtain this flow measurement.
- Replace the magmeter on the sludge line feeding the GBT.
- Consider installing a flowmeter on the odor control blowdown sump discharge line to the headworks to monitor blowdown return from odor control.
- Consider installing a flowmeter on the W2 line downstream from the hydropneumatic tank to monitor W2 flow to plant processes.
- Service or replace the flowmeter on the W3 line to restore monitoring of W3 flow to plant processes.
- Consider installing a flowmeter on the in-plant pump station discharge line to obtain return flow measurement to the headworks.
- Consider installing a flowmeter on the WAS line from the RAS pump station to the WAS tanks to monitor WAS flow.
- Consider installing a flowmeter on the secondary scum pump discharge line to monitor secondary scum flow to the WAS/TWAS tanks.
- HDR recommends that the Sewer Utility consider installation of suspended solids
  probes in the aeration basins and WAS line at MWWTP based on the outcome of the
  suspended solids probe and hydraulically determined SRT calculation performance
  at CKTP.
- Install analytical probes in the aeration basins to monitor the BNR process as part of the plant upgrade to adapt to new TN limits.
- Install a level transmitter for the sodium hypochlorite tank and install local indication
  of tank level at the location from which the tank is filled. For reduced maintenance
  and avoiding the need to modify the existing tank, HDR recommends considering
  radar level measurement technology that can measure level through plastic tank
  ceilings. This would allow the sensor to be installed on a wall-mounted bracket
  without disturbing the tank.
- Service or replace non-functional combustible gas-monitoring equipment in the sludge pumping gallery, headworks odor control system, and WAS tanks.

#### **Automation Improvements**

The following items include HDR recommendations for automation improvements at MWWTP:

- Develop a SCADA HMI screen for monitoring the comprehensive liquid stream flow balance for the plant along with HRT values for tanks, basins, and clarifiers. HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity.
- Develop a SCADA HMI screen for monitoring the comprehensive solid stream flow balance for the plant along with detention time values for the WAS and TWAS tanks.



HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity.

- If the Sewer Utility experiences favorable results with the suspended solids probes and hydraulically determined SRT calculations at CKTP, provide PLC programming and SCADA HMI modifications to monitor mixed liquor suspended solids and WAS suspended solids and to calculate hydraulically determined SRT at MWWTP. HDR recommends that the Sewer Utility continue operating based on laboratorydetermined SRT while comparing performance of the hydraulically determined SRT calculated via the SCADA system with lab data. This comparison should be used to determine ideal suspended solids probe location(s) for the aeration basins and, if SRT values calculated via the SCADA system are found to align reasonably well with laboratory-determined SRT values, to evaluate the potential for implementing automated SRT control at the plant.
- Until BNR process upgrades due to new TN limits are determined, provide PLC
  programming and SCADA HMI screen modifications to allow operations staff to
  schedule and adjust aeration blower operation time sequence from SCADA HMIs.
  Functionality should include the ability to set unique on/off time durations for each
  day of the week.
- Install an electrically actuated isolation valve on the WAS line to the WAS tanks to enable SCADA control of the sludge wasting process. This will also require PLC programming and SCADA HMI screen modifications to add functionality for operations staff to manually open and close the valve from SCADA HMIs.
- Wire a fault signal from the mixing channel blower motor starter to the discrete input
  at the LP-225 RIO rack in the headworks building and provide PLC programming and
  SCADA HMI screen modification to integrate the fault alarm. This alarm could then
  be used to alert operations staff to mixing channel blower failures, improving operator
  response time, and eliminating the need for staff to visit the building to check
  equipment status.

## 6.2.13 Implement SWWTP Instrumentation and Automation Improvements

Instrumentation Upgrades and Replacement

The following items include HDR recommendations for additional instrumentation and servicing and replacement of failed instrumentation at SWWTP. Note, these recommendations are general and, in some cases, would require further evaluation beyond the scope of the Master Plan to determine feasibility and detailed design requirements. Confirmation of appropriate instrument technology, installation location, and specification requirements for new instruments should be determined through a more detailed design process.

- Service or replace the combustible gas monitoring equipment in the process building upper floor process room.
- Consider installing a flowmeter for the thickened sludge storage tank truck loadout station.

- Verify calibration of the thickened sludge storage tank level transmitter. After calibrating, record a series of measured level values versus actual tank level during two or three tank loadout operations. If accuracy and repeatability of level measurement are unacceptable, consider installing a radar level transmitter to replace the pressure-based level transmitter currently installed in a non-ideal location on the pump suction line. Record drawings indicate that a spare 6-inch nozzle was provided on the tank for a future instrument, which could be used for installation of the radar level transmitter.
- Consider installing a radar level transmitter for monitoring and control of sludge storage tank level. Provide a more permanent and less failure-prone installation for the sludge storage tank high level switch so that it can provide a reliable backup high level interlock and alarm.
- Install DO probes in the SBRs. Depending on the outcome of ongoing facility
  planning, the Sewer Utility may wish to consider additional analytical probes to
  facilitate improved monitoring and control of the BNR process. In addition to
  monitoring and control functionality, pH probes, for example, could supplement
  and/or reduce the number of manual measurements required by operations staff.
- Replace the damaged thermal dispersion flow switch on the RDT spray water supply line.
- HDR recommends that the Sewer Utility consider installation of suspended solids probes in the SBRs and WAS line at SWWTP based on the outcome of the suspended solids probe and hydraulically determined SRT calculation performance at CKTP.
- Consider installing a flowmeter on the discharge line from the drain collection pump station to monitor return flow to the headworks equipment.
- Consider installing a flowmeter on the W3 line downstream from the reclaimed water pumps to monitor W3 flow to plant processes.
- Service or replace the process building fire alarm system.

#### **Automation Improvements**

The following items include HDR recommendations for automation improvements at SWWTP:

- Develop a SCADA HMI screen for monitoring the comprehensive liquid stream flow balance for the plant along with HRT values for SBRs and tanks. HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity.
- Develop a SCADA HMI screen for monitoring the comprehensive solid stream flow balance for the plant along with detention time values for the sludge storage tank. HDR recommends that real-time and daily peak-hour flow data be displayed within the context of the associated process/pump system design capacity.
- Service or replace the effluent flow control valve to restore its ability to maintain positions from SCADA-issued commands. Because this will likely require a plant



shutdown, because of the lack of bypass piping for the valve, HDR recommends that the Sewer Utility identify other improvements/upgrades at the plant that would also require a shutdown to perform so as to maximize its benefit from the outage. Unfortunately, there do not seem to be options for installing bypass piping around the valve in its current position. To install a bypass the Sewer Utility would need to evaluate modifications to existing piping, particularly the overflow pipe that connects to the effluent line immediately downstream from the valve.

• Eliminating the manual RDT operation at reduced dewatering efficiency is a high priority for the Sewer Utility. As indicated in TM-1, Sewer Utility staff have a theory about undersized piping on the thickened sludge pump discharge creating high discharge pressures during pump operation that shut the pump down. HDR recommends that the Sewer Utility perform an assessment to diagnose the issue so that appropriate corrective action can be taken. As a first step in this assessment, HDR recommends that the Sewer Utility confirm that plug valves on the discharge line are fully open and that throttled valves are not contributing to increased discharge pressure. HDR also recommends verifying the pump's discharge pressure switch set point and comparing that with the pump curve to confirm that the high-pressure set point is appropriate. Assuming that throttled valves and/or an inappropriate high-pressure set point are not the root cause, an evaluation of pump selection and discharge piping size would be recommended along with a site visit conducted by a pump system subject matter expert to identify potential low-cost mitigations.

### 6.2.14 Remote Pump Station Instrumentation and Automation

#### Instrumentation Upgrades and Replacement

The following items include HDR recommendations for additional instrumentation and servicing and replacement of failed instrumentation at Sewer Utility remote pump stations. Note, these recommendations are general and, in some cases, would require further evaluation beyond the scope of the Master Plan to determine feasibility and detailed design requirements. Confirmation of appropriate instrument technology, installation location, and specification requirements for new instruments should be determined through a more detailed design process.

- Install pressure transmitters on remote pump station force mains. This will allow the Sewer Utility to monitor and trend force main pressures over time, allowing for early detection of force main breaks, grease and/or sediment build-up, and plugging.
   When combined with wet well level and pump discharge flow, force main pressure will also enable the Sewer Utility to monitor actual pump station system curves, evaluate where lift station pumps are operating on their pump curves, and more effectively monitor and control pump performance.
- Service or replace the combustible gas monitoring equipment at the PS-24 wet well.
- Consider replacement of the PS-24 wet well level transducer and transmitter, as they
  have likely been in service for roughly 20 years. If the level transducer is replaced,
  HDR recommends providing a submergence shield for the new transducer given the
  conditions to which the existing transducer has been exposed. If instrument

- replacement is deferred, HDR recommends cleaning the wet well level transducer and performing calibration to verify that level measurement accuracy and repeatability are acceptable.
- Install a level transmitter for the PS-71 BIOXIDE storage tank. For reduced
  maintenance and avoiding the need to modify the existing tank, HDR recommends
  considering radar level measurement technology that can measure level through
  plastic tank ceilings. This would allow the sensor to be installed on a wall-mounted
  bracket without disturbing the tank.
- Service or replace the combustible-gas monitoring equipment at the PS-71 wet well.

#### Automation Improvements

The following items include HDR recommendations for automation improvements at the Sewer Utility remote pump stations:

- Develop SCADA HMI screens to provide a summary-level, process flow diagram depiction of the conveyance system associated with each WWTP. Currently, the pump station SCADA HMI screens appear to consist only of a map screen for selecting specific pump stations, a summary status and alarm screen for all pump stations, and pump station specific pop-up screens. The current screens do not appear to provide depiction of where the specific pump stations are situated within the conveyance system, which requires operators to rely on institutional knowledge to recall where pump stations pump to and which pump stations will need to be considered in the event of conveyance system disruptions (e.g., a downstream pump station outage).
  - HDR recommends that the summary conveyance system screens display pump running status, flow, force main pressure, and indication of whether or not an alarm is active for each pump station.
- To assist with prioritizing response to pump station emergencies, the Sewer Utility may wish to implement time-to-overflow monitoring for its critical (or all) pump stations. This would involve using the wet well level measurement to calculate change in wet well volume over time and to then extrapolate the time remaining until the wet well level exceeds top elevation, volume exceeds overflow storage capacity, and/or other spill point triggers. These calculations could be initiated by alarms related to reductions in pump station pump capacity (e.g., power failure, pump faults, etc.) and could also be manually enabled and disabled by operations staff as required. The estimated time remaining would be displayed at the individual pump station SCADA HMI screens and could also be incorporated into the proposed summary-level conveyance system screens.
- For pump stations with VFDs where real-time monitoring of pump power (kW) and flow is or could be implemented, the Sewer Utility could consider modifying existing PLC programming logic to favor energy efficient operating points while within normal level range in the wet well. This could be done by calculating gallons pumped per kW consumed in real-time and providing that value as feedback to the pump speed control loop. The pump speed control loop would then make an incremental adjustment to the speed, either increasing or decreasing, depending on the direction



of the last speed adjustment and whether or not the new operating point is an improvement from the previous operating point. The speed range would still be bounded by minimum and maximum speed set points configured at the VFD and, if desired, as further constrained by operator entry at the pump station OIT. Energy efficiency prioritization would also be overridden by variable-level-based speed control when the wet well level rises above the upper threshold of an operator-entered normal level range.

Compared to more traditional control methods like constant-level control, where pump speed is modulated in an attempt to match outgoing flow to incoming flow at the pump station, and variable-level control, where the pump speed is modulated evenly throughout a set level range, this control method leverages the available system response time buffer provided by the wet well's capacity to maximize the efficiency of the pumping system. This approach also allows the controls to adapt to changes in the pump station system curve influenced by fluctuating wet well levels and gradual increases in force main friction head over time, as opposed to maintaining one preferred operating speed derived through theoretical analysis or historical observations.

While the energy savings potential of this control method will vary depending on pump station characteristics, implementing these controls would consist mainly of minor PLC programming and OIT graphics modifications and would not require significant investment. If applied to several pump stations, particularly those with larger pumps, the combined energy savings may be significant. If the Sewer Utility is interested in applying this alternative control method, HDR recommends that baseline energy consumption be established for the existing controls prior to introducing the alternative control method. This will provide a means of comparison and could be used to justify the application of energy-efficiency-based speed control to additional remote pump stations. Pump station capacity should also be evaluated prior to attempting to implement this alternate control method. Pump stations with undersized wet wells for present day flows and/or where pumps are already having to operate near full speed to keep up with incoming flows for the vast majority of their runtime would not have enough operating speed flexibility to be good candidates for this particular pursuit of energy savings.

- As part of the recommended PS-24 PLC upgrade, HDR recommends that the hardwired relay logic and PLC programming for the existing pump controls be reviewed to confirm as-implemented conditions, which may be contributing to the pump short cycling occurring at the pump station. The proposed telemetry upgrades will also allow the Sewer Utility to begin monitoring near-real-time wet well level, flow, and pump on and off transitions, which will aid in the analysis of current level set points. After review of existing controls and near-real-time pump station data, HDR recommends implementing appropriate control improvements to reduce or eliminate pump short cycling at the station to increase the useful service life of the equipment.
- HDR recommends that a control system upgrade occur at PS-34. The control system
  upgrade would include replacement of the existing control panel with a PLC-based
  control panel and an OIT for improved local monitoring and control functionality. HDR
  recommends that the Sewer Utility use the control system upgrade as an opportunity

- to bring the station into conformance with the Sewer Utility ICS standards documentation proposed later in this TM.
- HDR recommends evaluating remote alarm reset functionality for select remote pump station alarms. While high wet well level and other critical alarms certainly warrant a site visit by Public Works Facilities staff, there may be some less critical alarms that could be reset remotely to avoid unnecessary site visits. For example, remote resetting of VFD faults to help restore pump functionality after a power bump at a remote pump station that frequently experiences power issues could be beneficial so long as the remote reset capability were not abused. Note, remote reset capability will likely require additional hardwiring at the remote pump station, in addition to PLC programming and SCADA HMI screen modifications.
  - Establish Sewer Utility PLC platform standard and schedule replacement of select WWTP and remote pump station PLCs.
  - Develop a standard approach for monitoring and control of motorized equipment.
  - Develop a standard approach for monitoring remote pump stations.
  - ♠ Replace CKTP MCC DeviceNet networks with Ethernet-capable motor controllers.
  - Sestablish Sewer Utility OIT platform standard and schedule replacement of select WWTP and remote pump station OITs.
  - Develop a formal instrument calibration and maintenance program.
  - Implement CKTP digester building PNL 6000 relocation and MCC replacement.
  - Include integration of composite sampler alarms and monitoring with replacement of existing samplers.
  - Evaluate remaining years of useful service life for remote WWTP UV systems to determine best approach for improved SCADA monitoring of the UV systems.
  - Implement CKTP instrumentation and automation improvements.
  - Implement KWWTP instrumentation and automation improvements.
  - Implement MWWTP instrumentation and automation improvements.
  - Implement SWWTP instrumentation and automation improvements.

#### TM-2: SCADA Use Cases and Operational Needs Sewer Utility SCADA Master Plan



Implement remote pump station instrumentation and automation improvements.

This page intentionally left blank.



# 7 ICS Software: Future Needs and Recommended Improvements

This section identifies the Sewer Utility's future needs related to its ICS software and describes the information and functionality that Sewer Utility staff would like to obtain from the ICS software in the future. The future needs presented are derived from information obtained from Sewer Utility staff during site assessment visits, workshops, and staff interviews. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for the ICS software.

### 7.1 Future Needs

This subsection describes the Sewer Utility's future needs as they relate to the ICS software.

### 7.1.1 Establish Centrally Managed, Standards-based HMI and Historian Platform for the WWTPs

The Sewer Utility and QCC have elected to migrate from standalone Wonderware InTouch runtime installations at the various WWTP SCADA PCs and panel PCs to AVEVA System Platform. This upgrade is intended to meet the Sewer Utility's future needs of establishing a central repository for all Sewer Utility historical SCADA data, addressing the lack of standardization in SCADA HMI graphics between the Sewer Utility's WWTPs, and enabling the ability to monitor all Sewer Utility infrastructure at any WWTP. AVEVA System Platform software will be installed on servers at CKTP, which will establish a centralized historian for all WWTPs and pump stations, a centralized development environment, and a repository for standardized HMI graphics objects and AVEVA InTouch applications.

### 7.1.2 Implement HPHMI Concepts for WWTP SCADA HMI Screens

As part of the effort to standardize its SCADA HMI graphics throughout its infrastructure, the Sewer Utility would like to incorporate HPHMI concepts to improve operator situational awareness and overall effectiveness of the SCADA HMI screens. Some of the HPHMI concepts the Sewer Utility would like to consider as part of its SCADA HMI graphics standards development include:

- Limited, consistent, and intentional use of color, with color not being the only means of communicating status
- No distracting animations or three-dimensional depictions
- Analog values presented with context of desirable/normal operating range, set point and alarm thresholds, and deadband ranges, where applicable
- Consistent screen hierarchy with progressive exposure to more detailed information
- Logical and consistent screen navigation

- Embedded and properly formatted historical trends
- Prioritized alarms indicated via redundant methods (e.g., color, text, and/or shape),
   with use of flashing or animation for unacknowledged alarms
- Display where alarms have been suppressed
- Provide links or pop-ups to alarm rationalization information (e.g., consequences, potential causes, and corrective actions)

### 7.1.3 Implement Real-time Monitoring and Historical Trending of WWTP KPIs

Sewer Utility staff would be like to have the ability to monitor WWTP process key performance indicators (KPIs) such as HRT and SRT at the SCADA HMI screens. Staff would also like to have access to historical values for WWTP KPIs for dashboarding and data visualization purposes.

### 7.1.4 Improve Accessibility of Historical SCADA Data

To fully leverage its historical SCADA data, the Sewer Utility needs simple interfaces for staff to view trends and work with the data. The SCADA data from all WWTPs and pump stations also need to reside in a central repository so that the Sewer Utility does not have to work from data stores scattered throughout its infrastructure. Historical data will also need to be made available to several Sewer Utility and Public Works users and software platforms external to the Sewer Utility OT network. For example, Sewer Utility management staff would like to have access to flow and other engineering-focused data derived from the Sewer Utility ICS and Public Works management staff have expressed an interest in combining select operational data with financial information derived from their enterprise resource planning (ERP) software.

## 7.1.5 Mitigate Loss of SCADA Data from Remote WWTPs during Communication Outages

The transition to a centralized historian will require SCADA data from the remote WWTPs to be communicated to the historian server at CKTP. The communication conduits involved in this data exchange are subject to outages, which could result in historian data gaps for the remote WWTPs if not accounted for in the AVEVA software configuration. Store-and-forward functionality will need to be implemented for the AVEVA software installed at the remote WWTPs to ensure that real-time data are stored locally during disruptions in communications with the CKTP historian and then forwarded once communications are reestablished. AVEVA software has this capability and HDR believes that QCC is already planning to leverage it for the remote WWTPs and CKTP historian.

### 7.1.6 Migrate to Thin Client Configuration for CKTP HMIs

As part of its AVEVA System Platform upgrade, the Sewer Utility has decided to adopt a thin client deployment for the various panel PCs that will serve as process area SCADA HMIs at CKTP. This approach will remove the AVEVA InTouch runtime installations at



the various panel PCs, which will eliminate the need to separately patch and update each runtime installation, resolve ongoing alarm acknowledgement propagation issues, and allow for centralized management of the Sewer Utility's SCADA HMI software application. Sewer Utility staff will still require read and write access to the SCADA HMI screens and historical trends from the panel PCs and must be able to acknowledge alarms from these locations.

#### 7.1.7 Improved Alarm Notification System

The Sewer Utility needs its on-call operations and supervisory staff to have better access to active alarms and their acknowledged/unacknowledged status via mobile phones. The Sewer Utility would prefer to have an implementation that includes a mobile app as the user interface to eliminate the need for staff to call into the alarm notification system and listen to alarm information. Sewer Utility staff have also identified some outstanding issues with the existing system that need to be resolved.

#### 7.1.8 PLC Firmware Standardization

Sewer Utility staff have identified PLC firmware standardization as a high priority. The Sewer Utility would like to establish a standard firmware version for each of the PLC controller types it maintains throughout its infrastructure and to then bring its PLCs into firmware version alignment. This will reduce the number of Rockwell Automation Studio 5000 and RSLogix 500 software versions the Sewer Utility needs to support while also enabling the PLC controllers on older firmware to benefit from security patches and optimized controller features available in a more recent firmware version.

### 7.1.9 Establish Tracking of ICS Set Point Changes

The Sewer Utility would like to have the ability to track ICS set point changes made at the SCADA HMI. Knowing when changes were made and by whom will help the Sewer Utility manage set point drift and identify the individual(s) who can provide operational context for why changes may have been made.

# 7.1.10 Provide Read-only Access to WWTP SCADA HMI Screens at Laboratory

Laboratory staff currently have no access to WWTP SCADA HMI screens and rely on word-of-mouth to keep abreast of current operating modes at the Sewer Utility's WWTPs. To give laboratory staff insight into current WWTP operations and notification of relevant alarms, the Sewer Utility would like to implement read-only access to WWTP SCADA HMI screens at the laboratory.

### 7.2 Recommended Improvements

This subsection describes the recommended improvements related to ICS software.

# 7.2.1 Upgrade WWTP Standalone SCADA HMI Installations to AVEVA System Platform with Managed InTouch Applications and Standardized Templates Based on HPHMI Concepts

To establish centralized management of the Sewer Utility SCADA HMI applications, the Sewer Utility and QCC are in the process of installing AVEVA System Platform on servers within the CKTP OT network. This will allow the Sewer Utility to manage its various AVEVA InTouch HMI applications from the ArchestrA Integrated Development Environment (IDE) tool within the System Platform software package. HDR believes that QCC is taking the approach of converting the standalone InTouch HMI applications at the Sewer Utility WWTPs to managed InTouch HMI applications, which will allow for centralized modification and deployment of the InTouch HMI applications. This approach will streamline SCADA HMI screen development and management and is consistent with HDR recommendations.

The upgrade to AVEVA System Platform will also enable an object-oriented approach to standardizing the representation of Sewer Utility assets and the operator interface for monitoring and controlling them. HDR recommends this approach because it will allow the Sewer Utility to develop templates for common assets like pumps, mixers, and control valves and to then reuse that content for like assets throughout the Sewer Utility infrastructure. Attributes like color, symbology, I/O structure, status and alarm indication, tag structure and naming conventions, and control interfaces would be defined within the template so that any later revisions required would automatically be pushed out to the various objects derived from the template. This way, a decision to change the running color of a pump, for example, would not require modifying every instance of a pump throughout all of the Sewer Utility SCADA HMI screens. The Sewer Utility can also leverage pre-built templates from AVEVA Industrial Graphics (formerly known as ArchestrA Graphics) and AVEVA Asset Library to reduce the amount of development required. Several of these out-of-the-box templates have been developed specifically for HPHMI implementations.

Developing standard templates based on HPHMI concepts and applying them to the Sewer Utility's existing InTouch HMI applications will be a significant effort, but this upfront investment will reduce the cost and effort to maintain and modify the SCADA HMI screens in the future and will resolve the current lack of consistency throughout the Sewer Utility's WWTP SCADA HMI screens. The Sewer Utility and QCC have already scheduled workshops to begin determining visual and functional requirements for the future SCADA HMI screens along with the templates that will form the building blocks within AVEVA System Platform. These workshops should include discussions on which HPHMI concepts the Sewer Utility would like to apply to its future SCADA HMI screens along with its preferences for screen hierarchy and navigation. A workshop approach is consistent with HDR recommendations. Sewer Utility stakeholders need to be involved early and often during the SCADA HMI screen development process to ensure that the final implementation meets the Sewer Utility's needs and expectations.



# 7.2.2 Establish Access to All Sewer Utility SCADA HMI Screens at Each WWTP Control Room and at the County Public Works Annex Facility

The Sewer Utility would like to establish access to all Sewer Utility SCADA HMI screens at each WWTP control room and the County Public Works Annex facility so that staff can obtain a more comprehensive view of Sewer Utility operations from multiple locations. Though the objective for each facility is the same, the recommended software installation and configuration approach differs slightly between them.

For the remote WWTPs, a local AVEVA InTouch HMI runtime installation running the InTouch application for each respective WWTP will be required so that the SCADA HMI screens for the WWTP remain functional during a communication outage between the plant and CKTP. The remote WWTPs will also require local installations of select AVEVA Communication Driver components to facilitate communications between the InTouch application and the Allen-Bradley PLCs and other devices installed at the WWTP. However, the remote WWTPs will not require local installations of InTouch applications for other WWTPs and the remote pump stations because there are no local devices serving information to those InTouch applications and loss of communications to CKTP would disrupt functionality for the SCADA HMI screens included in those applications. Instead, HDR recommends that access to other WWTP and remote pump station SCADA HMI screens be provided via RDS and AVEVA's InTouch Access Anywhere software. This approach would allow Sewer Utility staff to access those screens via an HTML5-compliant web browser, simplifying the local software configuration requirements at the remote WWTPs.

Similarly, HDR recommends that RDS and InTouch Access Anywhere be used to provide access to all Sewer Utility SCADA HMI screens from a dedicated PC at the County Public Works Annex facility.

At CKTP, PCs in the control room will have InTouch HMI runtime installations running the InTouch application for CKTP and the remote pump stations. HDR does not believe that AVEVA supports running two or more parallel InTouch applications on the same machine, which presents challenges to running InTouch applications for the remote WWTPs on the CKTP control room PCs. For access to SCADA HMI screens for the remote plants, HDR recommends that RDS and InTouch Access Anywhere be used. This will avoid having to implement VMs on the control room PCs to support running parallel InTouch applications or requiring Sewer Utility staff to open and close InTouch applications each time they wish to see SCADA HMI screens from a different WWTP.

### 7.2.3 Complete Migration to Thin Client Configuration for CKTP HMIs

As part of its AVEVA System Platform upgrade, the Sewer Utility and QCC are planning to adopt a thin client deployment for the various panel PCs that will serve as process area SCADA HMIs at CKTP. This migration would meet the Sewer Utility's objectives of eliminating the need to separately patch and update several runtime installations, resolving ongoing alarm acknowledgement propagation issues, and allowing for centralized management of the Sewer Utility's SCADA HMI software application. Based on the Sewer Utility's stated objectives, this approach is consistent with HDR recommendations.

### 7.2.4 Determine Standard PLC Firmware Versions for the Sewer Utility and Perform Firmware Upgrades

HDR recommends inventorying the Sewer Utility's PLCs that are not slated for near-term replacement and determining the most recent firmware version that its controllers support. Rockwell Automation provides a Product Compatibility and Download Center service on its website, which is an excellent tool for selecting specific Allen-Bradley controllers and the applicable PLC programming software to view firmware compatibility (Rockwell Automation 2020c). Once this information is compiled, the Sewer Utility should select the most recent firmware version that all PLCs within a given product line can support and establish that firmware version as a Sewer Utility standard. Note, HDR recommends that the Sewer Utility consult QCC and North Coast Electric (local Rockwell Automation distributor) before making final firmware version selections. It is not uncommon for certain firmware versions to have significant bugs and known issues, and individuals who regularly work with the controllers will have experience with several firmware versions and may be able to provide insight that influences the Sewer Utility's firmware selections.

After the Sewer Utility finalizes its PLC firmware standards, HDR recommends that the selected PLC firmware versions be documented in the proposed Sewer Utility ICS standards documentation. The Sewer Utility should then work with a systems integrator to schedule the PLC firmware upgrades to bring the Sewer Utility's PLC inventory into firmware alignment. HDR also recommends that the Sewer Utility schedule recurring reviews of available firmware versions from the manufacturer to assess the criticality of upgrading to the most recent firmware version. Significant security patches and performance improvements would be drivers for adopting newer firmware versions, while minor fixes may not justify the time and expense of keeping up with every new version released by the manufacturer. When new firmware versions are adopted and deployed throughout the Sewer Utility's PLC inventory, the Sewer Utility's ICS standards documentation should be updated accordingly.


### 7.2.5 Develop PLC Programming Standards and Leverage Them to Standardize Future PLC Programming Work Products

As part of the Sewer Utility's effort to standardize its ICS infrastructure, HDR recommends that the Sewer Utility work with QCC or another local systems integrator to develop a standard approach to PLC program development for the Sewer Utility. The standard approach should then be documented as part of the Sewer Utility's ICS standards. The PLC programming standards should document elements like preferred PLC programming project file organization; appropriate level of annotation; tagging conventions; use of tag descriptions; program and routine naming conventions; use of ladder logic and function block diagram; and standard AOIs, UDTs, and subroutines that are to be used for common applications throughout the Sewer Utility ICS infrastructure. Examples of standard AOIs, UDTs, and subroutines include those described in Section 6.2.2 for the standard approach for monitoring and controlling motorized equipment. Once the PLC programming standards are developed and documented, they should be applied to future PLC programming efforts.



To avoid having to develop the PLC programming standards as a standalone project, HDR recommends that the standards development work be embedded in the scope of a near-term implementation project. This will allow the standards to be applied to the project and revised based on feedback from actual implementation efforts. The Sewer Utility also already has several "standard" AOIs and UDTs that were applied in the PLC programming for the PLCs added under the CKTP Resource Recovery project (see Figure 7-1 for an example of an AOI being called for the classifying selector blower [B2205]). Though these AOIs and UDTs may require some modification to best serve the Sewer Utility's needs, they could provide a starting point in the standards development process. QCC, or another local systems integrator that is engaged to develop the software portion of the standards, will likely have in-house standard approaches and programming objects that could be used to jumpstart the standards development, as well.

Figure 7-1. Example AOI for VFD equipment called in CKTP PLC 2939 programming



### 7.2.6 Implement an Alarm Management Program Based on ISA-18.2

HDR recommends that the Sewer Utility implement an alarm management program based on ISA-18.2, an industry standard for alarm management (ANSI/ISA 2016). A flow diagram depicting the ISA-18.2 alarm management process in terms of an alarm's life cycle is presented in Figure 7-2.

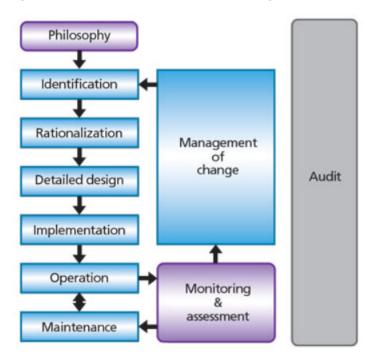


Figure 7-2. ANSI/ISA-18.2 alarm management flow diagram

Source: Yokogawa (2017).

The Sewer Utility began an ISA-18.2 initiative in recent years, and HDR believes that some of the initial groundwork for instituting an alarm management program is already completed. The proposed alarm management program will inform the Sewer Utility's efforts to standardize PLC programming and SCADA HMI graphics development, so HDR recommends that the Sewer Utility continue developing its alarm management program in parallel with or prior to other ICS automation programming efforts. Among other improvements, the recommended ISA-18.2 alarm management program should address the following deficiencies identified in TM-1 and TM-2:

- There is a high volume of alarm activity at CKTP Wonderware implementation, much of the activity being from the same alarms
- Sewer Utility staff do not have means of shelving nuisance alarms or alarms associated with known issues
- SCADA HMI screens do not provide alarm priority information or allow for sorting and filtering of alarms by alarm priority
- Root-cause analysis and alarm suppression functionality have not been developed for SCADA HMI screens
- SCADA HMI screens do not have troubleshooting text prompts or decision tree aids to help operations staff react to alarm conditions
- Alarm summary and alarm history screens at SWWTP are not automatically updated to display current alarm information



- Monitored alarms should include PLC faults and communication errors so that Sewer Utility staff are alerted when PLCs and RIO racks are experiencing performance issues
- Monitored alarms should include signal out-of-range alarms for all analog signals so that Sewer Utility staff are notified when current-based signals fall outside of the 4– 20 mA range


As part of the proposed alarm management program, HDR recommends that data related to ICS alarms be captured in the historian or other database environment and made available to users on the Sewer Utility business LAN. Third-party alarm management software or dashboarding tools like Tableau and Microsoft Power Business Intelligence (BI) could then be leveraged to develop visualizations and reports that would help the Sewer Utility manage alarms and alarm responsiveness.

7.2.7 Establish a Tiered Historian Implementation at CKTP to Centralize Sewer Utility Historical ICS Data and Provide Secure Access to Historical ICS Data from the Sewer Utility Business LAN

HDR recommends that the Sewer Utility establish a central historian at CKTP for consolidating ICS data received from all Sewer Utility WWTPs and remote pump stations. PCs and thin clients on the Sewer Utility OT networks would access data from this central historian to display embedded trends. HDR also recommends that the Sewer Utility implement AVEVA Historian Client software to simplify access to historian data and to facilitate the development of static and ad hoc trends from the PCs on OT networks. HDR believes that QCC and the Sewer Utility are already planning to implement this software as part of the ongoing AVEVA System Platform upgrade. As part of this effort, the Sewer Utility will need to implement store-and-forward functionality for the remote WWTPs so that ICS data received from those plants are not lost during communication outages between the remote WWTPs and CKTP.

To provide access to historian data for users on the Sewer Utility business LAN and County enterprise networks, HDR recommends that the Sewer Utility establish a "Tier 2" historian on the Sewer Utility business LAN at CKTP. A high-level network architecture depicting the proposed implementation is shown in Figure 7-3. The central historian on the OT network, or "Tier 1" historian, would replicate data through the proposed industrial DMZ (depicted as a firewall in Figure 7-3) to the "Tier 2" historian. The one-way nature of this data flow and limited open port requirements would simplify industrial DMZ firewall configuration, improve OT network security controls, and significantly reduce the network traffic traversing the industrial DMZ firewall(s) compared with a scenario where business LAN users are required to access the "Tier 1" historian on the OT network for their data analysis needs. With a dedicated historian for users on the Sewer Utility business LAN and County enterprise network, these users could then use AVEVA Historian Client, dashboarding and data visualization tools, and other software packages to view and analyze the ICS data and inform organizational decisions.

Figure 7-3. High-level tiered historian network architecture

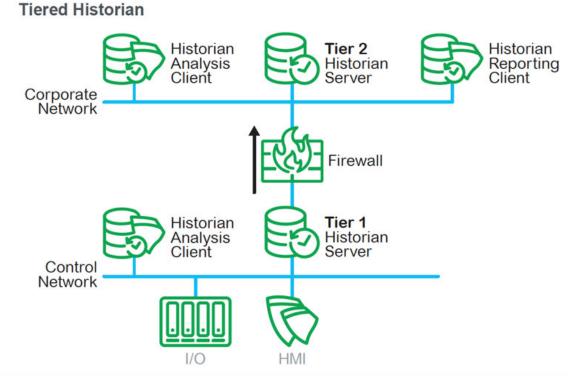

Source: Schneider Electric (2015).

7.2.8 Broaden the Data Set Archived by the Sewer Utility Historian to Establish Foundations for More Comprehensive Process- and Asset-level Health and Performance Monitoring

#### Preliminary Improvements

HDR recommends that the Sewer Utility audit currently available parameters already monitored by its PLCs and configure the historian to historize parameters of interest. As indicated in Section 4.3.3 of TM-1, many tags within the existing Wonderware system are not being recorded in the CKTP historian or remote WWTP LGH files. Many of these tags could serve as inputs to a predictive maintenance program and help establish baselines for future process and asset health and performance monitoring efforts. Table 7-1 includes a summary of parameters that HDR recommends the Sewer Utility consider for incorporating into its historian.



Table 7-1. Summary of available equipment and process parameters to consider including in historian

Parameter	Alarm/ command/ status	Description
In Auto	Status	Indicates that the equipment's Hand-Off-Auto (HOA) selector switch(es) are placed in Auto and that equipment is being controlled by SCADA. Recording time stamps when this status changes can help determine asset availability, when maintenance/troubleshooting events are occurring and for how long, and current and past levels of automation achieved at the plant.
Close/open command	Command	Indicates an open or close command sent to a gate/valve actuator. The Sewer Utility is currently recording open and/or closed status for several of its isolation gate/valve actuators, but it is not recording the open or close commands actually sent to the equipment from SCADA. Recording open/close commands and open/closed status enables analysis and trending of gate/valve travel times as a predictive maintenance input.
Position command	Command	Indicates the position set point sent to the gate/valve actuator from the PLC. The Sewer Utility is currently recording position feedback for most modulating gate/valve actuators, but it is not recording the position command set points actually sent to the equipment from SCADA. Recording both position command and feedback values enables analysis of equipment response to position control, trending of gate/valve travel times as a predictive maintenance input, provides more insight into the effectiveness and stability of proportional-integral-derivative (PID) control loops, and can aid troubleshooting efforts.
Start/stop command	Command	Indicates a start/stop command sent to a motor controller or equipment package. The Sewer Utility is currently recording running status for most assets but it is not recording the start/stop commands actually sent to the equipment from SCADA. Recording start/stop commands and running status and their timestamps can aide troubleshooting efforts and root cause analysis when equipment does not respond as expected to start/stop commands.
Speed command	Command	Indicates the speed set point sent to the VFD from the PLC. The Sewer Utility is currently recording speed feedback for most variable-speed equipment, but it is not recording the speed command set points actually sent to the equipment from SCADA. Recording both speed command and feedback values enables analysis of equipment response to speed control, provides more insight into the effectiveness and stability of PID control loops, and can aid troubleshooting efforts.
Set point	Command	Indicates the target set point of a control loop (PID, or otherwise) or alarm threshold. In general, the Sewer Utility is not currently recording operator-adjustable or PID-determined set point values. HDR recommends recording these values each time that they are adjusted. Having a history of adjustable set point values can provide context to control loop performance, determine when changes were made and by whom, and enable comparison of process performance based on differing set point values.
Energy consumption (kilowatt-hour [kWh])	Status	Indicates equipment's total energy consumption since parameter was last reset. The Sewer Utility is currently recording power in kilowatts (kW) for many of its networked motor controllers. However, the Sewer Utility is not recording actual energy consumption for these assets. Though energy consumption can be calculated from historical power values, the accuracy of these calculations depends on how frequently the power values are recorded and can place additional processing burden on the PLCs or ICS software responsible for the calculations. Most Ethernet-capable motor controllers offer energy consumption in kWh as a parameter and HDR recommends recording these values in lieu of calculating them from recorded power values. Energy consumption is critical to evaluating asset O&M costs and performance.

Table 7-1. Summary of available equipment and process parameters to consider including in historian

Parameter	Alarm/ command/ status	Description
Power data (amps, volts, power, and power factor)	Status	Indicates motor amps, volts, power, and power factor. The Sewer Utility is currently recording some or all of these power parameters for its networked motor controllers, but there are instances where some of these parameters are not being recorded. HDR recommends that the Sewer Utility standardize on recording these parameters for motor controllers as they provide important data for analyzing asset health and performance and can be used to trigger predictive maintenance activities. Note, to reduce tag counts and programming complexity, HDR recommends that the Sewer Utility continue its practice of monitoring and recording average amps, average volts, total power, and total power factor. Ethernet-capable motor controllers will already communicate alarms and warnings for phase imbalances, so logging load-level per phase power data is unlikely to yield many benefits. However, the Sewer Utility should consider monitoring and recording per phase power parameters for generators and larger motors (e.g., larger than 100 horsepower [hp]).
Fail/fault	Alarm	Indicates that the equipment has an active failure or fault that is preventing it from running. Several hardwired fail and fault signals are being monitored by the Sewer Utility's SCADA system and not all of them are recorded in the historian. Some of these are generated by overload relay contacts, VFD fault outputs, or common alarm contacts. Recording time stamps when fail or fault alarms occur and when they are reset is a key input to determining asset availability and analyzing past asset performance. Whenever possible, the specific failure or fault should be identified in the tag description to provide context for the alarm. For example, motor overload, VFD fault, fail to run when called, motor winding high temperature, submersible pump motor leak, etc., provide much more context than a generic equipment fail alarm.
Networked equipment alarms and warnings	Alarm	Indication of specific equipment alarm or warning. Ethernet-capable motor controllers, vendor package controllers, power monitors, and other devices are capable of communicating alarms and warnings on a much more granular scale than can be achieved with hardwiring. Not all of these alarms and warnings may be worth recording in a historian. Furthermore, if an organization were to include every alarm and warning available in its historian, it would quickly see its tag count explode, which may trigger increased licensing costs. Many manufacturers make alarm and warning codes available via Ethernet communications. These codes are used to look up alarm/warning descriptions and troubleshooting steps in the manufacturer manuals. Recording alarm and warning code values allows for tracking of several alarms and events with one or a few tags. When available, HDR recommends that the Sewer Utility include alarm and warning codes in its historian along with specific, critical alarms it wishes to monitor separately.

#### Improvements to Align with Future Upgrades

When process upgrades or equipment replacements initiate changes to ICS infrastructure, HDR recommends that the Sewer Utility take advantage of these opportunities to implement monitoring and recording of the parameters listed in Table 7-1 for the assets that do not currently have these parameters available. This would be in addition to the parameters that the Sewer Utility has already standardized on recording (e.g., running status, runtime hours, level, flow, pressure, analytical probe measurements, process switch status, etc.). Note that monitoring and recording



parameters listed in Table 7-1 may require updating PLC programming, field wiring, and Ethernet device configuration to implement standardized I/O for like assets.

In addition to those parameters, Table 7-2 includes a summary of additional parameters that HDR recommends the Sewer Utility consider for incorporating into its historian. These additional parameters will likely require additional instrumentation and/or field wiring to incorporate.

Table 7-2. Summary of additional equipment and process parameters to consider including in historian

Parameter	Alarm/ command/ status	Description
Actuator torque	Status	Indicates the torque that a gate/valve actuator is generating. Most electric actuator manufacturers offer an analog torque signal as a 4–20 mA output. Monitoring and recording actuator opening and closing torque can inform predictive maintenance efforts by comparing current torque profiles against historical baselines.
Pump suction and discharge pressure	Status	Indicates the suction and discharge pressures experienced by a pump. Monitoring and recording suction and discharge pressures for a pump or group of parallel pumps enables calculation of the total head that a pump is producing. This is an important value for determining where a pump is operating along its pump curve, its operating efficiency point, and how the pump's operating point may be changing over time. This information can be applied to predictive and proactive maintenance efforts and to prioritize assets for energy optimization initiatives.
Liquid stream and solid stream low and flow totalization	Status	Indicates process flows and volumes. HDR recommends that the Sewer Utility standardize on monitoring and recording all significant liquid stream and solid stream flows within its WWTPs. In addition to receiving a flow signal, HDR recommends that the Sewer Utility standardize on receiving an accumulated volume pulse signal from the flowmeter, when available, as the primary source for flow totalization rather than calculating flow totals from instantaneous flow measurements at the PLC. Flow totalization based on pulse count is typically more accurate. Having accurate flow and volume data will allow for derivation of comprehensive liquid stream and solid stream balances and will inform efforts to determine where pumps are operating along their pump and efficiency curves.

### 7.2.9 Upgrade Alarm Notification System

HDR recommends that the Sewer Utility upgrade its WIN-911 alarm notification system to a current version that is supported by the software vendor. As part of this upgrade, the Sewer Utility should evaluate incorporating the software's Mobile-911 app to provide oncall operations and supervisory staff with better access to active alarms and their acknowledged/unacknowledged status via mobile phones. HDR believes that QCC and the Sewer Utility are already planning on upgrading the WIN-911 software as part of the ongoing Systems Platform upgrade.

## 7.2.10 Provide Read-only Access to WWTP SCADA HMI Screens at Laboratory

To meet the Sewer Utility's objective of providing laboratory staff with read-only access to WWTP SCADA HMI screens, HDR recommends that RDS and AVEVA InTouch

Access Anywhere be used to enable access to the screens from one or more PCs within the laboratory via an HTML5-compliant web browser. Alternatively, or in addition to the PC(s), one or more large-format displays would be helpful in providing laboratory staff with an at-a-glance view of operating conditions and alarms for all WWTPs.

- Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.
- Establish access to all Sewer Utility SCADA HMI screens at each WWTP control room and at the County Public Works Annex facility.
- Complete migration to thin client configuration for CKTP HMIs.
- Determine standard PLC firmware versions for the Sewer Utility and perform firmware upgrades.
- Develop PLC programming standards and leverage them to standardize future PLC programming work products.
- Implement an alarm management program based on ISA-18.2.
- Establish a tiered historian implementation at CKTP to centralize Sewer Utility historical ICS data and provide secure access to historical ICS data from the Sewer Utility business LAN.
- Broaden the data set archived by the Sewer Utility historian to establish foundations for more comprehensive process- and asset-level health and performance monitoring.
- Upgrade alarm notification system.
- Provide read-only access to WWTP SCADA HMI screens at laboratory.



# 8 ICS Documentation: Future Needs and Recommended Improvements

This section identifies the Sewer Utility's future needs related to its ICS documentation and describes the information that Sewer Utility staff would like to develop and maintain. The future needs presented are derived from information obtained from Sewer Utility staff during site assessment visits, workshops, and staff interviews. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for ICS documentation.

#### 8.1 Future Needs

This subsection describes the Sewer Utility's future needs as they relate to ICS documentation.

### 8.1.1 Develop Sewer Utility ICS Standards Documentation

The Sewer Utility would like to develop ICS standards documentation that could be handed to consultants and systems integrators to guide design and implementation for future projects. These standards would be required to be referenced in consultant specifications so that they become part of the contractor's scope. Once Sewer Utility ICS standards documentation is developed, the Sewer Utility would like to establish annual reviews of the standards documentation and ICS infrastructure to keep the standards current and to identify upcoming ICS upgrade/replacement projects that need to be included in CIP planning. Monitoring for hardware and software obsolescence should be a factor in these periodic reviews.

### 8.1.2 Develop Control Strategy Documentation for Sewer Utility ICS Processes

The Sewer Utility would like to develop control strategy documentation to capture asimplemented automation programming and process control for the various WWTP and pump station processes throughout its infrastructure. This documentation would be a resource that operations staff could consult to obtain an understanding of local and SCADA HMI controls, interlocks, and alarms without having to decipher equipment and process functionality from wiring diagrams, PLC programming logic, and equipment O&M documentation. The Sewer Utility would also like to have an authoritative document to keep track of appropriate set points to help manage set point drift. Control strategy documentation could also be used for this purpose.

### 8.1.3 SOPs and Documented Workflows for ICS Technology

The Sewer Utility has identified that its staff will require training to support modernization of the Sewer Utility ICS. However, once initial or recurring training sessions conclude, staff will likely need periodic reminders, particularly for procedures that occur infrequently. The Sewer Utility would like to document preferred workflows and standard operating procedures (SOPs) for the ICS technology that staff interact with to help

supplement training and provide staff with a self-service resource when they need a refresher. The Sewer Utility will also require policies to ensure that certain SOPs are enforceable.

### 8.2 Recommended Improvements

This subsection describes the recommended improvements related to ICS documentation.

### 8.2.1 Develop Sewer Utility ICS Standards Documentation

The Sewer Utility's goal of developing ICS standards documentation to guide future design and implementation efforts is consistent with HDR recommendations. As the Sewer Utility's ICS infrastructure grows and changes in complexity and technology, it is critical to define and standardize the implementation and configuration practices to ensure that the system is easy to maintain, expand, and develop. ICS standards provide an organization's staff and contractors with a clear set of guidelines to follow when modifying or adding elements to ICS infrastructure. When standards are well-developed and documented, expectations for quality, work approach, and results are easily ascertainable from the standards documents. This helps an organization ensure that work is performed in a consistent and desirable manner throughout the SCADA system and establishes a basis for effectively managing the performance of internal and contracted staff.

With the upgrade to a new, centralized SCADA HMI and historian platform, the Sewer Utility has an opportunity to document how this new technology should be integrated into a high-functioning SCADA system before the integration work is complete. The Sewer Utility and QCC have already decided to adopt an object-oriented programming (OOP) approach for the SCADA platform by selecting AVEVA System Platform to develop a template library of common automation objects that can be applied widely throughout the Sewer Utility's infrastructure. As discussed previously in this TM, several of the PLC programs running at the Sewer Utility's WWTPs already leverage AOIs and UDTs, which is also consistent with an OOP approach. These existing AOIs and UDTs may be modified or replaced to create a standard library of PLC programing objects for the Sewer Utility moving forward. Having an OOP foundation in place and well-documented in formal standards is consistent with industry best practices.

To support modernization and development of the Sewer Utility's ICS infrastructure, HDR recommends that the following standards documents be developed to capture Sewer Utility preferences and standard programming object libraries:

- PLC programming standards: This standards documentation would consist of written guidelines with screenshots and programming files that specify requirements and standard programming objects for all Allen-Bradley PLC platform programming and configuration work.
- HMI graphics standards: This standards documentation would consist of written guidelines with screenshots and programming files that specify requirements and standard programming objects for graphics development and configuration work associated with AVEVA System Platform.



ICS control and telemetry panel hardware standards: This standards
documentation would consist of written guidelines and template drawings that specify
hardware component requirements; general control panel interior and exterior
layouts; power distribution methodology; and fabrication, testing, and installation
requirements for new ICS control and telemetry panels at Sewer Utility WWTPs and
pump stations. The standards would also document network device configuration
and hardening requirements for Ethernet switches, cellular gateways, and other
network components to be installed within these panels.

#### 8.2.2 Institute Sewer Utility ICS Standards Documentation Governance

The development of ICS standards often entails a significant investment of time and money for an organization. This investment is wasted if standards are not enforced or maintained. To ensure that any standards documents that are developed remain a valuable resource for the Sewer Utility, it is important that the standards be perceived as living documents and responsibility for their maintenance and enforcement is clearly assigned.

HDR recommends that the ICS standards be managed, maintained, and updated by a Standards Committee. Members of the committee would be technically qualified individuals with a willingness and interest to participate in maintaining the standards. A selected representative from each internal group impacted by the control system should be included on the Standards Committee. The committee should schedule periodic reviews of the standards documentation to adapt it to product obsolescence, incorporate lessons learned on recent design or implementation projects, and align it with changes in Sewer Utility preferences.

An ICS standards manager will also be required at the Sewer Utility to enforce and continue to develop the standards. This may be a single individual or a team of individuals assigned to this role. The individual(s) in charge of the standards documentation is responsible for revising the standards to incorporate any modifications or additions that need to be made as the SCADA system evolves, and for reviewing the work products of internal and contracted staff to ensure that the standards are being followed. It is also the responsibility of this individual to maintain careful version control of the standards documents and files and to ensure that work being put out to bid has appropriate references to relevant Sewer Utility ICS standards so that bidding contractors are aware of the standards and include effort to adhere to them in their bids.

### 8.2.3 Develop and Maintain Control Strategy Documentation

HDR recommends that the Sewer Utility develop and maintain control strategies to document how WWTP and pump station processes and equipment are controlled locally and via SCADA. These documents are critical for understanding how WWTP and pump station processes are operating, and for evaluating their performance based on data obtained through SCADA. Control strategies are also an extremely useful tool for familiarizing new staff with Sewer Utility infrastructure, which can help the Sewer Utility mitigate knowledge transfer challenges as senior staff retire in the coming years. These documents would also be very useful supporting documentation for the AVEVA System Platform upgrade and unit process optimization efforts being conducted as part of the

ongoing facilities planning work. Making control strategy documentation available to Sewer Utility staff on the County electronic operation and maintenance (eO&M) SharePoint site would be one way of providing easy access to the information.

An important consideration to be included in the control strategy development is to establish procedures and assign responsibility for updating control strategy documentation when controls are modified so that the documentation remains current and accurate. Long-term set point changes, PLC programming modifications, and SCADA HMI graphics updates should prompt a review of applicable control strategies to align them with the current state of the ICS. This is a best practice but it is also a tedious one. As with the proposed ICS standards, maintaining control strategy documentation needs to be embedded in the Sewer Utility's culture of stewardship or, over time, the documents will drift away from the processes they are meant to summarize and will lose their value.

#### 8.2.4 Establish Electronic Records for Operator Logs

HDR recommends that the Sewer Utility find an appropriate software solution for recording operator log information and establish the practice of logging daily notes, observations, and activities in an electronic format. This will greatly improve the Sewer Utility's ability to access past operator log information and provide some protection against the loss of valuable information in the event of lost or damaged physical logbooks. Implementing standard formatting for electronic operator logs would also allow for log data to be used by other software packages.

## 8.2.5 Update WWTP and Pump Station P&IDs and Compile Current Consolidated P&ID Sets on County eO&M SharePoint Site

HDR recommends that the Sewer Utility compile relevant piping and instrumentation diagrams (P&IDs) from past design projects into consolidated P&ID sets for each WWTP and pump station. These sets should then be reviewed against actual installed infrastructure so that the P&IDs can be updated where necessary. Because of lack and/or age of P&ID documentation for SWWTP and MWWTP, the Sewer Utility may need to develop new P&IDs based on as-built conditions at these facilities. Once consolidated P&ID sets have been updated to reflect as-built conditions, HDR recommends including these compiled sets on the Sewer Utility eO&M SharePoint site to provide staff and contractors with easy access to these important record documents.

### 8.2.6 Develop and Maintain OT Network Architecture Diagrams and Fiber-optic Patch Panel Schedules

HDR recommends that the Sewer Utility establish the practice of maintaining network architecture diagrams (physical and logical) for the four WWTPs. This documentation will assist Sewer Utility staff in maintaining the OT network and with planning network modifications. The documentation will also enable consultants and systems integrators to familiarize themselves with the OT network infrastructure much more quickly, saving the Sewer Utility the expense of third parties having to as-built or field-determine conditions. As part of the network documentation, HDR also recommends that the Sewer Utility develop and maintain an asset inventory for OT network devices.



HDR also recommends that the Sewer Utility maintain accurate fiber-optic patch panel schedules that document to and from information for each fiber-optic pair, as well as information about the fiber-optic cable and patch panels. HDR can provide a template schedule upon request. Another recommendation is that the Sewer Utility standardize on a tagging convention for the fiber-optic patch panels and cables throughout its OT network infrastructure. This tagging convention should be included in the Sewer Utility ICS standards documentation.

## 8.2.7 Develop Policies, SOPs, and Documented Workflows for ICS Technology

As the Sewer Utility becomes more reliant on ICS technology for day-to-day operations, staff will need to learn new skills and become familiar with a variety of user interfaces and procedures. Initial and periodic training will help streamline staff interaction with the technology, but having self-service resources to turn to as needed will boost staff efficiency and avoid scenarios where more technically proficient staff are frequently distracted with requests for assistance with navigating the technology. These self-service resources will also assist I&C technicians with more technical tasks that are not frequently performed, giving them a script to follow instead of having to consult manufacturer documentation and trying to remember what was done before.

For these reasons, HDR recommends that the Sewer Utility develop SOPs and documented workflows for its ICS technology. The best time to develop this documentation is during implementation, so getting in the practice of documenting procedures in parallel with execution is critical to making sure documentation happens in an efficient manner. Typical SOPs and workflow documentation for ICS technology include step-by-step instructions with supporting screenshots so that readers can follow along with their PCs or tablets. References to manufacturer literature can also be provided where detailed background information is required, but, ideally, the SOPs and workflows should be able to stand on their own as a one-stop resource to successfully execute the task.

HDR also recommends that the Sewer Utility develop policies that set the standards of behavior for activities involving the ICS and OT networks. For example, an acceptable use policy (AUP) outlines the constraints and practices that employees must agree to in order to access the OT networks. The County IS department likely already has an AUP in place for other County networks and Internet access, which could be modified or adapted to apply to the Sewer Utility OT networks. Other common useful policies include an access control policy (ACP), change management policy (CMP), and information security policy (ISP). These policies define the standards of behavior for items like password complexity, securing of County-issued laptops and tablets, documentation requirements for network device configuration changes, and adherence to established security controls. It should be noted that these policies can also be applied to third-party contractors requiring access to Sewer Utility ICS and OT network resources.

To help formulate policies, the Sewer Utility may benefit from selecting an industry-recognized standards framework on which to base its policies and procedures. The NIST Cybersecurity Framework and ISA 62443 standards are the two most frequently adopted standards for these purposes. While these standards contain valuable insights and best practices, they can be cumbersome to digest for those less familiar with the subject

matter. To fast-track policy development while staff gain familiarity with new concepts, the Sewer Utility may wish to consider starting from templates that organizations like the SysAdmin, Audit, Network, and Security (SANS) Institute and International Association of Privacy Professionals (IAPP) have made publicly available online.

- Develop Sewer Utility ICS standards documentation.
- Institute Sewer Utility ICS standards documentation governance.
- Develop and maintain control strategy documentation.
- Establish electronic records for operator logs.
- Update WWTP and pump station P&IDs and compile current consolidated P&ID sets on County eO&M SharePoint site.
- Develop and maintain OT network architecture diagrams and fiber-optic patch panel schedules.
- Develop policies, SOPs, and documented workflows for ICS technology.



### 9 Other Software Packages: Future Needs and Recommended Improvements

This section identifies the Sewer Utility's future needs related to non-ICS software packages and describes the information and functionality that Sewer Utility staff would like to obtain from the software in the future. The future needs presented are derived from information obtained from Sewer Utility staff during site assessment visits, workshops, and staff interviews. Based on comparison of current use cases to future needs of the Sewer Utility, the section presents recommended improvements for non-ICS software.

### 9.1 Future Needs

This subsection describes the Sewer Utility's future needs as they relate to non-ICS software.

### 9.1.1 Establish Data Exchange between SCADA and LIMS

The Sewer Utility would like to eliminate the current manual data entry process involved with communicating WWTP flows to the laboratory by implementing a software solution where SCADA data needed by laboratory staff are automatically acquired from the Sewer Utility SCADA system. Laboratory staff are also interested in obtaining additional data from SCADA, such as dissolved oxygen (DO), pH, ammonia, nitrate, nitrite, and other measurements from WWTP analytical probes. Integrating SCADA with laboratory information management system (LIMS) software used by the laboratory would establish the necessary data exchange and eliminate the current lag in the manual data delivery to laboratory staff.

### 9.1.2 Establish Data Exchange between SCADA and CMMS

The Sewer Utility would like to eliminate the current manual data collection and entry process involved with inputting equipment runtimes into LLumin by implementing a software solution where SCADA runtime information is automatically acquired by LLumin from the Sewer Utility SCADA system. The Sewer Utility is also interested in exploring applications for other SCADA alarm and status data within LLumin in the future for potentially automating the generation of preventive, corrective, and/or predictive maintenance work orders.

# 9.1.3 Develop Dashboards and Data Visualizations to Deepen Insight into Sewer Utility Operations

The Sewer Utility would like to have dashboards and data visualizations that provide high-level summaries of past, current, and projected operational statuses for the Sewer Utility's various organizational groups. For example, Sewer Utility management staff have expressed interest in developing a heat map for each of the Sewer Utility's drainages where color is used to communicate current capacity and maintenance-related

issues associated with the drainage's WWTP and pump stations. Many of the Sewer Utility management and other County staff requiring access to these dashboards/data visualizations will reside on the Sewer Utility business LAN or other County networks. This will require that Sewer Utility SCADA historian data and other data stores on the OT network be made available to the software serving the dashboards/data visualizations while preserving the security of the OT network.

### 9.2 Recommended Improvements

This subsection describes the recommended improvements related to non-ICS software.

## 9.2.1 Complete Hach WIMS Implementation and Establish Data Exchange with AVEVA System Platform

The Sewer Utility has selected Hach WIMS as its new LIMS and would like to see the software become a shared resource for the various Sewer Utility operational groups. As part of its ongoing implementation of Hach WIMS, the Sewer Utility would like to leverage the Hach WIMS SCADA Interface software module to automatically acquire data from its SCADA system. Once the Sewer Utility has Hach WIMS up and running, HDR recommends that staff explore the software's features and compile a list of the specific SCADA data from the various WWTPs that would be beneficial to automatically import into Hach WIMS. With the SCADA data defined, the Sewer Utility would then configure automated imports of the desired data within the Hach WIMS software. After data exchange between Hach WIMS and the Sewer Utility historian is established, staff will also have the ability to select specific SCADA tags and date ranges for ad hoc data imports and trend analysis from within Hach WIMS.

Because several of the Sewer Utility Hach WIMS users will be working from PCs on the Sewer Utility business LAN, HDR recommends that the server running Hach WIMS software be located on the business LAN and that the software be configured to interface with the "Tier 2" historian proposed for the business LAN. In the interim, while the industrial DMZ has yet to be implemented, the Hach WIMS server may need to be deployed on the CKTP OT network to establish data exchange with the CKTP historian. Under this deployment, for OT network security purposes, HDR recommends that the Hach WIMS server be accessed only by PCs on the OT network and that the Sewer Utility resist the temptation to implement dual-homed machines (i.e., one PC or server with connections to both the business LAN and OT network).

# 9.2.2 Complete Asset Creation and Data Entry Required for LLumin Implementation, Establish Automatic Importing of Asset Runtimes, and Develop a Plan for Automating Work Order Generation

The Sewer Utility is in the process of establishing a parent-child asset hierarchy for its infrastructure within the LLumin software. Some configuration and data entry work remains to be completed before all Sewer Utility assets are represented within the LLumin platform. This initial effort should be completed so that asset identifiers and relationships are defined prior to establishing connections to other software platforms and linking asset attributes and data points between them. HDR believes that the LLumin



implementation is a high priority for the Sewer Utility and that staff will complete this work in the near future.

Once the foundational work is completed, HDR recommends that the Sewer Utility establish automatic importing of asset runtimes from the Sewer Utility historian. HDR believes that the Sewer Utility has already purchased the LLumin software module required to integrate LLumin with its SCADA system (LLumin Machine Interface Server). However, implementing the data exchange securely requires careful planning because of the cloud-hosted, software as a service (SaaS) nature of the Sewer Utility's LLumin implementation. To reduce the Sewer Utility's cyber threat exposure, HDR recommends that the LLumin platform be configured to interface with the "Tier 2" historian proposed for the business LAN. This approach would eliminate direct communication between the LLumin cloud instance and the Sewer Utility OT network, while still providing access to asset runtime data. LLumin Machine Interface Server can be implemented as a cloud-hosted service or an on-premise solution, where it runs as a Windows service. HDR recommends that the Sewer Utility take the latter approach, as it will simplify the data exchange with cloud-hosted resources and allow for aggregate data to be sent out to the cloud instead of handling historian tags individually.

After Sewer Utility staff have become more familiar with the LLumin platform and automated importing of asset runtimes has been successfully implemented, HDR recommends that the Sewer Utility develop a plan to leverage additional functionality within the LLumin platform. The LLumin software supports asset-specific, rule-based generation of work orders, which could significantly streamline scheduling for maintenance staff and reduce asset downtime. To take advantage of this functionality, the Sewer Utility would need to identify asset runtime thresholds, alarms, events, and/or analog value set points (e.g., pump high discharge pressure) that should trigger a work order within the LLumin system. Identifying this information for all assets at once would be a significant effort, so HDR recommends that the Sewer Utility select a small sample of assets on which to pilot the approach at first. Once rules have been established and implemented within LLumin for the first asset sample, the Sewer Utility could then evaluate how the work order automation could be tweaked to improve its efficacy. Assuming the Sewer Utility experiences favorable results with automation of work orders within LLumin, HDR recommends that the Sewer Utility develop a schedule for deploying the approach to its remaining assets, where applicable.

Note, if the Sewer Utility wishes to pursue alarm- or event-based work order generation on a near-real-time basis, periodic data exchange between LLumin and the historian may not be sufficient. LLumin's Machine Interface Server software module would need to communicate with AVEVA System Platform, in this case, which would likely require relocating the LLumin Machine Interface Server software to the CKTP OT network or industrial DMZ and implementing additional security controls. HDR recommends starting with data exchange between LLumin and the "Tier 2" historian, initially, and then considering expansion of the LLumin system after the Sewer Utility's CMMS program is further developed.

# 9.2.3 Select a Data Analytics and Visualization Software Platform and Develop In-house Skill Sets through Creation of Initial Dashboards

AVEVA System Platform, LLumin, Hach WIMS, and other software that the Sewer Utility has implemented all have some degree of native dashboarding and data visualization capabilities, and HDR recommends that the Sewer Utility explore this functionality and apply it where the software can meet the Sewer Utility's needs. However, there can be challenges to using these purpose-built software platforms for analyzing data from outside of their design scope or for creating custom visualizations to answer specific questions that do not land well within the software's niche. As the Sewer Utility's data sets become broader and more accessible and Sewer Utility staff have more opportunities to interact with the data, the Sewer Utility will need a flexible data analytics and visualization software tool that can ingest data from a wide variety of data sources. The software tool will also need to be self-service with a relatively intuitive user interface so as to empower staff to look for answers on their own and enable them to easily share findings with other stakeholders.

HDR recommends that the Sewer Utility select a suitable software solution for general data analytics and visualization purposes throughout the organization and to then begin developing the ability to create and manipulate dashboards and visualizations in-house. Turning data into insights is an iterative process, which means that reliance on third parties for dashboard development and other data-driven initiatives adds cost and time to every iteration. Having staff with the skill sets to solicit input from stakeholders and to then take ideas and develop them into meaningful dashboards and reports that present useful information is an integral part of growing an organization's data program.

A good first step to cultivating these in-house skill sets would be to identify staff members who have the interest and availability to acquire these skills, schedule initial online training to familiarize them with the selected software solution, and then have them create a few dashboards centered around currently available data. The first dashboards produced may not be perfect, but their creation will establish an internal process that the Sewer Utility can refine over time. And as in-house skill sets also develop over time, the Sewer Utility will be in a better position to delve into more technical approaches to data analysis and, potentially, to explore some of the emerging technologies like machine-learning that may have big impacts in terms of process control and utility management in the coming years.

### 9.2.4 Begin Leveraging the Sewer Utility's Power and Energy Data

Energy consumption is a considerable expense for a wastewater utility and also serves as a good metric for quantifying the utility's overall operational efficiency when it comes to electrical power. However, a utility cannot improve what it cannot measure, and electric bills alone will not provide sufficient information for a utility to identify opportunities for efficiency gains at the equipment, process, and procedural levels. Submetering is critical to enabling these insights. Monitoring power flows through the electrical distribution system at the bus and load levels allows a utility to track where energy is being consumed within its infrastructure. And when historical energy data are paired with other parameters that represent the total product handled or level of treatment achieved over the same time frame, useful performance metrics are created



that can be used to establish baselines, set goals, and measure progress toward those goals over time.

Fortunately, the Sewer Utility has made past investments in submetering that could be put to work in the development of an energy management program. Power monitors are installed at many of the major electrical distribution system buses throughout the Sewer Utility's WWTPs and several pump stations. However, the data available from these power monitors are not being used and, in many cases, not even recorded for future use. The Sewer Utility also already has the capability to monitor power and energy data at the load level for equipment powered from the DeviceNet MCCs at CKTP, some of the WWTP aeration blowers, and select other loads. Yet, load-level energy data are not being used either.

#### Initial Power and Energy Data Acquisition

As a first step in developing an energy management program, HDR recommends that the Sewer Utility harvest its low-hanging fruit by beginning to record historical power and energy data from installed power monitors and network-capable motor controllers, where it is not already doing so. In some cases, this may require installation of network cabling to establish communications with power monitors that are not currently communicating with the Sewer Utility SCADA system. For Ethernet-capable power monitors that are not currently communicating with a PLC, the Sewer Utility should consider direct communication between the power monitor and its AVEVA SCADA software. This would eliminate the need for additional PLC programming and gateway modules to enable the PLC to communicate with the power monitor via an Ethernet protocol that the PLC does not support natively (e.g., Modbus TCP in the case of Allen-Bradley CompactLogix controllers). Once communications are established and tags are defined within AVEVA System Platform, HDR recommends recording the power and energy parameters listed in Table 9-1 within the Sewer Utility's centralized historian.

Table 9-1. Recommended power and energy parameters for initial energy management program baselines by application

Application	Parameter description	Parameter engineering unit
Power monitor	Total real power	kW
	Total reactive power	Kilovolt-amperes reactive (kVAR)
	Total apparent power	Kilovolt-amperes (kVA)
	Received energy	kWh
	Delivered energy (only for buses with a connected generator)	kWh
	Power factor	PF
	Phase currents (phases A, B, and C)	Amperes (A)
	Phase-to-phase voltages ( $V_{ab}$ , $V_{bc}$ , and ( $V_{ca}$ )	VAC
	Frequency	Hertz (Hz)
	Total harmonic distortion (THD), current	THD <sub>I</sub>
	Total harmonic distortion, voltage	THD <sub>V</sub>

Table 9-1. Recommended power and energy parameters for initial energy management program baselines by application

Application	Parameter description	Parameter engineering unit
Motor controller	Total real power	kW
	Total energy consumed	kWh
	Average amps	A
	Average voltage	VAC
	Total power factor	PF

While the instantaneous power-related parameters would not have an application in the energy-based KPIs discussed later in this subsection, they do provide valuable information about the state of the electrical distribution system and equipment performance. Power information can be used to monitor electrical capacity, phase balance, and levels of harmonic distortion at the various electrical buses. This information is useful for evaluating the existing infrastructure's capacity to accept additional electrical loads and for assessing when harmonic distortion is approaching unacceptable levels. As mentioned previously in this TM, load-level power information can be a valuable input for analyzing asset health and performance and can be used to trigger predictive maintenance activities.

#### Transition from EnerVista Viewpoint Monitoring Software at CKTP

Though the existing General Electric (GE) EnerVista Viewpoint Monitoring software installed on the power monitoring PC in the CKTP SPB control room is capable of monitoring and recording these parameters for networked power monitors at CKTP, and has several additional features, this software does not present a solution for all of the Sewer Utility's WWTPs and pump stations without additional investment in software licensing and OT network configuration. Instead of expanding the GE EnerVista Viewpoint Monitoring software platform as a parallel system to the AVEVA deployment, which would result in another data silo to manage, HDR recommends that the Sewer Utility leverage AVEVA software to monitor and record the Sewer Utility's power and energy data moving forward. It should be noted that the EnerVista Viewpoint Monitoring software is only one component within GE's EnerVista software suite, and that this software suite can serve as a valuable platform for in-depth analysis and management of a utility's electrical distribution infrastructure and protective relaying. However, given the scale of the Sewer Utility's infrastructure, HDR does not see further investment in the EnerVista platform providing significant returns for the Sewer Utility.

Plan for Installation of Additional Power Monitors and Future Ethernet Motor Controllers

HDR recommends that the Sewer Utility plan on installing Ethernet-capable power monitors at all major electrical distribution buses (e.g., MCCs, switchgear [SWGR], switchboards) as this equipment is replaced and/or upgraded in the coming years. The Sewer Utility could also consider installation of Ethernet-capable power monitors for equipment not slated for near-term improvements as funding allows. When selecting



power monitor hardware, it is important that the power monitor is capable of communicating power and energy parameters via an Ethernet protocol. Several power monitors have Ethernet ports but are capable of serving only a web browser interface and cannot be integrated into SCADA platforms.

As discussed previously, HDR also recommends that future motor controllers be provided with Ethernet communications so that the recommended power and energy data can be monitored and recorded.

#### Define Energy-based Metrics and Establish Baselines

HDR recommends that the Sewer Utility determine energy-based metrics to be used as KPIs for evaluating its operations and to then leverage these KPIs to establish baselines at each of its WWTP and remote pump station facilities. Some examples of potential KPIs are provided in Table 9-2. The application column of the table indicates the scope of the equipment and process(es) evaluated by the KPI. For example, WWTP would indicate that the energy consumed by the entire WWTP is to be considered, while secondary treatment would indicate that only the loads associated with secondary treatment equipment would be considered in calculating the KPI value.

Table 9-2. Example energy-based KPIs for wastewater infrastructure

Application	KPI description	KPI engineering unit
WWTP	Energy consumed per volume treated	kWh/million gallons (MG)
WWTP	Energy consumed per pound (lb) of biological oxygen demand (BOD) removed	kWh/lb BOD
WWTP	Energy consumed per population served per year	kWh/population equivalent (PE)/year
Preliminary treatment	Energy consumed per volume treated	kWh/MG
Preliminary treatment: screenings equipment	Energy consumed per volume of screenings removed	kWh/cubic foot (ft³)
Preliminary treatment: grit removal equipment	Energy consumed per volume of grit removed	kWh/ft <sup>3</sup>
Primary treatment	Energy consumed per pound of total suspended solids (TSS) removed	kWh/lb TSS
Primary treatment	Energy consumed per pound of phosphorus (P) removed	kWh/lb P
Primary treatment	Energy consumed per pound of BOD removed	kWh/lb BOD
Primary treatment	Energy consumed per pound of chemical oxygen demand (COD) removed	kWh/lb COD
Secondary treatment	Energy consumed per pound of total nitrogen removed	kWh/lb TN
Secondary treatment	Energy consumed per pound of phosphorus removed	kWh/lb P
Secondary treatment	Energy consumed per pound of BOD removed	kWh/lb BOD
Secondary treatment	Energy consumed per pound of COD removed	kWh/lb COD

Table 9-2. Example energy-based KPIs for wastewater infrastructure

Application	KPI description	KPI engineering unit
UV system	Energy consumed per volume treated	kWh/MG
Reclaimed water system	Energy consumed per volume of reclaimed water produced	kWh/MG
Solids treatment	Energy consumed per volume treated	kWh/MG
Solids treatment	Energy consumed per pound of total solids (TS) removed	kWh/lb TS
Solids treatment: GBTs	Energy consumed per volume treated	kWh/MG
Solids treatment: GBTs	Energy consumed per pound of total solids treated	kWh/lb TS
Solids treatment: RDTs	Energy consumed per volume treated	kWh/MG
Solids treatment: RDTs	Energy consumed per pound of total solids treated	kWh/lb TS
Solids treatment: GBTs	Energy consumed per volume treated	kWh/MG
Solids treatment: GBTs	Energy consumed per pound of total solids treated	kWh/lb TS
Solids treatment: anaerobic digesters	Energy consumed per volume treated	kWh/MG
Solids treatment: centrifuges	Energy consumed per volume treated	kWh/MG
Solids treatment: centrifuges	Energy consumed per pound of total solids treated	kWh/lb TS
Pump station	Energy consumed per volume treated	kWh/MG
Pump (individual)	Energy consumed per volume pumped	kWh/MG

As the data required to track these KPIs are integrated into the AVEVA platform and collected by the historian, it will take some time before sufficient historical data are compiled to adequately establish baselines for current operations. Ideally, baselines are established from at least 1 year's worth of data so that weather and seasonal variation factors can be accounted for, enabling the Sewer Utility to contrast current performance with the same month or season from prior years. However, KPIs that apply to the entire WWTP could be assessed from past electrical billing information as a start, if the Sewer Utility is not already doing so.

In terms of the software used to monitor and track energy-based KPIs, HDR recommends that the Sewer Utility consider developing dashboards with the selected data analytics and visualization software. Hach WIMS also has some energy usage tracking functionality that may prove useful to the Sewer Utility.

#### Set Goals and Measure Progress

Once the Sewer Utility has established adequate baseline energy data to support the KPIs it is interested in monitoring, HDR recommends that the baselines be reviewed to identify processes and equipment where energy efficiency measures are most likely to yield benefits. Targeted goals would then be set and the KPIs would be used to measure progress toward those goals. Conducting a formal energy audit prior to establishing goals would likely help identify quick wins and potential high-yield returns on investment in infrastructure or operational change, which would assist with the goal-setting process.



- Complete Hach WIMS implementation and establish data exchange with AVEVA System Platform.
- Complete asset creation and data entry required for LLumin implementation, establish automatic importing of asset runtimes, and develop a plan for automating work order generation.
- Select a data analytics and visualization software platform and develop in-house skill sets through creation of initial dashboards.
- Begin leveraging the Sewer Utility's power and energy data.

This page intentionally left blank.



# 10 Risks and Deficiencies with Recommended Improvements Summary

Table 10-2 compiles the risks and deficiencies associated with the Sewer Utility's OT networks, SCADA system components, and associated infrastructure that were identified in TM-1 and previous sections of TM-2. These risks and deficiencies are paired with the recommended improvement(s) that will mitigate the risk or resolve the deficiency. Subsection references are provided to help readers locate the specific subsections where the risks, deficiencies, and recommended improvements are described in detail. Note, some recommended improvements are simple enough that a summary description in a previous subsection of this TM was unwarranted. In these cases, recommended improvements are provided directly in Table 10-2 and appear without a subsection reference.

As an expansion of the risk and deficiency summary table provided in TM-1, Table 10-2 preserves the correlation of each risk and deficiency to one or more of the organizational improvement categories introduced in Section 7 of TM-1. Applicable organizational improvement categories are denoted with one or more \* symbols in their respective columns. To help communicate the significance of various risks and deficiencies, a ranking system was applied in TM-1 based on the quantity of \* symbols shown for a given organizational improvement category. These rankings have been carried over from TM-1 and are repeated in Table 10-1 for the reader's convenience. Risks and deficiencies from each TM-1 and TM-2 section are sorted in Table 10-2 so that the most significant risks and deficiencies from each section appear first.

Table 10-1. Risk and deficiency ranking system description

Ranking	Description
***	<b>Major</b> risk or deficiency. Immediate corrective measures are recommended and/or major organizational health benefit(s) to be gained from related improvements.
**	<b>Moderate</b> risk or deficiency. Near-term corrective measures are recommended and/or significant organizational health benefit(s) to be gained from related improvements.
*	<b>Minor</b> risk or deficiency. Corrective measures are recommended, but likelihood and/or impact of failure/event may be low. Some organizational health benefit(s) to be gained from related improvements.

This ranking system is also meant to communicate the priority level of the recommended improvement(s), which can be used to distinguish between recommendations requiring immediate action or decisions, items that will need to be considered for near-term planning, and more long-term initiatives. In a subsequent phase of the Master Plan, these recommendations will be grouped into phases of a proposed implementation plan and the recommendation priority level will be one of the factors used to determine how the various implementation plan phases are sequenced.

Table 10-2. Risks and deficiencies with recommended improvements summary

		sholds with recommended improvements summary							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: Network Architecture	2.7	There is a direct connection between CKTP business LAN and OT network switches in the SPB control room network cabinet. This direct connection between the business LAN and OT network presents a significant security risk for the OT network.			***			<ul> <li>HDR recommends eliminating this connection and believes that Sewer Utility staff have already disconnected the Category cable connecting the two network switches.</li> <li>Establish an industrial DMZ between Sewer Utility business LAN and OT network.</li> </ul>	5.2.7
TM-1: Network Architecture	2.7	A cellular router was found connected to the unmanaged OT network switch in the SPB control room network cabinet. The device could provide a backdoor into the CKTP OT network for external devices that the Sewer Utility has no control over, bypassing security measures in place for the network. Sewer Utility staff have since disconnected the cellular router from the network.			***			HDR recommends removing the cellular router from the OT network and believes that Sewer Utility staff have already done so.	
TM-1: Network Architecture	2.13	No automated or manual backup procedures appear to be in place for the historical SCADA data contained on the CKTP historian. Failure of the CKTP historian server could result in loss of CKTP's historical SCADA data.				***		<ul> <li>Extend OT network to County Public Works Annex facility.</li> <li>Establish automated backup procedures for ICS servers that include on-premise and off-site storage.</li> </ul>	5.2.2 5.2.8
TM-1: Network Architecture	2.13	Historical SCADA data for KWWTP, MWWTP, and SWWTP may exist only on external hard drives connected to the SCADA PCs at the WWTPs. Failure of the external hard drive or a catastrophic event that impacts the SCADA PC and external hard drive may result in loss of the WWTP's historical SCADA data.				***		<ul> <li>Establish automated backup procedures for ICS servers that include onpremise and off-site storage.</li> <li>Establish a tiered historian implementation at CKTP to centralize Sewer Utility historical ICS data and provide secure access to historical ICS data from the Sewer Utility business LAN.</li> </ul>	5.2.8 7.2.7
TM-1: Network Architecture	2.3	Pump stations on the VHF licensed radio WAN experience long delays in communication of pump station statuses and alarms, which have presented challenges to County staff in providing timely responses to critical pump station alarms and accurate calculations of accumulated equipment runtimes.	**				*	<ul> <li>Migrate pump stations from VHF licensed radio WAN to cellular WAN.</li> <li>Implement store-and-forward and exception reporting for remote pump station telemetry and eliminate PLC data concentrator for cellular WAN.</li> </ul>	5.2.3
TM-1: Network Architecture	2.2	Given the current network arrangement, the most critical network switch in the CKTP OT network is a single point of failure for the network.				**		Upgrade to stacked Layer 3 distribution switches at CKTP SPB.	5.2.4
TM-1: Network Architecture	2.2	CKTP OT network arrangement in PNL 8580A has created multiple single points of failure for communication between CKTP SCADA nodes and all of the plant PLCs.				**		Upgrade to stacked Layer 3 distribution switches at CKTP SPB.	5.2.4
TM-1: Network Architecture	2.2	CKTP OT network has no resilience because of a lack of access switch and cable path redundancy, and there are instances where lack of OT network redundancy may undermine process redundancy.				**		Establish cable path redundancy for critical segments of the OT network.	5.2.5
TM-1: Network Architecture	2.2	Improving CKTP OT network resilience could prevent loss of SCADA monitoring and control functionality and continue logging of historical SCADA data in the event of singular network component or cable failure.				**		<ul> <li>Upgrade to stacked Layer 3 distribution switches at CKTP SPB.</li> <li>Establish cable path redundancy for critical segments of the OT network.</li> </ul>	5.2.4 5.2.5



Table 10-2. Risks and deficiencies with recommended improvements summary

Tubio To 2: Tilotto u	na acnor	encies with recommended improvements summary							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: Network Architecture	2.3	Currently, Sewer Utility staff do not have a central location where all WWTP SCADA systems can be monitored and controlled.					**	<ul> <li>Upgrade CKTP control room.</li> <li>Establish access to all Sewer Utility SCADA HMI screens at each WWTP control room and at the County Public Works Annex facility.</li> </ul>	5.2.1 7.2.2
TM-1: Network Architecture	2.3	The lower bandwidth inherent in VHF-based telemetry is ill-suited for increased data exchange between the pump stations and the CKTP SCADA system and would constrain the Sewer Utility's objective of near-real-time monitoring and alarming for wastewater pump stations.		**				<ul> <li>Migrate pump stations from VHF licensed radio WAN to cellular WAN.</li> <li>Implement store-and-forward and exception reporting for remote pump station telemetry and eliminate PLC data concentrator for cellular WAN.</li> </ul>	5.2.3
TM-1: Network Architecture	2.3	Four of the six pump stations with historically poor VHF communications remain on the VHF licensed radio WAN. Planned modifications for the Manchester area pump stations may improve communications for those pump stations.		**				<ul> <li>Migrate pump stations from VHF licensed radio WAN to cellular WAN.</li> <li>Implement store-and-forward and exception reporting for remote pump station telemetry and eliminate PLC data concentrator for cellular WAN.</li> </ul>	5.2.3
TM-1: Network Architecture	2.3	The CKTP SCADA system does not appear to be accurately recording communication status data for the pump stations on the cellular WAN.		**				Improve communication status monitoring and alarming for remote pump station telemetry.	5.2.3
TM-1: Network Architecture	2.7	Public IP addresses are assigned to IP nodes within the CKTP and SWWTP OT networks.			**			Develop and implement an improved OT network segmentation scheme.	5.2.8
TM-1: Network Architecture	2.7	There appear to be parallel entry points to the SWWTP OT network from external networks: one via SWWTP's Tempered Networks HIPswitch and one via a secure gateway used for the SWWTP business LAN wireless access point.			**			HDR recommends eliminating the connection between the secure gateway and the SWWTP OT network. Sewer Utility staff have indicated that they will investigate the intended use for the connection so that its functionality can be migrated to the Tempered Networks Airwall system, if needed, and will then make the disconnection.	
TM-1: Network Architecture	2.9	Because of inherent security risks with VNC-based applications, HDR recommends transitioning away from VNC sessions for remote access to the Sewer Utility's OT networks.			**			<ul> <li>Implement secure mobile access to SCADA HMI screens for remote and onsite staff.</li> <li>Implement secure remote access to OT network for I&amp;C technicians and contracted systems integrators.</li> </ul>	5.2.7
TM-1: Network Architecture	2.9	Users accessing the WWTP OT networks remotely share a common password, which means that no AAA measures are in place for remote access to the WWTP OT networks.			**			<ul> <li>Implement secure mobile access to SCADA HMI screens for remote and onsite staff.</li> <li>Implement secure remote access to OT network for I&amp;C technicians and contracted systems integrators.</li> </ul>	5.2.7
TM-1: Network Architecture	2.9	MFA for remote access sessions to the WWTP OT networks would provide additional security for the network in conjunction with the adoption of AAA measures.			**			<ul> <li>Implement secure mobile access to SCADA HMI screens for remote and onsite staff.</li> <li>Implement secure remote access to OT network for I&amp;C technicians and contracted systems integrators.</li> </ul>	5.2.7
TM-1: Network Architecture	2.10	The Sewer Utility's Tempered Networks Conductor instance has generic user accounts that do not allow for adequate user authentication or attributing of any security modifications made to a specific individual.			**			Establish unique user accounts and implement MFA for Tempered Networks Conductor management.	5.2.9
TM-1: Network Architecture	2.10	No MFA measures are in place to secure access to the Sewer Utility's Tempered Networks Conductor instance.			**			Establish unique user accounts and implement MFA for Tempered Networks Conductor management.	5.2.9

Table 10-2. Risks and deficiencies with recommended improvements summary

		y							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: Network Architecture	2.10	Multiple user types are allowed to assume remote control over SCADA PCs on the Sewer Utility's OT networks, which may be providing some users with more permissions and access to OT network resources than they require. Sewer Utility OT network remote access use cases need to be defined so that appropriate security controls can be identified and implemented.			**			<ul> <li>Implement secure mobile access to SCADA HMI screens for remote and onsite staff.</li> <li>Implement role-based overlay networks for the Sewer Utility Tempered Networks Airwall system.</li> </ul>	5.2.7 5.2.9
TM-1: Network Architecture	2.10	The Sewer Utility's Airwall edge services do not have current firmware versions installed.			**			Perform ICS server, PCs, and OT network device hardening to mitigate common cybersecurity risks.	5.2.9
TM-1: Network Architecture	2.10	The HIPswitch 100g installed at CKTP appears to be limited to 5 Mbps of data throughput. Given the intended application for SCADA-related data exchange between CKTP and the other WWTPs, this amount of throughput will likely be inadequate for the Sewer Utility's near-term needs.		**				HDR recommends replacing this HIPswitch with a Tempered Networks Airwall gateway capable of greater data throughput.	
TM-1: Network Architecture	2.11	Some of the PCs on the CKTP OT network have likely been in service for 5 to 7 years and should be replaced as part of the Sewer Utility's planned Wonderware upgrade at CKTP.		**				HDR recommends replacing the PCs and servers on the OT network that have been in service for more than 5 years. HDR believes that the CKTP historian is being replaced by QCC as part of a planned upgrade to the Sewer Utility AVEVA software.	
TM-1: Network Architecture	2.11	Operating system login sessions are maintained on CKTP OT network PCs and a common username and password is shared by all users.			**			Improve AAA measures for OT network.	5.2.8
TM-1: Network Architecture	2.12	Unprotected OT network components share space with exposed plumbing and mechanical equipment in the CTKP administration and lab building electrical room.				**		Implement modifications to CKTP administration and laboratory building electrical room.	5.2.4
TM-1: Network Architecture	2.12	Status and alarms are not monitored for UPSs that provide power to SCADA PCs and servers and OT network equipment. The installed UPSs also have no remote monitoring capability.				**		Establish robust UPS battery backup solution for ICS and OT network infrastructure.	5.2.6
TM-1: Network Architecture	2.12	KPUD-owned Carrier Ethernet access switches that provide communication between KWWTP, MWWTP, and SWWTP and CKTP are not on UPS power.				**		Establish robust UPS battery backup solution for ICS and OT network infrastructure.	5.2.6
TM-1: Network Architecture	2.12	The Sewer Utility's current strategy of allocating small, dedicated UPSs for OT network PCs, servers, and other critical loads provides very limited battery backup times for this equipment, leaving the Sewer Utility reliant on the proper functioning of the standby generators to keep the equipment online during power outages.				**		Establish robust UPS battery backup solution for ICS and OT network infrastructure.	5.2.6
TM-1: Network Architecture	2.13	No automated or manual procedures are in place for establishing off- site backups of Sewer Utility WWTP SCADA data or ICS configuration and programming files.				**		Establish automated backup procedures for ICS servers that include on-premise and off-site storage.	5.2.8
TM-1: Network Architecture	2.13	No automated or manual backup procedures appear to be in place for backing up the Sewer Utility OT network PCs and servers.				**		Establish automated backup procedures for ICS servers that include on-premise and off-site storage.	5.2.8
TM-1: Network Architecture	2.16	The Sewer Utility does not have a formal cybersecurity incident response program for the OT networks it manages.			**			Develop a formal cybersecurity incident response program.	5.2.9



Table 10-2. Risks and deficiencies with recommended improvements summary

	TM sub-		Operational optimization	frastructure ability and odernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency		TM-2 sub-
TM and section	section	Risk or deficiency	0 6	ਦ <b>ਨ</b> ਵ	6.∓	ပ် 🖺	e K	Recommended improvement(s)	section
TM-1: Network Architecture	2.11	CKTP OT network has been set up as a workgroup. Implementing a domain for the OT network would allow the Sewer Utility to manage all user accounts and permissions on a single server and enable segmentation of the OT network to increase security and optimize network performance.	*		*		*	Implement a domain for the CKTP OT network.	5.2.8
TM-1: Network Architecture	2.14	The Sewer Utility does not have software tools to monitor the CKTP OT network and manage its performance.	*		*		*	Implement OT network performance monitoring and logging capabilities.	5.2.8
TM-1: Network Architecture	2.5	Several unmanaged switches at CKTP are recommended for replacement with managed switches to mitigate risks to network stability and security.		*	*			Establish standard Layer 2 managed access switch with gigabit downlink ports for future OT network applications and replacement of select unmanaged switches.	5.2.5
TM-1: Network Architecture	2.14	The Sewer Utility does not have a Syslog server or other central repository for collecting CKTP OT network device logs and network event data.			*		*	Implement OT network performance monitoring and logging capabilities.	5.2.8
TM-1: Network Architecture	2.2	The access switch serving the CKTP SCADA PCs and historian server is an unmanaged switch, which propagates undesirable broadcast and multicast packets generated by the operating systems on those machines throughout the network.		*				Upgrade to stacked Layer 3 distribution switches at CKTP SPB.	5.2.4
TM-1: Network Architecture	2.2	KWWTP OT network has no resilience because of a lack of access switch and cable path redundancy, and this lack of OT network redundancy may undermine liquid stream process redundancy.				*		No recommended improvement. Based on input from the Sewer Utility, the Master Plan will focus on higher-priority risks and deficiencies.	
TM-1: Network Architecture	2.3	The pump station communication efficiency parameter values displayed at the CKTP SCADA HMI and logged in the CKTP historian may be misrepresenting actual VHF licensed radio WAN radio path performance because of the calculations used in the MTU PLC programming.	*					Improve communication status monitoring and alarming for remote pump station telemetry.	5.2.3
TM-1: Network Architecture	2.4	An OM1 fiber-optic patch cable has been used to patch two Optical Multi-mode 3 (OM3) fiber-optic cables at the fiber-optic patch panel within PNL 2920 in the CKTP power/blower building. This patch cable should be replaced with a suitable OM3 patch cable.		*				Replace patch cable with suitable OM3 patch cable.	
TM-1: Network Architecture	2.4	There are instances of unshielded twisted pair (UTP) Category cables with insufficient voltage insulation ratings connecting IP nodes within 480 VAC equipment enclosures at CKTP and PS-67.		*				For network connections to enclosures containing 480 VAC equipment, include requirement for shielded Category cables with 600 VAC insulation rating in proposed Sewer Utility ICS standards documentation.	
TM-1: Network Architecture	2.5	The Sewer Utility has not standardized on a specific managed switch, which can lead to stocking of additional spare switches to facilitate rapid switch replacement in the event of switch failure.	*					Establish standard Layer 2 managed access switch with gigabit downlink ports for future OT network applications and replacement of select unmanaged switches.	5.2.5
TM-1: Network Architecture	2.5	All ports on most switches throughout the Sewer Utility OT networks are capping connected devices at the theoretical 100 Mbps limit inherent in the switch ports. As data volumes increase within the Sewer Utility's OT networks in the coming years, the port speeds supported by these switches may become a limiting factor.		*				Establish standard Layer 2 managed access switch with gigabit downlink ports for future OT network applications and replacement of select unmanaged switches.	5.2.5
TM-1: Network Architecture	2.5	Several managed switches on Sewer Utility OT networks are accessible via manufacturer default username and password.			*			Perform ICS server, PCs, and OT network device hardening to mitigate common cybersecurity risks.	5.2.9

Table 10-2. Risks and deficiencies with recommended improvements summary

		encies with recommended improvements summary							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: Network Architecture	2.6	The Sewer Utility has not implemented on-site tablet-based workflows for Sewer Utility staff, which can improve workforce efficiency and increase staff engagement with ICS software.					*	Implement secure mobile access to SCADA HMI screens for remote and on-site staff.	5.2.7
TM-1: Network Architecture	2.7	The subnet assigned to the CKTP OT network effectively limits the network to 254 connected devices. The Sewer Utility will require a larger pool of IP addresses to support additional devices in the future and adapt to the proliferation of IP devices that is becoming the norm in the industrial automation industry.		*				Develop and implement an improved OT network segmentation scheme.	5.2.8
TM-1: Network Architecture	2.7	Unused network switch ports are enabled and assigned to active VLANs throughout the Sewer Utility's OT networks.			*			Perform ICS server, PCs, and OT network device hardening to mitigate common cybersecurity risks.	5.2.9
TM-1: Network Architecture	2.9	UltraVNC encryption plugin is not enabled. Security of VNC sessions used to establish remote access to WWTP OT networks could be increased by enabling encryption at the VNC application layer.			*			<ul> <li>Implement secure mobile access to SCADA HMI screens for remote and onsite staff.</li> <li>Implement secure remote access to OT network for I&amp;C technicians and contracted systems integrators.</li> </ul>	5.2.7
TM-1: Network Architecture	2.10	On-call staff, QCC, and I&C technicians all share access to the Tempered Networks Kitsap Telemetry overlay network. This may be allowing access to PLCs and other OT network resources that on-call staff do not require access to and complicates management of third-party access to the Sewer Utility's OT network.			*			Implement role-based overlay networks for the Sewer Utility Tempered Networks Airwall system.	5.2.9
TM-1: Network Architecture	2.10	Devices are included in the Tempered Networks Kitsap IC overlay network that County staff may not need to access remotely. If remote access is not required for these devices, they should be removed from the overlay network as a security precaution.			*			Implement role-based overlay networks for the Sewer Utility Tempered Networks Airwall system.	5.2.9
TM-1: Network Architecture	2.10	HIPswitches are providing a single layer of defense at the periphery of the Sewer Utility's OT networks, which does not adhere to Defense-in-Depth strategies recommended by DHS and other information security organizations.			*			Introduce OT network firewall layer upstream from WWTP Tempered Networks HIPswitches.	5.2.9
TM-1: Network Architecture	2.10	Communication links between KWWTP, MWWTP, and SWWTP and CKTP have no redundancy.				*		Implement HIPswitch cellular failover functionality to establish communication link redundancy for WWTPs.	5.2.3
TM-1: Network Architecture	2.10	Pump station and CKTP MTU VHF radios have AES encryption disabled, which exposes the pump station VHF licensed radio WAN to eavesdropping and security risks.			*			Perform ICS server, PCs, and OT network device hardening to mitigate common cybersecurity risks.	5.2.9
TM-1: Network Architecture	2.11	KWWTP, MWWTP, and SWWTP SCADA servers have likely been in service for 3 to 4 years and should be replaced as part of the Sewer Utility's planned Wonderware upgrade at the plants.		*				HDR recommends replacing these SCADA servers and believes that the server replacement is being performed by QCC as part of a planned upgrade to the Sewer Utility AVEVA software.	
TM-1: Network Architecture	2.12	Physical security at the Sewer Utility WWTPs could be improved by introducing camera systems and providing monitoring and alarming of more of the building entrances during hours when the WWTPs are unattended.			*			Because physical security for the WWTPs affects all Sewer Utility assets, not just the OT network and ICS infrastructure, HDR recommends that the Sewer Utility consider site security improvements as part of the larger ongoing Sewer Utility Facilities Plan effort.	
TM-1: Network Architecture	2.12	Network cabinet and network panel PNL-8580A are routinely left unlocked.			*			HDR recommends establishing the protocol of locking or otherwise restricting access to network cabinets and future network racks.	



Table 10-2. Risks and deficiencies with recommended improvements summary

TM and pastion	TM sub-	Rick or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Decommended improvement/s)	TM-2 sub-
TM and section TM-1: Network Architecture	2.12	Risk or deficiency  Construction activity at KWWTP is generating a significant amount of dust in the space occupied by KWWTP's Internet service demarcation appliance.				*		HDR believes that construction activities are now completed. The Sewer Utility should survey the dust accumulated on the device and coordinate with KPUD, if buildup is considerable. Dusting with compressed air would likely remedy the situation.	section
TM-1: Network Architecture	2.13	Backups of PLC programming project files could be better organized to improve version control.				*		HDR recommends that the Sewer Utility store all PLC programming project files for all WWTPs and pump stations on an OT network file server at CKTP. HDR also recommends that the Sewer Utility develop a standard file naming convention for PLC programming project files that incorporates the date of last modification in the filename using a YYYY-MM-DD format. This will allow various versions to be easily sorted by last modification date. The file naming convention should be included in the Sewer Utility ICS standards documentation.	
TM-1: Network Architecture	2.13	The Sewer Utility is not leveraging virtualization for the PCs and servers in its OT networks. Recovering from loss of one of these physical machines or a disaster would require significantly more time and effort than a scenario where the Sewer Utility's ICS software is installed in a virtualized environment.				*		Establish virtualized environments for all ICS servers.	5.2.8
TM-1: Network Architecture	2.12	In general, the network switches within the Sewer Utility's OT network have no on-board power supply or external 24 VDC power supply redundancy.				*		Standardize on redundant onboard power supplies and 24 VDC power supplies for ICS and OT network infrastructure.	5.2.6
TM-1: Network Architecture	2.14	The Sewer Utility does not maintain an organized system of easily accessible network device configuration file backups for managed switches and cellular routers within its OT networks.				*		HDR recommends that the Sewer Utility store all configuration files for all OT network devices on an OT network file server at CKTP. HDR also recommends that the Sewer Utility develop a standard file naming convention network device configuration files that incorporates the date of last modification in the filename using a YYYY-MM-DD format. This will allow various versions to be easily sorted by last modification date. The file naming convention should be included in the Sewer Utility ICS standards documentation.	
TM-1: Network Architecture	2.15	The Sewer Utility has high-level network block diagrams for the WWTPs, but does not maintain comprehensive network architecture diagrams.					*	Develop and maintain OT network architecture diagrams and fiber-optic patch panel schedules.	8.2.6
TM-1: Network Architecture	2.15	The Sewer Utility does not maintain detailed fiber-optic patch panel schedules or have a consistently applied tagging system for fiber-optic patch panels and cables.					*	Develop and maintain OT network architecture diagrams and fiber-optic patch panel schedules.	8.2.6
TM-1: Network Architecture	2.15	The Sewer Utility practices for tagging copper Ethernet cables at both ends could be improved.					*	HDR recommends that the Sewer Utility standardize on a tagging convention for the copper Ethernet cables throughout its OT network infrastructure. Cable tags should be applied to all new cables. HDR recommends that the Sewer Utility take the opportunity to apply cable tags to existing cables when other activities prompt staff to interact with the cables or devices that they connect. The copper Ethernet tagging convention should be included in the Sewer Utility ICS standards documentation.	
TM-1: ICS Hardware	3.5	The LEL transmitter on the CKTP headworks odor control fan ductwork is registering an infrared (IR) source fault and is not monitoring combustible-gas concentration in the odor control system.		***				Implement CKTP instrumentation and automation improvements.	6.2.10

Table 10-2. Risks and deficiencies with recommended improvements summary

TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Hardware	3.5	HDR observed that the thermal dispersion flowmeter installed on the aeration line for the CKTP aerated grit tank 1 stage 2 diffuser is measuring zero flow, while the positions of manual valves on either side of the instrument suggest that flow should be occurring.		***				Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	Combustible-gas monitoring equipment at the MWWTP sludge pumping gallery, headworks odor control system, and WAS tank is non-functional.		***				Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-1: ICS Hardware	3.5	Combustible-gas monitoring equipment at the SWWTP process building upper-floor process room is non-functional.		***				Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.5	The SWWTP process building fire alarm panel has failed so SWWTP is not currently monitoring or alarming for fires.		***				Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.5	Combustible-gas monitoring equipment at the PS-24 wet well is faulted.		***				Implement remote pump station instrumentation and automation improvements.	6.2.14
TM-1: ICS Hardware	3.5	Combustible-gas monitoring equipment at the PS-71 wet well is non-functional.		***				Implement remote pump station instrumentation and automation improvements.	6.2.14
TM-1: ICS Hardware	3.5	Operation of the SWWTP RDT is a highly manual process where operations staff have to target a reduced sludge thickness to avoid shutting down the thickened sludge pump on high discharge pressure because of reportedly undersized sludge discharge piping. This workaround is reducing the efficacy of the RDT because the equipment is not dewatering sludge to the extent that it could.		**			**	Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.5	The SWWTP sludge storage tank level is not monitored. Operations staff have resorted to a manual method of controlling tank level that introduces significant risk of operator error and relies on a high-level switch with a non-ideal installation for alarming and shutdown of the sludge supply to the tank.		**			*	Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.1	The Allen-Bradley MicroLogix 1500 PLCs installed at PS-4, PS-7, and PS-17 have been discontinued by the manufacturer and are nearing the end of their useful service life.		**				Establish Sewer Utility PLC platform standard and schedule replacement of select WWTP and remote pump station PLCs.	6.2.1
TM-1: ICS Hardware	3.1	The Allen-Bradley SLC 500 PLCs installed at PS-24 and PS-71 are in the active mature phase of the manufacturer's product life cycle and are nearing the end of their useful service life.		**				Establish Sewer Utility PLC platform standard and schedule replacement of select WWTP and remote pump station PLCs.	6.2.1
TM-1: ICS Hardware	3.1	HDR observed that the PLC controller battery alarm light was illuminated at the bar screen 1023 main control panel in the CKTP headworks building electrical room.				**		HDR recommends that Sewer Utility I&C technicians investigate and replace the controller battery, if necessary.	
TM-1: ICS Hardware	3.2	The OITs installed at PS-4, PS-17, PS-24, PS-71, and CP-300 at KWWTP are nearing the end of their useful service life.		**				Establish Sewer Utility OIT platform standard and schedule replacement of select WWTP and remote pump station OITs.	6.2.5



Table 10-2. Risks and deficiencies with recommended improvements summary

						_			
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Hardware	3.3	OT network and ICS components within the CKTP digester control building control panel (PNL 6000) are exposed to significant levels of hydrogen sulfide ( $H_2S$ ) and high ambient temperatures. Installation of this panel in an area with a hazardous-area classification is a National Electrical Code (NEC) violation. County electricians also indicated that $H_2S$ corrosion has been a significant maintenance issue for control wiring at the nearby MCC within the building.				**		Implement CKTP digester building PNL 6000 relocation and MCC replacement.	6.2.7
TM-1: ICS Hardware	3.3	Status and alarms are not monitored for UPSs that provide power to ICS and instrumentation equipment. Many of the installed UPSs have no remote monitoring capability.				**		Establish robust UPS battery backup solution for ICS and OT network infrastructure.	5.2.6
TM-1: ICS Hardware	3.3	Several control panels at Sewer Utility facilities do not have battery backup power.				**		Establish robust UPS battery backup solution for ICS and OT network infrastructure.	5.2.6
TM-1: ICS Hardware	3.4	Sewer Utility staff have no means of monitoring or controlling KWWTP, MWWTP, and SWWTP from the existing CKTP SCADA PCs.					**	Establish access to all Sewer Utility SCADA HMI screens at each WWTP control room and at the County Public Works Annex facility.	7.2.2
TM-1: ICS Hardware	3.4	Sewer Utility staff do not have access to near-real-time status and alarm information for wastewater pump stations at CKTP.					**	<ul> <li>Migrate pump stations from VHF licensed radio WAN to cellular WAN.</li> <li>Implement store-and-forward and exception reporting for remote pump station telemetry and eliminate PLC data concentrator for cellular WAN.</li> </ul>	5.2.3
TM-1: ICS Hardware	3.5	Based on discussions with Sewer Utility I&C technicians, HDR believes that the Sewer Utility does not have a formal calibration and maintenance program for field instrumentation and associated control loops.		**				Develop a formal instrument calibration and maintenance program.	6.2.6
TM-1: ICS Hardware	3.5	Current CKTP effluent flow calculations provided by the TrojanUV system are resulting in higher flows than those derived from an accounting of other CKTP flow measurements.	**					Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	Automated control of the CKTP BNR process has proved to be unstable. Operators currently position the aeration control valves manually and have to frequently adjust blower header pressure set points based on process demand.	**					Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	Unlike the other three CKTP aeration basins, aeration basin 1 has no DO probes installed. This is one of the deficiencies frustrating the Sewer Utility's BNR efforts at CKTP.	**					Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	The chlorine residual and turbidity analyzers associated with the CKTP reclaimed-water filtration system were found powered down during HDR's site visit.		**				Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	The low-level switch for the CKTP thickened sludge blending tank has failed and the tank's circulation pump and digester feed pumps are likely operating without a low-level shutdown interlock.		**				Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	The Sewer Utility has no means of direct measurement for plant influent flow at MWWTP.	**					Implement MWWTP instrumentation and automation improvements.	6.2.12

Table 10-2. Risks and deficiencies with recommended improvements summary

		choics with recommended improvements summary							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Hardware	3.5	Some of the instrumentation related to the MWWTP headworks odor control system and its associated chemical system either is non-functional or has been removed. Systems are no longer operating per their original design.		**				HDR believes that the condition of the MWWTP headworks odor control system warrants evaluation of the system as part of the ongoing Sewer Utility Facilities Plan effort. Upgrade or replacement of the failed instrumentation should be determined after the entire system is evaluated for replacement or upgrade.	
TM-1: ICS Hardware	3.5	The magmeter on the sludge line feeding the MWWTP GBT is severely corroded.		**				Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-1: ICS Hardware	3.5	The MWWTP aeration basins have no DO probes or other analytical instruments for monitoring the BNR process.		**				Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-1: ICS Hardware	3.5	The MWWTP SCADA system is not receiving a flow signal from the flow transmitter and totalizer on the plant W3 pump discharge piping.		**				Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-1: ICS Hardware	3.5	Instrumentation within the MWWTP TrojanUV system has had recent issues and operations staff have reduced confidence in the system's UV dosing control.		**				Evaluate remaining years of useful service life for remote WWTP UV systems to determine best approach for improved SCADA monitoring of the UV systems.	6.2.7
TM-1: ICS Hardware	3.5	The SWWTP effluent flow control valve is unable to maintain its position when commanded to close. The valve tries to maintain a closed position but eventually begins opening. SWWTP has no bypass piping around this valve, so the plant would need to shut down in order for the control valve to be serviced or replaced.		**				Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.5	The SWWTP SBRs have no DO probes or other analytical instruments for monitoring the BNR process.		**				Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.5	The ultrasonic level transducer measuring the PS-24 wet well level was observed to be coated with grime and dried scum. The condition of the transducer may be degrading the accuracy of the level measurement.		**				Implement remote pump station instrumentation and automation improvements.	6.2.14
TM-1: ICS Hardware	3.5	PS-34 has no PLC and the station's wet well level appears to be controlled by a level indicator and controller that monitors the wet well's radar level transmitter. Because of the age and condition of the control panel components, its undocumented modifications, and lack of PLC, PS-34 would be a good candidate for a control panel upgrade.		**				Implement remote pump station instrumentation and automation improvements.	6.2.14
TM-1: ICS Hardware	3.1	Sewer Utility staff have difficulty maintaining MCC DeviceNet networks at CKTP, which has the potential to increase downtime for equipment connected to the DeviceNet networks.		*		*		<ul> <li>Develop a standard approach for monitoring and control of motorized equipment.</li> <li>Replace CKTP MCC DeviceNet networks with Ethernet-capable motor controllers.</li> </ul>	6.2.2 6.2.3
TM-1: ICS Hardware	3.4	The Sewer Utility may benefit from establishing a secure, dedicated space for ICS servers and critical network equipment.			*	*		Consolidate CKTP OT network servers, distribution switches, and other appliances in a network rack environment within the SPB.	5.2.4
TM-1: ICS Hardware	3.5	A condition assessment survey of existing instrumentation has yet to be performed. This effort would provide the most value if done on a process-by-process basis as part of process and equipment level-of-automation and performance optimization evaluations.	*	*				<ul> <li>Develop a formal instrument calibration and maintenance program.</li> <li>HDR recommends incorporating instrument condition assessment into the proposed instrument calibration and maintenance program.</li> </ul>	6.2.6



Table 10-2. Risks and deficiencies with recommended improvements summary

		encies with recommended improvements summary	nal tion	cture and zation	curity	ystem e			
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastrue stability moderniz	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Hardware	3.5	Sewer Utility staff indicated that the level transmitter for the SWWTP thickened sludge storage tank is reporting level measurements that do not align with actual tank levels.		*			*	Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.5	Short cycling of the pumps is a common occurrence at PS-24.	*	*				Implement remote pump station instrumentation and automation improvements.	6.2.14
TM-1: ICS Hardware	3.1	Allen-Bradley has made an end-of-life announcement for the CompactLogix L3x PLCs installed in various panels at CKTP. These PLCs were discontinued by the manufacturer in December 2020.		*				Establish Sewer Utility PLC platform standard and schedule replacement of select WWTP and remote pump station PLCs.	6.2.1
TM-1: ICS Hardware	3.1	The MWWTP blower building RIO control panel is installed above another control panel in a location that is not easily accessible by Sewer Utility staff.					*	HDR recommends that the control panel be relocated to a more accessible location when there are other drivers for control modifications in the blower building. The potential upgrade to variable-speed aeration blowers might be a good opportunity for relocation of this panel.	
TM-1: ICS Hardware	3.1	The Sewer Utility does not appear to have standardized on PLC platform I/O module types. I/O module standardization could help the Sewer Utility reduce spare-parts inventory and enforce its preferences.	*					Establish Sewer Utility PLC platform standard and schedule replacement of select WWTP and remote pump station PLCs.	6.2.1
TM-1: ICS Hardware	3.2	The CP-300 OIT at KWWTP was experiencing a communication error during HDR's site visit.		*				The communication error may have been due to construction activities and in- progress automation work. HDR recommends that the Sewer Utility investigate and take corrective action if the communication error persists.	
TM-1: ICS Hardware	3.2	The OIT at the master station CTU control panel in the SPB control room at CKTP appears to be out of service.		*				HDR does not believe that there is a significant driver for replacing this OIT because it is located in the control room where Sewer Utility staff will have access to SCADA HMI screens and PCs from which OT network devices can be accessed. No further action is recommended.	
TM-1: ICS Hardware	3.3	Several control panels at Sewer Utility facilities do not have 24 VDC power supply redundancy.				*		Standardize on redundant onboard power supplies and 24 VDC power supplies for ICS and OT network infrastructure.	5.2.6
TM-1: ICS Hardware	3.3	There is a mix of 120 VAC and 24 VDC control and power circuits within the Sewer Utility's industrial control panels and the voltages present are not always readily apparent without closer inspection of the components. To eliminate or reduce shock hazards for personnel, the Sewer Utility may wish to consider standardizing on 24 VDC power and controls and/or improved voltage segregation and identification for control panels introduced by future CIP projects.	*					HDR recommends that the Sewer Utility standardize on 24 VDC power and controls, where possible, as well as control panel voltage segregation best practices. These requirements should be included in the proposed Sewer Utility ICS standards documentation.	
TM-1: ICS Hardware	3.3	The Sewer Utility is having difficulty maintaining desirable ambient temperatures within the MWWTP electrical room and some of the CKTP electrical rooms.	*					HDR believes that this deficiency has been captured in the condition assessments led by Murraysmith and that the facilities planning effort will address these issues.	
TM-1: ICS Hardware	3.4	The CKTP SPB control room has only two standard-size monitors where SCADA screens can be displayed. Having large-format displays would make it so that SCADA screens are discernible from a greater distance and could be referenced more easily during staff discussions. Additional monitors/displays would allow staff to leave commonly referenced screens on display at all times.					*	Upgrade CKTP control room.	5.2.1
TM-1: ICS Hardware	3.5	The Sewer Utility has no means of direct measurement for CKTP effluent flow.	*					Implement CKTP instrumentation and automation improvements.	6.2.10

Table 10-2. Risks and deficiencies with recommended improvements summary

Table 10-2. Kisks at	ia aerici	encies with recommended improvements summary							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Hardware	3.5	The CKTP headworks odor control biofilter sprinkler control panel is out of service and watering of the biofilter is now a manual process for Sewer Utility staff. Replacing and/or introducing instrumentation to maintain desirable moisture levels in the biofilter via automation could improve Sewer Utility workforce efficiency and the effectiveness of the biofilter.					*	Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	Only CKTP aeration basin 4 has ammonium and nitrate probes installed to monitor nitrogen removal occurring in the basin.	*					Implement CKTP instrumentation and automation improvements.	6.2.10
TM-1: ICS Hardware	3.5	The CKTP cogeneration system and digester gas conditioning system have been abandoned in place because of high material and maintenance costs and limited digester gas production.		*				HDR believes that the condition of the CKTP cogeneration system warrants evaluation of the system as part of the ongoing Sewer Utility Facilities Plan effort. Until there are financial or process-related drivers for recommissioning the cogeneration system, HDR has no recommendations for further investment in associated I&C infrastructure.	
TM-1: ICS Hardware	3.5	One of the analytical probes associated with the SWWTP odor control system appears to have a splice in the probe's manufacturer cable, which may be degrading the accuracy of the probe's measurement or disrupting the signal entirely.		*				HDR believes that the SWWTP odor control system is likely nearing the end of its useful service life and should be considered for replacement as part of the ongoing facilities planning effort. Because this system is already being operated manually, HDR does not recommend replacing or upgrading system instrumentation that will become obsolete once the odor control system is in replaced.	
TM-1: ICS Hardware	3.5	The thermal dispersion flow switch on the SWWTP RDT spray water supply line has been damaged. This may result in a shorter than expected useful service life for the switch.		*				Implement SWWTP instrumentation and automation improvements.	6.2.13
TM-1: ICS Hardware	3.5	The Sewer Utility is not currently monitoring BIOXIDE storage tank level at PS-71.		*				Implement remote pump station instrumentation and automation improvements.	6.2.14
TM-1: ICS Software	4.2	Lack of centralized management for ICS device data and SCADA visualizations has resulted in non-standardized programming objects and visualizations at the Sewer Utility's WWTPs.	***				***	Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.	7.2.1
TM-1: ICS Software	4.2	Red and green on/off, open/closed color schemes are not consistently applied throughout the Sewer Utility's HMI and OIT screens.					***	Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.	7.2.1
TM-1: ICS Software	4.3	SCADA data are not being leveraged beyond data required for mandatory reporting.	**	**			**	<ul> <li>Broaden the data set archived by the Sewer Utility historian to establish foundations for more comprehensive process- and asset-level health and performance monitoring.</li> <li>Complete Hach WIMS implementation and establish data exchange with AVEVA System Platform.</li> <li>Complete asset creation and data entry required for LLumin implementation, establish automatic importing of asset runtimes, and develop a plan for automating work order generation.</li> <li>Select a data analytics and visualization software platform and develop inhouse skill sets through creation of initial dashboards.</li> </ul>	7.2.8 9.2.1 9.2.2 9.2.3
TM-1: ICS Software	4.3	The Sewer Utility is not using data visualization tools to access and derive meaning from its historical SCADA data.	**	**			**	Select a data analytics and visualization software platform and develop in-house skill sets through creation of initial dashboards.	9.2.3



Table 10-2. Risks and deficiencies with recommended improvements summary

TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Software	4.2	Sewer Utility staff do not appear to have a means of shelving nuisance alarms or alarms associated with known issues.	**				**	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-1: ICS Software	4.2	Sewer Utility WWTP HMI screens do not appear to provide alarm priority information or allow for sorting and filtering of alarms by alarm priority.	**				**	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-1: ICS Software	4.3	The Sewer Utility has no historical data for the overwhelming majority of its SCADA tags, and the Sewer Utility is not capturing data for several processes and equipment.	**				**	Broaden the data set archived by the Sewer Utility historian to establish foundations for more comprehensive process- and asset-level health and performance monitoring.	7.2.8
TM-1: ICS Software	4.1	The Sewer Utility does not have PLC programming standards in place and its PLC programming project files reflect a variety of conventions and programming objects implemented by multiple systems integrators.	**					Develop PLC programming standards and leverage them to standardize future PLC programming work products.	7.2.5
TM-1: ICS Software	4.2	The Sewer Utility's Wonderware InTouch software at its WWTPs is in, or will soon be entering, the mature support phase of the software developer's product life cycle, during which limited support is offered.		**				Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.	7.2.1
TM-1: ICS Software	4.2	HMI overview and process screens could be updated to include more contextual information to facilitate operator situational awareness.					**	Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.	7.2.1
TM-1: ICS Software	4.2	Sewer Utility staff have no means of remotely resetting pump station alarms from CKTP HMI screens. The lack of remote alarm reset requires County staff to physically visit the pump stations to reset alarms.					**	Implement remote pump station instrumentation and automation improvements.	6.2.14
TM-1: ICS Software	4.2	HDR observed that there are issues with communication of analog parameters between several pump stations and CKTP. Several pump station pop-up HMI screens appear to constantly display zero values for analog parameters and historian data are also logging constant, out-of-range values for these pump station parameters.		**				Develop a standard approach for monitoring remote pump stations.	6.2.3
TM-1: ICS Software	4.2	The Sewer Utility does not appear to have pump station remote monitoring capabilities for wet well level, force main pressure, pump speed, LEL, BIOXIDE/chemical storage tank level, power and energy parameters, or other analog parameters for the pump stations.	**					<ul> <li>Develop a standard approach for monitoring remote pump stations.</li> <li>Remote pump station instrumentation and automation improvements.</li> </ul>	6.2.3 6.2.14
TM-1: ICS Software	4.2	Alarm summary and alarm history HMI screens at SWWTP are not automatically updated to display current alarm information.		**				Implement an alarm management program based on ISA-18.2.	7.2.6
TM-1: ICS Software	4.2	The CKTP Wonderware implementation is generating considerable alarm activity, much of which is caused by the same alarms.					**	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-1: ICS Software	4.3	The Sewer Utility's Wonderware Historian and Historian Client software at CKTP is in the mature support phase of the software developer's product life cycle, during which limited support is offered.		**				<ul> <li>Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.</li> <li>Establish a tiered historian implementation at CKTP to centralize Sewer Utility historical ICS data and provide secure access to historical ICS data from the Sewer Utility business LAN.</li> </ul>	7.2.1 7.2.7

Table 10-2. Risks and deficiencies with recommended improvements summary

Table 10-2. Risks at	iu delici	encies with recommended improvements summary							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Software	4.3	The historical SCADA data for KWWTP, MWWTP, and SWWTP are accessible only via the SCADA PC at each WWTP and have not been imported to the Sewer Utility's historian at CKTP.					**	Establish a tiered historian implementation at CKTP to centralize Sewer Utility historical ICS data and provide secure access to historical ICS data from the Sewer Utility business LAN.	7.2.7
TM-1: ICS Software	4.3	The Sewer Utility's means of accessing its historical SCADA data are time-consuming, are ill-suited for handling large queries, and present a barrier to ad hoc data exploration.					**	Establish a tiered historian implementation at CKTP to centralize Sewer Utility historical ICS data and provide secure access to historical ICS data from the Sewer Utility business LAN.	7.2.7
TM-1: ICS Software	4.3	The Sewer Utility has not implemented automated reports for SCADA data at any of the WWTPs.					**	<ul> <li>Establish a tiered historian implementation at CKTP to centralize Sewer Utility historical ICS data and provide secure access to historical ICS data from the Sewer Utility business LAN.</li> <li>Complete Hach WIMS implementation and establish data exchange with AVEVA System Platform.</li> <li>Complete asset creation and data entry required for LLumin implementation, establish automatic importing of asset runtimes, and develop a plan for automating work order generation.</li> <li>Select a data analytics and visualization software platform and develop inhouse skill sets through creation of initial dashboards.</li> </ul>	7.2.7 9.2.1 9.2.2 9.2.3
TM-1: ICS Software	4.4	There is no redundant alarm notification method for KWWTP, MWWTP, and SWWTP. Failure of the SCADA PC's analog telephony card or disruption of telephone service to the WWTP would result in loss of remote alarm notification for the WWTP.				**		Implement HIPswitch cellular failover functionality to establish communication link redundancy for WWTPs.	5.2.3
TM-1: ICS Software	4.1	Sewer Utility PLCs are running a variety of firmware versions.		*				Determine standard PLC firmware versions for the Sewer Utility and perform firmware upgrades.	7.2.4
TM-1: ICS Software	4.2	At CKTP, alarm acknowledgments made at one HMI thick client are not being registered by other HMI thick clients.					*	Complete migration to thin client configuration for CKTP HMIs.	7.2.3
TM-1: ICS Software	4.2	Horizontal alarm banner at the bottom of SWWTP HMI screens may be non-functional.	*					<ul> <li>Upgrade WWTP standalone SCADA HMI installations to AVEVA System     Platform with managed InTouch applications and standardized templates     based on HPHMI concepts.</li> <li>Implement an alarm management program based on ISA-18.2.</li> </ul>	7.2.1 7.2.6
TM-1: ICS Software	4.2	Sewer Utility staff have indicated that there are cases throughout the WWTP HMI process screens where the wrong engineering units are being displayed for equipment speed values.		*				<ul> <li>Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.</li> <li>HDR recommends that Sewer Utility staff compile a list of known engineering unit conflicts so that I&amp;C technicians and/or systems integrators can correct the issues.</li> </ul>	7.2.1
TM-1: ICS Software	4.2	Equipment pop-up windows/screens do not appear to have functionality to provide information on active alarms or conditions, not internal to the equipment, that are inhibiting the equipment from running.					*	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-1: ICS Software	4.2	Equipment pop-up windows/screens could be developed to include additional electrical, diagnostic, and performance data as well as expanded motor start count information.					*	<ul> <li>Develop a standard approach for monitoring and control of motorized equipment.</li> <li>Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.</li> </ul>	6.2.2 7.2.1



Table 10-2. Risks and deficiencies with recommended improvements summary

		encies with recommended improvements summary							
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: ICS Software	4.2	Trend screens display current values against time only and do not provide meaningful situational awareness.					*	Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.	7.2.1
TM-1: ICS Software	4.2	Root-cause analysis and alarm suppression functionality have not been developed for the Sewer Utility's WWTP HMI systems.	*				*	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-1: ICS Software	4.2	HMI screens do not have troubleshooting text prompts or decision tree aids to help operators react to alarm conditions.					*	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-1: ICS Software	4.4	Sewer Utility staff indicate that an unresolved issue with the Sewer Utility's WIN-911 implementation prevents operators from obtaining a listing of active alarms when calling in to the WIN-911 system.					*	Upgrade alarm notification system.	7.2.9
TM-1: ICS Documentation	5.2	The Sewer Utility is currently logging process control changes in physical operator log books and not in a more readily accessible, electronic format that can be backed up to prevent loss of information.	*				**	Establish electronic records for operator logs.	8.2.4
TM-1: ICS Documentation	5.5	The Sewer Utility does not have formal ICS standards documentation to guide third-party design and implementation efforts.	*				*	Develop Sewer Utility ICS standards documentation.	8.2.1
TM-1: ICS Documentation	5.1	Record P&IDs are not maintained in consolidated drawing sets or located in one location.					*	Update WWTP and pump station P&IDs and compile current consolidated P&ID sets on County eO&M SharePoint site.	8.2.5
TM-1: ICS Documentation	5.1	Record P&IDs for MWWTP are out of date.					*	Update WWTP and pump station P&IDs and compile current consolidated P&ID sets on County eO&M SharePoint site.	8.2.5
TM-1: ICS Documentation	5.1	Aside from P&IDs recently developed for the SWWTP sludge thickening processes, no detailed P&IDs appear to be available for SWWTP.					*	Update WWTP and pump station P&IDs and compile current consolidated P&ID sets on County eO&M SharePoint site.	8.2.5
TM-1: ICS Documentation	5.2	General control descriptions have yet to be added to the County's eO&M SharePoint site for the major processes at KWWTP, MWWTP, and SWWTP and wastewater pump stations.					*	Develop and maintain control strategy documentation.	8.2.3
TM-1: ICS Documentation	5.2	The Sewer Utility does not maintain as-implemented control strategies for its WWTPs and pump stations.					*	Develop and maintain control strategy documentation.	8.2.3
TM-1: ICS Documentation	5.2	PLC programming modifications may be occurring without documentation of changes made to process controls.					*	Develop and maintain control strategy documentation.	8.2.3
TM-1: ICS Documentation	5.3	The County eO&M SharePoint site is missing record drawings from 2018 control system upgrade at MWWTP.					*	Upload applicable record drawings to County eO&M SharePoint site.	
TM-1: Other Software Packages	6.4	The Sewer Utility is not currently using data analytics or visualization software to derive insights from its CMMS, energy management system (EMS), laboratory, SCADA, and other data sets outside of their respective software environments.	**	**			**	Select a data analytics and visualization software platform and develop in-house skill sets through creation of initial dashboards.	9.2.3
TM-1: Other Software Packages	6.2	It appears that the Sewer Utility has not generated any historical EMS data since the CKTP EMS was installed because the EMS software was never set to record any of the real-time power data that it monitors.		**			**	Begin leveraging the Sewer Utility's power and energy data.	9.2.4

Table 10-2. Risks and deficiencies with recommended improvements summary

Table 10-2. Risks a	na delici	encies with recommended improvements summary					,		
TM and section	TM sub- section	Risk or deficiency	Operational optimization	Infrastructure stability and modernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency	Recommended improvement(s)	TM-2 sub- section
TM-1: Other Software Packages	6.2	The Sewer Utility is not currently using power or energy data at the bus level or load level to establish plant, process, or asset baselines or to evaluate process and equipment performance.		**			**	Begin leveraging the Sewer Utility's power and energy data.	9.2.4
TM-1: Other Software Packages	6.2	Aside from Puget Sound Energy billing data and a few load-level power parameters recorded by the CKTP historian, HDR believes that the Sewer Utility has little to no historical power and energy data for its WWTP and wastewater pump station infrastructure.		**			**	Begin leveraging the Sewer Utility's power and energy data.	9.2.4
TM-1: Other Software Packages	6.1	Data entry of WWTP and pump station assets and their attributes into the LLumin database has yet to be completed.		**			*	Complete asset creation and data entry required for LLumin implementation, establish automatic importing of asset runtimes, and develop a plan for automating work order generation.	9.2.2
TM-1: Other Software Packages	6.1	The Sewer Utility's CMMS and SCADA data remain siloed and the Sewer Utility has not implemented automated work orders based on accumulated runtimes, alarms, and other events registered at the SCADA system.		*			**	Complete asset creation and data entry required for LLumin implementation, establish automatic importing of asset runtimes, and develop a plan for automating work order generation.	9.2.2
TM-1: Other Software Packages	6.3	HDR believes that the Sewer Utility laboratory data are recorded in Excel spreadsheets and do not currently reside on a database, which makes working with the data labor-intensive.					**	Complete Hach WIMS implementation and establish data exchange with AVEVA System Platform.	9.2.1
TM-1: Other Software Packages	6.2	Several MCCs at CKTP have no power monitor installed, which prevents them from being included in the CKTP EMS.	*	*			*	Begin leveraging the Sewer Utility's power and energy data.	9.2.4
TM-1: Other Software Packages	6.2	Power monitors installed at the KWWTP and MWWTP MCCs are not networked to the WWTP PLCs or SCADA PCs.	*	*			*	Begin leveraging the Sewer Utility's power and energy data.	9.2.4
TM-1: Other Software Packages	6.2	The CKTP EMS and SCADA system are not monitoring power and energy data that may be available from power monitors and other electrical equipment at the Sewer Utility's pump stations.		*			*	Begin leveraging the Sewer Utility's power and energy data.	9.2.4
TM-1: Other Software Packages	6.2	CKTP standby generators and large electrical loads (e.g., aeration blowers) have not been integrated into the CKTP EMS.					*	Begin leveraging the Sewer Utility's power and energy data.	9.2.4
TM-1: Other Software Packages	6.2	Power monitors installed at the CKTP UV disinfection facility have not been integrated into the CKTP EMS.					*	Begin leveraging the Sewer Utility's power and energy data.	9.2.4
TM-1: Other Software Packages	6.2	With the exception of SWGR-2961, the CKTP EMS is not monitoring switch and breaker statuses for the major electrical distribution system buses at CKTP.					*	<ul> <li>Begin leveraging the Sewer Utility's power and energy data.</li> <li>Because HDR is not recommending further investment in the GE EnerVista Viewpoint Monitoring software, implementation of breaker and switch status monitoring via this software is not recommended. If Sewer Utility staff would find this information useful, the requisite signals could be integrated into AVEVA System Platform and SCADA HMI screens could be developed to present this information in one-line diagram context.</li> </ul>	9.2.4
TM-1: Other Software Packages	6.2	The CKTP EMS one-line diagram screens have not been configured to display current breaker statuses for SWGR-2961.					*	<ul> <li>Begin leveraging the Sewer Utility's power and energy data.</li> <li>Because HDR is not recommending further investment in the GE EnerVista Viewpoint Monitoring software, implementation of breaker and switch status monitoring via this software is not recommended. If Sewer Utility staff would find this information useful, the requisite signals could be integrated into AVEVA System Platform and SCADA HMI screens could be developed to present this information in one-line diagram context.</li> </ul>	9.2.4



Table 10-2. Risks and deficiencies with recommended improvements summary

	TM sub-		Operational optimization	nfrastructure tability and nodernization	Cybersecurity risk mitigation	Critical system resilience	Workforce efficiency		TM-2 sub-
TM and section	section	Risk or deficiency	0.0	= 6 =	0.5	0.5	<b>&gt;</b> 0	Recommended improvement(s)	section
TM-2: Sewer Utility Staff Interviews	4.1	MWWTP lacks SCADA control for the sludge wasting valve so the sludge wasting process is entirely manual.	**				**	Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-2: Sewer Utility Staff Interviews	4.3	Laboratory staff currently have no access to SCADA HMI screens or historical SCADA data.	*	*			**	Provide read-only access to WWTP SCADA HMI screens at laboratory.	7.2.10
TM-2: Sewer Utility Staff Interviews	4.5	Equipment runtimes are manually collected and entered into Sewer Utility CMMS.	**				**	Complete asset creation and data entry required for LLumin implementation, establish automatic importing of asset runtimes, and develop a plan for automating work order generation.	9.2.2
TM-2: Sewer Utility Staff Interviews	4.1	MWWTP does not have a flowmeter for monitoring WAS flow to the WAS tanks.	**				*	Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-2: Sewer Utility Staff Interviews	4.1	PLC status monitoring and alarming may not be effectively applied for all WWTP PLCs.		**			*	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-2: Sewer Utility Staff Interviews	4.1	Sewer Utility operations staff believe that they are not receiving signal out-of-range alarms at SCADA HMI screens for lost analog signals from some field instruments.		**			*	Implement an alarm management program based on ISA-18.2.	7.2.6
TM-2: Sewer Utility Staff Interviews	4.1	There are no SCADA alarms or monitoring in place for composite samplers at all WWTPs.		*			*	Include integration of composite sampler alarms and monitoring with replacement of existing samplers.	6.2.8
TM-2: Sewer Utility Staff Interviews	4.1	Some WWTP VFDs do not have VFD fault alarms monitored at SCADA.		*			*	Develop a standard approach for monitoring and control of motorized equipment.	6.2.2
TM-2: Sewer Utility Staff Interviews	4.1	MWWTP headworks mixing channel blower fault is not monitored at SCADA.		*			*	Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-2: Sewer Utility Staff Interviews	4.1	Operators have no means of managing the MWWTP blower operating time sequence via the SCADA HMI screens.	*				*	Implement MWWTP instrumentation and automation improvements.	6.2.12
TM-2: Sewer Utility Staff Interviews	4.1	Sewer Utility operations staff would like to have more detailed information on UV systems available at the HMIs for all plants.		*			*	Evaluate remaining years of useful service life for remote WWTP UV systems to determine best approach for improved SCADA monitoring of the UV Systems.	6.2.9
TM-2: Sewer Utility Staff Interviews	4.1	The Sewer Utility is likely overestimating the thickened sludge volumes received at CKTP from remote WWTPs because none of the remote WWTPs have a flowmeter for monitoring thickened sludge flow during truck loadout activities.	*					<ul> <li>Implement KWWTP instrumentation and automation improvements.</li> <li>Implement MWWTP instrumentation and automation improvements.</li> <li>Implement SWWTP instrumentation and automation improvements.</li> </ul>	6.2.11 6.2.12 6.2.13
TM-2: Sewer Utility Staff Interviews	4.2	The Sewer Utility needs a standardized tag naming convention for the AVEVA SCADA system.					*	Upgrade WWTP standalone SCADA HMI installations to AVEVA System Platform with managed InTouch applications and standardized templates based on HPHMI concepts.	7.2.1



## 11 References

#### ANSI/ISA (American National Standards Institute/International Society of Automation)

2015 ANSI/ISA-101.01-2015, Human Machine Interfaces for Process Automation Systems.

2016 ANSI/ISA-18.2-2016, Management of Alarm Systems for the Process Industries.

#### **AVEVA**

AVEVA Intouch Access Anywhere. https://www.aveva.com/en/products/aveva-intouch-access-anywhere/. Viewed on December 7, 2020.

#### Brodersen

2020 DNP3 Slave. https://brodersen.com/dnp3slave/. Viewed on December 4, 2020.

#### Chatsworth Products (Chatsworth)

Z4-Series Seismic Frame Cabinet System. https://www.chatsworth.com/en-us/products/cabinets-enclosures-containment/network-cabinets/critical-facilities/z4-series-seismicframe-cabinet-system?sourcecall=googleads&insitesid=1454&gclid=Cj0KCQiAzsz-BRCCARIsANotFgO9x--WnD6J1tQhE4riK-OnMdRuuAD9k5\_ZjIEJbugm8tXSah8y-ssaAst3EALw wcB. Viewed on December 11, 2020.

#### HydroLogic Research

2021 *Water Control Room.* https://www.hydrologic.com/themes/water-control-room/. Viewed on January 4, 2021.

#### IBM (International Business Machines Corporation)

Learn About Hypervisors, System Virtualization, and How It Works in a Cloud Environment. https://developer.ibm.com/articles/cl-hypervisorcompare/. Viewed on December 13, 2020.

#### ISA/IEC (International Society of Automation/International Electrotechnical Commission)

2020 ISA/IEC 62443-3-2:2020. Security for Industrial Automation and Control Systems – Part 3.2: Security Risk Assessment for System Design.

#### NAAT (North American Access Technologies, Inc.)

2021 Cooling – Data Centers, Servers and Communications. http://us.naat.com/Data%20Centers/cooling.html. Viewed on January 4, 2021.

#### **Phoenix Contact**

#### 2021 ACB Technology.

https://www.phoenixcontact.com/online/portal/sg?1dmy&urile=wcm:path:/sgen/web/main/products/technology\_pages/subcategory\_pages/ACB\_Technology/2f1942c6-2dd9-4dd0-b01d-1c44e9f4d7d0. Viewed on January 4, 2021.

#### **Rockwell Automation**

2019 *Migration Solutions: E3/E3 Plus to E300/E200 Electronic Overload Relay.*https://literature.rockwellautomation.com/idc/groups/literature/documents/pp/migrat-pp042 -en-p.pdf

- 2020a *Product Lifecycle Status.* https://www.rockwellautomation.com/global/support/product-compatibility-migration/lifecycle-status/overview.page. Viewed on December 18, 2020.
- 2020b 193 IEC E3 Plus Relays. https://www.rockwellautomation.com/en-us/products/hardware/allen-bradley/discontinued-products/193-iec-e3-plus-relays.html#resources. Viewed on December 18, 2020.
- 2020c Product Compatibility and Download Center.
  https://compatibility.rockwellautomation.com/Pages/home.aspx. Viewed on December 24, 2002.

#### Schneider Electric

2015 Optimize Configurations of Wonderware InTouch Machine Edition and Wonderware Historian for Improved Data Collection. http://blog.wonderware.com/2015/06/optimize-configurations-of-wonderware.html.

#### Sewer Utility (Kitsap County Public Works Sewer Utility)

2019 Six-Year Capital Facilities Plan 2020–2025.

#### SolarWinds Worldwide, LLC

2021 *Network Performance Monitor.* https://www.solarwinds.com/network-performance-monitor. Viewed on January 5, 2021.

#### TrojanUV

2018 *TrojanUV3000B: Wastewater Disinfection.* https://www.resources.trojanuv.com/wp-content/uploads/2018/07/TrojanUV3000B-Brochure.pdf.

#### Yokogawa

2017 Effective Alarm Management Planning Using ANSI/ISA-18.2. https://www.yokogawa.com/us/library/resources/media-publications/effective-alarm-management-planning-using-ansiisa-182/.








# TM-3: Technology Selection

Sewer Utility SCADA Master Plan

Kitsap County Public Works Sewer Utility Division

December 10, 2021



#### Kitsap County Public Works, Sewer Utility Division Sewer Utility SCADA Master Plan

TM-3: Technology Selection

December 10, 2021

Prepared by:

Brandon Erndt, PE HDR Engineering, Inc. (602) 522-7712

Christopher Maras, PE HDR Engineering, Inc. (402) 208-7051

and

Bruce Johnston, PE HDR Engineering, Inc. (425) 450-6217



I hereby certify that the technical memorandum was prepared under my direct supervision and that I am a duly registered Engineer under the laws of the State of Washington.



### **Contents**

1	Intro	duction.		1-1
	1.1	Approa	ach	1-1
	1.2	Techn	ical Memorandum Organization	1-1
		1.2.1	Structure	1-1
2	Prev	iously S	elected Technology	2-1
	2.1		rk Architecture	
	2.2		rial Control System Hardware	
	2.3		rial Control System Software	
	2.4		Software Packages	
2			· ·	
3			Architecture Technology and Software	
	3.1		rk Equipment Evaluation	
	3.2		ged Network Switches	
		3.2.1 3.2.2	Industrial Panel-Mounted Network Switches	
		3.2.3	Rack-Mounted Switches (with Redundant Network Access)	
		3.2.4	Cost	3-5
	3.3	Uninte	rrupted Power Supplies	3-5
		3.3.1	Control Panel Uninterrupted Power Supply	
		3.3.2	Cost	
		3.3.3 3.3.4	Rackmount Uninterrupted Power SupplyCost	
	3.4		bersecurity and Disaster Recovery	
		3.4.1	OT Access Control	
		3.4.2	OT Network Monitoring and Logging Software	3-10
		3.4.3	Cost	
	3.5		ctor Authentication for HMI Software	
	3.6		n Control and Backup Software for OT Systems	
		3.6.1	Version Control Software	
		3.6.2 3.6.3	Version Control Software Cost	
		3.6.4	Secure Offline Storage Cost	
1	DI C	Hardwa	re and Software	
4	4.1			4-1
	4.1		Bradley CompactLogix 5380 Controller and Compact 5000 I/O Standard controls	4-1
		4.1.1	Controller	
		4.1.2	EtherNet/IP Adapter	
		4.1.3	Power Supply Considerations	
		4.1.4	I/O Modules	
		4.1.5 4.1.6	End Cap  Recommended Standard Component Summary Table	
	4.2		rogramming Software	
	4.2		latform Evaluation	
	4.3	4.3.1	Ease of Migration	
		4.3.1	Capability	
		4.3.3	Cost	



### **Tables**

Table 2-1. Summary of previously selected network architecture technology	2-1
Table 2-2. Summary of previously selected ICS hardware technology	2-2
Table 2-3. Summary of previously selected ICS software technology	2-2
Table 2-4. Summary of previously selected additional software packages	2-3
Table 3-1. Allen-Bradley Stratix switches	3-3
Table 3-2. Cisco Catalyst 9000 switches	3-5
Table 3-3. APC Smart-UPS SRT 1500, UPS Network Management Card	3-8
Table 3-4. APC Smart-UPS SRT 1500 Rackmount, APC Smart-UPS SRT Battery Pack	3-10
Table 3-5. Network monitoring and logging software	3-11
Table 3-6. Network monitoring and logging software	3-14
Table 3-7. LTO-7 tape drive and storage media	3-14
Table 3-8. Off-site Storage Service	3-14
Table 4-1. Allen-Bradley CompactLogix 5380 controller and Compact 5000 I/O platform standard components summary	4-9
Table 4-2. Allen-Bradley CompactLogix 5380 and ControlLogix 5580 controller comparison	
Table 4-3. Allen-Bradley CompactLogix 5380 and ControlLogix 5580 component cost comparison	
Figures	
Figure 3-1. Allen-Bradley Stratix switch	3-3
Figure 3-2. Cisco Catalyst 9000 family switch	3-5
Figure 3-3. APC Smart-UPS SRT 1500 Tower	3-7
Figure 3-4. APC Smart-UPS SRT 1500 Rackmount	3-9
Figure 3-5. APC Smart-UPS SRT Battery Pack	3-10
Figure 3-6. Logical relationships of Rockwell software products required for FactoryTalk  AssetCentre	3-13
Figure 4-1. Allen-Bradley CompactLogix 5380 controller with Compact 5000 I/O modules	4-1
Figure 4-2. Allen-Bradley 5069-L320ER CompactLogix 5380 controller	4-2
Figure 4-3. Allen-Bradley 5069-AEN2TR Compact 5000 I/O EtherNet/IP adapter	4-4
Figure 4-4. Allen-Bradley 5069-IF8 Compact 5000 I/O analog input module	4-5
Figure 4-5. Allen-Bradley 5069-OF8 Compact 5000 I/O analog output module	4-6
Figure 4-6. Allen-Bradley 5069-IB16F Compact 5000 I/O digital input module	4-7
Figure 4-7. Allen-Bradley 5069-OB16 Compact 5000 I/O digital output module	4-8
Figure 4-8. Allen-Bradley 5069-ECR CompactLogix 5380 and Compact 5000 I/O end cap	4-9

#### **Abbreviations**

°F degree(s) Fahrenheit AD Active Directory

BGP Border Gateway Protocol
CIP Common Industrial Protocol
CKTP Central Kitsap Treatment Plant

CMMS computerized maintenance management system

County Kitsap County
DLR Device Level Ring
DMZ demilitarized zone

DNP3 Distributed Network Protocol 3

DS Domain Server

EIGRP Enhanced Interior Gateway Routing Protocol

FNF flexible netflow FT FactoryTalk GB gigabyte(s)

Gbps gigabit(s) per second
HDR HDR Engineering, Inc.
HMI human-machine interface
HSRP Hot Standby Router Protocol
I&C instrumentation and controls
ICS industrial control system

IEEE Institute of Electrical and Electronics Engineers

IGMP Internet Group Management Protocol

I/O input/output IoT Internet of Things IP Internet Protocol

IS-IS Intermediate System to Intermediate System

LAN local-area network LED light-emitting diode

LIMS laboratory information management system

LTE Long-Term Evolution M2M machine-to-machine

Master Plan Sewer Utility SCADA Master Plan

MB megabyte(s)

Mbps megabit(s) per second MCC motor control center

MOD module

N/A not applicable

NFPA National Fire Protection Association

NMS network monitoring system
OSPF Open Shortest Path First
OT Operational Technology
PBR Policy-Based Routing
PC personal computer

PCAP Network Packet Analyzer and Capture

PLC programmable logic controller QCC Quality Controls Corporation

QoS quality of service RIO remote input/output

RIP Routing Information Protocol RTD resistance temperature detector

RTU remote telemetry unit

#### TM-3: Technology Selection Sewer Utility SCADA Master Plan



SA sensor/actuator

SCADA supervisory control and data acquisition

SD Secure Digital

SDN software-defined network

Sewer Utility Public Works Sewer Utility Division

SFP small form-factor pluggable

SNMP Simple Network Management Protocol

SPB solids processing building SVI Switched Virtual Interface TM technical memorandum

TM-2 SCADA Use Cases and Operational Needs Technical Memorandum

TM-3 Technology Selection Technical Memorandum

TM-4 Sewer Utility SCADA Master Plan Technical Memorandum

TP/TX Transport Protocol/Transmit uRPF Unicast Reverse Path forwarding

USB Universal Serial Bus

UV ultraviolet V volt(s)

VAC volt(s) alternating current
VDC volt(s) direct current
VM virtual machine

VRF Virtual Routing and Forwarding VRRP Virtual Router Redundancy Protocol

WAN wide-area network

WIMS Water Information Management Solution

WWTP wastewater treatment plant



# 1 Introduction

This *Technology Selection Technical Memorandum* (TM-3) documents the specific hardware and software platforms selected to become the new standard for the Kitsap County (County) Public Works Sewer Utility Division (Sewer Utility) supervisory control and data acquisition (SCADA) system. This technical memorandum (TM) describes the evaluation approach by which these technological elements were selected based on the Sewer Utility's existing infrastructure and its future operational needs identified in the *SCADA Use Cases and Operational Needs Technical Memorandum* (TM-2). These platforms will serve as the building blocks for the system architecture conceptual design to be developed in the subsequent *Sewer Utility SCADA Master Plan Technical Memorandum* (TM-4).

# 1.1 Approach

TM-3 completes the third phase of the Sewer Utility SCADA Master Plan (Master Plan), which is to identify the hardware and software platforms that will be the foundational SCADA equipment for use by the Sewer Utility going forward. The hardware and software selections are based on the existing SCADA equipment condition and useful life cycle as well as the Operational Needs and Deficiencies Assessment completed in the previous TMs.

In addition, the hardware and software selections identified in this TM-3 support the requirements needed to appropriately design the conceptual control system architecture in Phase 4.

A meeting was held in June 2021 to review the previously selected technology for both the Operational Technology (OT) network and control system equipment. Preferences for additional required OT network equipment and software and the system architecture conceptual design were also discussed.

# 1.2 Technical Memorandum Organization

This section describes the structure of the TM and the annotation for addressing the operational needs identified in TM-2 and recommended improvements.

#### 1.2.1 Structure

TM-3 is organized into five sections, as described below:

- **Section 1: Introduction** summarizes the TM organization and the approach taken for the third phase of the Master Plan in preparation for TM-3.
- Section 2: Previously Selected Technology provides a summary of the various SCADA-related hardware and software platforms that the Sewer Utility has selected prior to or in parallel with the Master Plan and that will remain part of the Sewer Utility's core technological assets into the future.
- Section 3: OT Network Architecture Technology and Software describes the network architecture technology components and software products selected for

future Sewer Utility OT network improvements and software to support the SCADA-related assets. The section also provides a summary of the features of each of these components and software products as related to the Sewer Utility's system.

- Section 4: PLC Hardware and Software describes the Allen-Bradley CompactLogix 5380 controller and Compact 5000 input/output (I/O) platform components selected as the new Sewer Utility standard for wastewater treatment plant (WWTP) and remote pump station programmable logic controller (PLC) design and implementation. The section also provides a summary of the evaluation approach by which these PLC components were selected.
- Section 5: References lists the supporting source materials cited in TM-3.



This page intentionally left blank.



# 2 Previously Selected Technology

This section provides a summary of the various SCADA-related hardware and software platforms that the Sewer Utility has selected prior to or in parallel with the Master Plan and that will remain part of the Sewer Utility's core technological assets into the future. Technology selected in TM-3 will be combined with the Sewer Utility's previously selected technology to form a cohesive system.

## 2.1 Network Architecture

Previously selected network architecture technology is summarized in Table 2-1.

Table 2-1. Summary of previously selected network architecture technology

Manufacturer/ vendor	Product/model	Description	Application
Tempered Networks	Airwall system	Software-defined network (SDN) technology for implementing security policies, network segmentation, and encryption over wide-area networks (WANs). Platform consists of a cloud-hosted management portal (Airwall Conductor), cloud-hosted routing service (Airwall Relay), and hardware and software gateways (Airwall Gateways).	<ul> <li>Data exchange between Sewer Utility WWTPs</li> <li>Remote access to Sewer Utility OT network for Sewer Utility staff</li> <li>Remote access to Sewer Utility OT network for contractors</li> </ul>
Verizon Wireless	Private network service, zero-tunnel configuration	4G Long-Term Evolution (LTE) cellular plan for machine-to-machine (M2M) applications. Communication restricted to customer mobile devices.	Remote pump station telemetry
Cradlepoint	IBR600C series cellular router	4G LTE cellular router	Remote pump station telemetry
VMWare	ESXi	Type 1 hypervisor for hosting virtual machines (VMs)	Central Kitsap Treatment Plant (CKTP) primary and secondary SCADA servers

# 2.2 Industrial Control System Hardware

Previously selected industrial control system (ICS) hardware technology is summarized in Table 2-2.

Table 2-2. Summary of previously selected ICS hardware technology

Manufacturer/ vendor	Product/model	Description	Application
Allen-Bradley	MicroLogix 1400	Compact controller with onboard I/O points, Ethernet port, and EtherNet/Internet Protocol (IP) and Distributed Network Protocol 3 (DNP3) communication capability	Remote pump station remote telemetry unit (RTU) controller

# 2.3 Industrial Control System Software

Previously selected ICS software technology is summarized in Table 2-3.

Table 2-3. Summary of previously selected ICS software technology

Manufacturer/ vendor	Product/model	Description	Application
AVEVA	System Platform 2020 <sup>a</sup>	SCADA software platform for centralized management of SCADA human-machine interface (HMI) graphics and historical SCADA data. Includes communication drivers for integrating PLCs, network devices, and other ICS components. Also includes the individual AVEVA software components listed below.	<ul> <li>WWTP and remote pump station SCADA HMI screens</li> <li>Redundant installation on servers residing at CKTP</li> </ul>
AVEVA	InTouch HMI 2020 <sup>a</sup>	Runtime and development software for SCADA HMI graphics.	<ul> <li>WWTP and remote pump station SCADA HMI screens</li> <li>Runtime installations installed at WWTP operator SCADA personal computers (PCs) and workstations</li> </ul>
AVEVA	Historian 2020 <sup>a</sup>	SCADA data repository and management platform.	WWTP and remote pump station SCADA data
AVEVA	Historian Client 2020 <sup>a</sup>	User interface for simplifying access to historical SCADA data and developing static and ad hoc trends.	<ul> <li>WWTP and remote pump station SCADA data</li> <li>Installed at WWTP operator SCADA PCs and workstations</li> </ul>
Rockwell Automation	Studio 5000 Logix Designer	PLC programming development environment	WWTP and remote pump station PLCs

a. Quality Controls Corporation (QCC) plans to update its ongoing System Platform 2017 implementation work for the Sewer Utility to System Platform 2020, the most current software offering.

# 2.4 Other Software Packages

Previously selected additional software packages are summarized in Table 2-4.



Table 2-4. Summary of previously selected additional software packages

Manufacturer/ vendor	Product/model	Description	Application
LLumin	LLumin	Computerized maintenance management system (CMMS)	Sewer Utility asset tracking and maintenance management
Hach	Water Information Management Solution (WIMS)	Laboratory information management system (LIMS)	<ul> <li>CKTP laboratory management</li> <li>WWTP laboratory and SCADA data tracking and analysis</li> </ul>

This page intentionally left blank.



# 3 OT Network Architecture Technology and Software

This section describes the network architecture technology components and software to support the SCADA-related assets. The section also provides a summary of the features of each of these components and software products as related to the Sewer Utility's system. The costing provided in this section is current as of the time of writing but may vary greatly depending on continuing supply chain issues.

# 3.1 Network Equipment Evaluation

In TM-2, Section 5.1.1, several requirements were identified for the Sewer Utility's OT network. These OT network requirements include the following:

- Secure and reliable connection between CKTP and the remote pump stations and WWTPs
- Remote access for instrumentation and controls (I&C) technicians via County-issued laptops
- Secure access to ICS data from business local-area network (LAN)

Several vendors of the industrial grade network equipment can meet the technical requirements. The following key attributes were considered for the selection of the Sewer Utility OT network equipment.

When selecting the modern OT network architecture technology components, the ability to integrate with the Sewer Utility's PLC hardware and software, relative costs, and minimal technical requirements are considered.

# 3.2 Managed Network Switches

Network equipment should be managed as a system and will ideally be consistent across manufacturer, product line, and vintage. Intermingling of network manufacturers, product lines, and vintages should be minimized. Network life cycle should be considered as part of facility planning.

Industrial-rated, panel-mounted switches like Allen-Bradley Stratix switches (Figure 3-1) should be used for control and I/O networks. Rack-mounted switches like the Cisco Catalyst 9000 switching family (Figure 3-2) should be used for SCADA and demilitarized zone (DMZ) networks.

#### 3.2.1 Industrial Panel-Mounted Network Switches

Industrial panel-mounted network switches should support the following design features and protocols:

- A. Support Ethernet 10/100/1000 megabits per second (Mbps)
- B. Backbone (trunk) fiber ports shall be via small form-factor pluggable (SFP) modules

- C. Provide as required (plus at least two spare) 10/100/1000 MBit/s port (twisted pair) at each Ethernet switch
- D. Support Device Level Ring (DLR) topology
- E. Support EtherNet/IP (Common Industrial Protocol [CIP]) protocol
- F. Support Simple Network Management Protocol (SNMP) v3 and web-based management
- G. Rapid Spanning Tree Protocol
- H. Internet Group Management Protocol (IGMP) support for Internet Protocol (IP) multicast filtering to enable switches to automatically route messages only to appropriate ports
- Check all received data for validity
  - 1. Discard invalid and defective frames or fragments
- J. Monitor connected TP/TX line segments for short-circuit or interrupt using regular link test pulses in accordance with Institute of Electrical and Electronics Engineers (IEEE) 802.3
- K. Monitor attached fiber-optic lines for open circuit conditions in accordance with IEEE
- L. Dual redundant power supplies
- M. Light-emitting diode (LED) status lights to indicate:
  - 1. Power: Supply voltage present
  - 2. Fault
  - 3. Port status
- N. Environmental rating:
  - 1. Operating temperature: -40 degrees Fahrenheit (°F) to 140°F
  - 2. Humidity: 95 percent relative humidity, non-condensing



Figure 3-1. Allen-Bradley Stratix switch



Source: Rockwell Automation 2021b.

#### 3.2.2 Cost

The costing for Allen-Bradley Stratix switches varies based on features such as the number of ports, managed or unmanaged, DLR connectivity, etc. Retail pricing for a few common Stratix switches that are typically used in PLC panels is shown in Table 3-1 for reference. Although unmanaged options are available for industrial panel-mounted switches they are not recommended. Each switch will need to be sized individually based on the network requirements for that panel.

Table 3-1. Allen-Bradley Stratix switches

Component	Component cost <sup>a</sup>
1783-BMS10CGN Stratix 5700 10-port managed switch	\$3,032
1783-BMS06SA Stratix 5700 6-port managed switch	\$1,352
1783-US5T Stratix 2000 unmanaged switch	\$155

a. Retail cost information obtained from North Coast Electric website (North Coast Electric 2021a-c).

# 3.2.3 Rack-Mounted Switches (with Redundant Network Access)

Rack-mounted network switches should support the following design features and protocols:

- A. Support Ethernet 10/100/1000 Mbps
- B. Ethernet backbone uplink modules for connection to multimode and/or single-mode fiber via type LC connectors

- C. Backbone (trunk) fiber ports shall be via SFP modules
- D. Provide as required (plus at least two spare) 10/100/1000 MBit/s port (twisted pair) at each Ethernet switch
- E. Support SNMP v3 and web-based management
- F. Rapid Spanning Tree Protocol
- G. IGMP support for IP multicast filtering to enable switches to automatically route messages only to appropriate ports
- O. Check all received data for validity
  - 1. Discard invalid and defective frames or fragments
- P. Monitor connected TP/TX line segments for short-circuit or interrupt using regular link test pulses in accordance with IEEE 802.3
- H. Monitor attached fiber-optic lines for open circuit conditions in accordance with IEEE 802.3
- I. Distance vector protocols:
  - 1. Routing Information Protocol (RIP)
  - 2. Border Gateway Protocol
  - 3. Rapid Spanning Tree Protocol
- J. Link state protocols:
  - 1. Open Shortest Path First (OSPF)
- K. Redundancy protocols:
  - 1. Hot Standby Router Protocol (HSRP)
- L. Layer-3 LAN Base: support for static IP routing; support for Switched Virtual Interface (SVI)
- M. Layer-3 IP base: RIP, EIGRP stub, OSPF for routed access, Policy-Based Routing (PBR), IPv4 and IPv6 EIGRP stub routing, IPv6 Unicast Reverse Path forwarding (uRPF), IPV6 PBR, Virtual Router Redundancy Protocol (VRRPv3), Policy Classification Engine, HSRP v6
- N. Layer-3 IP services: OSPF, EIGRP, Border Gateway Protocol (BGP), Intermediate System to Intermediate System (IS-IS), Virtual Routing and Forwarding (VRF-lite)
- O. Software support for IPv4 and IPv6 routing, multicast routing, modular quality of service (QoS), flexible netflow (FNF) and enhanced security features
- P. Dual redundant power supplies

- Q. LED status lights to indicate
  - 4. Power: supply voltage present
  - 5. Fault
  - 6. Port status
- R. Environmental rating:
  - 3. Operating temperature: 32°F to 122°F
  - 4. Humidity: 95 percent relative humidity, non-condensing

Figure 3-2. Cisco Catalyst 9000 family switch



Source: Cisco Systems 2021.

#### 3.2.4 Cost

Like the Industrial panel-mounted switches, the costing for the Cisco Catalyst 9000 series varies based on features such as the number of ports, stackability, etc. Retail pricing for a few common Catalyst 9000 switches is shown in Table 3-2 for reference. Each switch will need to be sized individually based on the OT network requirements for that particular switch.

Table 3-2. Cisco Catalyst 9000 switches

Component	Component cost <sup>a</sup>
C9200-24P-E 24-port managed switch	\$1,416
C9300-48P-A 48-port managed switch	\$5,910

a. Retail cost information obtained from CDW 2021a-b.

## 3.3 Uninterrupted Power Supplies

Uninterrupted Power Supplies (UPS) should be used during a loss of power as a backup power source so that operators can be notified of a power loss and the SCADA system can temporarily maintain monitoring and control functions. The UPS can also help protect against potential damage to your equipment during power surges and spikes.

A tower style UPS like the APC SRT1500XLA should be used within the control panel. A rackmount UPS like APC SRT1500RMXLA-NC and additional rackmount external

batteries like APC SRT48RMBP should be used inside the network rack to provide backup power for approximately 4 hours.

## 3.3.1 Control Panel Uninterrupted Power Supply

Uninterrupted power supplies should support the following design features:

- A. Double Conversion, true online type
- B. Tower type format
- C. Waveform: Pure sine wave
- D. Power factor correction
- E. Provide enough time to notify operator of in pending power loss when UPS is exhausted
- F. Frequency range: 45-65 HZ
- G. Input protection: Fuse or Circuit Breaker
- H. Output voltage regulation: ±1% online and ±2% on battery mode.
- I. Battery: Sealed, lead-acid; maintenance free.
- J. Three stage battery charging for prolonged battery life.
- K. Battery over discharge protection.
- L. Input power cord.
- M. Output receptacles.
- N. Efficiency:
  - 1. Normal mode, minimum: 89%.
  - 2. Efficiency mode, minimum: 95%.
  - 3. Battery mode, minimum: 83%.
- O. Operating temperature: 32 to 104 DEGF.
- P. Relative humidity: 5-95% non-condensing.
- Q. Integral bypass to automatically bypass UPS on selected fault conditions.
- R. Front panel indication of UPS status and alarm conditions.
  - 1. UPS Fault.
  - 2. UPS on battery.
  - 3. UPS is online and operating normally.

- 4. Battery low.
- 5. UPS in bypass.
- S. Utilize network management card to enable remote annunciation of the following conditions.
  - 1. UPS Fault.
  - 2. UPS on battery.
  - 3. UPS is online and operating normally.
  - 4. Battery low.
  - 5. UPS in Bypass
- T. Agency Approvals:
  - 1. Safety: UL 1778.
  - 2. Emissions: FCC Part 15 (Class A).

Figure 3-3. APC Smart-UPS SRT 1500 Tower



Source: APC

## 3.3.2 Cost

The costs for both the UPS as well as the network management card to provide remote monitoring and control of the UPS are shown below in Table 3-3 for reference.

Table 3-3. APC Smart-UPS SRT 1500, UPS Network Management Card

Component	Component cost <sup>a</sup>
APC Smart-UPS SRT 1500VA, 120V, LCD, tower, 6x NEMA 5-15R outlets	\$1,450
UPS Network Management Card 3 with Environmental Monitoring	\$539

a. Retail cost information obtained from APC website (APC 2021a-b).

## 3.3.3 Rackmount Uninterrupted Power Supply

Uninterrupted power supplies should have the following design features:

- A. Double Conversion, true online type
- B. Network Rackmount type format
- C. Waveform: Pure sine wave
- D. Power factor correction
- E. Minimum 4 hours power ride through of 100% of connected load without incoming power.
  - 1. Provide extended battery or batteries as necessary to achieve the specified battery run time.
- F. Frequency range: 45-65 HZ
- G. Input protection: Fuse or Circuit Breaker
- H. Output voltage regulation: ±1% online and ±2% on battery mode.
- I. Battery: Sealed, lead-acid; maintenance free.
- J. Three stage battery charging for prolonged battery life.
- K. Battery over discharge protection.
- L. Input power cord.
- M. Output receptacles.
- N. Efficiency:
  - 1. Normal mode, minimum: 89%.
  - 2. Efficiency mode, minimum: 95%.
  - 3. Battery mode, minimum: 83%.
- O. Operating temperature: 32 to 104 DEGF.



- P. Relative humidity: 5-95% non-condensing.
- Q. Integral bypass to automatically bypass UPS on selected fault conditions.
- R. Front panel indication of UPS status and alarm conditions.
  - 1. UPS Fault.
  - 2. UPS on battery.
  - 3. UPS is online and operating normally.
  - 4. Battery low.
  - 5. UPS in bypass.
- S. Utilize network management card to enable remote annunciation of the following conditions.
  - 1. UPS Fault.
  - 2. UPS on battery.
  - 3. UPS is online and operating normally.
  - 4. Battery low.
  - 5. UPS in Bypass
- T. Agency Approvals:
  - 1. Safety: UL 1778.
  - 2. Emissions: FCC Part 15 (Class A).

Figure 3-4. APC Smart-UPS SRT 1500 Rackmount



Source: APC

Figure 3-5. APC Smart-UPS SRT Battery Pack



Source: APC

#### 3.3.4 Cost

Unlike the tower UPS, the rackmount UPS is bundled with a network management card. Additional Battery Packs may be required to achieve necessary backup time. The battery packs are stackable up to 10 units to provide the necessary backup time. Retail prices for the UPS and the battery pack are shown in Table 3-4 below.

Table 3-4. APC Smart-UPS SRT 1500 Rackmount, APC Smart-UPS SRT Battery Pack

Component	Component cost <sup>a</sup>
APC Smart-UPS SRT 1500VA, 120V, LCD, rackmount, 2U, 6x NEMA 5-15R outlets, w/network card	\$1,975
APC Smart-UPS SRT Battery Pack (1kVA & 1.5kVA) 48V, 594VAh, rackmount, 2U	\$839

b. Retail cost information obtained from APC website (APC 2021c-d).

# 3.4 OT Cybersecurity and Disaster Recovery

This section describes OT cybersecurity and disaster recovery for the Sewer District, including OT access control, OT network monitoring and logging software, and cost.

#### 3 4 1 OT Access Control

To manage users on the OT network, consider implementing Microsoft Active Directory Domain Server (AD DS). AD authenticates and authorizes all users and computers in the domain network, assigns and enforces security polices for all computers, provides authentication and authorization mechanisms, and establishes a framework to deploy other related services.

# 3.4.2 OT Network Monitoring and Logging Software

OT network traffic events should be logged and stored on a centralized server that has enough memory to allow personnel to monitor and troubleshoot network issues. SolarWinds Network Performance Monitor and Kiwi Syslog Sever platform provide centrally managed syslog messages, real-time alerts, storage, and report generation.



Network monitoring software should provide the following features:

- A. Network mapping tool and SNMP scanner
- B. Network monitoring software with alerts
- C. Network Packet Analyzer and Capture (PCAP) tool
- D. Network path analysis and uptime monitor
- E. Infrastructure monitoring

The network monitoring system (NMS) on the local OT network shall be used to monitor the operation of OT system network hosts. Network hosts shall be scanned only after confirming with the vendor that the device can be safely scanned. For example, Allen-Bradley PLC-5 or SLC PLCs are known to be sensitive to scanning.

#### 3.4.3 Cost

Retail pricing for the SolarWinds Network Performance Monitoring and Syslog server logging is shown in Table 3-5 for reference. The SolarWinds NPM SL250 perpetual license provides management of up to 250 elements, which will meet the current and anticipated future needs of the Sewer Utility's OT network.

Table 3-5. Network monitoring and logging software

Component	Component cost <sup>a</sup>
SolarWinds NPM SL250 perpetual license	\$7,279
SolarWinds Kiwi Syslog Server	\$319

a. Retail cost information obtained from SolarWinds 2021a-b.

## 3.5 Multifactor Authentication for HMI Software

Because of increasing cybersecurity risks, a zero-trust security model should be used when accessing the control system equipment, particularly from a remote location outside of the OT network. One additional layer of security that should be considered is multifactor authentication. It is recommended that all mobile devices connecting to the control network equipment should be protected with a multifactor authentication application. There are several multifactor authentication applications including DUO, which has a partnership with Cisco network for more integrated zero-trust security solutions. Most multifactor authentication costing is done on a monthly subscription basis per user at a cost of approximately \$6 to \$10 per user per month based on the features used.

# 3.6 Version Control and Backup Software for OT Systems

This section describes version control and backup software for OT systems, including version control software and secure offline storage and cost for each.

#### 3.6.1 Version Control Software

In a disaster response scenario, it is critical to have current configuration files for ICSs components (PLCs, operator panel, network switches, motor drives, etc.). Rockwell Software FactoryTalk (FT) Asset Centre provides a centralized tool for securing, managing, versioning, tracking, and reporting automation-related asset information across the entire Sewer Utility.

Rockwell Software FT AssetCentre is dedicated software for securing, managing, tracking, and documenting (versioning) the control system assets of the Sewer Utility.

FT AssetCentre will allow Sewer Utility staff to provide archive and disaster recovery for Allen-Bradley equipment, audit trails of programming changes, provide security on access to view and change production PLC code, and maintain controls assets along their useful life cycle. From a maintenance and troubleshooting standpoint FT AssetCentre has the capability to compare versions of Rockwell Software Studio5000 PLC code, which allows users to see programming changes quickly and easily between the two versions being compared. Also, FT AssetCentre can communicate directly with the Studio5000 Logix PLCs to retrieve scheduled backups and/or download the last known version to the processor itself, allowing all backups and version changes must be done automatically.

The graphic shown in Figure 3-6 shows the necessary requirements for the user permissions, network connections (and permissions), licensing, and version control. In the graphic the PLC represents all PLCs within the Sewer Utility's OT network and the user machine represents that field programming PCs. The FT AssetServer, FT Directory, and FT AssetCentre Agent are server PCs housed within the OT network.

AssetCentre Server AssetCentre Agent Logix5K Services FT Activation Manager FTAC Server FTAC Agent RSLinx Path RSLinx Config File Path to Activations Agent Schedule Agent Controller Verification Agent License File Tree Specify FTD Location Security Settings Specify FTD Location FTD Hostname FTD Hostname **Factory Talk** PLC **FT Activation AssetCentre** Directory Server Database FT Administration Console Compiled Logic FTAC Database FT Activation Server Hardware Configuration Windows AD linked User Groups File Repository Activation Repository User Group Definitions Action Group Definitions PLC Program Logic Permissions Security Settings **User Machine** AssetCentre Client RSLinx Studio 5000 Local Working Folder RSLinx Config File RSLinx Path Security Settings PLC Program Logic FT Activation Manager License Specify FTD Location Path to Activations Security Settings FTD Hostname LEGEND Connection enabled by Program Title Configuration Configuration for: User Permissions Networking License Management Version Control File Access

Figure 3-6. Logical relationships of Rockwell software products required for FactoryTalk AssetCentre

Source: Rockwell Automation 2021c.

#### 3.6.2 Version Control Software Cost

Retail pricing for Rockwell Software FT AssetCentre is shown in Table 3-6 for reference. Rockwell Software FT AssetCentre is available in two different formats: perpetual (ownership) and subscription. Perpetual licensing also has the option to pay a yearly support cost.

Table 3-6 highlights the costing associated with the two formats. Also, the Sewer Utility may elect to add the Archive Management of Change module, which would allow the formal approval (and documentation) of changes to be integrated within the FT AssetCentre software, rather than being done separately. Only one server and license is anticipated to be required for the Sewer Utility.

Table 3-6. Network monitoring and logging software

Component	Perpetual <sup>a</sup>	Subscription
FT AssetCentre one-time cost	\$16,300/license	N/A
FT AssetCentre annual cost	\$3,260/server/year	\$6,600/server/year
Archive Management of Change module one-time cost	\$6,000/license	N/A
Archive Management of Change module annual cost	\$1,317/server/year	\$2,439/server/year

a. Retail cost information obtained from Border States Electric 2021a-b.

## 3.6.3 Secure Offline Storage

In the event of a ransomware attack on the Sewer Utility control system, secure offline storage of Sewer Utility control system files (software licenses, configuration files, environmental compliance data, etc.) will be critical for the timely recovery of affected systems. The Sewer Utility should consider creating routine offline copies of ICS files. The Sewer Utility can either self-manage storage of physical media locally or use a company like Iron Mountain to store files at a secure off-site facility either in the cloud or with physical media.

## 3.6.4 Secure Offline Storage Cost

Table 3-7 shows the costing for offline storage via a tape drive and storage media for the backups. Alternatively, off-site storage via a service company like Iron Mountain requires a specific quote but is costed based on the number of virtual machines (VMs) being protected and gigabytes (GB) of data begin backed up. Payments for those services are generally done as a monthly or yearly service cost. An estimated yearly cost is shown in Table 3-8.

Table 3-7. LTO-7 tape drive and storage media

Component	Component cost <sup>a</sup>
HPE StoreEver LTO-7 Ultrium 15000 - tape drive - LTO Ultrium - SAS-2	\$3,274
Quantum - LTO Ultrium 7 x 1 - 6 TB - storage media	\$78

a. Retail cost information obtained from CDW 2021c-d.

Table 3-8. Off-site Storage Service

Component	Component cost <sup>a</sup>
Estimated yearly cost based on 5 VM and 10 GM/month of data	\$896

a. Retail cost information obtained from Panoptics 2021.



This page intentionally left blank.



# 4 PLC Hardware and Software

This section describes the Allen-Bradley CompactLogix 5380 controller and Compact 5000 I/O platform components selected as the new Sewer Utility standard for WWTP and remote pump station PLC design and implementation. The section also provides a summary of the evaluation approach by which these PLC components were selected. The costing provided in this section is current as of the time of writing but may vary greatly depending on continuing supply chain issues.

# 4.1 Allen-Bradley CompactLogix 5380 Controller and Compact 5000 I/O Standard Components

The Allen-Bradley CompactLogix 5380 controller and Compact 5000 I/O platform comprise several component options and features that allow for flexibility in designing a PLC system that aligns with Sewer Utility preferences. The platform does not use a chassis and all modules are DIN-rail-mountable. This section documents the platform components that are recommended for the Sewer Utility to standardize on for future design and implementation projects. A summary table (Table 4-1) comprising the recommended platform components is provided in Section 4.1.6. An example of a PLC rack assembled from controller and I/O modules within this product line is provided in Figure 4-1.

Figure 4-1. Allen-Bradley CompactLogix 5380 controller with Compact 5000 I/O modules



Source: Rockwell Automation 2018a.

#### 4.1.1 Controller

This section describes the controller module and recommended accessories of the Allen-Bradley CompactLogix 5380 PLC platform.

#### Controller Module

The Allen-Bradley CompactLogix 5380 controller family includes several controller modules that feature a range of capabilities in terms of user memory, local I/O module capacity, and supported EtherNet/IP connections. The retail cost for these controllers

currently ranges from roughly \$1,300 to \$16,000 depending on the capabilities of the controller (North Coast Electric 2021d). Selecting a controller that is right-sized for the application can result in component cost savings and is recommended over a one-sizefits-all approach to controller module selection. A 5069-L320ER controller is depicted in Figure 4-2. This controller, for example, has 2 megabytes (MB) of user memory and supports up to 16 local I/O modules and 40 EtherNet/IP connections.

Figure 4-2. Allen-Bradley 5069-L320ER CompactLogix 5380 controller



Source: North Coast Electric 2021e.

All controller modules in the Allen-Bradley 5380 CompactLogix platform include two builtin 1 Gbps Ethernet ports. These ports can be configured for linear or DLR topologies where the ports share one IP address, or the ports can be configured with unique IP addresses to support network segmentation approaches. All controllers have a built-in Universal Serial Bus (USB) port for local programming, configuration, firmware updates, and online edits. Controllers also support Secure Digital (SD) memory cards for storing non-volatile memory.

Note, the CompactLogix 5380 controllers with part numbers ending in ERM, ERMK, and ERP include integrated motion and other advanced features that are not used in typical wastewater applications. The Sewer Utility is unlikely to leverage the additional functionality provided by these controllers, so investment in these higher-cost components is not recommended.

#### Controller Accessories

The Allen-Bradley 5380 CompactLogix controllers can be provided with spring clamp or screw clamp terminals for power connections, which must be ordered separately from the controller module. Either terminal kit would be suitable, but Sewer Utility staff are likely already familiar with screw clamp terminals based on the Sewer Utility's existing ICS infrastructure. For this reason, the Allen-Bradley 5069-RTB64-SCREW power terminal kit is recommended.



An SD memory card is also recommended for non-volatile memory storage of application programming and data. A 2 GB SD memory card (part 1784-SD2) ships with each controller and should provide sufficient memory storage for most, if not all, Sewer Utility applications.

## 4.1.2 EtherNet/IP Adapter

This section describes the Allen-Bradley Compact 5000 I/O EtherNet/IP adapter recommended for the Sewer Utility.

#### EtherNet/IP Adapter

The Allen-Bradley Compact 5000 I/O platform includes two types of EtherNet/IP adapters that serve as communication modules for remote input/output (RIO) racks: the 5069-AENTR and 5069-AEN2TR. Both EtherNet/IP adapters facilitate high-speed data transfer between the connected Compact 5000 I/O modules within the RIO rack and one or more CompactLogix 5380 controllers (or other compatible controllers) on a shared EtherNet/IP network. Both EtherNet/IP adapters also include two built-in 1 Gbps Ethernet ports. These ports can be configured for linear or DLR topologies where the ports share one IP address, or a single port can be used to connect to a star network topology.

The most significant advantage that the 5069-AENTR has over the 5069-AEN2TR is some security features included in what Allen-Bradley refers to as Protected Mode. Among other things, these features are meant to reduce the attack surface of the device by preventing configuration changes, firmware updates, and remote resets from occurring once the adapter is exchanging I/O with a controller. While the 5069-AEN2TR does not support Protected Mode, the adapter has a four-character digital display that communicates status and fault messages, which can help with troubleshooting. The 5069-AEN2TR also supports SD memory cards for storing the adapter's configuration in non-volatile memory. The latter feature allows for the adapter to automatically revert to its last saved configuration on power-up, which allows the device to automatically recover from loss or corruption of internal memory. While both EtherNet/IP adapters have advantages, the enhanced troubleshooting and resilience features of the 5069-AEN2TR are likely to be more beneficial to the Sewer Utility. For this reason, HDR Engineering, Inc. (HDR) recommends that the Sewer Utility standardize on the 5069-AEN2TR for future RIO racks (Figure 4-3).

Figure 4-3. Allen-Bradley 5069-AEN2TR Compact 5000 I/O EtherNet/IP adapter



Source: North Coast Electric 2021f.

#### EtherNet/IP Adapter Accessories

The Allen-Bradley 5069-AEN2TR EtherNet/IP adapter can be provided with spring clamp or screw clamp terminals for power connections, which, like the controller module, must be ordered separately from the EtherNet/IP adapter module. The power terminal kits used for the controller module are identical for the 5069-AEN2TR. As discussed for the controller module, HDR recommends that the Sewer Utility standardize on the Allen-Bradley 5069-RTB64-SCREW power terminal kit.

An SD memory card is also recommended for non-volatile memory storage of adapter configuration. A 1 GB SD memory card, the smallest available from Allen-Bradley, should provide ample memory storage for the adapter configuration.

## 4.1.3 Power Supply Considerations

The CompactLogix 5380 controller and Compact 5000 I/O platform does not include power supply modules like previous generations of the CompactLogix product line. Instead, the system requires the use of external power supplies that are wired to the power terminals on the CompactLogix 5380 controller or Compact 5000 I/O EtherNet/IP adapter. Power is distributed from the controller/adapter to the connected Compact 5000 I/O modules via a module (MOD) power bus. Similarly, power is distributed from the controller/adapter to the instrumentation with I/O connections to the Compact 5000 I/O modules via a sensor/actuator (SA) power bus. Both of these power buses reside at the rear of the controller/adapter and I/O modules and are made continuous by the interconnection of the modules.

Rockwell Automation recommends providing separate external power supplies for the MOD and SA power buses. This approach prevents a scenario where both power buses are lost because of the failure of a single component. The MOD power bus must be supplied with 24 volts direct current (VDC) power. While the SA power bus may be



powered via 24 VDC or 120 volts alternating current (VAC), HDR recommends that the Sewer Utility standardize on 24 VDC for the SA power bus. According to National Fire Protection Association (NFPA) 70E: Standard for Electrical Safety in the Workplace, all voltages 50 volts (V) and greater are considered to present a shock hazard under most circumstances (NFPA 2021). In general, standardizing on the use of 24 VDC controls and power distribution, to the extent possible, within industrial control panels and for field instrumentation can reduce or eliminate shock hazards for personnel.

#### 4.1.4 I/O Modules

This section describes the Allen-Bradley Compact 5000 I/O modules recommended for the Sewer Utility. To reduce shock hazards within industrial control panels and at field instrumentation, HDR recommends that the Sewer Utility standardize on 24 VDC control voltage for all I/O modules on future projects, when feasible. The I/O modules recommended in this section have been selected to conform with this 24 VDC control voltage standard.

#### **Analog Input Module**

HDR recommends that the Sewer Utility standardize on the Allen-Bradley 5069-IF8 module for analog inputs (Figure 4-4). This module supports current- and voltage-based two- and four-wire analog devices. A combination of these device types may be wired to the same module. Each module has eight available channels wired as differential inputs.

Figure 4-4. Allen-Bradley 5069-IF8 Compact 5000 I/O analog input module



Source: North Coast Electric 2021g.

Note, the Compact 5000 I/O platform also includes four-channel analog input modules that support thermocouple and resistance temperature detectors (RTDs) in addition to the two- and four-wire devices supported by the 5069-IF8 analog input module. However, unless thermocouples or RTDs are to be wired to the analog input module, the Sewer Utility would gain no benefit from using a module with fewer available channels.

## **Analog Output Module**

HDR recommends that the Sewer Utility standardize on the Allen-Bradley 5069-OF8 module for analog outputs (Figure 4-5). This module supports current- or voltage-based analog outputs. Each module has eight available channels wired as differential outputs.

Figure 4-5. Allen-Bradley 5069-OF8 Compact 5000 I/O analog output module



Source: North Coast Electric 2021h.

## Digital Input Module

HDR recommends that the Sewer Utility standardize on the Allen-Bradley 5069-IB16F module for digital inputs (Figure 4-6). This module has 16 available channels wired as sinking 24 VDC inputs.



Figure 4-6. Allen-Bradley 5069-IB16F Compact 5000 I/O digital input module



Source: North Coast Electric 2021i.

The 5069-IB16F is the high-speed variant of the 16-channel 24 VDC digital input modules available within the Compact 5000 I/O platform, which allows for connection of higher-speed frequency inputs for counter applications. A common application of counter applications in wastewater is for flow totalization where magmeter frequency outputs are monitored to determine total flows. Given that the high-speed variant of the digital input module retails for roughly \$30 more than the standard digital input module, there is not likely to be considerable cost savings from only using the high-speed module for counter applications. Standardizing on two digital input module types would also require additional spare parts to be managed. For these reasons, HDR recommends that the Sewer Utility standardize on the 5069-IB16F for all digital input applications.

#### Digital Output Module

HDR recommends that the Sewer Utility standardize on the Allen-Bradley 5069-OB16 module for digital outputs (Figure 4-7). This module has 16 available channels wired as sourcing 24 VDC outputs.

Figure 4-7. Allen-Bradley 5069-OB16 Compact 5000 I/O digital output module



Source: North Coast Electric 2021j.

Unlike the previously discussed I/O modules, the 5069-OB16 module does not draw current from the SA power bus. Instead, wiring to an external power supply is required for the module, which allows for the digital output circuits to be isolated from the SA power bus used by other I/O modules.

#### I/O Module Accessories

The Allen-Bradley analog and digital I/O modules can be provided with spring clamp or screw clamp terminals for I/O connections. These terminal kits must be ordered separately from the modules. As discussed for the controller module, HDR recommends that the Sewer Utility standardize on the screw terminal kit variant, the Allen-Bradley 5069-RTB18-SCREW terminal kit.

## 4.1.5 End Cap

All CompactLogix 5380 controller and Compact 5000 I/O racks require installation of a 5069-ECR end cap on the right side of the rightmost module in the rack (see Figure 4-8). The end cap covers the exposed interconnections like the MOD and SA power buses on the rightmost module within the rack. Failure to install the end cap can result in equipment damage and risk of electric shock.



Figure 4-8. Allen-Bradley 5069-ECR CompactLogix 5380 and Compact 5000 I/O end cap



Source: EESCO 2021.

#### 4.1.6 Recommended Standard Component Summary Table

The Allen-Bradley CompactLogix 5380 controller and Compact 5000 I/O platform components recommended for the Sewer Utility standard PLC and RIO components are summarized in Table 4-1.

Table 4-1. Allen-Bradley CompactLogix 5380 controller and Compact 5000 I/O platform standard components summary

Part number	Туре	Description
5069-L3xxER	Controller	CompactLogix 5380 controller: sized per application
5069-RTB64-SCREW	Controller and EtherNet/IP adapter accessories	Screw clamp power terminal kit
1784-SD2	Controller accessories	SD memory card for application and data storage: 2 GB
5069-AEN2TR	EtherNet/IP adapter	Compact 5000 I/O EtherNet/IP adapter for RIO racks
1785-SD1	EtherNet/IP adapter accessories	SD memory card for configuration storage: 1 GB
5069-IF8	Analog input module	Analog input module: 8-channel, differential
5069-OF8	Analog output module	Analog output module: 8-channel, differential
5069-IB16F	Digital input module	Digital input module: 16-channel, high-speed, sinking
5069-OB16	Digital output module	Digital output module: 16-channel, sourcing
5069-RTB18-SCREW	I/O module accessories	Screw clamp terminal kit: 18-pin
5069-ECR	End cap	End cap: required on rightmost module in rack

# 4.2 PLC Programming Software

The Allen-Bradley CompactLogix 5380 controllers are configured and programmed with Rockwell Automation's Studio 5000 Logix Designer Application. This is the same software used to program the Sewer Utility's existing CompactLogix controllers from previous generations of the product line and HDR believes that the Sewer Utility already owns a license for the software. The CompactLogix 5380 controllers have minimum Logix Designer version requirements, which ranges from Version 28.00.00 to Version 29.00.00 for the controllers most suitable to the Sewer Utility's applications (Rockwell Automation 2020).

## 4.3 PLC Platform Evaluation

In TM-2, Section 6.1.1, several requirements were identified for the Sewer Utility's next PLC platform standard. These PLC platform requirements include the following:

- Support integration of an increasing number of Ethernet devices
- Compatible with existing PLC programming logic
- Actively supported by the manufacturer for the next 10 to 15 years
- Manufactured by Allen-Bradley to preserve the Sewer Utility's existing investment in standardizing on Allen-Bradley PLCs

Of the PLC platforms currently offered by Allen-Bradley, several controllers would meet the technical requirements. However, only two controller families are likely to satisfy the long-term active support requirements: ControlLogix 5580 and CompactLogix 5380. These controllers are compared in subsequent paragraphs.

Note, Allen-Bradley also offers a relatively new CompactLogix 5480 line of controllers that runs an instance of Windows 10 Internet of Things (IoT) Enterprise "in parallel" with the Logix control engine (Rockwell Automation 2021a). The intent of this offering is to allow advanced data processing and analytics to be shifted down from central servers to the device level. However, HDR has several concerns regarding the stability of the Windows 10 operating system, its fluctuating demands on device resources, and the high number of vulnerabilities that require frequent patches and updates from Microsoft. Long-term support of the Windows 10 operating system is also dubious, given that the extended support window for Windows 10 is currently slated to end on October 14, 2025 (Microsoft 2021). For these reasons, the CompactLogix 5480 product line was not considered as a viable candidate for the next Sewer Utility PLC platform standard.

## 4.3.1 Ease of Migration

Both the ControlLogix 5580 and CompactLogix 5380 controllers are made by the same manufacturer as the Sewer Utility's existing PLCs and share the same native industrial Ethernet communications protocol (EtherNet/IP) and programming environment as the existing CompactLogix PLCs. When it comes to the future migration of existing CompactLogix controllers, either platform would allow for relatively simple migration of existing programming logic and preservation of existing SCADA communication driver configuration.



The existing Allen-Bradley SLC 5/05 and MicroLogix 1500 PLCs that are recommended for near-term replacement are programmed via Rockwell Automation's RSLogix 500 software, which is a different programming environment from the Studio 5000 Logix Designer Application software used to program both the ControlLogix 5580 and CompactLogix 5380 controllers. The SLC 5/05 PLCs also use a different communication driver to establish data exchange with the Sewer Utility's AVEVA SCADA software. Because both candidate controllers share a common programming environment and require the same EtherNet/IP-based communication driver, neither controller has a distinct advantage when it comes to migrating the existing programming logic to the new platform and would both require transitioning to the communication driver currently used by the Sewer Utility's existing CompactLogix PLCs.

One significant benefit that the CompactLogix 5380 and Compact 5000 I/O platform has over the ControlLogix 5580 platform in terms of ease of migration is its form factor. The footprint of the CompactLogix 5380 and Compact 5000 I/O platform components is considerably smaller, which could reduce the amount of control panel modifications required for replacement of existing PLCs within existing enclosures. When it comes to SLC 5/05 PLC rack replacement, the CompactLogix 5380 and Compact 5000 I/O components could fit within the SLC 5/05 footprint with room to spare, assuming a one-for-one component replacement. The chassis required by the ControlLogix product line have a roughly identical footprint to those required by the SLC 500 product line. The difference in form factor will be more pronounced when it comes to replacement of the MicroLogix 1500 PLCs, which have a smaller footprint than either candidate platform. For these remote pump station control panel applications, the smaller footprint of the CompactLogix 5380 and Compact 5000 I/O components presents a significant advantage.

## 4.3.2 Capability

When determining modern controller requirements, programming application memory size (in megabytes) and maximum number of IP nodes supported are two significant metrics that are commonly considered. The former represents the available memory for the programming file and the data being handled, while the latter, in general terms, indicates how many IP devices the controller can communicate with. Table 4-2 includes a comparison of these metrics for the two Allen-Bradley controller families considered for the Sewer Utility. To provide some context for the comparison, the table also provides the actual memory used by the existing CKTP ultraviolet (UV) system PLC, which appears to have the largest memory usage of all PLCs in the Sewer Utility's inventory. For additional context, the table also includes an estimate of the maximum number of IP nodes that will need to communicate with any one PLC in the future Sewer Utility SCADA system. This estimate is based on the solids processing building (SPB) PLC (PLC 7105) and a scenario where the existing SPB motor control centers (MCCs) are upgraded with EtherNet/IP motor controllers and CKTP expansion adds loads to these MCCs. An allowance for 10 new Ethernet-capable instruments is also included in this estimation.

Table 4-2. Allen-Bradley CompactLogix 5380 and ControlLogix 5580 controller comparison

Controller family	Application memory size (MB) <sup>a</sup>	Max IP nodes supported <sup>a</sup>
CompactLogix 5380 standard controller	0.6–10.0	16–180
ControlLogix 5580 standard controller	3–40	100–300
Existing CKTP UV SCC 3100 controller memory used	~1.54	
Estimated maximum IP nodes communicating to one controller in future Sewer Utility SCADA system		~75

a. Metrics obtained from Rockwell Automation literature (Rockwell Automation 2018b and Rockwell Automation 2019).

While PLC memory usage will increase somewhat as the Sewer Utility acquires more data from Ethernet-capable devices in the future, it is not anticipated that the Sewer Utility will have applications that exceed the upper limit on the ControlLogix 5380 memory size range in the next 10 to 15 years. Nor is it anticipated that a single PLC within the Sewer Utility SCADA system will need to communicate with more IP nodes than the CompactLogix 5380 controllers can support within that time frame. Based on memory size and the number of IP nodes supported, the CompactLogix 5380 presents a more right-sized option for the Sewer Utility's needs.

Another consideration for modern controllers is Ethernet communication speed capabilities. Both the CompactLogix 5380 and ControlLogix 5580 controllers are capable of 1 Gbps Ethernet communications. ICSs are gradually migrating from 100 Mbps port speeds to support higher data communication rates at the controller and device level, and 1 Gbps is quickly becoming the new standard. Having controllers that support higher port speeds will allow the Sewer Utility to benefit from other proposed improvements to the Sewer Utility SCADA system network infrastructure and increase the likelihood that the controllers remain compatible with equipment that may be installed in the future.

One of the major advantages that the ControlLogix 5580 controllers have over the CompactLogix 5380 controllers is their support for controller redundancy. However, as identified in TM-2, controller redundancy is not a requirement for the Sewer Utility. While the ControlLogix 5580 controllers have some additional technical functionality and features, like hot-swappable I/O modules, these are not critical features that would present sufficient drivers to select an oversized controller on their merits alone.

#### 4.3.3 Cost

In terms of cost, the CompactLogix 5380 controller and associated Compact 5000 I/O components are the clear choice over the ControlLogix product line. Retail pricing for components required for a single, hypothetical seven-slot PLC rack with similar I/O capabilities is provided in Table 4-3 for reference. Note, because of the difference in I/O module costs, the cost delta will become more pronounced as the number of I/O modules in the racks increases.



Table 4-3. Allen-Bradley CompactLogix 5380 and ControlLogix 5580 component cost comparison

Component	CompactLogix 5380/ Compact 5000 I/O component cost <sup>a</sup>	ControlLogix 5580/ ControlLogix I/O component cost <sup>a</sup>
7-slot chassis	Not required	\$632
Rack power supply module (24 VDC)	Not required	\$1,137
Controller module, 3 MB, support for at least 60 IP nodes	\$5,586	\$6,404
Analog input module, 8-channel	\$867	\$1,327
Analog output module, 8-channel	\$1,520	\$2,494
Digital input module, 16-channel, high-speed	\$292	\$616
Digital output module, 16-channel	\$340	\$689
Slot filler (quantity of 2)	Not required	\$70
I/O module terminal blocks (quantity of 4)	\$248	\$384
Controller module terminal blocks	\$34	Not required
End cap	\$25	Not required
Total	\$8,912	\$13,753

a. Retail cost information obtained from North Coast Electric website (North Coast Electric 2021d).

This page intentionally left blank



# 5 References

#### APC

- 2021a APC Smart-UPS SRT 1500VA, 120V, LCD, tower, 6x NEMA 5-15R outlets. https://www.apc.com/shop/us/en/products/APC-Smart-UPS-SRT-1500VA-120V-LCD-rackmount-w-kit-6x-NEMA-5-15R-outlets/P-SRT1500XLA. Viewed on December 1, 2021.
- 2021b UPS Network Management Card 3 with Environmental Monitoring.

  https://www.apc.com/shop/us/en/products/UPS-Network-Management-Card-3-withEnvironmental-Monitoring/P-AP9641?Chat\_CSC\_ID=a50002. Viewed on December 1,
  2021
- 2021c APC Smart-UPS SRT 1500VA, 120V, LCD, rackmount, 2U, 6x NEMA 5-15R outlets, w/network card.
  https://www.apc.com/shop/us/en/products/APC-Smart-UPS-SRT-1500VA-120V-LCD-rackmount-2U-6x-NEMA-5-15R-outlets-w-network-card/P-SRT1500RMXLA-NC?Chat CSC ID=a50002. Viewed on December 1, 2021.
- 2021d APC Smart-UPS SRT Battery Pack (1kVA & 1.5kVA) 48V, 594VAh, rackmount, 2U. https://www.apc.com/shop/us/en/products/APC-Smart-UPS-SRT-Battery-Pack-1kVA-1-5kVA-48V-594VAh-rackmount-2U/P-SRT48RMBP?Chat\_CSC\_ID=a50002. Viewed on December 1, 2021.

#### **Border States Electric**

- 2021a FactoryTalk AssetCentre Perpetual and Subscription Costing. Obtained on August 27, 2021.
- 2021b FactoryTalk AssetCentre Archive Management of Change Module Perpetual and Subscription Costing. Obtained on August 27, 2021.

#### **CDW**

- 2021a Cisco Catalyst 9200 Network Essentials switch 24 ports smart rack. https://www.cdw.com/product/cisco-catalyst-9200-network-essentials-switch-24-ports-smart-rack/5638586?pfm=srh. Viewed on August 14, 2021.
- 2021b Cisco Catalyst 9300 Network Advantage switch 48 ports managed rack. https://www.cdw.com/product/cisco-catalyst-9300-network-advantage-switch-48-ports-managed-rac/4696725?pfm=srh. Viewed on August 14, 2021.
- 2021c HPE StoreEver LTO-7 Ultrium 15000 tape drive LTO Ultrium SAS-2. https://www.cdw.com/product/hpe-storeever-lto-7-ultrium-15000-tape-drive-lto-ultrium-sas-2/4510331?pfm=srh. Viewed on September 8, 2021.
- 2021d Quantum LTO Ultrium 7 x 1 6 TB storage media. https://www.cdw.com/product/quantum-lto-ultrium-7-x-1-6-tb-storage-media/3936476?pfm=srh. Viewed on September 8, 2021.

#### Cisco Systems

2021 Cisco Catalyst 9000 Series. https://www.cisco.com/c/en/us/products/collateral/switches/catalyst-9000/nb-09-cat-9k-aag-cte-en.html. Viewed on September 5, 2021.

#### **EESCO**

2021 Allen-Bradley End Cap. https://buy.eescodist.com/Automation-and-Control/PLC-HMI-and-Logic-Devices/PLC-Components/PLC-End-Caps/ROCKWELL-AUTOMATION/End-

Cap-with-Adapter-Required-on-Right-Most-I-O-Module/5069-ECR/p/88950833414-1?dimId=1gn8i5m. Viewed on March 2. 2021.

#### Microsoft

2021 Microsoft Active Directory Server. https://docs.microsoft.com/en-us/troubleshoot/windows-server/identity/active-directory-overview. Viewed on September 3, 2021.

#### NFPA (National Fire Protection Association)

2021 NFPA 70E: Standard for Electrical Safety in the Workplace.

#### North Coast Electric

- 2021a Allen-Bradley 1783-BMS10CGN Stratix 5700 10-Port Managed Switch. https://www.northcoast.com/product/detail/911180/allen-bradley-rockwell-1783-bms10cgn. Viewed on September 8, 2021.
- 2021b Allen-Bradley 1783-BMS06SA Stratix 5700 6-Port Managed Switch. https://www.northcoast.com/product/detail/832979/allen-bradley-rockwell-1783-bms06sa. Viewed on September 8, 2021.
- 2021c Allen-Bradley 1783-US5T Stratix 2000 5-Port Unmanaged Switch. https://www.northcoast.com/product/detail/950131/allen-bradley-rockwell-1783-us5t. Viewed on September 8, 2021.
- 2021d Various component costs published online. https://www.northcoast.com. Viewed on March 1–2, 2021.
- 2021e Allen-Bradley 5069-L320ER. https://www.northcoast.com/product/detail/AB-CMX-5069-L320ER?s=1271268. Viewed on March 1, 2021.
- 2021f *Allen-Bradley 5069-AEN2TR*. https://www.northcoast.com/product/detail/AB-CMX-5069-AEN2TR?s=1271075. Viewed on March 2, 2021.
- 2021g Allen-Bradley 5069-IF8. https://www.northcoast.com/product/detail/AB-CMX-5069-IF8?s=1276577. Viewed on March 2, 2021.
- 2021h Allen-Bradley 5069-OF8. https://www.northcoast.com/product/detail/AB-CMX-5069-OF8?s=1276578. Viewed on March 2, 2021.
- 2021i Allen-Bradley 5069-IB16F. https://www.northcoast.com/product/detail/AB-CMX-5069-IB16F?s=1337024. Viewed on March 2, 2021.
- 2021j Allen-Bradley 5069-OB16. https://www.northcoast.com/product/detail/AB-CMX-5069-OB16?s=1271079. Viewed on March 2, 2021.

#### **Panoptics**

Backup-as-a-Service. https://www.panoptics.com/services/datacenter-connectivity/backup-as-a-service/#section 5. Viewed on September 6, 2021.

#### **Rockwell Automation**

- 2018a Migration Solutions: CompactLogix 1768-L4x Controller to CompactLogix 5380 Controller. https://literature.rockwellautomation.com/idc/groups/literature/documents/pp/migrat-pp037 -en-e.pdf. November.
- 2018b ControlLogix 5580 Controllers. Publication 1756-PP001E-EN-P.
- 2019 CompactLogix 5380 Controllers. Publication 5069-PP003E-EN-P.
- 2020 CompactLogix 5380 and Compact GuardLogix 5380 Controllers. https://literature.rockwellautomation.com/idc/groups/literature/documents/um/5069-um001\_-en-p.pdf. August.



- 2021a *CompactLogix 5480 Controllers.* https://www.rockwellautomation.com/en-us/products/hardware/allen-bradley/programmable-controllers/small-controllers/compactlogix-family/compactlogix-5480-controllers.html. Viewed on March 5, 2021.
- 2021b Stratix 5400 Industrial Ethernet Switches. https://www.rockwellautomation.com/en-us/products/hardware/allen-bradley/network-security-and-infrastructure/ethernet-networks/stratix-5400-industrial.html. Viewed on September 10, 2021.
- 2021c FactoryTalk AssetCentre Getting Results Guide. https://literature.rockwellautomation.com/idc/groups/literature/documents/gr/ftac-gr002\_en-e.pdf. Viewed on July 27, 2021.

#### SolarWinds Worldwide, LLC

- 2021a Network Performance Monitor. https://www.solarwinds.com/network-performance-monitor. Viewed on September 5, 2021.
- 2021b Kiwi Syslog Server. https://www.solarwinds.com/kiwi-syslog-server. Viewed on September 5, 2021.







# TM-4: System Architecture Conceptual Design


Sewer Utility SCADA Master Plan


Kitsap County Public Works Sewer Utility Division


October 26, 2021



- All mobile wireless communications will use VPN for AAA (authentication, authorization, accounting) and encryption.
- Tablets will be updated with Group Policy Objects from Active Directory. This excludes devices based on Android or IOS operating systems

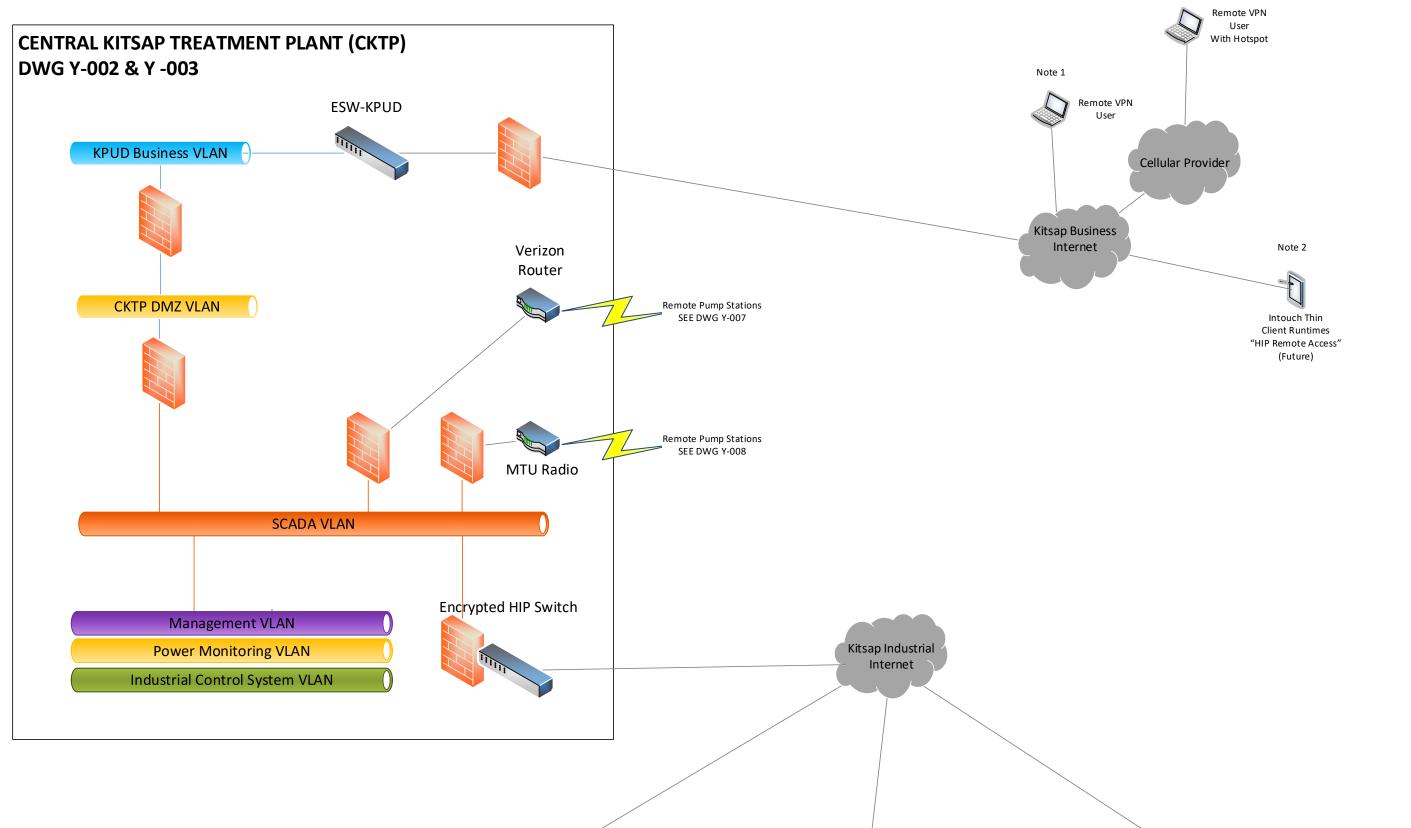

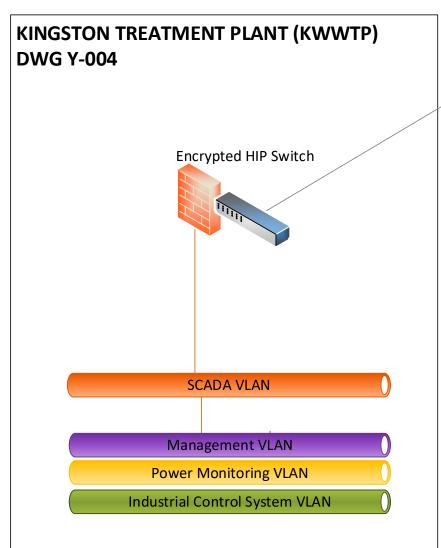

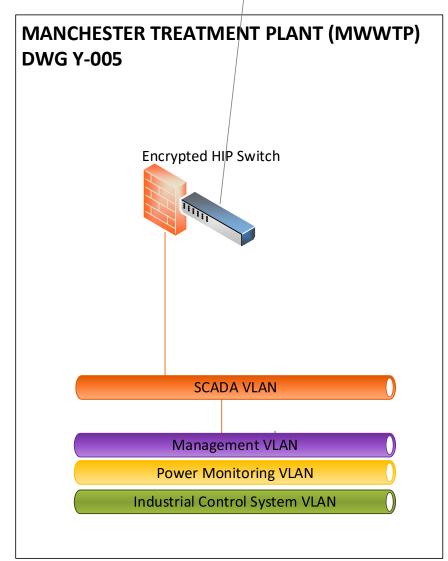

SUQUAI DWG Y-	MISH TREATMENT PLANT (SWWTP) 006
	Encrypted HIP Switch
	SCADA VI ANI
	SCADA VLAN
	SCADA VLAN  Management VLAN

NO	DATE	BY	APPR	REVISIONS



HDR Engineering, Inc. 1917 S. 67<sup>th</sup> Street Omaha, NE 68106 402.399.1000

DESIGNED BY DATE

DRAWN BY DATE

CHECKED BY DATE

_	APPROVED BY	DATE
	10231983	
	HDR PROJECT NUMBER	DATE
	KC-205-20	
	CLIENT PROJECT NUMBER	DATE



Kitsap County Public Works
Sewer Utility Division
12351 Brownsville Highway NE
Poulsbo, WA 98370


KITSAP COUNTY PUBLIC WORKS SEWER UTILITY DIVISION SEWER UTILITY SCADA MASTER PLAN


SCALE: NONE


CONCEPT DIAGRAM KITSAP SCADA OVERVIEW


DRAWING: Y-001

SHEET <u>1</u> OF <u>8</u>

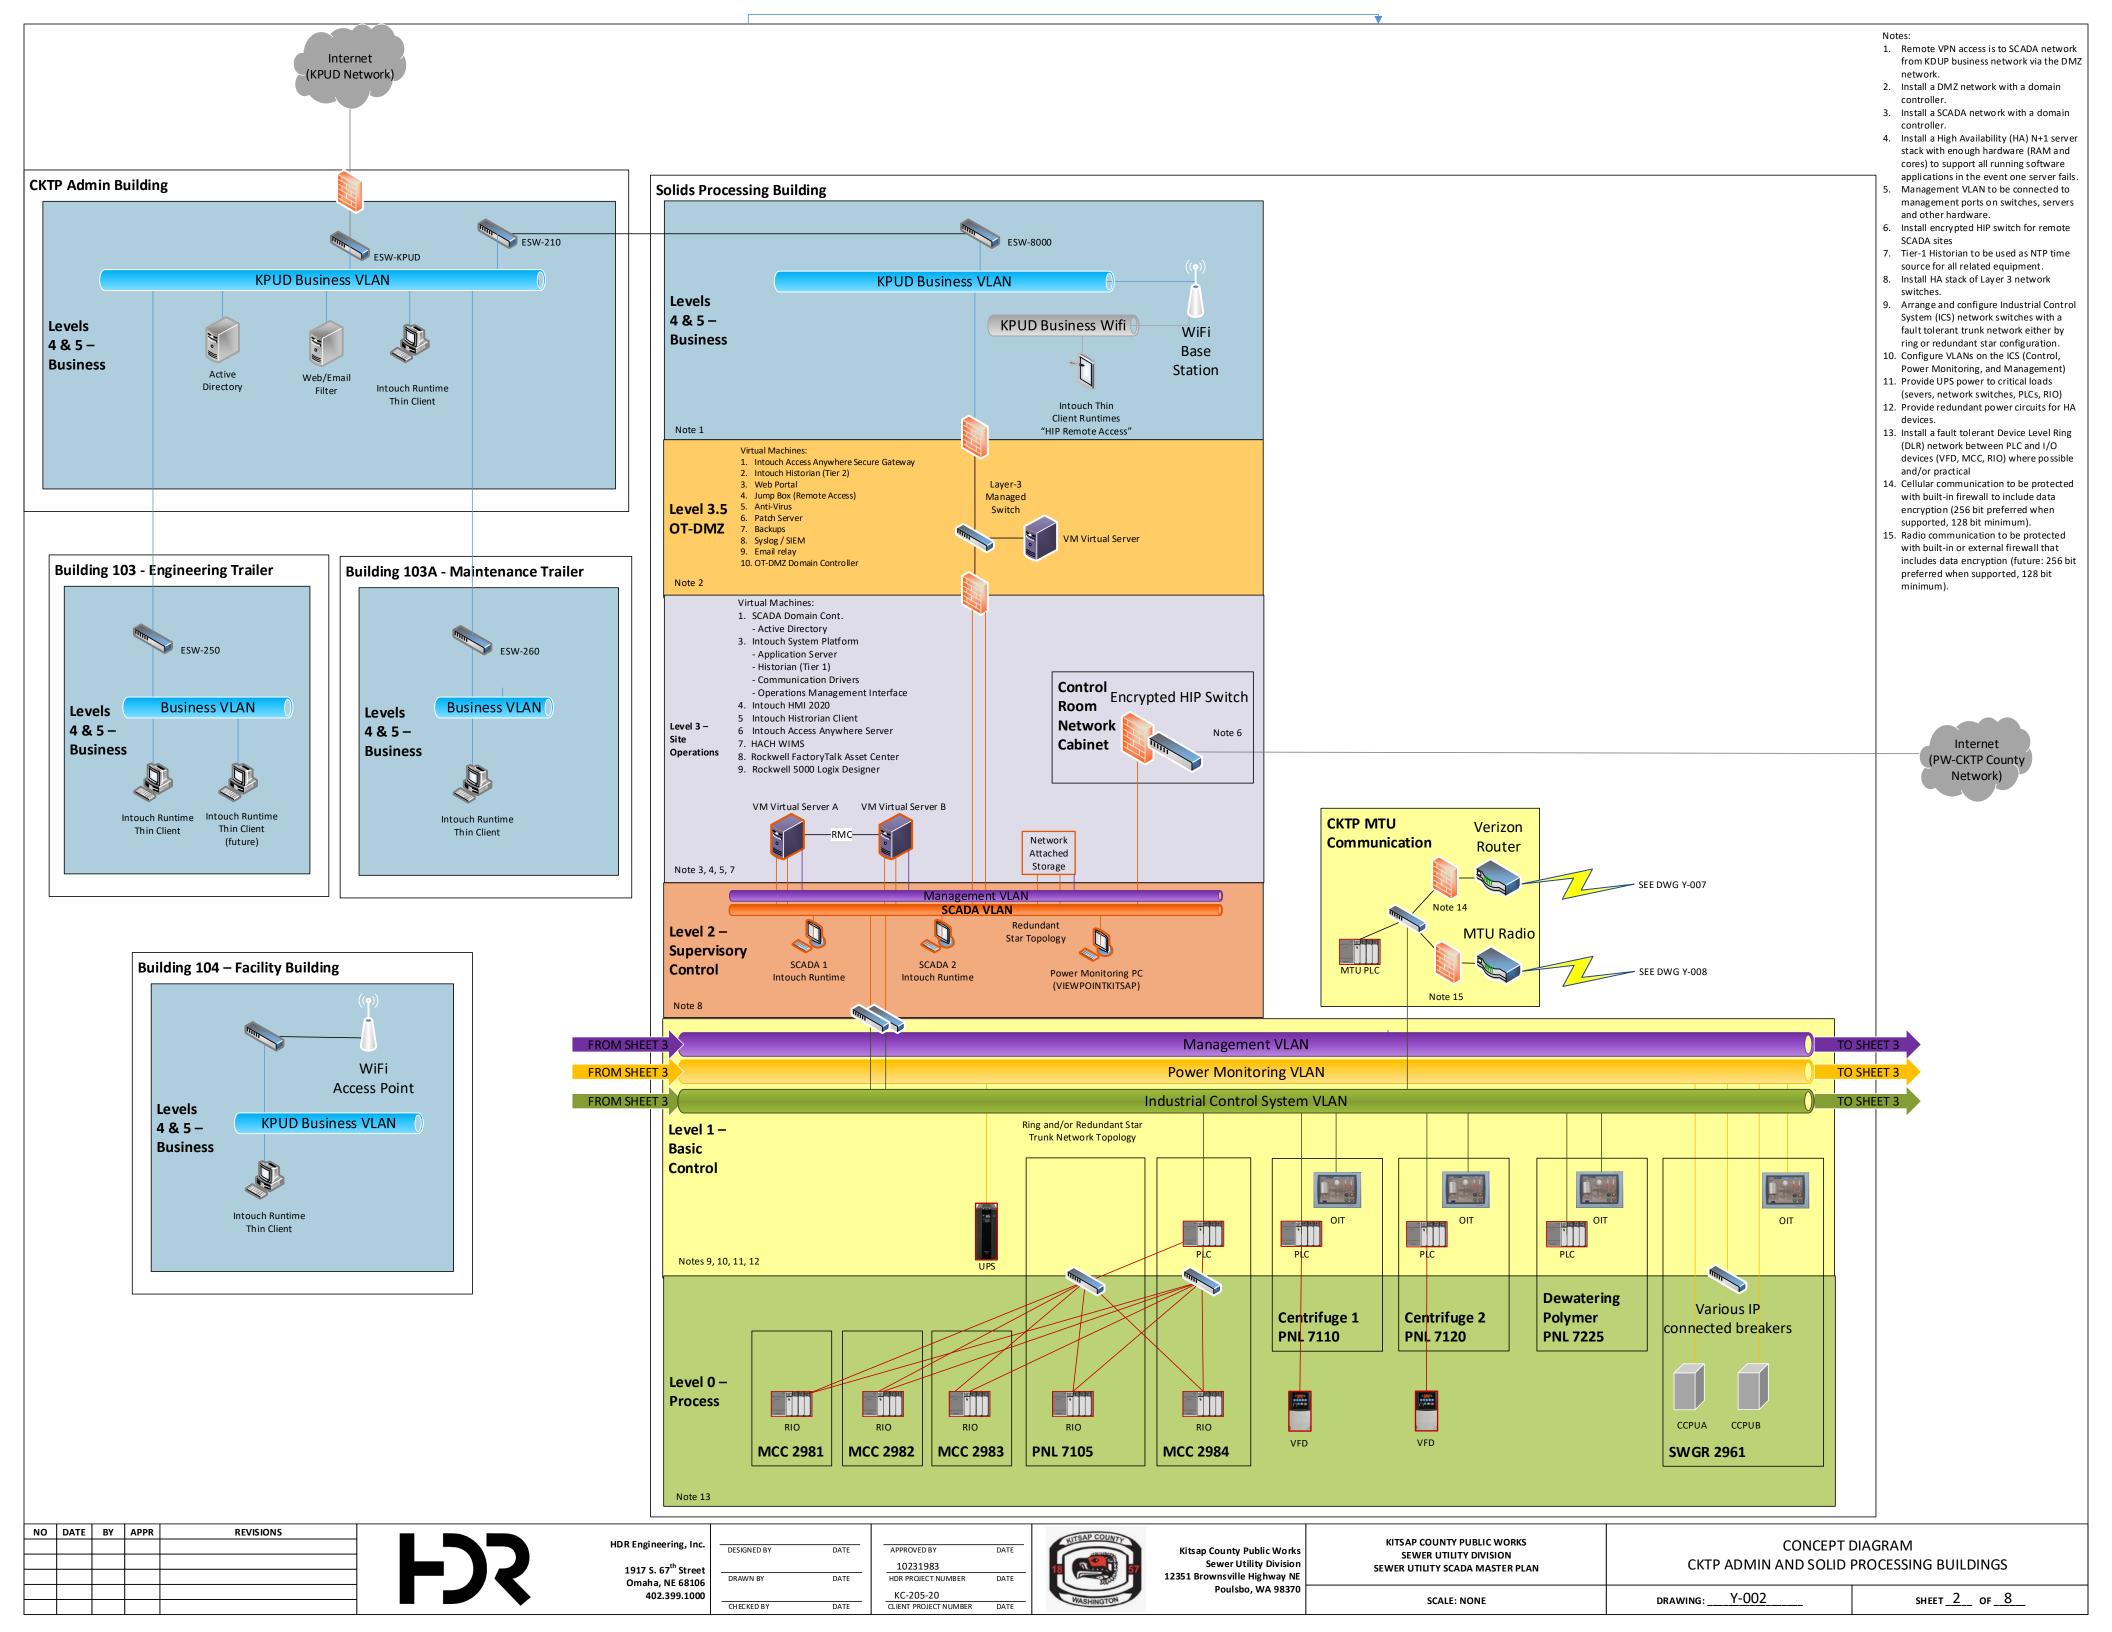

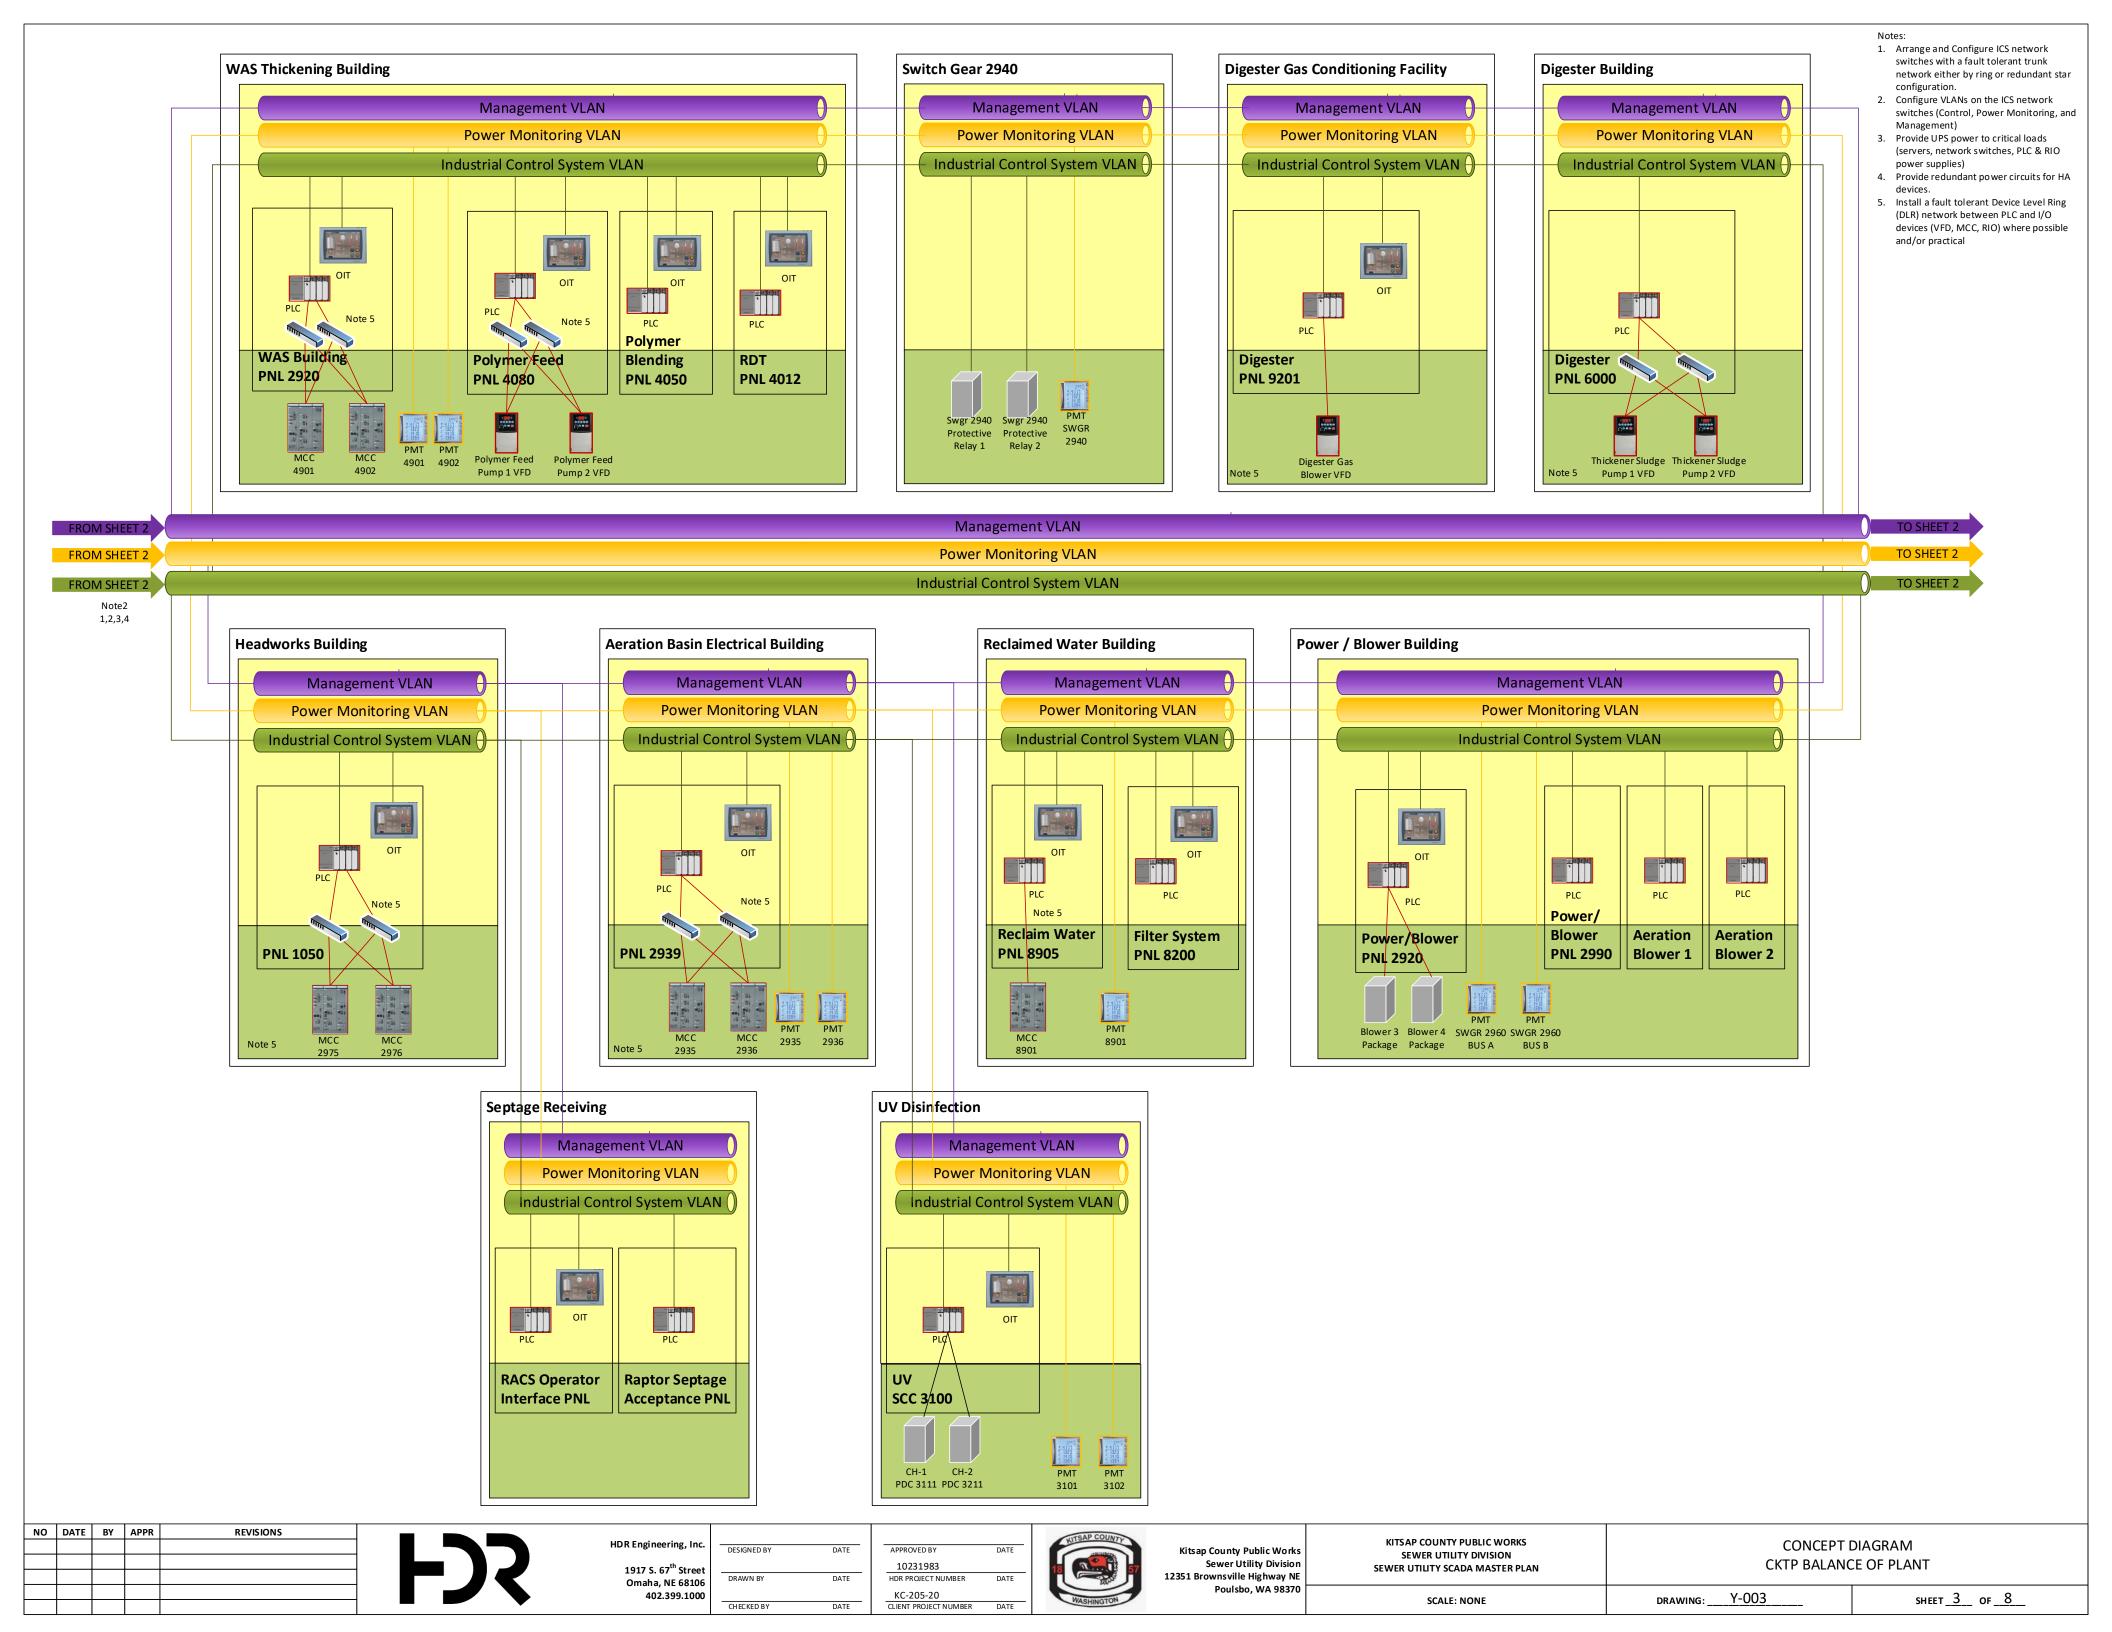

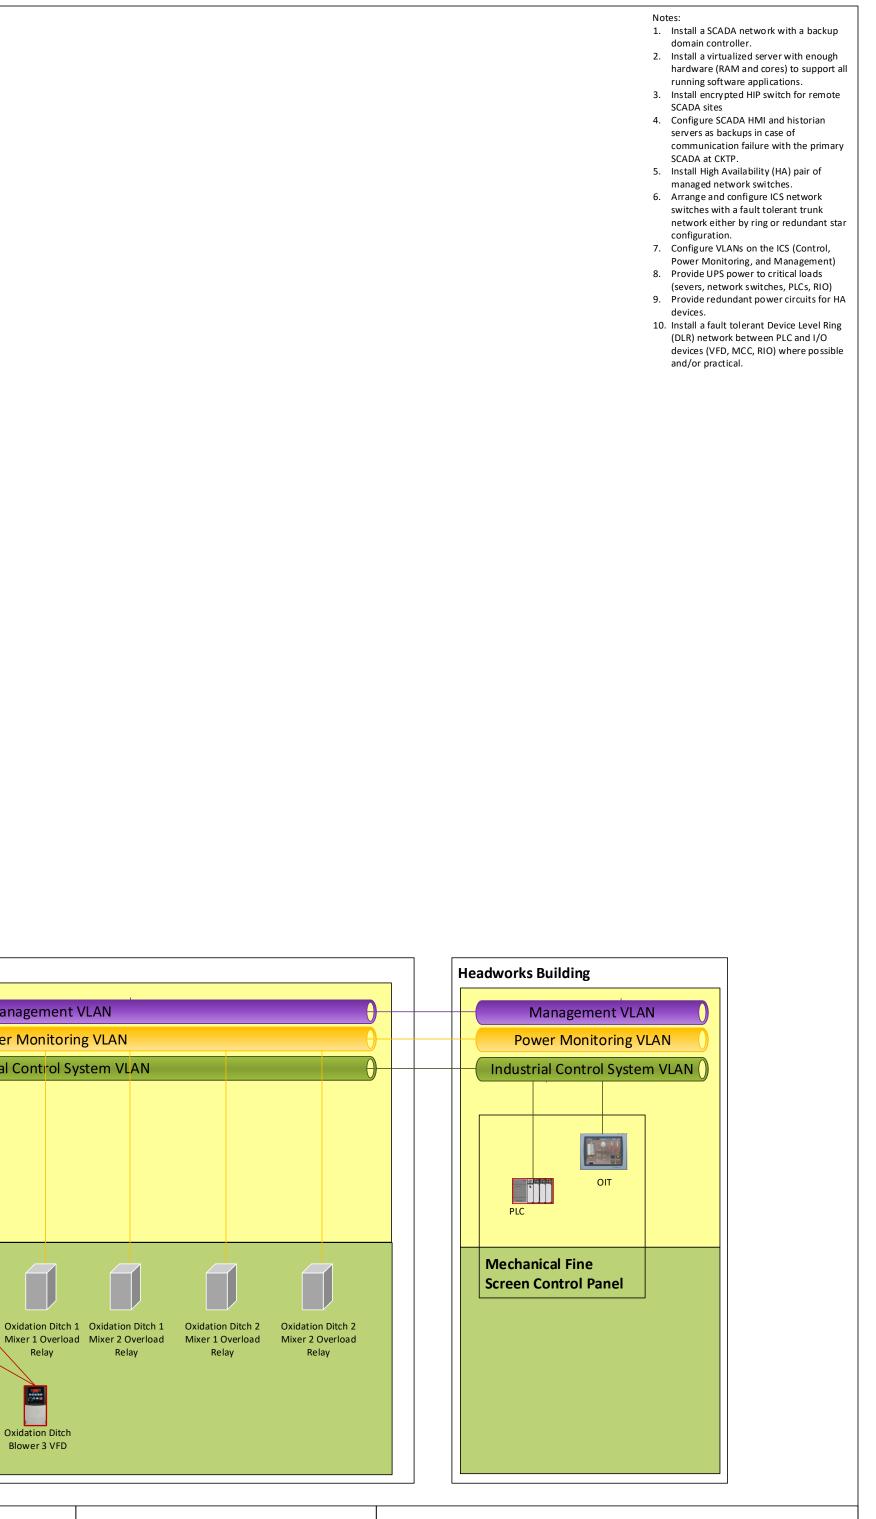

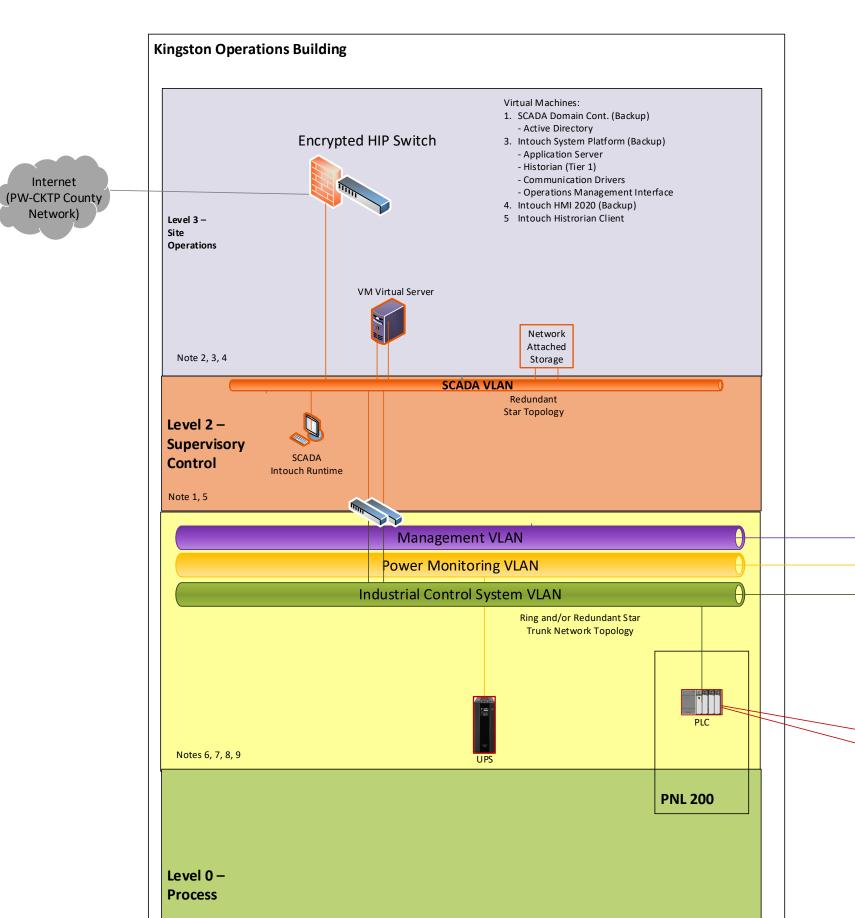

Note 10 APPROVED BY 10231983 DRAWN BY DATE HDR PROJECT NUMBER KC-205-20
CLIENT PROJECT NUMBER



OIT

Kitsap County Public Works **Sewer Utility Division** 12351 Brownsville Highway NE Poulsbo, WA 98370

Oxidation Ditch Oxidation Ditch Blower 1 VFD Blower 2 VFD Blower 3 VFD

Relay

Management VLAN

Power Monitoring VLAN

Industrial Control System VLAN

KITSAP COUNTY PUBLIC WORKS SEWER UTILITY DIVISION SEWER UTILITY SCADA MASTER PLAN

SCALE: NONE

CONCEPT DIAGRAM KINGSTON WWTP

DRAWING: Y-004

SHEET 4 OF 8

NO DATE BY APPR REVISIONS

Note 10


Internet

HDR Engineering, Inc. 1917 S. 67<sup>th</sup> Street Omaha, NE 68106

402.399.1000 CHECKED BY

**PNL 300** 

**Process Building** 

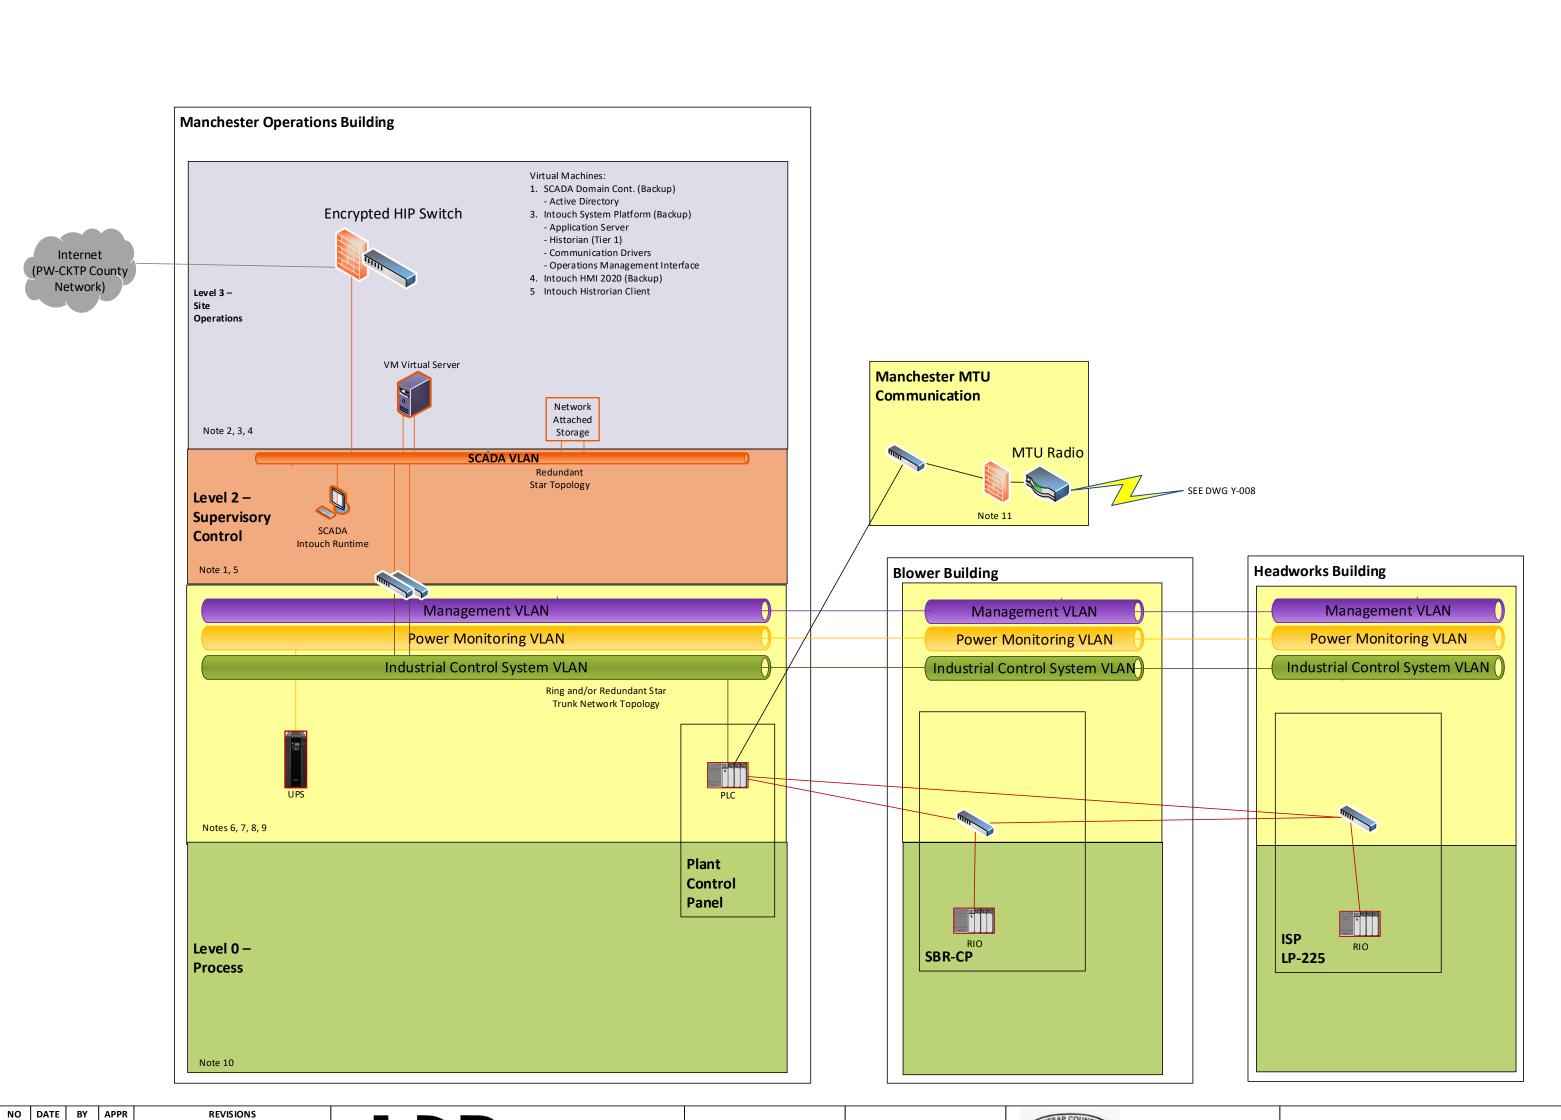


KITS AP COUNTY PUBLIC WORKS HDR Engineering, Inc. CONCEPT DIAGRAM APPROVED BY Kitsap County Public Works SEWER UTILITY DIVISION MANCHESTER WWTP 10231983 **Sewer Utility Division** SEWER UTILITY SCADA MASTER PLAN 1917 S. 67<sup>th</sup> Street 12351 Brownsville Highway NE DRAWN BY DATE HDR PROJECT NUMBER Omaha, NE 68106 Poulsbo, WA 98370 KC-205-20
CLIENT PROJECT NUMBER 402.399.1000 DRAWING: Y-005 SHEET <u>5</u> of <u>8</u> SCALE: NONE CHECKED BY

Notes:

- Install a SCADA network with a backup domain controller.
- Install a virtualized server with enough hardware (RAM and cores) to support all running software applications.
- Install encrypted HIP switch for remote SCADA sites
   Configure SCADA HMI and historian
- Configure SCADA HMI and historian servers as backups in case of communication failure with the primary SCADA at CKTP.
- Install High Availability (HA) pair of managed network switches.
- Arrange and configure ICS network switches with a fault tolerant trunk network either by ring or redundant star configuration.
- Configure VLANs on the ICS (Control, Power Monitoring, and Management)
   Provide UPS power to critical loads
- (severs, network switches, PLCs, RIO)

  9. Provide redundant power circuits for H
- 9. Provide redundant power circuits for HA devices.
- Install a fault tolerant Device Level Ring (DLR) network between PLC and I/O devices (VFD, MCC, RIO) where possible and/or practical
- Radio communication to be protected with built-in or external firewall that includes data encryption (future: 256 bit preferred when supported, 128 bit minimum).

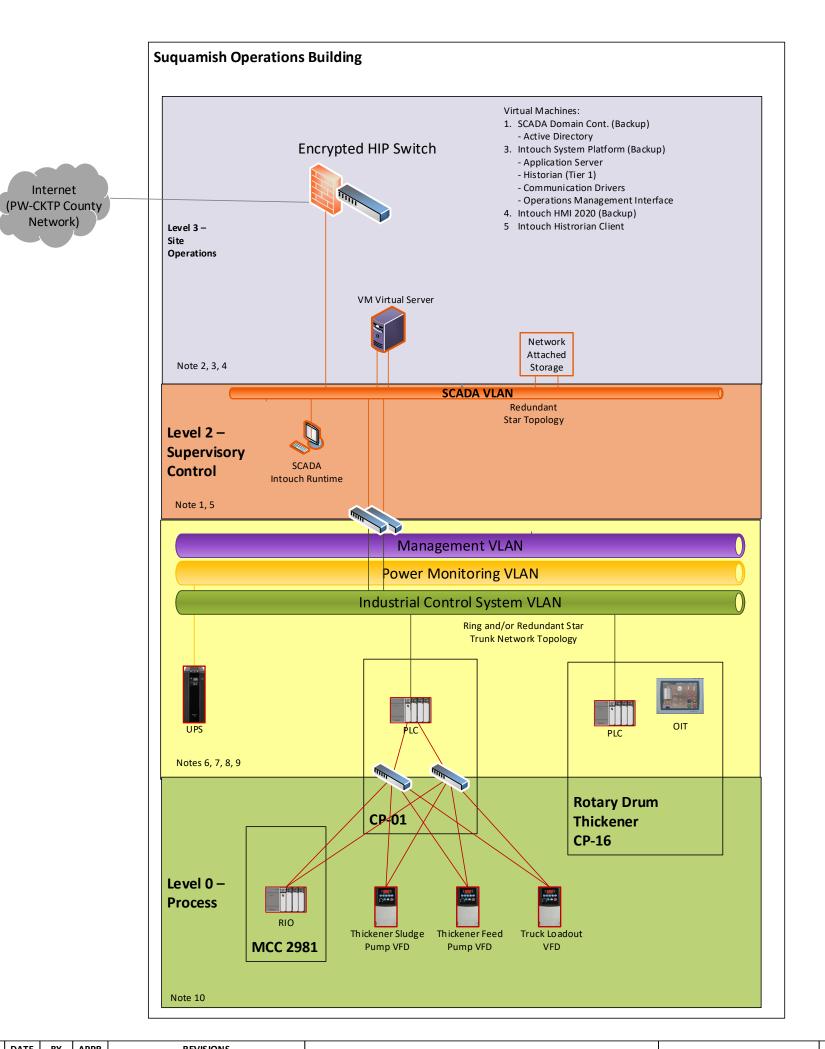

NO DATE BY APPR

Internet

HDR Engineering, Inc. 1917 S. 67<sup>th</sup> Street Omaha, NE 68106 402.399.1000

APPROVED BY 10231983 HDR PROJECT NUMBER KC-205-20
CLIENT PROJECT NUMBER



Kitsap County Public Works **Sewer Utility Division** 12351 Brownsville Highway NE Poulsbo, WA 98370

KITS AP COUNTY PUBLIC WORKS SEWER UTILITY DIVISION SEWER UTILITY SCADA MASTER PLAN

SCALE: NONE

CONCEPT DIAGRAM

DRAWING: Y-006

SUQUAMISH WWTP

SHEET <u>6</u> OF <u>8</u>

1. Install a SCADA network with a backup

2. Install a virtualized server with enough hardware (RAM and cores) to support all running software applications. 3. Install encrypted HIP switch for remote

4. Configure SCADA HMI and historian servers as backups in case of

5. Install High Availability (HA) pair of managed network switches. 6. Arrange and configure ICS network switches with a fault tolerant trunk network either by ring or redundant star

7. Configure VLANs on the ICS (Control, Power Monitoring, and Management) 8. Provide UPS power to critical loads (severs, network switches, PLCs, RIO) 9. Provide redundant power circuits for HA

10. Install a fault tolerant Device Level Ring (DLR) network between PLC and I/O devices (VFD, MCC, RIO) where possible

communication failure with the primary

domain controller.


SCADA sites

SCADA at CKTP.

configuration.

devices.

and/or practical

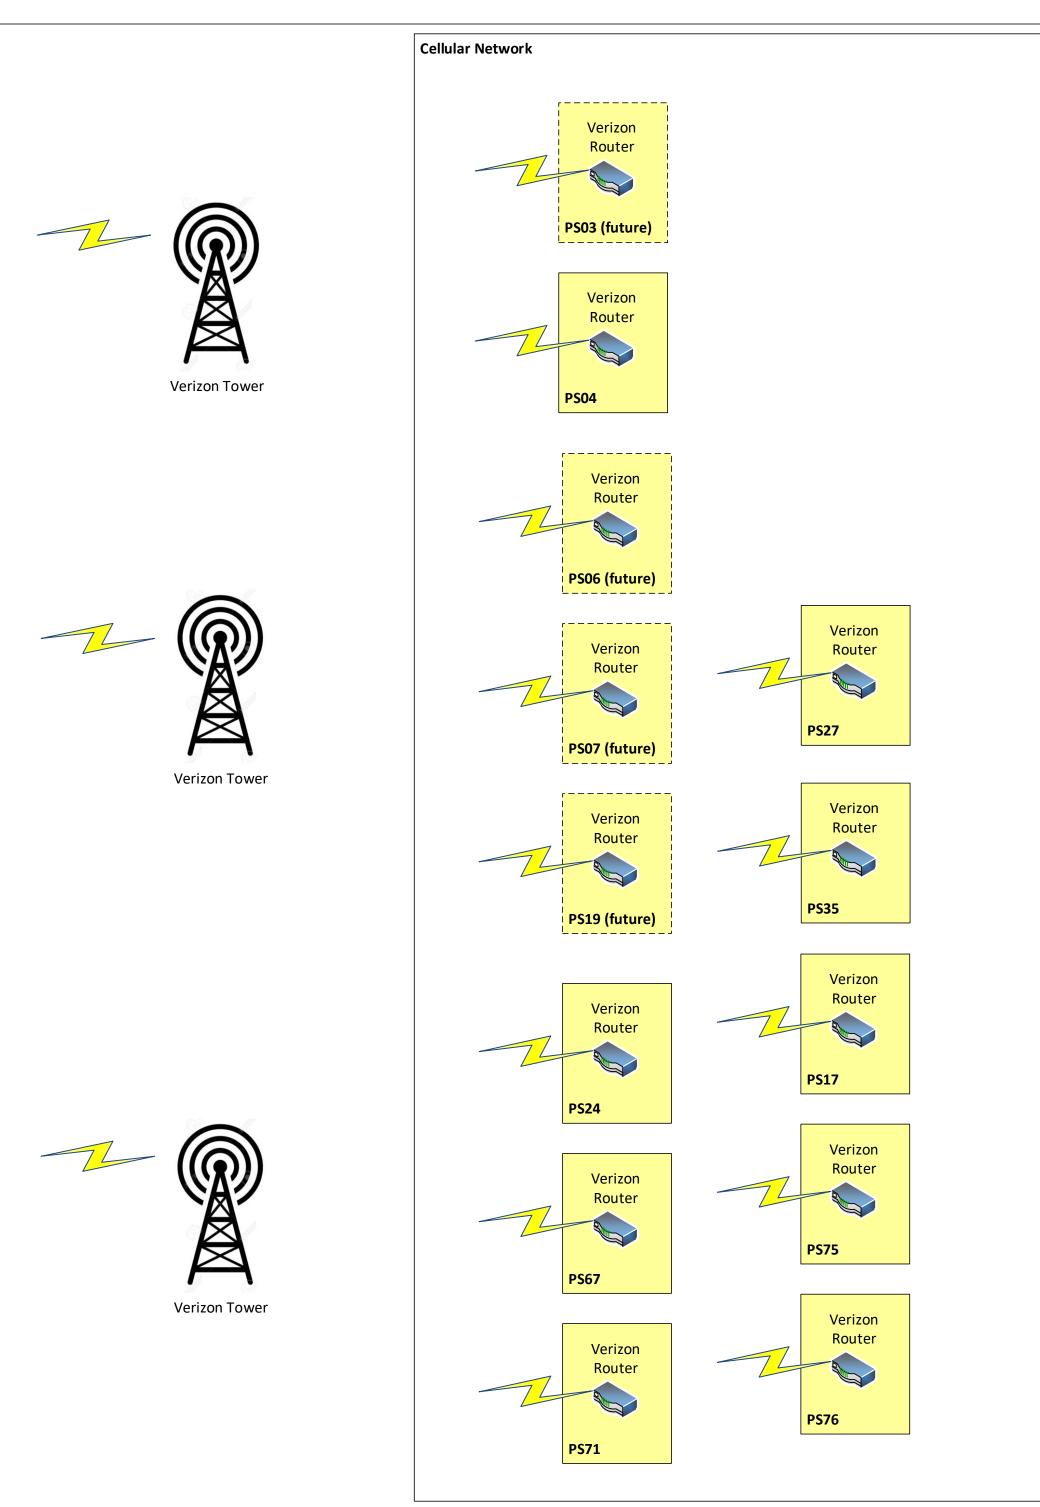

	REVISIONS	APPR	BY	DATE	NO
ĺ					
ĺ					
1					

Verizon

Router

CKTP MTU

Note 1, 2, 3

Communication DWG Y-002



Verizon Tower

HDR Engineering, Inc. 1917 S. 67<sup>th</sup> Street Omaha, NE 68106 402.399.1000 DESIGNED BY DATE

DRAWN BY DATE

CHECKED BY DATE

APPROVED BY DATE

10231983
HDR PROJECT NUMBER DATE

KC-205-20
CLIENT PROJECT NUMBER DATE



Kitsap County Public Works
Sewer Utility Division
12351 Brownsville Highway NE
Poulsbo, WA 98370

KITSAP COUNTY PUBLIC WORKS SEWER UTILITY DIVISION SEWER UTILITY SCADA MASTER PLAN

SCALE: NONE

CONCEPT DIAGRAM: KITSAP CELLULAR NEWORK

1. Verizon Private LTE Machine to Machine

2. Cellular communication to be protected with either built-in firewall or an external


3. Cellular communication to provide data encryption (256 bit preferred, 128 bit

Network

minimum).

security appliance.

DRAWING: Y-007 SHEET 7 OF 8

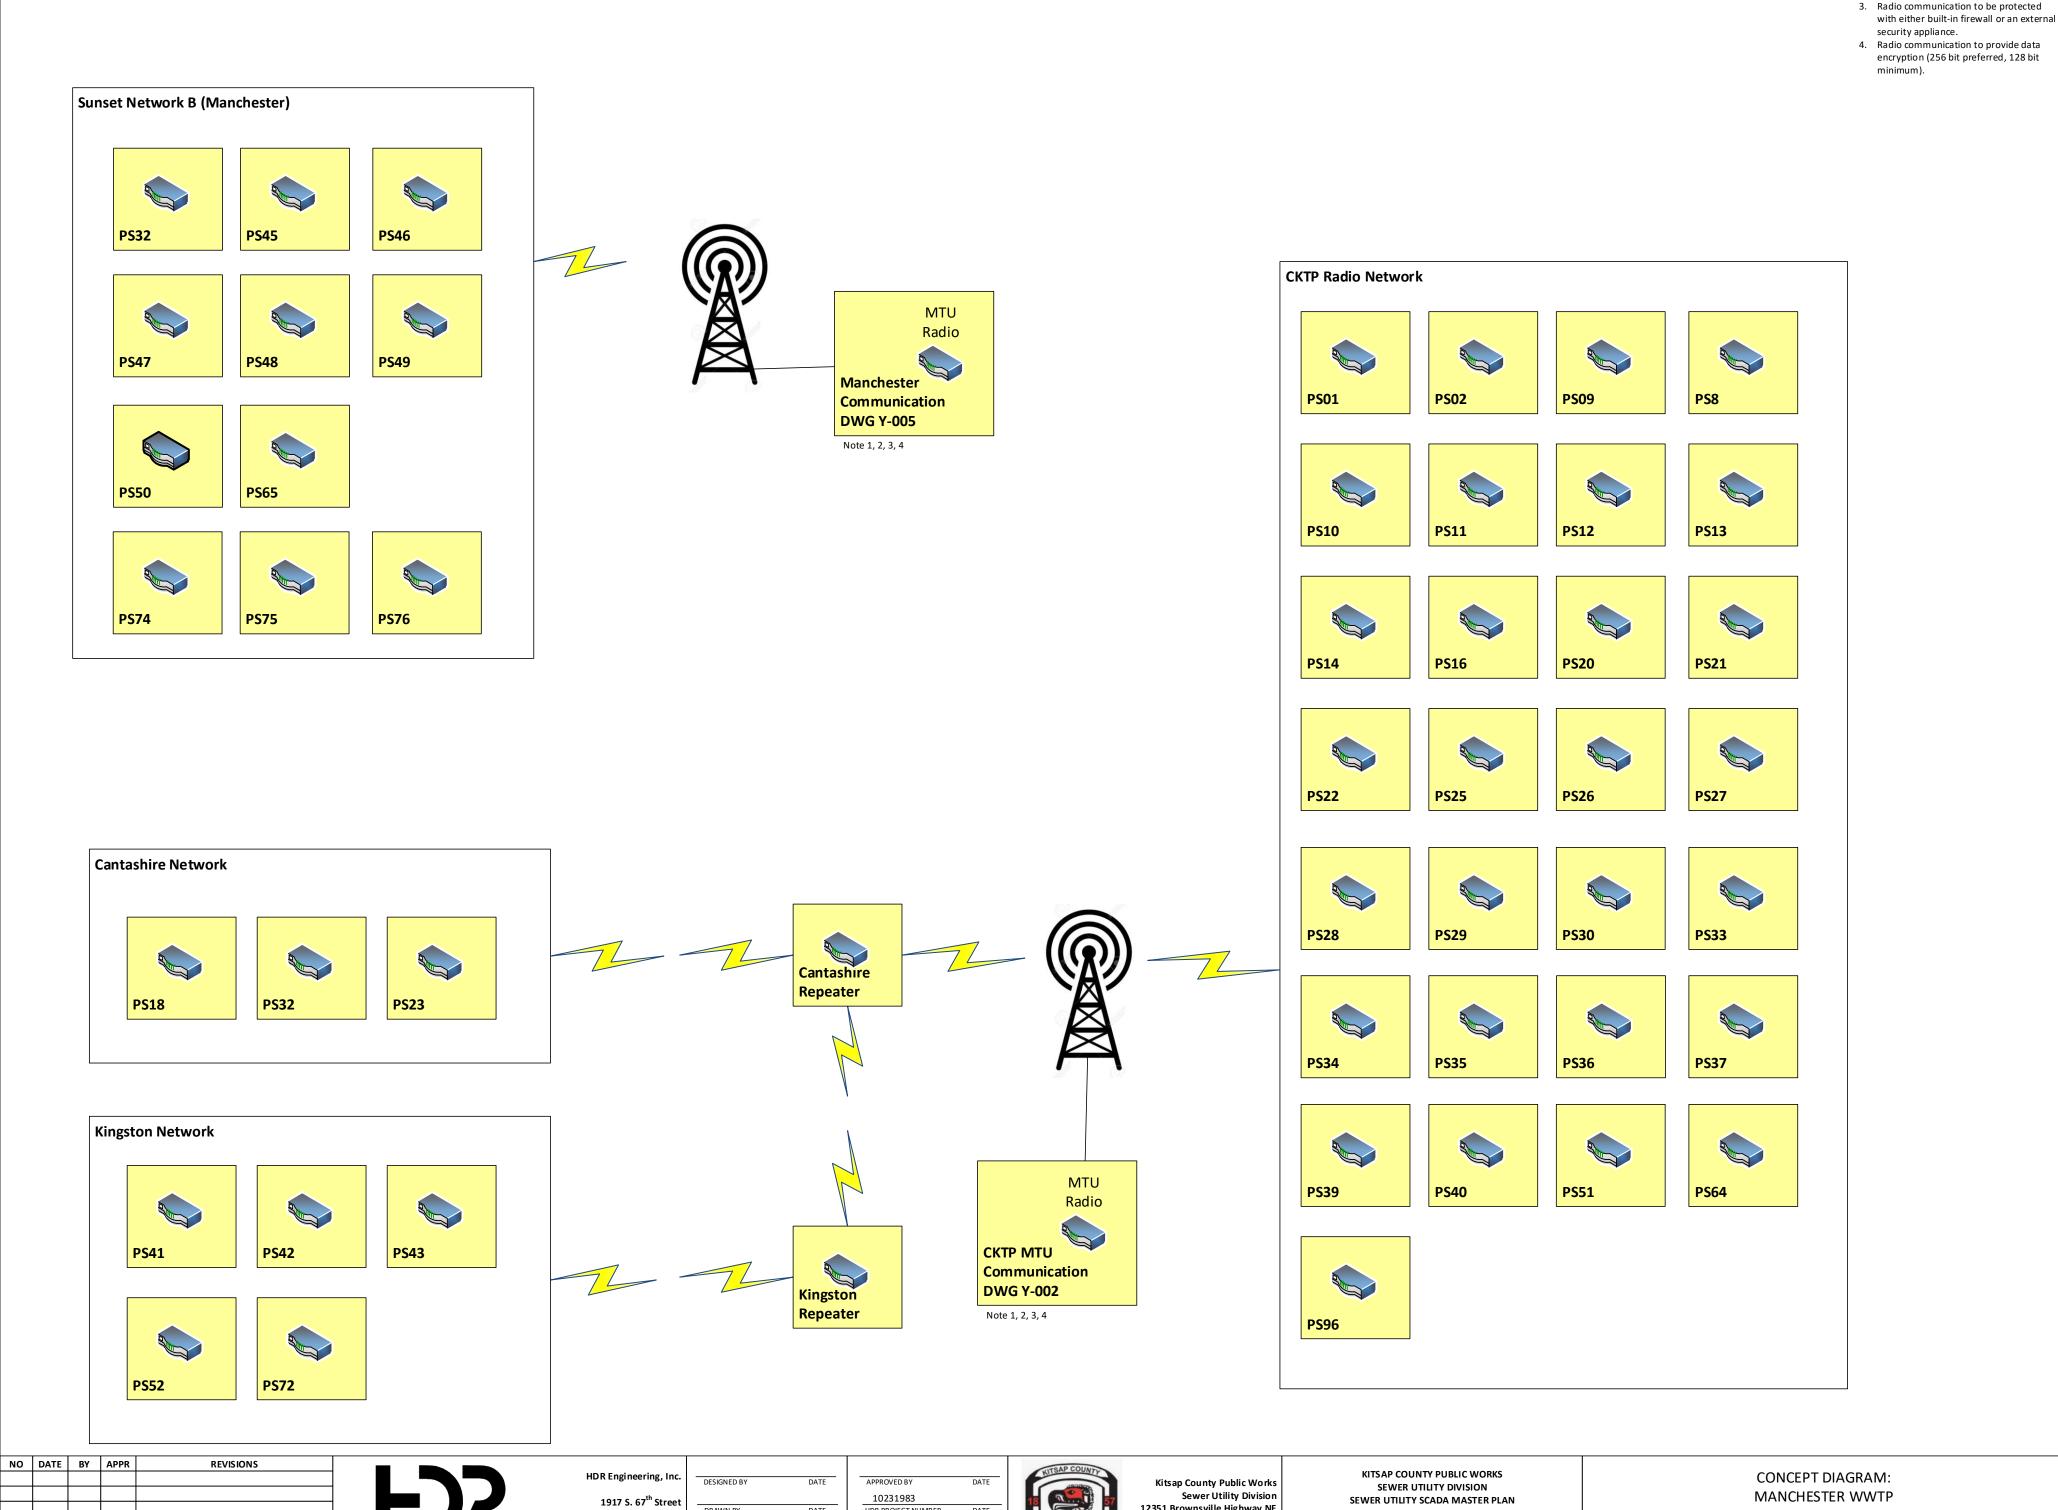

DRAWN BY

CHECKED BY

Omaha, NE 68106 402.399.1000

HDR PROJECT NUMBER

KC-205-20
CLIENT PROJECT NUMBER

12351 Brownsville Highway NE

Poulsbo, WA 98370


MANCHESTER WWTP SEWER UTILITY SCADA MASTER PLAN DRAWING: Y-008 SHEET <u>8</u> OF <u>8</u> SCALE: NONE

1. Fixed Frequency Radio Network

2. VHF 173.3125 MHZ





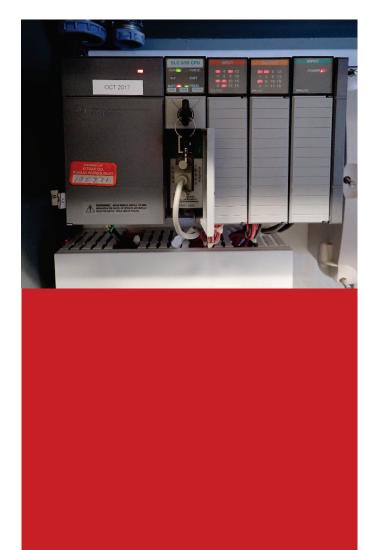


# TM-5: Project Overview

Sewer Utility SCADA Master Plan

Kitsap County Public Works Sewer Utility Division

May 23, 2022



# Kitsap County Public Works, Sewer Utility Division Sewer Utility SCADA Master Plan

**TM-5: Project Overview** 

May 23, 2022

Prepared by:

Brandon Erndt, PE

HDR Engineering, Inc.

(602) 522-7712

Christopher Maras, PE

HDR Engineering, Inc.

(402) 208-7051

and

Bruce Johnston, PE

HDR Engineering, Inc.

(425) 450-6217



I hereby certify that the technical memorandum was prepared under my direct supervision and that I am a duly registered Engineer under the laws of the State of Washington.

This page intentionally left blank.

.



#### Contents

1	Intro	duction	1-1
	1.1	Approach	1-1
	1.2	Technical Memorandum Organization	1-1
		1.2.1 Structure	1-1
2	Impr	ovement Projects Segmentation	2-1
	2.1	Network Architecture	2-1
	2.2	Hardware	2-1
	2.3	Software	2-2
	2.4	Documentation	2-2
	2.5	Other Software Packages	2-3
3	Over	all Schedule	3-1
	3.1	Projects in Fiscal Year 2023	3-1
	3.2	Projects in Fiscal Year 2024	3-1
	3.3	Projects in Fiscal Year 2025	3-2
	3.4	Projects in Fiscal Year 2026	3-2
	3.5	Projects in Fiscal Year 2027	3-2
	3.6	Projects in Fiscal Year 2028	3-3
	3.7	Projects in Fiscal Year 2029	3-3
4	Sum	mary of Cost of Opinions	4-1
	4.1	Cost Breakdown for Each Fiscal year	4-1
5	Impr	ovement Projects	5-3
	5.1	Network Architecture Projects	5-4
	5.2	Hardware Projects	5-15
	5.3	Software Projects	5-36
	5.4	Documentation Projects	5-40
	5.5	Other Software Package Projects	5-44

## **Tables**

Table 2-1. Projects List: Network Architecture Projects	2-′
Table 2-2. Projects List: Hardware Projects	2-
Table 2-3. Projects List: Software Projects	2-2
Table 2-4. Projects List: Documentation Projects	2-3
Table 2-5. Projects List: Other Software Package Projects	2-3
Table 3-1. Projects in FY2023	3-^
Table 3-2. Projects in FY2024	3-^
Table 3-3. Projects in FY2025	3-2
Table 3-4. Projects in FY2026	3-2
Table 3-5. Projects in FY2027	3-2
Table 3-6. Projects in FY2028	3-3
Table 3-7. Projects in FY2029	3-3
Table 4-1. Cost Breakdown for each Fiscal Year	4-′
Table 5-1. Project List	5-3
Figures	
Figure 4-1. CIP Budget Chart	4-^

# **Appendix**

Appendix A – Cost Estimate

Appendix B - Schedule



#### **Abbreviations**

CIP Common Industrial Protocol
CKTP Central Kitsap Treatment Plant

CMMS Computerized maintenance management system

DLR Device Level Ring
DMZ Demilitarized zone
DS Domain Server

EIGRP Enhanced Interior Gateway Routing Protocol

FNF Flexible netflow
FT FactoryTalk
GB Gigabyte(s)

HDR HDR Engineering, Inc.
HIP Host Identity Protocol
HMI Human-machine interface

HPHMI High Performance Human-Machine Interface

HRT Hydraulic Retention Time
HSRP Hot Standby Router Protocol
ICS industrial control system

IEEE Institute of Electrical and Electronics Engineers

IGMP Internet Group Management Protocol

IP Internet Protocol
IS Intermediate System

KPUD Kitsap Public Utility District

KWWTP Kingscliff Waste Water Treatment Plant

LAN Local-area network
LED Light-emitting diode

LIMS Laboratory information management system

LTE Long-Term Evolution

MB Megabyte(s)

MCC Motor control center

N/A Not applicable

NFPA National Fire Protection Association

NMS Network monitoring system
OSPF Open Shortest Path First
OT Operational Technology
OIT Operator interface terminal
PBR Policy-Based Routing
PC Personal computer

PCAP Network Packet Analyzer and Capture

PLC Programmable logic controller

PS Pump Station

#### TM -5 Project Overview Sewer Utility SCADA Master Plan

QCC Quality Controls Corporation

RIO remote input/output

RIP Routing Information Protocol RTD resistance temperature detector

RTU remote telemetry unit

SA sensor/actuator

SCADA supervisory control and data acquisition

SD Secure Digital

SDN software-defined network

Sewer Utility Public Works Sewer Utility Division

SFP small form-factor pluggable

SNMP Simple Network Management Protocol

SPB solids processing building SVI Switched Virtual Interface

SWWTP Shaoxing Wastewater Treatment Plant

TM Technical Memorandum

TM-2 SCADA Use Cases and Operational Needs Technical Memorandum

TM-3 Technology Selection Technical Memorandum

TM-4 Sewer Utility SCADA Master Plan Technical Memorandum
TM-5 Project Overview SCADA Master Plan Technical Memorandum

TP/TX Transport Protocol/Transmit UPS Uninterruptible Power Supply

USB Universal Serial Bus

UV ultraviolet V volt(s)

VAC volt(s) alternating current
VDC volt(s) direct current

VM virtual machine

VRF Virtual Routing and Forwarding
VRRP Virtual Router Redundancy Protocol

WAN wide-area network

WIMS Water Information Management Solution

WWTP wastewater treatment plant



## 1 Introduction

This *Project Overview SCADA Master Plan Technical Memorandum* (TM-5) documents the specific project descriptions, schedules, and cost breakdown for the Kitsap County (County) Public Works Sewer Utility Division (Sewer Utility) supervisory control and data acquisition (SCADA) system. This technical memorandum (TM) describes the current condition, arrangement, life-cycle state, and identified areas of risk identified in the *Existing System Overview Sewer Utility SCADA Master Plan Technical Memorandum* (TM-1). This technical memorandum also includes the evaluation approach by which these technological elements were selected based on the Sewer Utility's existing infrastructure and its future operational needs identified in the *SCADA Use Cases and Operational Needs Technical Memorandum* (TM-2). This technical memorandum includes the hardware and software platforms that were identified in the *Technology Selection Sewer Utility SCADA Master Plan* (TM-3) throughout the Kitsap County network drawn out in the *Concept Network Diagrams* (TM-4).

## 1.1 Approach

TM-5 completes the fifth phase of the *Sewer Utility SCADA Master Plan* (Master Plan), which is to provide project descriptions that include criticality, prerequisite projects, duration, and cost opinion. The projects have been organized into sections, Network Architecture, Hardware, Software, Documentation, and Other Software Packages. TM-5 will include a schedule which identifies the order of each project based on prioritization from Kitsap County.

## 1.2 Technical Memorandum Organization

This section describes the structure of the TM along with descriptions for each section.

#### 1.2.1 Structure

TM-5 is organized into five sections, as described below:

- **Section 1: Introduction** summarizes the TM organization and the approach taken for the fifth phase of the Master Plan TM-5.
- Section 2: Improvement Projects Segmentation identifies the 5 main sections that each project was organized into.
- Section 3: Overall Schedule shows the overall project schedule that was developed based on project dependencies, budget, and project priority.
- **Section 4: Summary of Cost Opinions** includes the cost for each project and total cost for each fiscal year.

• Section 5: Improvement Project Description includes detailed project descriptions that include task schedule and cost breakdown.



# 2 Improvement Projects Segmentation

This section provides how each project has been organized according to type of project that is being implemented in each WWTP in Kitsap County. The projects have been separated into segments of Network Architecture, Hardware, Software, Documentation, and Other Software Packages.

#### 2.1 Network Architecture

Projects within the Network Architecture section will be upgrading the current OT network within Kitsap County as well as implementing changes that will improve the overall network system design to meet the ICS standards.

Table 2-1. Projects List: Network Architecture Projects

Project ID	Facility	Project Name
NA-1	CKTP	Upgrade Central Kitsap Treatment Plant (CKTP) Control Room
NA-2	CKTP	Extend OT Network to County Public Works Annex Facility
NA-3	WWTPs and Remote Pump Stations	Remote Pump Station and WWTP Telemetry Improvements
NA-4	CKTP	CKTP OT Network Upgrades
NA-5	CKTP	Standardization to Managed Switches
NA-6	CKTP	ICS and OT Network Power Supply Improvements
NA-7	CKTP	DMZ and AVEVA InTouch Access Anywhere Implementation
NA-32	CKTP	Relocate Network Rack in Solids Processing Building

#### 2.2 Hardware

Projects within the Hardware section will be upgrading or making changes to any hardware devices throughout Kitsap County WWTPs.

Table 2-2. Projects List: Hardware Projects

Project ID	Facility	Project Name
HW-8	WWTPs and Remote Pump Stations	Establish Sewer Utility PLC/OIT Platform Standard and Schedule Replacement of Select WWTP and Remote Pump Station PLCs/OITs
HW-9	WWTPs and Remote Pump Stations	Replace CKTP MCC DeviceNet Networks with Ethernet Capable Motor Controllers

-		
HW-10	WWTPs and Remote Pump Stations	Develop a Formal Instrument Calibration and Maintenance Program
HW-11	CKTP	CKTP Digester Building PNL 6000 Relocation
HW-12	WWTPs and Remote Pump Stations	Include Integration of Composite Sampler Alarms and Monitoring with Replacement of Existing Samplers
HW-13	CKTP	Implement CKTP Instrumentation Improvements
HW-14	CKTP	Implement CKTP Automation Improvements
HW-15	KWWTP	Implement KWWTP Instrumentation Improvements
HW-16	KWWTP	Implement KWWTP Automation Improvements
HW-17	MWWTP	Implement MWWTP Instrumentation Improvements
HW-18	MWWTP	Implement MWWTP Automation Improvements
HW-19	SWWTP	Implement SWWTP Instrumentation Improvements
HW-20	SWWTP	Implement SWWTP Automation Improvements
HW-21	Remote Pump Stations	Implement Remote Pump Station Instrumentation Improvements
HW-22	Remote Pump Stations	Implement Remote Pump Station Automation Improvements

## 2.3 Software

Projects within the Software section will be upgrading or making changes to standalone HMI installations to AVEVA System Platform and the Historian.

Table 2-3. Projects List: Software Projects

Project ID	Facility	Project Name
SW-23	WWTPs	Upgrade WWTP Standalone SCADA HMI Installations to AVEVA System Platform with Managed InTouch Applications and Standardized Templates Based on HPHMI Concepts
SW-24	WWTPs and Remote Pump Stations	Implement an Alarm Management Program Based on ISA-18.2
SW-25	CKTP	Establish a Tiered Historian Implementation at CKTP
SW-26	WWTPs and Remote Pump Stations	Broaden the Data Set Archived by the Sewer utility Historian to Establish Foundations for More Comprehensive Process-and Asset- level Health and Performance Monitoring

## 2.4 Documentation

Projects within the Documentation section will be developing ICS Standards Document and the Control Strategy Document.



**Table 2-4. Projects List: Documentation Projects** 

Project ID	Facility	Project Name
DC-27A	WWTPs and Remote Pump Stations	Develop ICS Standards - Hardware
DC-27B	WWTPs and Remote Pump Stations	Develop ICS Standards – Software and Governance
DC-28	WWTPs and Remote Pump Stations	Develop and Maintain Control Strategy Documentation

## 2.5 Other Software Packages

Projects within the Other Software Packages section will include implementing other software packages within Kitsap County. The Kitsap County will implement a laboratory information management system to automatically import historian data and analyze the trends. The county will also implement a Machine Interface server and utilize its ability to identify asset runtime thresholds, alarms, events, and analog set points that trigger a work order.

Table 2-5. Projects List: Other Software Package Projects

Project ID	Facility	Project Name
OS-29	CKTP	Complete Hach WIMS Implementation and Establish Data Exchange with AVEVA System Platform
OS-30	CKTP	Complete Asset Creation and Data Entry Required for LLumin Implementation, Establish Automatic Importing of Asset Runtimes, and Develop a Plan for Automating Work Order Generation
OS-31	WWTPs and Remote Pump Stations	Begin Leveraging the Sewer Utility's Power and Energy Data

This page intentionally left blank.



# 3 Overall Schedule

This section shows the overall cost project schedule that has been developed showing each project, utilizing the project dependencies outlined in each project description. The project schedule is based on a program start in fiscal year 2023 and with an anticipated completion in fiscal year 2029.

## 3.1 Projects in Fiscal Year 2023

Table 3-1. Projects in FY2023

Year	ID	Project	Cost	Duration
2023	DC-27A	Develop ICS Standards - Hardware	\$154,000	4 months
2023	HW-8	Establish Sewer Utility PLC/OIT Platform Standard and Schedule Replacement of Select WWTP and Remote Pump Station PLCs/OITs	\$5,000	2 months
2023	HW-10	Develop a Formal Instrument Calibration and Maintenance Program	\$5,000	3 months
2023	NA-1	Upgrade Central Kitsap Treatment Plant (CKTP) Control Room	\$5,000	12 months
2023	DC-28	Develop and Maintain Control Strategy Documentation	\$167,000	18 months
2023	SW-23	Upgrade WWTP Standalone SCADA HMI Installations to AVEVA System Platform with Managed InTouch Applications and Standardized Templates Based on HPHMI Concepts	\$0	0.05 months
		Total	\$336,000	

# 3.2 Projects in Fiscal Year 2024

Table 3-2. Projects in FY2024

Year	ID	Project	Cost	Duration
2024	DC-27B	Develop ICS Standards – Software and Governance	\$344,000	6 months
2024	NA-32	Relocate Network Rack in Solids Processing Building	\$124,000	3 months
2024	NA-4	CKTP OT Network Upgrades	\$213,000	6 months
2024	NA-2	Extend OT Network to County Public Works Annex Facility	\$78,000	3 months
2024	NA-5	Standardization to Managed Switches	\$136,000	2 months
		Total	\$895,000	

# 3.3 Projects in Fiscal Year 2025

Table 3-3. Projects in FY2025

Year	ID	Project	Cost	Duration
2025	NA-6	ICS and OT Network Power Supply Improvements	\$153,000	6 months
2025	SW-26	Broaden The Data Set Archived by the Sewer Utility Historian	\$75,000	9 months
2025	HW-13	Implement CKTP Instrumentation Improvements	\$184,000	18 months
2025	NA-3	Remote Pump Station and WWTP Telemetry Improvements	\$264,000	24 months
2025	SW-24	Implement an Alarm Management Program Based on ISA-18.2	\$54,000	6 months
2025	NA-7	DMZ and AVEVA InTouch Access Anywhere Implementation	\$76,000	12 months
2025	HW-12	Include Integration of Composite Sampler Alarms and Monitoring with Replacement of Existing Samplers	\$5,000	6 months
		Total	\$811,000	

# 3.4 Projects in Fiscal Year 2026

Table 3-4. Projects in FY2026

Year	ID	Project	Cost	Duration
2026	HW-9	Replace CKTP MCC DeviceNet Networks w/ Ethernet Capable Motor Controllers	\$94,000	9 months
2026	SW-25	Establish a Tiered Historian Implementation at CKTP	\$89,000	3 months
2026	HW-14	Implement CKTP Automation Improvements	\$154,000	12 months
2026	HW-15	Implement KWWTP Instrumentation Improvements	\$105,000	6 months
2026	HW-17	Implement MWWTP Instrumentation Improvements	\$173,000	12 months
_	-	Total	\$615,000	_

## 3.5 Projects in Fiscal Year 2027

Table 3-5. Projects in FY2027

Year	ID	Project	Cost	Duration
2027	HW-16	Implement KWWTP Automation Improvements	\$39,000	6 months



2027	HW-19	Implement SWWTP Instrumentation Improvements	\$126,000	12 months
2027	HW-21	Implement Remote Pump Station Instrumentation Improvements	\$202,000	6 months
2027	HW-18	Implement MWWTP Automation Improvements	\$54,000	6 months
		Total	\$421,000	

# 3.6 Projects in Fiscal Year 2028

## Table 3-6. Projects in FY2028

Year	ID	Project	Cost	Duration
2028	HW-22	Implement Remote Pump Station Automation Improvements	\$61,000	12 months
2028	HW-20	Implement SWWTP Automation Improvements	\$48,000	6 months
2028	HW-11	CKTP Digester Building PNL 6000 and MCC Replacement	\$80,000	12 months
2028	OS-31	Begin Leveraging the Sewer Utility's Power and Energy Data	\$21,000	3 months
		Total	\$210,000	

# 3.7 Projects in Fiscal Year 2029

## Table 3-7. Projects in FY2029

Year	ID	Project	Cost	Duration
2029	OS-30	Complete Asset Creation and Data Entry Required for LLumin Implementation, Establish Automatic Importing of Asset Runtimes, and Develop a Plan for Automating Work Order Generation	\$387,000	6 months
2029	OS-29	Complete Hach WIMS Implementation and Establish Data Exchange with AVEVA System Platform	\$5,000	3 months
		Total	\$392,000	

This page intentionally left blank.



# 4 Summary of Cost of Opinions

Budgetary opinions of probable costs were developed for each of the projects. These cost opinions were developed at a planning level of accuracy and include 10% labor contingency and 15% materials contingency.

## 4.1 Cost Breakdown for Each Fiscal year

Table 4-1. Cost Breakdown for each Fiscal Year

Allocation	FY2023 \$ 336,000	FY2024 \$ 895.000	FY2025 \$ 811,000	FY2026 \$ 615,000	FY2027 \$ 421,000	FY2028 \$210,000	FY2029 \$392,000	Total \$3,680,000
Hardware	\$ 5,750	\$ 189,480	\$ 180,550	\$ 236,900	\$ 112,930	\$ 57,500	\$ -	+ -,
Software	\$ -	\$ 17,250	\$ 9,775	\$ 64,837	\$ -	\$ -	\$ -	
Integration	\$ 296,200	\$ 587,800	\$ 529,700	\$ 239,800	\$ 260,200	\$ 128,700	\$ 357,000	
Admin/QC/Misc	\$ 33,695	\$ 99,480	\$ 91,503	\$ 74,155	\$ 47,313	\$ 23,620	\$ 35,200	

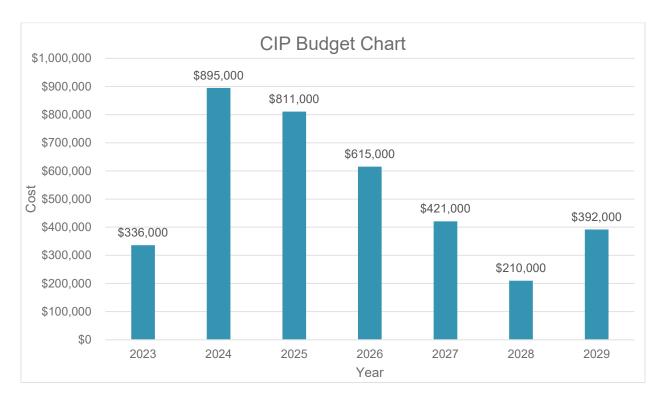


Figure 4-1. CIP Budget Chart

This page intentionally left blank.



# 5 Improvement Projects

This section includes detailed project descriptions for 33 projects. Each project description includes:

- Criticality
- Facilities
- Prerequisites
- Duration
- Description
- Impacted Stakeholders
- Cost Opinion

Table 5-1. Project List

ID	Project
Network Architect	ture
NA-1	Upgrade Central Kitsap Treatment Plant (CKTP) Control Room
NA-2	Extend OT Network to County Public Works Annex Facility
NA-3	Remote Pump Station and WWTP Telemetry Improvements
NA-4	CKTP OT Network Upgrades
NA-5	Standardization to Managed Switches
NA-6	ICS and OT Network Power Supply Improvements
NA-7	DMZ and AVEVA InTouch Access Anywhere Implementation
NA-32	Relocate Network Rack in Solids Processing Building
Hardware	
HW-8	Establish Sewer Utility PLC/OIT Platform Standard and Schedule Replacement of Select WWTP and Remote Pump Station PLCs/OITs
HW-9	Replace CKTP MCC DeviceNet Networks with Ethernet Capable Motor Controllers
HW-10	Develop a Formal Instrument Calibration and Maintenance Program
HW-11	CKTP Digester Building PNL 6000 Relocation
HW-12	Include Integration of Composite Sampler Alarms and Monitoring with Replacement of Existing Samplers
HW-13	Implement CKTP Instrumentation Improvements
HW-14	Implement CKTP Automation Improvements
HW-15	Implement KWWTP Instrumentation Improvements
HW-16	Implement KWWTP Automation Improvements
HW-17	Implement MWWTP Instrumentation Improvements
HW-18	Implement MWWTP Automation Improvements
HW-19	Implement SWWTP Instrumentation Improvements
HW-20	Implement SWWTP Automation Improvements
HW-21	Implement Remote Pump Station Instrumentation Improvements
HW-22	Implement Remote Pump Station Automation Improvements
Software	

ID	Project
SW-23	Upgrade WWTP Standalone SCADA HMI Installations to AVEVA System Platform with Managed InTouch Applications and Standardized Templates Based on HPHMI Concepts
SW-24	Implement an Alarm Management Program Based on ISA-18.2
SW-25	Establish a Tiered Historian Implementation at CKTP
SW-26	Broaden the Data Set Archived by the Sewer utility Historian to Establish Foundations for More Comprehensive Process-and Asset-level Health and Performance Monitoring
Documentation	
DC-27A	Develop ICS Standards - Hardware
DC-27B	Develop ICS Standards – Software and Governance
DC-28	Develop and Maintain Control Strategy Documentation
Other Software Pack	kages
OS-29	Complete Hach WIMS Implementation and Establish Data Exchange with AVEVA System Platform
OS-30	Complete Asset Creation and Data Entry Required for LLumin Implementation, Establish Automatic Importing of Asset Runtimes, and Develop a Plan for Automating Work Order Generation
OS-31	Begin Leveraging the Sewer Utility's Power and Energy Data

## **5.1 Network Architecture Projects**

Project Name	Upgrade Central Kitsap Treatment Plant (CKTP) Control Room
Project ID	NA-1
Criticality	Medium
Facilities	<ul> <li>CKTP</li> </ul>
Prerequisites	■ DC-27A
Duration	12 Months
Description	This project will establish a central monitoring location at the CKTP for all pump stations and WWTPs. To do so, the existing control room in the Solids Processing Building (SPB) will be upgraded to a suitable centralized monitoring location to meet monitoring requirements. Large-format displays will be installed for static display of overview screens for the pump stations and WWTPs. The Large-format displays will also be used to display operator-selected screens to support group discussion and decision making. Two SCADA PCs will be installed with access to HMI screens, Historian clients, and data visualization and dashboarding software applications. Four monitors will be installed for each PC to enable simultaneous display of multiple software application screens. This project can be performed at the same time as the upgrades for the standalone SCADA HMI installations to AVEVA System Platform (SW-23). In the event of a power outage at CKTP, UPS and backup battery packs will be installed to provide a minimum of 4 hours of backup power for the control room workstations and displays. Backup power will also be installed for the network servers as well. It is assumed that AVEVA licensing is part of a separate project and not included in this costing.



Project Name	Upgrade Central Kitsap Treatment Plant (CKTP) Control Room		
	This project will be handled internally by the Sewer Utility. Project is currently underway - 4 27" monitors (duplicating construction building 103).		
Impacted	Operation Staff		
Stakeholders	I&C Technician		
	Public Works Management		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
-	Hardware	<del>-</del>	-
	Software	-	-
	Integration	-	\$5,000
	Administration/Quality Control	10%	-
	MISC Expenses	-	-
	TOTAL CAPITAL COSTS	-	\$5,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Extend OT Network to County Public	Works Annex Fa	cility
Project ID	NA-2		
Criticality	Medium		
Facilities	<ul> <li>County Public Works Annex Facility</li> </ul>	ſ	
Prerequisites	<ul><li>None</li></ul>		
Duration	3 Months		
Description	The OT network will be extended to the establish a secondary monitoring location stations. A Host Identity Protocol Switch facility and a dedicated SCADA PC will Tempered Network Airwall System deploackup database server project.	on for its WWTPs a n (HIP Switch) will be installed with the	and remote pump be installed at this ne Sewer Utility's
Impacted	Operation Staff		
Stakeholders	I&C Technician		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	\$21,850
	Software	-	\$17,250
	Integration	-	\$27,500
	Administration/Quality Control	10%	\$6,660
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$78,000
	ANNUAL O&M COSTS	%	COST OPINION*
oforto Appondis A	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Remote Pump Station and WWTP Te	lemetry Improvements
Project ID	NA-3	
Criticality	Medium	
Facilities	<ul> <li>WWTPs and Remote Pump Station</li> </ul>	IS .
Prerequisites	<ul> <li>NA-4, NA-5, DC-27A, DC-27B</li> </ul>	
Duration	24 Months	
Description	This project will upgrade the telemetry semonitoring and alarming for the remote Sewer Utility will continue to work with the remote pump stations to a cellular was transition, a site survey will take place to Verizon Wireless Network at each pump latency difficulties and increasing pump cellular routers will be placed at CKTP. as well as provide a layer of redundance the remote pump station and CKTP. Alcourrent very high frequency (VHF) licencellular WAN communications are lost, and alarming at the remote pump station incorporate a store-and-forward function implemented in the existing Allen-Bradial located at the remote telemetry unit (RT report-by-exception telemetry solution was polling to reduce the data exchange volution which will be implemented with well. For the Sewer utility to assign accounts to the existing MTU PLC will be replaced.	pump stations. To accomplish this, the Quality Controls Corporation to transition vide-area network (WAN). Before the orassess the signal strength of the properties of station location. Due to unpredictable of stations introduced to the WAN, 2. This solution will mitigate latency issues by for the communication links between ong with the WAN implementation, the used radios will be left as is in case. To achieve near-real-time monitoring ons, DNP3 protocol will be utilized to mality. DNP3 protocol will be utilized to mality. DNP3 protocol will be ey Micrologix 1400 PLCs, which are replacing the current round-robin lume. This will be using the DNP3 in the existing Micrologix 1400 PLCs as urrate times to events and eliminate data
Impacted	to serve as a DNP3 master. Telemetry is be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since it sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provisioned a SIM card that will be activated on	offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the e the timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module
Impacted Stakeholders	to serve as a DNP3 master. Telemetry to be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since to Sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provisioned a SIM card that will be activated on Operation Staff	Server software, offered by AVEVA, will offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the e the timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module
Stakeholders	to serve as a DNP3 master. Telemetry to be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since to Sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provised and a SIM card that will be activated on Operation Staff I&C Technician	Server software, offered by AVEVA, will offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the e the timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module of the Sewer Utility's cellular WAN.
Stakeholders	to serve as a DNP3 master. Telemetry is be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since it sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provise and a SIM card that will be activated on Operation Staff I&C Technician CAPITAL COSTS	Server software, offered by AVEVA, will offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the e the timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module in the Sewer Utility's cellular WAN.  COST OPINION
Stakeholders	to serve as a DNP3 master. Telemetry is be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since it sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provise and a SIM card that will be activated on Operation Staff I&C Technician  CAPITAL COSTS  Hardware	Server software, offered by AVEVA, will offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the e the timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module in the Sewer Utility's cellular WAN.  COST OPINION 529,90
Stakeholders	to serve as a DNP3 master. Telemetry is be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since it sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provise and a SIM card that will be activated on Operation Staff I&C Technician  CAPITAL COSTS  Hardware  Software	Server software, offered by AVEVA, will offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the ethe timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module the Sewer Utility's cellular WAN.   COST OPINION  - \$29,90  - \$9,77
Stakeholders	to serve as a DNP3 master. Telemetry is be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since it sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provise and a SIM card that will be activated on Operation Staff I&C Technician  CAPITAL COSTS  Hardware  Software  Integration	Server software, offered by AVEVA, will offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the east the timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module the Sewer Utility's cellular WAN.   COST OPINION  COST OPINION  S29,90  \$9,77  \$195,80
Impacted Stakeholders Cost Opinion*	to serve as a DNP3 master. Telemetry is be integrated with the System platform than what is currently in place. To have performance, the uptime percentage will previous 24 hours and all history since it sewer Utility staff the ability to configure consecutive unsuccessful polls that wou alarm from the HMI. In the event of an onotifications, HIP switches will be provise and a SIM card that will be activated on Operation Staff I&C Technician  CAPITAL COSTS  Hardware  Software	Server software, offered by AVEVA, will offering, which will be easier to maintain accurate communication status and II be displayed at the HMI for the the last manual reset. This will give the ethe timer interval and number of uld initiate a loss of communications outage and to preserve alarm sioned with a cellular expansion module the Sewer Utility's cellular WAN.   COST OPINION  - \$29,90  - \$9,77

Project Name	Remote Pump Station and WWTP Telemetry Improvements			
	ANNUAL O&M COSTS % COST OPINION*			
	TOTAL ANNUAL COSTS**	-	\$1,600	

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	CKTP OT Network Upgrades		
Project ID	NA-4		
Criticality	High		
Facilities	<ul> <li>County Public Works Annex Facili</li> </ul>	ty (Solids Processing	Building)
Prerequisites	■ DC-27B, NA-32		
Duration	6 Months		
Description	To consolidate the network infrastructure and distribution switches for the OT network of the OT network of the OT network of the other standard 19-inch equipment and have for installation in the seismic zone with will be wide enough to accommodate weither side of the rack. The network rand Control room or in the ground floor of the located in the SPB, will be replaced with this replacement will eliminate the sind capabilities at the OT network distribution located in Panel 8580A, also located in optic cable connections will be patched switches. The OT network HIP switches and Laboratory building electrical room racks that will be placed in the SPB. F. GbE, multi-mode fiber-optic small form inserted to the combination port on the the existing Category Cable connection module will be patched to the existing electrical room communications backboard will be removed. SPB communications cabinet, using the two buildings. Afterwards, the Category VDC power supply components, and Communications backboard will be removed will be removed, instead UPS possible themselves the existing electrical so include creating the Management Control System VLAN for the WWTPs installed. New IP address may also be	etwork will be placed as. The network racks seismic testing certifing testing certifing testing certification CKTP. The rack caperitical cable managed cks will be placed in the SPB annex. The racked Layer 3 gle point of failure and ion layer. The two man SPB, will be replaced directly to the new less, located in the CKT and the relocation of the estate of the relocation of the estate of the HIP switch is fiber-optic patch panels are existing fiber-optic patch panels are existing fiber-optic by cable along with the DT network switch monoved. The UPS that there will be provided all room network racket trical room network racket after the managed syntages.	in one or more will be sized for dying their suitability abinet enclosures ement hardware on either the SPB unmanaged switch, distribution switch, d establish routing anaged switches ed and the fiber- Layer 3 distribution TP Administration of the new network dese switches, a 1 FP) module will be enet Switch where smade. The SFP fel mounted to the connection to the cable between the e HIP switch, 24 counted to the is in the electrical to the KPUD Carried to the KPUD Carried This will be done eack. This project will and Industrial witches have been
Impacted Stakeholders	Operation Staff I&C Technician		
Clarendiders	Sewer Utility IT staff		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION
COOL OPHINOIT	Hardware	-	\$75,90
	Software	-	, ,,,,,
	Integration	-	\$112,80
	Administration/Quality Control	10%	\$18,87

Project Name	CKTP OT Network Upgrades		
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$213,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Standardization to Managed Switches		
Project ID	NA-5		
Criticality	High		
Facilities	<ul> <li>CKTP</li> </ul>		
Prerequisites	■ NA-32		
Duration	2 months		
Description	This project will standardize using managed network. This will provide a uniform manager network access switches and reduce spare is standardized switches will support Layer 2 m network segmentation, traffic filtering (IGMP) cybersecurity controls. The switch will also haccommodate the gigabit port speeds of most standardized switches will replace the 5 currementioned in TM-1 at Table 2-1 (the unmanaged systems will not be replaced as pare establish redundant cable paths for critical Obuilding access switches at CKTP and the distribution that the SPB. Depending on the costs, either a standardized, the project will utilize single-mode munication links. Specifically, the fiber-of administration, laboratory building electrical with the single-mode fiber-optic cable. For configuration such as disabling unused ports.	ment interfaces witch inventors an agement in an agement in an age gigabit of dern ICS devent unmanaged switches to fit this project of this project in a topology of iber-optic called be room, and SF osting, only mean and second in the seco	te for maintaining OT ory requirements. The functionality for mentation of lownlink ports to rices. The ged switches that were as in the Vendor ect). This project will egments between ritch stack located in or a ring topology bles will be ic cables for tween the CKTP PB will be replaced minimal switch
Impacted Stakeholders	Operation Staff I&C Technician		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
Jost Opinion	Hardware	-	\$34,500
	Software	-	-
	Integration	-	\$84,200
	Administration/Quality Control	10%	\$11,870
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$136,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

<b>Project Name</b>	ICS and OT Network Power Supply Im	provements	
Project ID	NA-6		
Criticality	High		
Facilities	<ul> <li>CKTP</li> </ul>		
Prerequisites	<ul> <li>NA-4, DC-27B</li> </ul>		
Duration	6 months		
Description	This project will include installing UPS por WWTPs and Remote Pump Stations mer standalone UPS approach will also be im and RIO control panels that do not have I at CKTP will have a minimum backup por PLCs and RIO panels will have a backup available. Some existing panels will not he enough to provide 6 hours of backup power alarms will be monitored by the SCADA set HMI screens, and alarm notification system UPSs will have Ethernet Communication SCADA software, utilizing Ethernet protocol. The Sewer Utility will standardize supplies to the ICS and OT network device switches, servers, and other network appronboard power supplies. Installation of the been covered in the CKTP OT Network L	ntioned in TM-1 in plemented for the backup power. The wer of 15 minutes apower of up to 4 lave the space to wer. All UPS states and integrant To meet this options that can cols like Modbus are on carrying reces. All rack-modiances will be single network rack-resident of the metwork rack-resident of the power.	n Table 3-1. This le Sewer Utility's PLC he PLC control panels s, while the remote le to 6 hours if space is le support a UPS large luses, warnings, and rated into the SCADA requirement, the le integrated with the le Transmission Control dundant power lunted OT network landardized with dual mounted UPS have
Impacted	I&C Technician		
Stakeholders			
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	\$58,650
	Software	-	-
	Integration	-	\$75,900
	Administration/Quality Control	10%	\$13,455 \$5,000
	MISC Expenses TOTAL CAPITAL COSTS	-	\$5,000 <b>\$153,000</b>
	IOTAL CAPITAL COSTS	-	\$ 153,UUU
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0
Refer to <b>Annendix A</b>	for more information on the cost opinion approa	ch. Totals and sub	totals are rounded up to the

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	DMZ and AVEVA InTouch Access Any	where Impleme	ntation
Project ID	NA-7		
Criticality	Medium		
Facilities	<ul> <li>CKTP</li> </ul>		
Prerequisites	<ul> <li>NA-1, NA-4, NA-6, DC-27A, DC-27B</li> </ul>		
Duration	12 Months		
Description	This project will implement an industrial E between the industrial and enterprise zor of data flow for the ICS assets. The network with a single entry to the industrial DMZ for will set up the Virtual Machine Server in the Intouch Access Anywhere for mobile accessorems for the I&C technicians, third-particularly Staff. Multi-factor authentication with for users to gain access to the industrial I County IS Department. This will require the through the Sewer Utility business LAN will County IS department. The Sewer Utility department to make use of existing IT information such as Mobile Device Management (ME and Virtualization software (VMWare or Me Department will manage the implementate DMZ. The County IS Department will also web portal, Jump Box (Remote Access), Syslog/SIEM, Email relay, and OT-DMZ I to utilize HACH WIMS or another BI dash this project.	nes to provide a ork architecture from the enterpriche DMZ and impless to the Sewerty system integral be included du DMZ and will be the users to accept at the VPN service will coordinate with the coordinate with the propertion of the Fireward manage the implemental and the communication of the communication of the patch of the patch patch promain Controllers.	more secure method will be established se zone. The project plement AVEVA re Utility's SCADA HMI rators, and Sewer ring implementation handled by the establishment of the with the County IS software licensing, perating System (OS) V). The County IS call and switches for the uplementation of the en server, backups, err. It will be necessary
Impacted Stakeholders	Operation Staff I&C Technician System Integrators County IS Department Sewer Utility IT Staff		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
-	Hardware	-	\$17,250
	Software	-	
	Integration	-	\$47,300
	Administration/Quality Control	10%	\$6,455
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$76,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Relocate Network Rack in Solids Proce	essing Building	
Project ID	NA-32		
Criticality	Medium		
Facilities	<ul> <li>County Public Works Annex Facility (</li> </ul>	Solids Processin	g Building)
Prerequisites	<ul> <li>DC-27A, DC-27B</li> </ul>		
Duration	3 Months		
Description	This project will include locating a secure be in the Solids Processing Building. The space and access to run all required network support connection to all necessary OT numbers the network rack will be placed mulassociated hardware. To limit access to a rack will be either locked or in a locked ro	new location mu vork cables to/fro etwork devices. st be climate ass authorized person	ust have the required on the network rack to The new location sisted to support the
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
Oost Opinion	Hardware	-	\$57,500
	Software	-	-
	Integration	-	\$55,000
	Administration/Quality Control	10%	\$11,250
	MISC Expenses	-	-
	TOTAL CAPITAL COSTS	-	\$124,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



## **5.2 Hardware Projects**

Project Name	Establish Sewer Utility PLC/OIT Platform Standard and Schedule		
	Replacement of Select WWTP and Re	emote Pump Stati	ion PLCs/OITs
Project ID	HW-8		
Criticality	Medium		
Facilities	<ul> <li>WWTPs and Remote Pump Station</li> </ul>	S	
Prerequisites	■ DC-27A		
Duration	2 Months		
Description	Based on the current information of the life cycle of the existing PLCs and OITs, after the standards are created in project DC-27, the PLCs and OITs that need to be replaced will be prioritized by years in service, manufacturer support, and criticality of the application. No dedicated project is identified within this portfolio, but each PLC/OIT will be replaced as needed. This project will be handled internally by the Sewer Utility.		
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
•	Hardware	-	-
	Software	-	-
	Integration	-	\$5,000
	Administration/Quality Control	10%	-
	MISC Expenses	-	-
	TOTAL CAPITAL COSTS	-	\$5,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**		0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

	Replace CKTP MCC DeviceNet Netwo Controllers		or cupulity moto.
Project ID	HW-9		
Criticality	Medium		
Facilities	<ul> <li>WWTPs and Remote Pump Stations</li> </ul>	5	
Prerequisites	<ul> <li>NA-4, DC-27A, DC-27B</li> </ul>		
Duration	9 Months		
Description	This project will retrofit the existing MCC upgraded MCC units when eliminating the 700 AC Drives will be upgraded with the the PowerFlex 753 AC Drives will be upgetherNet/IP option module to replace the The Allen-Bradley E3 Plus electronic over E300 electronic overlay relays or other valuring the time of DeviceNet network replace compatible with the E300 relays. The size assessed as some hardwired signals are temp alarm) and will require more control PLC panels will need additional I/O model.	ne DeviceNet neto 20-COMM-E Eth graded with the 2 existing Devicel erlay relays will be riable replacement work. The with I/O expande of the MCC unite preferred (auto of relays and addition 20-COMM-E experies and addition	work. The PowerFlex perNet/IP adapter and 0-750-ENETR Net adapters/modules. The replaced with the period with the period to the DeviceNet Starter period modules will have to be status and motor high tional field wiring. The
Impacted	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the the additional hardwired I/O, the VFD converload relays will require Ethernet conwill use Category 6 cable with 600V insuexisting PLC programs will be modified that and the EtherNet/IP data exchange. This project by the county and can be resched.	nis will lead to add and/or new control ed in the electrical MCC units and the mmunication ada anection to the OT alation for these control to realign with the	ditional RIO racks in planels. Additional al room to establish e control panels. With pters/modules and network. The project onnections. The hardwired I/O points dered an opportunity
Impacted Stakeholders	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be require hardwired I/O connections between the the additional hardwired I/O, the VFD converload relays will require Ethernet consult use Category 6 cable with 600V insuexisting PLC programs will be modified that and the EtherNet/IP data exchange. This	nis will lead to add and/or new control ed in the electrical MCC units and the mmunication ada anection to the OT alation for these control to realign with the	ditional RIO racks in planels. Additional all room to establish e control panels. With pters/modules and network. The project onnections. The hardwired I/O points dered an opportunity
•	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the the additional hardwired I/O, the VFD converload relays will require Ethernet conwill use Category 6 cable with 600V insuexisting PLC programs will be modified that and the EtherNet/IP data exchange. This project by the county and can be resched to Operation Staff I&C Technicians  System Integrators  CAPITAL COSTS	nis will lead to add and/or new control ed in the electrical MCC units and the mmunication ada anection to the OT alation for these control to realign with the	ditional RIO racks in planels. Additional al room to establish e control panels. With pters/modules and network. The project onnections. The hardwired I/O points dered an opportunity y.
Stakeholders	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the strength additional hardwired I/O, the VFD converload relays will require Ethernet conwill use Category 6 cable with 600V insuexisting PLC programs will be modified than the EtherNet/IP data exchange. This project by the county and can be resched to Operation Staff I&C Technicians System Integrators CAPITAL COSTS Hardware	nis will lead to add and/or new control red in the electrical MCC units and the ammunication adal anection to the OT alation for these of to realign with the s project is considualed if necessar	ditional RIO racks in planels. Additional al room to establish e control panels. With pters/modules and network. The project onnections. The hardwired I/O points dered an opportunity y.
Stakeholders	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the strength additional hardwired I/O, the VFD converload relays will require Ethernet conwill use Category 6 cable with 600V insuexisting PLC programs will be modified than the EtherNet/IP data exchange. This project by the county and can be resched to Operation Staff I&C Technicians System Integrators CAPITAL COSTS Hardware Software	nis will lead to add and/or new control red in the electrical MCC units and the ammunication adal anection to the OT alation for these of to realign with the s project is considualed if necessar	ditional RIO racks in planels. Additional al room to establish e control panels. With pters/modules and network. The project onnections. The hardwired I/O points dered an opportunity y.  COST OPINION* \$49,450
Stakeholders	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the strength additional hardwired I/O, the VFD converload relays will require Ethernet conwill use Category 6 cable with 600V insuexisting PLC programs will be modified than the EtherNet/IP data exchange. This project by the county and can be resched to Operation Staff I&C Technicians System Integrators  CAPITAL COSTS  Hardware  Software  Integration	nis will lead to add and/or new controlled in the electrical MCC units and the electrical mection to the OT allation for these can be project is considuled if necessare when the electrical mechanism with the electrical mechanism.	ditional RIO racks in planels. Additional al room to establish e control panels. With pters/modules and network. The project onnections. The hardwired I/O points dered an opportunity y.  COST OPINION* \$49,450
Stakeholders	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the street the additional hardwired I/O, the VFD converload relays will require Ethernet conwill use Category 6 cable with 600V insuexisting PLC programs will be modified than the EtherNet/IP data exchange. This project by the county and can be resched to Operation Staff I&C Technicians System Integrators  CAPITAL COSTS  Hardware  Software Integration  Administration/Quality Control	nis will lead to add and/or new controlled in the electrical MCC units and the electrical mection to the OT allation for these of the consideration and the electrical method in the electrical method in the electrical method is project is considerated if necessary with the electrical mechanism.	ditional RIO racks in planels. Additional al room to establish e control panels. With pters/modules and network. The project connections. The hardwired I/O points dered an opportunity y.  COST OPINION* \$49,450  \$31,900 \$8,135
Stakeholders	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the strength additional hardwired I/O, the VFD converload relays will require Ethernet conwill use Category 6 cable with 600V insuexisting PLC programs will be modified than the EtherNet/IP data exchange. This project by the county and can be resched to Operation Staff I&C Technicians System Integrators  CAPITAL COSTS  Hardware  Software  Integration	nis will lead to add and/or new controlled in the electrical MCC units and the electrical mection to the OT allation for these can be project is considuled if necessare when the electrical mechanism with the electrical mechanism.	ditional RIO racks in planels. Additional al room to establish e control panels. With pters/modules and network. The project connections. The hardwired I/O points dered an opportunity y.  COST OPINION* \$49,450  \$31,900 \$8,135 \$5,000
Stakeholders	accommodate the new hardwired I/O. The the enclosures, subpanel replacement, a conduits and control wiring will be required hardwired I/O connections between the street the additional hardwired I/O, the VFD converload relays will require Ethernet contwill use Category 6 cable with 600V insuexisting PLC programs will be modified than the EtherNet/IP data exchange. This project by the county and can be resched to Operation Staff  I&C Technicians  System Integrators  CAPITAL COSTS  Hardware  Software  Integration  Administration/Quality Control  MISC Expenses	nis will lead to add and/or new controlled in the electrical MCC units and the electrical mection to the OT allation for these of the realign with the sproject is considuled if necessary    // 10% -	ditional RIO racks in planels. Additional all room to establish e control panels. With pters/modules and network. The project onnections. The hardwired I/O points dered an opportunity

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Develop a Formal Instrument Calibrat	tion and Maintenance Program	
Project ID	HW-10		
Criticality	Medium		
Facilities	<ul> <li>WWTPs and Remote Pump Stations</li> </ul>	S	
Prerequisites	■ DC-27A		
Duration	3 Months		
Description	This project will develop a formal instrun program for its WWTPs and remote pur accomplish the following:		
	<ul> <li>Determine the individuals responsible performing calibration procedures, main reviewing calibration records to determine required.</li> </ul>	taining program documentation, and	
	<ul> <li>Maintain an accurate inventory of ins manufacturer, model, and part number(s WIMS system they plan to implement in</li> </ul>	s).The County may utilize the Hach	
	<ul> <li>Document instrument range, last call accuracy requirements, most recent call analog instruments, and most recent call deadband settings for switches.</li> </ul>	brated zero and span settings for	
	<ul> <li>Document instrument-specific calibra manufacturer recommendations. Calibra test the instrument sensor (input), instru switch contact state, and instrument loop value/state being displayed at the HMI of</li> </ul>	ment 4–20 milliampere (mA) output or p, including verification of correct	
	<ul> <li>Document ideal frequency of calibrate recommendations, field observations, in performance.</li> </ul>	tion activities based on manufacturer strument criticality, and past instrumen	
	<ul> <li>Schedule calibration activities and ensure that they are performed and documented.</li> </ul>		
	<ul> <li>Maintain calibration records that doc results, final calibration settings, final ca individual(s) who performed the calibrati</li> </ul>	libration test results, field observations	
	This project will be handled internally by opportunity project by the county and ca	-	
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	% COST OPINION	
	Hardware Software	-	
	Integration	- - \$5,00	
	Administration/Quality Control	10%	
	MISC Expenses	-	
	TOTAL CAPITAL COSTS	- \$5,00	
	ANNULAL COM COCTO	0/ 0007 000110114	
	ANNUAL O&M COSTS	% COST OPINION*	

<b>Project Name</b>	Develop a Formal Instrument Calibration and Maintenance Program		
	TOTAL ANNUAL COSTS**	-	0

\*Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	CKTP Digester Building PNL 600	0 Relocation	_
Project ID	HW-11		
Criticality	Low		
Facilities	<ul> <li>CKTP</li> </ul>		
Prerequisites	<ul> <li>NA-4, DC-27A, DC-27B</li> </ul>		
Duration	12 Months		
Description	This project will relocate PNL 6000 control panel in a properly condition as a hazardous-area classification. planned to be relocated due to the location but is being considered as therefore not in the scope of this mathematical transfer of the project is considered an opport be rescheduled if necessary.	ned environment to The MCC in the copoor conditions in part of the larger aster plan so cost	hat is not classified ligester building is the current project and is not included.
Impacted Stakeholders	Operation Staff I&C Technicians System Integrators		
Cost	CAPITAL COSTS	%	COST OPINION*
Opinion*	Hardware	-	\$57,500
Оринон	Software	-	-
	Integration	-	\$11,000
	Administration/Quality Control	10%	\$6,850
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$80,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Implement CKTP Instrumentation Improvements
Project ID	HW-13
Criticality	Medium
Facilities	<ul> <li>CKTP</li> </ul>
Prerequisites	<ul> <li>NA-4, DC-27A, DC-27B, DC-28</li> </ul>
Duration	18 Months
Description	This project will perform an assessment of their Instrumentation equipment to determine the need for upgrades and replacement. The project will include the following:
	<ul> <li>Perform an alternatives analysis for implementing a direct means of plant effluent flow measurement to assess costs and feasibility of available options.</li> </ul>
	<ul> <li>Provide additional analytical probes and, potentially, aeration flowmeters per recommendations from a separate BNR optimization task in the Sewer Utility facility planning program.</li> </ul>
	<ul> <li>Install a flowmeter on the plant wastewater pump station discharge line to obtain a return flow measurement to upstream of the primary diversion channel. A magmeter could be installed in a new meter vault downstream from the valve vault potentially since there is no adequate room in the existing wastewater pump station valve vault.</li> </ul>
	<ul> <li>Install a flowmeter on the primary sludge line to GBTs to monitor primary sludge flow from the primary sludge pumps.</li> </ul>
	<ul> <li>Install a flowmeter on the scum line to GBTs to monitor primary and secondary scum flow from the scum pumps.</li> </ul>
	<ul> <li>Install a flowmeter on the mixed liquor line from the mixed liquor distribution channel foam wasting sump to monitor mixed liquor flow to the digesters.</li> </ul>
	<ul> <li>Install flowmeters on the thickened sludge lines from the GBTs to the thickened sludge blending tank to monitor individual thickened sludge flows from each GBT.</li> </ul>
	<ul> <li>Install a flowmeter on the thickened sludge line from the hauled sludge receiving station to the thickened sludge blending tank to monitor hauled sludge flows received from remote WWTPs.</li> </ul>
	<ul> <li>Install flowmeters on the digested sludge lines from the digesters to the centrifuges to monitor individual digested sludge flows from each digester.</li> </ul>
	• During next septage receiving station upgrade, ensure that the replacement vendor package system includes incoming septage flow monitoring.
	<ul> <li>Service or replace the lower explosive limit (LEL) transmitter on the headworks odor control fan ductwork.</li> </ul>
	<ul> <li>Service or replace the chlorine residual and turbidity analyzers associated with the reclaimed water system.</li> </ul>
	<ul> <li>Service or replace the thermal dispersion flowmeter installed on the aeration line for the aerated grit tank 1 stage 2 diffuser.</li> </ul>
	<ul> <li>Install suspended solids probes in the aeration basins and WAS pump discharge line to support automated calculation of hydraulically determined solids retention time. If installation is infeasible, a probe could be installed on</li> </ul>



	the RAS pumps discharge line with the assumption that the suspended solids profile would be the same.			
	This project is considered an opporturescheduled if necessary.	nity project by the cou	nty and can be	
Impacted Stakeholders	Operation Staff I&C Technicians System Integrators			
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*	
	Hardware	-	\$74,750	
	Software	-	-	
	Integration	-	\$88,000	
	Administration/Quality Control	10%	\$16,275	
	MISC Expenses	-	\$5,000	
	TOTAL CAPITAL COSTS	-	\$184,000	
	ANNUAL O&M COSTS	%	COST OPINION*	
	TOTAL ANNUAL COSTS**	-	0	

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Include Integration of Composite Sampler Alarms and Monitoring with Replacement of Existing Samplers		
Project ID	HW-12		
Criticality	Medium		
Facilities	<ul> <li>WWTPs and Remote Pump Stations</li> </ul>	3	
Prerequisites	<ul> <li>SW-24, DC-27A, DC-27B</li> </ul>		
Duration	6 Months		
Description	This project will integrate the composite alarms and statuses at SCADA. The Set SCADA requirements to the vendors so communication options can be integrated quotes for the samplers from vendors are sampler costs were not included.  This project will be handled internally by considered an opportunity project by the necessary.	wer Utility will need that the appropriated. The Sewer Utiled are currently extended the Sewer Utility	ed to communicate the late hardwired and lity has received valuating them, so
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	-
	Software	-	-
	Integration	-	\$5,000
	Administration/Quality Control	10%	-
	MISC Expenses	=	-
	TOTAL CAPITAL COSTS	-	\$5,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Implement CKTP Automation Improv	vements	
Project ID	HW-14		
Criticality	Medium		
Facilities	<ul> <li>CKTP</li> </ul>		
Prerequisites	<ul> <li>NA-4, HW-13, DC-27A, DC-27B, D</li> </ul>	C-28	
Duration	12 Months		
Description	This project will perform an assessmer determine the need for upgrades and r following:		• •
	<ul> <li>Develop a SCADA HMI screen to n flow balance for the plant along with the tanks basins, and clarifiers.</li> </ul>	•	•
	<ul> <li>Develop a SCADA HMI screen for stream flow balance for the plant along digesters, and the thickened sludge bleam</li> </ul>	with detention time	•
	<ul> <li>Provide PLC programming and SC automated control of the BNR process BNR optimization task in the Sewer Util</li> </ul>	per recommendation	ons from the separate
	<ul> <li>Develop a SCADA HMI screen to pawareness for the load shedding and eplanned and unplanned transitions between.</li> </ul>	mergency load seq	uencing during
	<ul> <li>Replace the headworks odor contrassociated instrumentation to restore a sprinklers/soaker hose. The Sewer Util to be implemented as an optional overcoperations staff to manually initiate and biofilter from SCADA HMIs.</li> </ul>	utomated control or ity will allow the SC ide of the sprinkler	f the biofilter ADA manual controls control panel to allow
	<ul> <li>Provide PLC programming modifications interlock for the thickened sludge blend feed pumps based on tank level transmelimination of the thickened sludge blend tillity will also replace the low-level sw</li> </ul>	ling tank circulation nitter measurement nding tank low level	pump and digester to support
	<ul> <li>Establish monitoring of high torque warning and high-high torque shutdo conditions at SCADA for its primary clarifiers.</li> </ul>		
	This project is considered an opportunit rescheduled if necessary.	ty project by the co	unty and can be
Impacted Stakeholders	Operation Staff I&C Technicians System Integrators		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
-	Hardware	-	\$86,825
	Software	-	- 040 400
	Integration	- 10%	\$48,400

Project Name	Implement CKTP Automation Improvements		
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$154,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Implement KWWTP Instrumentation In	nprovements	
Project ID	HW-15		
Criticality	Medium		
Facilities	<ul> <li>KWWTP</li> </ul>		
Prerequisites	<ul> <li>NA-4, DC-27A, DC-27B, DC-28</li> </ul>		
Duration	6 Months		
Description	This project will perform an assessment of KWWTP to determine the need for upgra following:		• •
	<ul> <li>Install a flowmeter for the thickened s station.</li> </ul>	ludge storage ta	nk truck loadout
	<ul> <li>Install a flowmeter on the biofilter sun monitor biofilter drainage flow to the oxida</li> </ul>		discharge line to
	<ul> <li>Install a flowmeter on the process builine to monitor return flow to the headwor</li> </ul>	•	p station discharge
	<ul> <li>Install a flowmeter on the W2 line downstream from the hydropneumatic tank to monitor W2 flow to plant processes.</li> </ul>		
	<ul> <li>Install a flowmeter on the secondary scum pump discharge line to monitor secondary scum flow to the WAS/TWAS tanks.</li> </ul>		
	<ul> <li>Install suspended solids probes in the KWWTP based on the outcome of suspendetermined SRT calculation performance</li> </ul>	nded solids prob	
	This project is considered an opportunity rescheduled if necessary.	project by the co	ounty and can be
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS Hardware	% -	<b>COST OPINION*</b> \$36,225
	Software Integration Administration/Quality Control MISC Expenses TOTAL CAPITAL COSTS	- 10% -	\$55,000 \$9,123 \$5,000 <b>\$105,000</b>
	ANNUAL O&M COSTS	<u>-</u> %	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Implement KWWTP Automation Imp	rovements	
Project ID	HW-16		
Criticality	Medium		
Facilities	<ul><li>KWWTP</li></ul>		
Prerequisites	<ul> <li>NA-4, NA-7, HW-15, DC-27A, DC-27B, DC28</li> </ul>		
Duration	6 Months		
Description	This project will perform an assessment of their Automation equipment at KWWTP to determine the need for upgrades and replacement. The project w include the following:		
	<ul> <li>Develop a SCADA HMI screen for stream flow balance for the plant along ditches, and clarifiers.</li> </ul>	•	•
	<ul> <li>Develop a SCADA HMI screen for is stream flow balance for the plant along TWAS tanks.</li> </ul>	•	
	<ul> <li>With favorable results from the suspended solids probes and hydraulically determined SRT calculations at CKTP, The Sewer Utility will develop PLC programming and SCADA HMI modifications to monitor mixed liquor suspended solids and WAS suspended solids and to calculate hydraulically determined SRT at KWWTP.</li> </ul>		
	This project is considered an opportuni rescheduled if necessary.	ty project by the co	unty and can be
Impacted Stakeholders	Operation Staff I&C Technicians System Integrators		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
•	Hardware	-	-
	Software	-	-
	Integration	100/	\$35,200
	Administration/Quality Control MISC Expenses	10%	\$3,520
	TOTAL CAPITAL COSTS	-	\$39,000
	101/12 OAI IIAE GOOTG		Ψ00,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0
ofor to Appondix	Λ for more information on the cost o	ninian annraach	Totala and aubtotala

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Implement MWWTP Instrumentation Improvements	
Project ID	HW-17	
Criticality	Medium	
Facilities	<ul> <li>MWWTP</li> </ul>	
Prerequisites	<ul> <li>NA-4, DC-27A, DC-27B, DC28</li> </ul>	
Duration	12 Months	
Description	This project will perform an assessment of their Instrumentation equipm MWWTP to determine the need for upgrades and replacement. The proinclude the following:	
	<ul> <li>Install a flowmeter for the thickened sludge storage tank truck loads station.</li> </ul>	out
	<ul> <li>Evaluate the installation of an ultrasonic or radar level instrument a existing Parshall flume downstream from the grit chamber to obtain this measurement.</li> </ul>	
	<ul> <li>Replace the magmeter on the sludge line feeding the GBT.</li> </ul>	
	<ul> <li>Install a flowmeter on the odor control blowdown sump discharge li headworks to monitor blowdown return from odor control.</li> </ul>	ne to the
	<ul> <li>Install a flowmeter on the W2 line downstream from the hydropneutank to monitor W2 flow to plant processes.</li> </ul>	matic
	<ul> <li>Service or replace the flowmeter on the W3 line to restore monitoring flow to plant processes.</li> </ul>	ng of W3
	<ul> <li>Install a flowmeter on the in-plant pump station discharge line to ob return flow measurement to the headworks.</li> </ul>	tain
	<ul> <li>Install a flowmeter on the WAS line from the RAS pump station to t tanks to monitor WAS flow.</li> </ul>	he WAS
	<ul> <li>Install a flowmeter on the secondary scum pump discharge line to r secondary scum flow to the WAS/TWAS tanks.</li> </ul>	monitor
	<ul> <li>Consider installation of suspended solids probes in the aeration bat WAS line at MWWTP based on the outcome of the suspended solids pand hydraulically determined SRT calculation performance at CKTP.</li> </ul>	
	<ul> <li>Install analytical probes in the aeration basins to monitor the BNR proces as part of the plant upgrade to adapt to new TN limits.</li> <li>Install a level transmitter for the sodium hypochlorite tank and install local indication of tank level at the location from which the tank is filled.</li> </ul>	
	<ul> <li>Service or replace non-functional combustible gas-monitoring equipments the sludge pumping gallery, headworks odor control system, and WAS</li> </ul>	
	This project is considered an opportunity project by the county and can rescheduled if necessary.	be
Impacted Stakeholders	Operation Staff	
Cost Opinion*	Hardware -	<b>PINION*</b> \$64,400
	Software - Integration -	\$88,000
	integration -	ψυυ,υυυ

Project Name	Implement MWWTP Instrumentation Improvements		
	Administration/Quality Control	10%	\$15,240
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$173,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Implement MWWTP Automation Impro	vements	
Project ID	HW-18		
Criticality	Medium		
Facilities	<ul><li>MWWTP</li></ul>		
Prerequisites	<ul> <li>NA-4, NA-7, HW-17, DC-27A, DC-27</li> </ul>	B, DC-28	
Duration	6 Months		
Description	This project will perform an assessment of MWWTP to determine the need for upgratinclude the following:  Develop a SCADA HMI screen for mostream flow balance for the plant along working clarifiers.	des and replace	ment. The project will prehensive liquid
	<ul> <li>Develop a SCADA HMI screen for mostream flow balance for the plant along wand TWAS tanks.</li> </ul>	-	•
	<ul> <li>With favorable results from the susper determined SRT calculations at CKTP, the programming and SCADA HMI modifications suspended solids and WAS suspended solids and WAS suspended solids and WAS suspended solids.</li> </ul>	e Sewer Utility wons to monitor m	ill develop PLC ixed liquor
	<ul> <li>Develop PLC programming and SCAI operations staff to schedule and adjust as sequence from SCADA HMIs.</li> </ul>		
	<ul> <li>Install an electrically actuated isolation tanks to enable SCADA control of the slun programming and SCADA HMI screen me functionality for operations staff to manual SCADA.</li> </ul>	dge wasting proc odifications will b	ess. PLC e developed to add
<ul> <li>Wire a fault signal from the mixing channel blower motor starter to discrete input at the LP-225 RIO rack in the headworks building and p PLC programming and SCADA HMI screen modification to integrate talarm.</li> </ul>		ilding and provide	
	This project is considered an opportunity rescheduled if necessary.	project by the co	unty and can be
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	-
	Software	-	e40.000
	Integration Administration/Quality Control	- 10%	\$49,000 \$4,900
	MISC Expenses	1070	φ <del>4</del> ,900
	TOTAL CAPITAL COSTS	-	\$54,000
			70-1,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

\*Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Implement SWWTP Instrumentation Imp	orovemente	
Project ID	HW-19	Jioveilleills	
Criticality	Medium		
Facilities	SWWTP		
Prerequisites	<ul> <li>NA-4, DC-27A, DC-27B, DC-28</li> </ul>		
Duration	12 Months		
Description	This project will perform an assessment of SWWTP to determine the need for upgrad include the following:  • Service or replace the combustible gas	es and replacer	nent. The project will
	process building upper floor process room	• .	
	<ul> <li>Install a flowmeter for the thickened slustation.</li> </ul>	udge storage tar	nk truck loadout
	<ul> <li>Verify calibration of the thickened sludy.         After calibrating, record a series of measure level during two or three tank loadout oper of level measurement are unacceptable, in replace the pressure-based level transmitt location on the pump suction line. Record nozzle was provided on the tank for a future for installation of the radar level transmitter.     </li> </ul>	red level values rations. If accura nstall a radar lev er currently insta drawings indica re instrument, w	versus actual tank ncy and repeatability el transmitter to alled in a non-ideal te that a spare 6-inch
	<ul> <li>Install a radar level transmitter for mon tank level with a level switch that can prov</li> </ul>	•	•
	<ul> <li>Install DO probes in the SBRs. Dependence facility planning, the Sewer Utility should control to facilitate improved monitoring and control</li> </ul>	onsider addition ol of the BNR pr	al analytical probes ocess.
	<ul> <li>Replace the damaged thermal dispers water supply line.</li> </ul>	ion flow switch o	on the RDT spray
	<ul> <li>Consider the installation of suspended line at SWWTP based on the outcome of the hydraulically determined SRT calculation pages.</li> </ul>	he suspended s	olids probe and
	<ul> <li>Install a flowmeter on the discharge lin station to monitor return flow to the headw</li> </ul>		• •
	<ul> <li>Install a flowmeter on the W3 line down pumps to monitor W3 flow to plant process</li> </ul>		e reclaimed water
	<ul> <li>Service or replace the process building information on the square footage and fee estimate).</li> </ul>		`
	This project is considered an opportunity prescheduled if necessary.	project by the co	unty and can be
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*

Hardware

\$43,700

Project Name	Implement SWWTP Instrumentation	Improvements	
	Software	-	-
	Integration	-	\$66,000
	Administration/Quality Control	10%	\$10,970
	MISC Expenses	-	\$5,000
	TOTAL CAPITAL COSTS	-	\$126,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**		0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Implement SWWTP Automation Improvement	ents	
Project ID	HW-20		
Criticality	Medium		
Facilities	<ul><li>SWWTP</li></ul>		
Prerequisites	<ul> <li>NA-4, NA-7, HW-19, DC-27A, DC-27B, D0</li> </ul>	C-28	
Duration	6 Months		
Description	This project will perform an assessment of the SWWTP to determine the need for upgrades a include the following:		
	<ul> <li>Develop a SCADA HMI screen for monitor stream flow balance for the plant along with H</li> </ul>	•	
	<ul> <li>Develop a SCADA HMI screen for monitor stream flow balance for the plant along with de sludge storage tank.</li> </ul>	•	•
	<ul> <li>Service or replace the effluent flow control maintain positions from SCADA-issued comm shutdown and the Sewer Utility will utilize this upgrades as well.</li> </ul>	ands. This v	will have to be done a
	This project is considered an opportunity project rescheduled if necessary.	ect by the co	ounty and can be
Impacted	Operation Staff		
Stakeholders	I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	-
	Software	-	- -
	Integration	- 10%	\$44,000
	Administration/Quality Control MISC Expenses	10%	\$4,400
	TOTAL CAPITAL COSTS	-	\$48,000
			ψ-10,000
	ANNUAL O&M COSTS	%	COST OPINION*

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Implement Remote Pump Station Inst	rumentation Imp	rovements
Project ID	HW-21		
Criticality	Medium		
Facilities	<ul> <li>Remote Pump Stations</li> </ul>		
Prerequisites	<ul> <li>NA-4, DC-27A, DC-27B, DC-28</li> </ul>		
Duration	6 Months		
Description	This project will perform an assessment their remote pump stations to determine replacement. The project will include the	the need for upgr	• •
	<ul> <li>Install pressure transmitters on remomenitor force main pressures. 12 pressures pump stations with PLC's installed alrea</li> </ul>	ıre transmitters wi	II be installed in the
	<ul> <li>Service or replace the combustible g wet well.</li> </ul>	as monitoring equ	uipment at the PS-24
<ul> <li>Replace PS-24 wet well level transducer and transmitter, which has service for about 20 years. With the replacement of the level transducer submergence shield will also be implemented. If the Sewer Utility is una replace the level transducer, then the current level transducer will be recalibrated and serviced.</li> </ul>		vel transducer, a er Utility is unable to	
	<ul> <li>Install a level transmitter for the PS-71 BIOXIDE storage tank.</li> </ul>		ge tank.
<ul> <li>Service or replace the combustible-gas monitoring equipment a wet well.</li> </ul>		uipment at the PS-71	
	This project is considered an opportunity rescheduled if necessary.	/ project by the co	ounty and can be
Impacted Stakeholders	Operation Staff I&C Technician		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	\$69,230
	Software	-	-
	Integration	100/	\$110,000
	Administration/Quality Control MISC Expenses	10%	\$17,923 \$5,000
	TOTAL CAPITAL COSTS	-	\$202,000
			Ψ202,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project ID Criticality Facilities Prerequisites Duration Description	Medium Remote Pump Stations NA-4, NA-7, HW-21, DC-27A, DC-27B, D Months This project will perform an assessment of the remote pump stations to determine the need of the project will include the following: Develop SCADA HMI screens to provide a diagram depiction of the conveyance system summary conveyance system screens will disforce main pressure, and indication of whether pump station. Implement time-to-overflow monitoring for Modify the existing PLC programming logic operating points while within normal level rangestations with VFDs that are monitoring pump on Review the hardwired relay logic and PLC pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life. Upgrade the control system at PS-34. The include replacement of the existing control pa	eir Automa or upgrad a summary associated play pump r an alarm its critical c to favor ge in the w cower and programm conditions ap station. , the Sewe ce or elimite of the ec	es and replacement.  y-level, process flow d with each WWTP. The p running status, flow, n is active for each  (or all) pump stations. energy efficient wet well for pump d flow. ming for the existing s, which will contribute . After review of existing er Utility will implement inate pump short cycling quipment.
Facilities Prerequisites Duration	<ul> <li>Remote Pump Stations</li> <li>NA-4, NA-7, HW-21, DC-27A, DC-27B, D</li> <li>Months</li> <li>This project will perform an assessment of the remote pump stations to determine the need of the project will include the following:</li> <li>Develop SCADA HMI screens to provide a diagram depiction of the conveyance system summary conveyance system screens will disforce main pressure, and indication of whether pump station.</li> <li>Implement time-to-overflow monitoring for</li> <li>Modify the existing PLC programming logic operating points while within normal level rangestations with VFDs that are monitoring pump on the pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life.</li> <li>Upgrade the control system at PS-34. The</li> </ul>	eir Automa or upgrad a summary associated play pump r an alarm its critical c to favor ge in the wo cower and programm conditions ap station. , the Sewe ce or elimite of the ec	es and replacement.  y-level, process flow d with each WWTP. The p running status, flow, n is active for each  (or all) pump stations. energy efficient wet well for pump d flow. ming for the existing s, which will contribute . After review of existing er Utility will implement inate pump short cycling quipment.
Prerequisites  Duration	<ul> <li>NA-4, NA-7, HW-21, DC-27A, DC-27B, D</li> <li>12 Months</li> <li>This project will perform an assessment of the remote pump stations to determine the need of the project will include the following:</li> <li>Develop SCADA HMI screens to provide a diagram depiction of the conveyance system summary conveyance system screens will disforce main pressure, and indication of whether pump station.</li> <li>Implement time-to-overflow monitoring for</li> <li>Modify the existing PLC programming logic operating points while within normal level rangestations with VFDs that are monitoring pump of the pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life.</li> <li>Upgrade the control system at PS-34. The</li> </ul>	eir Automa or upgrad a summary associated play pump r an alarm its critical c to favor ge in the wo cower and programm conditions ap station. , the Sewe ce or elimite of the ec	es and replacement.  y-level, process flow d with each WWTP. The p running status, flow, n is active for each  (or all) pump stations. energy efficient wet well for pump d flow. ming for the existing s, which will contribute . After review of existing er Utility will implement inate pump short cycling quipment.
Duration	This project will perform an assessment of the remote pump stations to determine the need of the project will include the following:  Develop SCADA HMI screens to provide a diagram depiction of the conveyance system summary conveyance system screens will disforce main pressure, and indication of whether pump station.  Implement time-to-overflow monitoring for Modify the existing PLC programming logic operating points while within normal level rangestations with VFDs that are monitoring pump a Review the hardwired relay logic and PLC pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life.  Upgrade the control system at PS-34. The	eir Automa or upgrad a summary associated play pump r an alarm its critical c to favor ge in the wo cower and programm conditions ap station. , the Sewe ce or elimite of the ec	es and replacement.  y-level, process flow d with each WWTP. The p running status, flow, n is active for each  (or all) pump stations. energy efficient wet well for pump d flow. ming for the existing s, which will contribute . After review of existing er Utility will implement inate pump short cycling quipment.
	This project will perform an assessment of the remote pump stations to determine the need of the project will include the following:  Develop SCADA HMI screens to provide a diagram depiction of the conveyance system summary conveyance system screens will disforce main pressure, and indication of whether pump station.  Implement time-to-overflow monitoring for Modify the existing PLC programming logic operating points while within normal level rangestations with VFDs that are monitoring pump on Review the hardwired relay logic and PLC pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life.  Upgrade the control system at PS-34. The	a summary associated play pumper an alarm its critical ce to favor ge in the woower and conditions ap station, the Sewer er elimite of the econditions and the sewer er elimite of the econditions and the sewer er elimite of the econditions and the sewer er elimite er end the econditions and the sewer er elimite er end the econditions are several end to the econditi	es and replacement.  y-level, process flow d with each WWTP. The p running status, flow, n is active for each  (or all) pump stations. energy efficient wet well for pump d flow. ming for the existing s, which will contribute . After review of existing er Utility will implement inate pump short cycling quipment.
Description	remote pump stations to determine the need of The project will include the following:  Develop SCADA HMI screens to provide a diagram depiction of the conveyance system summary conveyance system screens will districted force main pressure, and indication of whether pump station.  Implement time-to-overflow monitoring for Modify the existing PLC programming logic operating points while within normal level rangestations with VFDs that are monitoring pump a Review the hardwired relay logic and PLC pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life.  Upgrade the control system at PS-34. The	a summary associated play pumper an alarm its critical ce to favor ge in the woower and conditions ap station, the Sewer er elimite of the econditions and the sewer er elimite of the econditions and the sewer er elimite of the econditions and the sewer er elimite er end the econditions and the sewer er elimite er end the econditions are several end to the econditi	es and replacement.  y-level, process flow d with each WWTP. The p running status, flow, n is active for each  (or all) pump stations. energy efficient wet well for pump d flow. ming for the existing s, which will contribute . After review of existing er Utility will implement inate pump short cycling quipment.
	diagram depiction of the conveyance system a summary conveyance system screens will districted force main pressure, and indication of whether pump station.  Implement time-to-overflow monitoring for Modify the existing PLC programming logic operating points while within normal level rang stations with VFDs that are monitoring pump PLC pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life.  Upgrade the control system at PS-34. The	associated play pump r an alarm its critical c to favor ge in the woower and programm conditions ap station, the Sewe ce or elimite of the econdition of the	d with each WWTP. The prunning status, flow, in is active for each (or all) pump stations. energy efficient wet well for pump d flow. If the existing is, which will contribute after review of existing for Utility will implement that pump short cycling quipment.
	<ul> <li>Modify the existing PLC programming logic operating points while within normal level range stations with VFDs that are monitoring pump per stations.</li> <li>Review the hardwired relay logic and PLC pump controls to confirm the as-implemented to the pump short cycling occurring at the pump controls and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life.</li> <li>Upgrade the control system at PS-34. The</li> </ul>	c to favor ge in the woower and programmed conditions up station. the Sewe ce or elimite of the ec	energy efficient wet well for pump If flow. ming for the existing s, which will contribute After review of existing er Utility will implement inate pump short cycling quipment.
	<ul> <li>Review the hardwired relay logic and PLC pump controls to confirm the as-implemented to the pump short cycling occurring at the puncontrols and near-real-time pump station data the appropriate control improvements to reduce at the station to increase the useful service life</li> <li>Upgrade the control system at PS-34. The</li> </ul>	programmed	ming for the existing s, which will contribute . After review of existing er Utility will implement inate pump short cycling quipment.
		control s	vetem unarade would
	panel and an OIT for improved local monitoring		PLC-based control
	<ul> <li>Evaluate the remote alarm reset functional alarms. Remote reset capability will likely requiremote pump station, in addition to PLC programodifications.</li> </ul>	uire additio	onal hardwiring at the
	This project is considered an opportunity project rescheduled if necessary.	ect by the	county and can be
Impacted	Operation Staff		
Stakeholders	I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION
	Hardware	-	
	Software Integration	-	<u> </u>
	Integration Administration/Quality Control	10%	\$55,000 \$5,500
	MISC Expenses	-	φυ,υυι
	TOTAL CAPITAL COSTS	-	\$61,000
			¥2., <b>00</b>
	ANNUAL O&M COSTS	%	

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

## **5.3 Software Projects**

Project Name	Upgrade WWTP Standalone SCADA Platform with Managed InTouch App Based on HPHMI Concepts		
Project ID	SW-23		
Criticality	Medium		
Facilities	<ul><li>WWTPs</li></ul>		
Prerequisites	<ul><li>None</li></ul>		
Duration	N/A		
	CKTP OT Network. The Sewer Utility at converting the standalone InTouch HMI the SCADA HMI screen development a Standards (DC-27) are complete, the new System Platform upgraded HMI screens Stations. The upgrades will be implement screens and will require graphical adjust determine the visual and functional requirements. During these workshops, the Standard to confirm the final implementation.	applications, which applications, which management. It was standards will be standards at the alread standards. Workshop wirements of the fusion meets the Section meets the Section meets the Section meets the Section meets of the standards.	ch will help towards Once the ICS be implemented to the nd Remote Pump y existing InTouch os will be held to uture SCADA HMI holders will be ewer Utility's needs.
Impacted	Operation Staff		
Stakeholders	I&C Technician		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION
	Hardware	-	•
	Software	-	ውር
	Integration Administration/Quality Control	- 10%	\$0 \$0
	MISC Expenses	-	Ψ.
	TOTAL CAPITAL COSTS	-	\$0
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**		(

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



	Implement an Alarm Management Progra	m Based on	ISA-18.2
Project ID	SW-24		
Criticality	High		
Facilities	<ul> <li>WWTPs and Pump Stations</li> </ul>		
Prerequisites	<ul> <li>NA-1, NA-4, DC-27A, DC-27B</li> </ul>		
Duration	6 Months		
Description	This project will implement an alarm manage The Sewer Utility will continue developing its parallel with or prior to other ICS automation management program will address the follow	s alarm mana ı programmin	gement program in g efforts. The alarm
	<ul> <li>Lots of activity from the same alarm duri Implementation.</li> </ul>	ng CKTP Wo	nderware
	<ul> <li>No means of shelving nuisance alarms of issues.</li> </ul>	or alarms ass	ociated with known
	<ul> <li>HMI screens do not provide alarm priorit means to filter out alarms by priority.</li> </ul>	y information	and do not have any
	<ul> <li>Root-cause analysis and alarm suppression functionality have not been developed for HMI screens</li> <li>HMI screens do not have troubleshooting text prompt or decisions tree aid to help operation staff react to alarm conditions</li> </ul>		ality have not been
			or decisions tree aids
<ul> <li>Alarm summary and alarm history screens at SWWTP do not automatise.</li> <li>display current alarm information.</li> </ul>		odo not automatically	
	<ul> <li>Monitored alarms should include PLC faults and communication errors sthat Sewer Utility staff are alerted when PLCs and RIO racks are experienci performance issues</li> <li>Monitored alarms should include signal out-of-range alarms for all analogous</li> </ul>		icks are experiencing
signals so that Sewer Utility staff are notified when current-based outside of the 4–20 mA range			
	The data related to the ICS alarms will be captured in the historian or anot database environment and be made available to users on the Sewer Utility Business LAN. Third-party alarm management software or dashboards will used to develop visualizations and reports that will help manage alarms are		n the Sewer Utility or dashboards will be
	help with responsiveness.		
Impacted Stakeholders	Operation Staff  I&C Technician		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	-
	Software	-	- A 10 - 20
	Integration	100/	\$49,500
	Administration/Quality Control	10%	\$4,950
	MISC Expenses TOTAL CAPITAL COSTS	-	¢£4,000
	TOTAL CAPITAL COSTS	-	\$54,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0
ofento Annondiv A	for more information on the cost eninion appro	ash Tatala a	<u>_</u>

<sup>\*</sup>Refer to Appendix A for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Establish a Tiered Historian Impleme	entation at CKTP	
Project ID	SW-25		
Criticality	Medium		
Facilities	<ul><li>CKTP</li></ul>		
Prerequisites	<ul> <li>NA-2, NA-7, DC-27A, DC-27B</li> </ul>		
Duration	3 Months		
Description	This project will establish a central hist received from the Sewer Utility WWTP trends would display data that have be The AVEVA Historian Client software whistorian data and facilitate developme PCs on the OT network but cost has not the scope of the master plan. To preveduring an outage, store-and-forward fuz" historian will be established on the Sprovide access to the historian data for data through the DMZ to the "Tier 2" High data flow and limited open port require configuration, improve OT network section that the configuration during the historian impless by the County IS Department.	s and remote pump en received from the will be implemented ent of static and ad ho of been included be ent loss of data recei- inctionality will be im- Sewer Utility Busines r users. The "Tier 1" istorian and the one ments will simplify in- curity controls, and se trial DMZ firewall. Al	stations. Embedded e central historian. to access the loc trends from the cause it is not within lived from the plants aplemented. A "Tier as LAN at CKTP to Historian will push a-way nature of this adustrial DMZ firewall aignificantly reduce any additional Firewall
Impacted Stakeholders	Operation Staff I&C Technician		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	- -
	Software	-	\$64,837 \$16,500
	Integration Administration/Quality Control	10%	\$16,500 \$8,134
	MISC Expenses	10 /0	φυ, 134
	TOTAL CAPITAL COSTS	-	\$89,000
	ANNUAL O&M COSTS	%	COST OPINION*

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

Project Name	Broaden the Data Set Archived by the Sewer utility Historian to Establish Foundations for More Comprehensive Process-and Asset-level Health and Performance Monitoring
Project ID	SW-26
Criticality	Medium
Facilities	<ul> <li>WWTPs and Pump Stations</li> </ul>
Prerequisites	■ NA-4, DC-27B, DC-28
Duration	9 Months
Description	This project will audit the parameters that are being monitored and configure the site Tier 1 historian to historize the parameters of interest.



## Project Name Broaden the Data Set Archived by the Sewer utility Historian to Establish Foundations for More Comprehensive Process-and Asset-level Health and Performance Monitoring

The project will also include the following in the historian:

- In Auto Status
- Close/Open Commands
- Position Commands
- Start/Stop Commands
- Speed Commands
- Set Point Commands
- Energy Consumption Status
- · Power Data Status
- Fail/Fault Alarm
- Networked Equipment alarms and warnings
- · Actuator Torque Status
- Pump Suction and Discharge Pressure Status
- Liquid Stream and Solid Stream Low and Flow Totalization Status

To monitor and record the above parameters, the PLC program, filed wiring, and Ethernet Device configuration will need to be investigated. No hardware costing for any required updates has been included in this cost.

Impacted	Operation Staff		
Stakeholders	I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	-
	Software	-	-
	Integration	-	\$68,200
	Administration/Quality Control	10%	\$6,820
	MISC Expenses	-	-
	TOTAL CAPITAL COSTS	-	\$75,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

## 5.4 Documentation Projects Project Name Develop ICS Standards - Hardware

Project Name	Develop ICS Standards - Hardware		
Project ID	DC-27A		
Criticality	Medium		
Facilities	<ul> <li>WWTPs and Pump Stations</li> </ul>		
Prerequisites	<ul><li>None</li></ul>		
Duration	4 Months		
Description	This project will develop PLC, HMI, and	l control panel st	tandards.
	The ICS control and telemetry panel hard and template drawings that specify hardword control panel interior and exterior layouts fabrication, testing, and installation requitelemetry panels at Sewer Utility WWTP would also document network device confor Ethernet switches, cellular gateways, installed within these panels.  Anticipated standards to be created are:	vare component s; power distribute for new and pump state of figuration and be a second state of the second	requirements; general ation methodology; and ICS control and ions. The standards nardening requirements
	SCADA Instrument and Vendor Commu		
	SCADA Equipment Procurement Std		
Impacted Stakeholders	Operation Staff		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	\$5,750
	Software	-	- #120 400
	Integration	100/	\$129,400
	Administration/Quality Control	10%	\$13,515
	MISC Expenses TOTAL CAPITAL COSTS	-	\$5,000 <b>\$154,000</b>
	TOTAL CAFTTAL COSTS	<u>-</u>	\$154,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



Project Name	Develop ICS Standards – Software and Governance
Project ID	DC-27B
Criticality	Medium
Facilities	WWTPs and Pump Stations
Prerequisites	• DC-27A
Duration	6 Months
Description	This project will develop PLC, HMI, and control panel standards.
	The PLC standard will include information like preferred PLC programming project file organization; appropriate level of annotation; tagging conventions; use of tag descriptions; program and routine naming conventions; use of ladder logic and function block diagram; and standard AOIs, UDTs, and subroutines that are to be used for common applications throughout the Sewer Utility ICS infrastructure.'
	The HMI graphics standard will include guidelines with screenshots and programming files that specify requirements and standard programming objects for graphics development and configuration work associated with AVEVA System Platform.
	Once the ICS Standards Documentation are created, which will contain PLC Programming standards, HMI graphics standards, and ICS control and telemetry panel hardware standards, it will be managed by a standards committee. The members of the committee will be technically qualified and be willing to participate in maintaining the standards. There will also be an ICS standards manager who will enforce the development of the standards and will oversee revising the document when necessary. The standards manager will also be responsible for maintaining version control of the document and make sure that the contractors have the most updated version available so that they may meet the requirements.
	With the standards being created, the Sewer Utility will establish an appropriate method for Operators to electronically log daily notes, observations, and activities. The Sewer Utility will compile relevant P&IDs from past projects into consolidated sets for each WWTP and Pump Station. Then they will be reviewed to the actual infrastructure so that the P&IDs can be updated. After the sets are compared to the current infrastructure, they will be compiled into the eO&M SharePoint site. The Sewer Utility will then develop and maintain the network architecture diagrams for the four WWTPs (physical and logical). They will also develop and maintain an asset inventory for the OT Network devices. The fiber-optic patch panel schedules and the information about the fiber-optic cables and patch panels will also be maintains. The tagging convention for the panels and cables will be standardized and noted on the ICS standard documentation.
	The project will utilize a software platform to implement a dashboarding and data visualization functionality for analyzing data. The project will first select a software solution and then begin developing the ability to create dashboards and visualizations in-house. Staff will need to be trained first and preliminary dashboards will need to be created. As in-house skills develop over time, the

## Project Name Develop ICS Standards - Software and Governance

dashboards and visualizations will become more technical and have more impact in process control and utility management. Once the standards are created remote access via tablets will be available for reference. Anticipated standards to be created are:

SCADA Application Programming Std for PLCs
HMI Software and Architecture Std
SCADA Application Programming Std for HMI
SCADA Data Historization and Archiving Std
SCADA Cybersecurity and Network Monitoring Std
SCADA Software Management and Revision Control Std
Staff Roles and Skills Development Std

## Impacted Stakeholders Cost Opinion\*

Operation Staff

CAPITAL COSTS	%	COST OPINION*
Hardware	-	-
Software	-	-
Integration	-	\$308,300
Administration/Quality Control	10%	\$30,830
MISC Expenses	-	\$5,000
TOTAL CAPITAL COSTS	-	\$344,000
ANNUAL O&M COSTS	%	COST OPINION*
TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.



	Develop and Maintain Control Strateg	y Documentatio	n
Project ID	DC-28		
Criticality	High		
Facilities	<ul> <li>WWTPs and Pump Stations</li> </ul>		
Prerequisites	■ DC-27A		
Duration	18 Months		
Description	This project will develop and maintain or WWTP, pump station process, and equi SCADA. The control strategies will be us data that has been obtained through SC document is created, the document will operation and maintenance SharePoint control strategy will be updated and mar accurate.	pment are control sed to evaluate per ADA. Once the co be available on the site for the Sewer	lled locally and with erformance based on ontrol strategy se County electronic rutility Staff. The
Impacted Stakeholders	Operation Staff		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
•	Hardware	-	-
	Software	-	-
	Integration	-	\$151,800
	Administration/Quality Control	10%	\$15,180
	MISC Expenses	-	-
	TOTAL CAPITAL COSTS	-	\$167,000
	ANNUAL O&M COSTS	%	COST OPINION*
ofonto Ammondia A	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

## 5.5 Other Software Package Projects

	Complete Hach WIMS Implementati	on and Establish D	ata Exchange with			
	AVEVA System Platform					
Project ID	OS-29					
Criticality	Low					
Facilities	<ul> <li>CKTP</li> </ul>					
Prerequisites	<ul> <li>NA-4, NA-7, SW-25, DC-27A, DC-</li> </ul>	-27B, OS-30				
Duration	3 Months					
Description	This project will use Hach WIMS for its system (LIMS) software. The Sewer use automatically import data into the new between Hach WIMS and the Sewer use have the ability to select specific SCAI imports and trend analysis within Hack software will be located is on the busin "Tier 2" historian. In the meantime, the the CKTP OT network while the Indust Project is considered an opportunity prescheduled if necessary.	tility will have its curred that will have the hach will be trued to be that will be trued that will be that will be trued to be that will will be that will will be that will will be	rent SCADA system the exchange ablished, the staff will nges for ad hoc data that the Hach WIMS configured with the will be deployed on aplemented. The			
Impacted	Operation Staff					
Stakeholders	I&C Technicians					
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*			
	Hardware	-	-			
	Software	-	ΦΕ 000			
	Integration Administration/Quality Control	10%	\$5,000			
	MISC Expenses	10 /0	-			
	TOTAL CAPITAL COSTS	-	\$5,000			
			+3,000			
	ANNUAL O&M COSTS	%	COST OPINION*			
	TOTAL ANNUAL COSTS**	-	0			

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.





	Complete Asset Creation and Data Implementation, Establish Automati Develop a Plan for Automating Wor	ic Importing of Ass	set Runtimes, and
Project ID	OS-30		
Criticality	Low		
Facilities	<ul><li>CKTP</li></ul>		
Prerequisites	<ul> <li>NA-4, NA-7, HW-21 SW-25, DC-2</li> </ul>	7A, DC-27B	
Duration	6 Months		
Description	Once the Sewer Utility completes som the assets, this project will establish at the Sewer Utility Historian. The Sewer historian within the business LAN. The implemented as an on-premise solution project will utilize the software's ability generation of work orders to identify as and analog set points that trigger a worlnitially, a small sample of assets will be the work order automation. Once favor develop a schedule to implement this sor event based work order generation LLumin's Machine Interface server soft AVEVA System Platform. To do this, the LLumin Machine Interface Server soft industrial DMZ. First, the Sewer utility LLumin and the "Tier 2" historian and the Sewer utility's CMMS program is developed included. Cartagraph will also be this project. This project is considered can be rescheduled if necessary.	utomatic importing of Utility will be confige LLumin Machine Ir n, running as a Winto support asset species runtime threshourk order within the Lore implemented first rable results are seen system to the remains on a near-real-time fitware will need to come project will need ware to the CKTP Owill start with the dathen expand the LLuloped. The County I in software so no lice integrated with the	of asset runtimes from ured with the "Tier 2" aterface Server will be dows service. The ecific, rule-based olds, alarms, events, .Lumin system. to see the efficacy of en, the project will ander assets. If alarm basis is required, The communicate with to relocate the T Network or ta exchange between umin system after the S Department will bense costs have implementation of
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
- 201 0	Hardware	-	-
	Software	-	-
	Integration	-	\$352,000
	Administration/Quality Control	10%	\$35,200
	MISC Expenses TOTAL CAPITAL COSTS	-	- \$387,000

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

	Begin Leveraging the Sewer Utility's Pow	ver and Ener	gy Data
Project ID	OS-31		
Criticality	Low		
Facilities	<ul> <li>WWTPs and Pump Stations</li> </ul>		
Prerequisites	<ul> <li>NA-4, SW-23, DC-27A, DC-27B</li> </ul>		
Duration	3 Months		
Description	This project will begin recording historical popular monitors and network-capable motor install of network cabling to establish commerce for the Ethernet-capable power monitors the PLC, communication will have to established the AVEVA SCADA software. This informati existing infrastructure's capacity to accept a assess when harmonic distortion is approach Sewer Utility will transition away from the existence Monitoring software in the CKTP SPB control System Platform to monitor and record the State.	controllers. Tunication with at are not cord between the on will be used dditional electriciting unacceptisting GE Encol room and use Sewer Utility's	This will require the a the power monitors. In municating with the e power monitors and ed to evaluate the strical loads and to otable levels. The ervista Viewpoint utilize the AVEVA is power and energy
	The project will install Ethernet-capable pow distribution buses as the equipment is replace not been included in the cost. When installing Sewer Utility will make sure that they will be communication so that power and energy day When determining energy-based metrics the	ced/upgraded ng future moto provided with ata can be mo e Sewer utility	I in the future and has or controllers, the n Ethernet onitored and recorded.
	evaluating its operations and then leverage of its WWTPs and remote pump stations. The from 1 years' worth of data to account for secutilize data analytics and visualization software based KPIs. Once sufficient baseline energy reviewed to identify processes and equipment measures are likely to yield benefits. A form then targeted goals will be set as part of a security of the set as part of a security processes.	ne baselines versonal variate are to track a data is provent where eneal energy audi	will be established ion. The project will nd monitor energy- ided, they will be ergy efficiency dit will take place and
Impacted Stakeholders	Operation Staff I&C Technicians		
Cost Opinion*	CAPITAL COSTS	%	COST OPINION*
	Hardware	-	-
	Software	-	- ¢10 700
	Integration Administration/Quality Control	10%	\$18,700 \$1,870
	MISC Expenses	10%	φ1,07U 
	TOTAL CAPITAL COSTS	-	\$21,000
			Ψ21,000
	ANNUAL O&M COSTS	%	COST OPINION*
	TOTAL ANNUAL COSTS**	-	0

<sup>\*</sup>Refer to **Appendix A** for more information on the cost opinion approach. Totals and subtotals are rounded up to the nearest \$1,000.

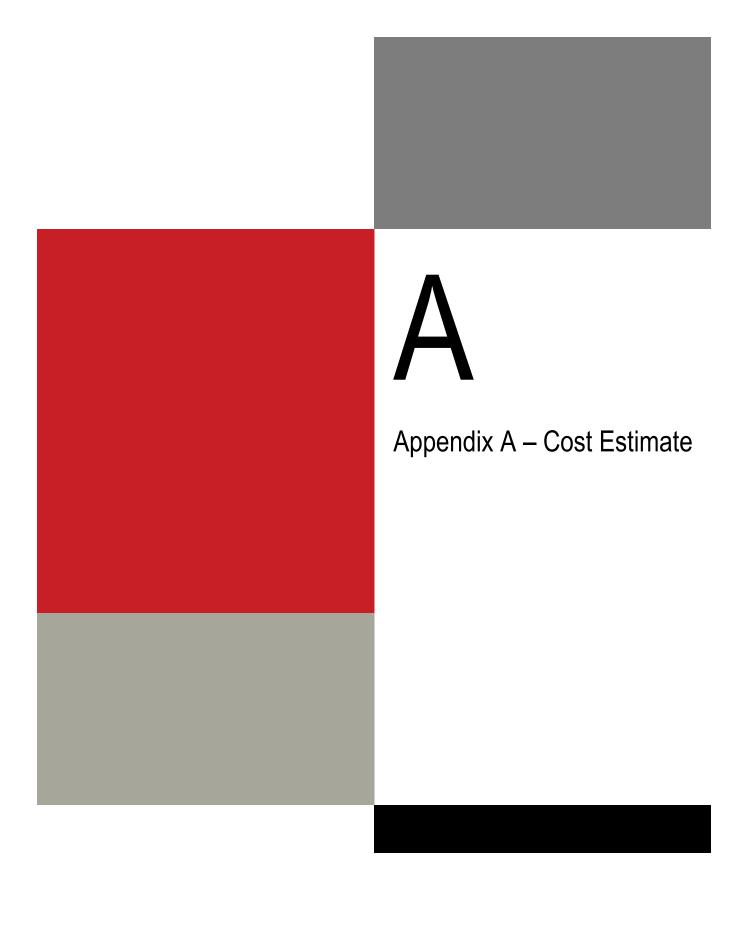



		NA	-1						
	Upgrade Central K	-							
Hardware Items		Qty			it Prices		ed		
			0	\$	-	\$	-		
	Hardware Subto	otal				\$	-		
C-6									
Software Items			0	\$		ċ			
	Software Subto	ntal	U	Ş	-	\$ \$	_		
	Software Subto	itai				Y			
	To	otals	0	\$	-	\$	-		
Installation/ Configura	ation	Qty		Unit	Price	Extende	ed		
Sewer Utility will har	ndle internally		1	\$	5,000	\$	5,000		
		Subtotal Co	onfig		_	_	and Startup	\$	5,000
			<i>c.</i>		ntingency		10%		
		Total Con	ifigu	iratio	n, Progra	mming d	and Startup		
					Suhti	otal Hard	dware Costs	ς .	_
				Coi	ntingency		15%	•	_
							lware Total	•	-
					Sub	total Sof	tware Costs	\$	-
				Coi	ntingency			\$	-
						Soft	tware Total	\$	-
			To	otal H	lardware	and Soft	ware Costs	\$	-
Admin/QC							10%	\$	_
Misc Expenses								•	
							Total	\$	-

	NA-2							
Extend OT Net	work to County Pul	blic Works	An		lity			
				Unit	_			
Hardware Items		Qty		Prices		tended		
Workstations (Testing)		1						
Large Screen Monitors (Training)		2		2,000				
HIP Switch	ırdware Subtotal	1	>	10,000	\$ \$	10,000		
на	raware Subtotai				Ş	19,000		
Software Items								
Lic: Workstations (1)		1	\$	15,000	\$	15,000		
• •	oftware Subtotal		·	,	\$	15,000		
					•	ŕ		
	Totals	5	\$	32,000	\$	34,000		
Installation/ Configuration		Qty		Init Price	Ev	tondad		
HMI/Historian				10,000				
Firewall Installation / Configuration		1		5,000				
Workstation Installation / Configuration				10,000				
Workstation installation / comigure	Subtotal Config						\$	25,000
	castota: conj.g		_	tingency		10%		2,500
	Total Configu						•	27,500
			,		.,		4	10.000
						are Costs		19,000
		C	on	tingency Har		15% are Total	•	2,850 <b>21,850</b>
				nui	uwc	ne rotar	Ą	21,030
			Sul	ototal Soj	ftwo	are Costs	\$	15,000
		C	on	tingency		15%	\$	2,250
				Sof	two	are Total	\$	17,250
	To	tal Hardw	are	e and Sof	two	are Costs	Ś	39,100
	<u>-</u>							,
Admin/QC						10%	\$	6,660
Misc Expenses							\$	5,000
						Total	\$	78,000

N	IA-3							
Remote Pump Station and W	/WTP Telem	etı	ry	Improv	eme	nts		
				Unit				
Hardware Items	Qty			Prices	Ex	tended		
Cellular Router for Verizon		2	\$	500	\$	1,000		
Server		1	\$	15,000	\$	15,000		
Switch		1	\$	10,000	\$	10,000		
Hardware Subtota	I				\$	26,000		
Software Items								
Lic: AVEVA Telemetry Server Software		1	\$	8,500	\$	8,500		
Software Subtota	I				\$	8,500		
Tota	als	5	\$	34,000	\$	34,500		
Installation/ Configuration	Qty		U	Init Pric	e Ex	tended		
Server Installation / Configuration	- <b>,</b>	1				10,000		
Firewall Installation / Configuration						10,000		
Cellular Radio Configuration and Testing	6					122,000		
HMI/Historian						10,000		
PLC Programing		1	-	6,000		6,000		
Cellular Site Survey						20,000		
•	nfiguration, i						\$	178.000
	.,.g,		_	tingency	_	10%		17,800
Total Conj	figuration, P						•	
		S	ub	total Ho	ırdw	vare Costs	\$	26,000
				tingency		15%	•	3,900
				-		are Total		29,900
			Sul	htotal S	oftw	vare Costs	\$	8,500
				tingency	-	15%		1,275
				,		are Total		9,775
	Total Hard	w	are	e and So	oftw	are Costs	\$	39,675
Admin/QC						10%	ç	23,548
Misc Expenses						10%	\$ \$	5,000
						Total	\$	264,000
Annual AVEVA Telemetry Server Support Cost	\$1,60	0						
# of pump stations								

3 1	\$ \$ \$	Unit Prices 15,000 15,000 4,000 2,000	\$ \$ \$	<b>ended</b> 15,000 45,000 4,000		
3 1	\$ \$ \$	Prices 15,000 15,000 4,000	\$ \$ \$	15,000 45,000 4,000		
3 1	\$ \$ \$	15,000 15,000 4,000	\$ \$ \$	15,000 45,000 4,000		
3 1	\$ \$	15,000 4,000	\$ \$	45,000 4,000		
1	\$	4,000	\$	4,000		
1	\$	2,000	۲.			
				2,000		
			\$	66,000		
			\$	-		
6	\$	36,000	\$	15,000		
	,,	nit Drice	. Ev≠	andad		
3						
						10,300 <b>112,800</b>
Pro	gr	ramming	g and	d Startup	\$	112,800
S	ub	total Ho	ırdw	are Costs	\$	66,000
Сс	nt	ingency		15%	\$	9,900
		На	rdw	are Total	\$	75,900
	Su	btotal S	oftw	are Costs	Ś	_
			-			_
		So	oftwo	are Total	\$	-
dw	ar	e and Sc	oftwo	are Costs	\$	75,900
				10%	ć	18,870
				10%	ب \$	5,000
						•
	3 1 1 Pro Co Pro	U 3 \$ 1 \$ 1 \$ Progr	Unit Price 3 \$ 2,000 1 \$ 66,500 1 \$ 30,000  Programming Contingency Programming Subtotal Ha Contingency Ha Subtotal Sc Contingency So	Unit Price Ext 3 \$ 2,000 \$ 1 \$ 66,500 \$ 1 \$ 30,000 \$  Programming and Contingency Programming and Contingency Hardwood Contingency  Subtotal Hardwood Contingency  Hardwood Contingency  Subtotal Softwood Contingency  Soft	Unit Price Extended  Very Service of Software Costs  Contingency  Subtotal Hardware Costs  Contingency  Subtotal Software Costs  Contingency  Subtotal Software Total  Subtotal Software Total  Software Total  Marage Software Costs  Contingency  Software Total	Unit Price Extended  3 \$ 2,000 \$ 6,000  1 \$ 66,500 \$ 66,500  1 \$ 30,000 \$ 30,000  Programming and Startup \$ Contingency 10% \$ Programming and Startup \$ Subtotal Hardware Costs \$ Contingency 15% \$ Hardware Total \$  Subtotal Software Costs \$ Contingency 15% \$ Software Total \$  dware and Software Costs \$

				NA-5				
	Standard	dizatio	on	to Managed	Switche	es		
Hardware Items		Qty		<b>Unit Prices</b>	Extend	ed		
Switch (Managed)		5	\$	6,000	\$	30,000		
	Hardware Subtotal				\$	30,000		
Software Items								
	Software Subtotal				\$	-		
	Totals	5	\$	6,000	\$	30,000		
Installation/ Configu	ration	Qty	U	Init Price	Extend	ed		
Fiber Installation		1	\$	66,500	\$	66,500		
Switch Installation ,	/ Configuration	5	\$	2,000	\$	10,000		
			ota	Contingency	on, Prog	gramming and Startup 10% gramming and Startup ubtotal Hardware Costs 15%	\$ <b>\$</b> \$	76,500 7,700 <b>84,200</b> 30,000 4,500
				,		Hardware Total	\$	-
				Contingency	S	ubtotal Software Costs 15% <b>Software Total</b>	\$	- - -
				Total	Hardwa	re and Software Costs	\$	34,500
Admin/QC Misc Expenses						10%	\$ \$	11,870 5,000
						Total	\$	136,000
· ·	ot without conduit or i 000 feet for Fiber with				rith cond	duit.		

ontingency	\$\$ \$ Exter \$\$ \$ and the second of the second	51,000 51,000 - 51,000 - mded 8,000	\$	•
1,000  Init Price 8,000 10,000 1,000 1,000 1,000 1,000 1,000	\$ \$ <b>Exter</b> \$ \$	51,000 51,000 - 51,000 nded 8,000 10,000 51,000 and Startup 10%	\$	6,900
1,000  Init Price 8,000 10,000 1,000 1,000	\$ \$ Exter \$ \$ ming a	51,000  - 51,000  nded 8,000 10,000 51,000  and Startup 10%	\$	6,900
Init Price 8,000 10,000 1,000 , Programmontingency	\$ Exter \$ \$ ming a	51,000 nded 8,000 10,000 51,000 and Startup 10%	\$	6,900
Init Price 8,000 10,000 1,000 , Programmontingency	\$ Exter \$ \$ \$ ming a	8,000 10,000 51,000 and Startup 10%	\$	6,900
Init Price 8,000 10,000 1,000 , Programmontingency	\$ Exter \$ \$ \$ ming a	8,000 10,000 51,000 and Startup 10%	\$	6,900
Init Price 8,000 10,000 1,000 , Programmontingency	Exter \$ \$ \$ ming a	8,000 10,000 51,000 and Startup 10%	\$	6,900
8,000 10,000 1,000 , Programm ontingency	\$ \$ \$ ming a	8,000 10,000 51,000 and Startup 10%	\$	6,900
8,000 10,000 1,000 , Programm ontingency	\$ \$ \$ ming a	8,000 10,000 51,000 and Startup 10%	\$	6,900
10,000 1,000 , Programm ontingency	\$ \$ ming a	10,000 51,000 and Startup 10%	\$	6,900
1,000 , Programr ontingency	\$ ming a	51,000 and Startup 10%	\$	6,900
ontingency		10%	\$	6,900
ontingency		10%	\$	6,900
			•	•
		•	•	73,300
Subtota	l Hardı	ware Costs	\$	51,000
ontingency		15%	•	7,650
gee,				
Subtoto	al Softs	ware Costs	\$	_
				-
······································			•	-
rdware and	d Softi	ware Costs	\$	58,650
		100/	ç	12 /55
		10%		13,455
			<b>&gt;</b>	5,000
		Total	\$	153,000
ס	Subtoto ontingency	Hard Subtotal Soft ontingency Soft	Hardware Total  Subtotal Software Costs Intingency 15% Software Total  rdware and Software Costs  10%	Subtotal Software Costs \$ ontingency 15% \$ Software Total \$

NA-7	7						
DMZ and AVEVA InTouch Access	Anywhere	lm	ple	ementat	ion		
				Unit			
Hardware Items	Qty			Prices	Extended		
Server		1	\$	15,000	\$ 15,000		
Hardware Subtota	1				\$ 15,000		
Software Items							
		1	\$	-	\$ -		
Software Subtota	l				\$ - \$ -		
Tota	ıls	2	\$	15,000	\$ 15,000		
Installation/ Configuration	Qty		11	nit Price	Extended		
Server Installation / Configuration	٠.,	1			\$ 20,000		
AVEVA InTouch Access Anywhere Configuration		1			\$ 5,000		
Coordination with County IS Department					\$ 18,000		
Subtotal Conf	iguration, I					\$	43,000
·		C	ont	ingency	10%	\$	4,300
Total Config	guration, P	rog	raı	nming a	nd Startup	\$	47,300
		Sul	bto	tal Hard	ware Costs	\$	15,000
				ingency		•	2,250
					ware Total		
		Sı	ıht	otal Soft	ware Costs	¢	_
				ingency			_
		-	,,,,		ware Total		-
	Total Hard	wai	e (	and Soft	ware Costs	\$	17,250
				-		,	
Admin/QC					10%	-	6,455
Misc Expenses						\$	5,000
					Total	\$	76,000
3 weeks * \$150 per hour							

Cs/OITs Qty	) \$	Unit Prices - -		elect W ended - -	/WTP aı	nd Remote
C	) \$	Prices	\$ \$ \$	ended - - -		
C	) \$		\$ \$ \$	ended - - -		
C	) \$	-	\$ \$	-		
		-	\$ \$	-		
		-		-		
		-		-		
C			\$			
C				-		
	) \$	-	\$	-		
у	Uı	nit Price	Ext	ended		
1	L \$	5,000	\$	5,000		
					,	
	_	_		-		5,000
		-				
on, Prog	gran	nming a	iria 3	cartup		
Sı	ubto	tal Hara	lwar	e Costs	\$	-
(	Cont	ingency		15%	\$	-
		Hard	war	e Total	\$	-
S	Subt	otal Soft	war	e Costs	\$	-
(	Cont	ingency		15%	\$	-
		Soft	war	e Total	\$	-
Hardwa	are d	and Soft	war	e Costs	\$	-
				10%	Ś	_
					•	
				Total	\$	-
	y tion, Pro	y Unition, Program Conti Subto Cont Subto Cont	y Unit Price  1 \$ 5,000  tion, Programming of Contingency Son, Programming of Contingency Hard  Subtotal Soft Contingency Soft	y Unit Price Extends  1 \$ 5,000 \$  tion, Programming and S  Contingency  on, Programming and S  Subtotal Hardward  Contingency  Hardward  Subtotal Softward  Contingency  Softward  Softward  Softward	y Unit Price Extended  1 \$ 5,000 \$ 5,000  tion, Programming and Startup Contingency 10%  on, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total  Subtotal Software Costs Contingency 15% Software Total  Hardware and Software Costs  10%	y Unit Price Extended  1 \$ 5,000 \$ 5,000  tion, Programming and Startup \$ Contingency 10%  on, Programming and Startup  Subtotal Hardware Costs \$ Contingency 15% \$ Hardware Total \$  Subtotal Software Costs \$

	HW-9		
Replace CKTP MCC Devi	ceNet Networks w/ Ethernet Capable Motor Controlle	rs	
	Unit		
Hardware Items	Qty Prices Extended		
Ethernet/IP Adapter/Module	19 \$ 1,000 \$ 19,000		
E300 Electronic Overlay Relays	4 \$ 1,000 \$ 4,000		
Miscelaneous PLC I/O Module	1 \$ 20,000 \$ 20,000		
Н	lardware Subtotal \$ 43,000		
Software Items			
:	Software Subtotal \$ -		
	<i>Totals</i> 24 \$ 22,000 \$ 43,000		_
Installation/ Configuration	Qty Unit Price Extended		
PLC Programing	1 \$ 6,000 \$ 6,000		
Communication Module Retrofit	23 \$ 500 \$ 11,500		
EtherNet Wiring Allowance	23 \$ 500 \$ 11,500		
	Subtotal Configuration, Programming and Startup	\$	29,000
	Contingency 10%		2,900
	Total Configuration, Programming and Startup	\$	31,900
	Subtotal Hardware Costs	\$	43,000
	Contingency 15%	\$	6,450
	Hardware Total	\$	49,450
	Subtotal Software Costs	\$	_
	Contingency 15%		_
	Software Total		-
	Total Hardware and Software Costs	\$	49,450
Admin/QC	10%	\$	8,135
Misc Expenses	1070	\$	5,000
	Total	¢	94,000

	HW-10							
Develop a Fo	ormal Instrument Calibration	and N	1air		e Pr	ogram		
		_		Unit				
Hardware Items	Q		<b>)</b>	Prices -		tended		
	Hardware Subtotal	U	Þ	-	\$ \$	-		
Software Items					109			
	Software Subtotal		\$	-		-		
	Totals	0	\$	-	\$	-		
Installation/ Configuration Creation of Program for M	Qty		Uı	nit Price	e Ext	tended		
Calibration ( will handle in		1	\$	5,000	\$	5,000		
	Subtotal Configuration	_		_		-	\$	5,000
	Total Configuration,			ingency n <b>mina d</b>				
						re Costs	-	-
		Co	ont	ingency		15%	-	-
				Hara	lwai	re Total	\$	-
		Sι	ıbto	otal Sof	twai	re Costs	\$	-
		Co	ont	ingency		15%	\$	-
				Soft	twai	re Total	\$	-
	Total Ha	rdwai	re a	ınd Soft	war	e Costs	\$	-
Admin/QC						10%	\$	_
Misc Expenses						1070	\$	-
						Total		

	п	V-11				
CKTP Digester Build	ling PNL	600	0 and	d MCC Rep	lacement	
Hardware Items	Qt	y	Ur	nit Prices	Extended	
PLC Panel	\$	1	\$	50,000	\$ 50,000	
Hardware Subtotal					\$ 50,000	
Software Items						
Software Subtotal					\$ -	
Totals	;	1	\$	50,000	\$ 50,000	
Installation/ Configuration	Qty		Uni	t Price	Extended	
Miscellaneous Field Wiring	Qty	1	\$		\$ 10,000	
Subtotal Co	onfigura	tion,	_	ramming o	and Startup 10%	
Total Cor	nfigurat	ion, I	Progr	ramming a	ınd Startup	\$ 11,000
			Sub	total Hara	lware Costs	\$ 50,000
			Со	ntingency	15%	\$ 7,500
				Hard	lware Total	\$ 57,500
			Su	btotal Soft	tware Costs	\$ -
			Со	ntingency	15%	\$ -
				Soft	ware Total	\$ -
	Total	Hard	dwar	e and Soft	ware Costs	\$ 57,500
Admin/QC					10%	\$ 6,850
Misc Expenses						\$ 5,000

	HV	V-12						
Include Integration of Composite		ms and	Mon	itoring wi	ith Rep	olacement	of Ex	isting
Hardware Items	Qt	y	Un	it Prices	Exte	nded		
		-	\$	_	\$	_		
Hardware Subto	tal				\$	-		
Software Items								
		0	\$	-	\$	-		
Software Subto	tal				\$	-		
To	otals	0	\$	-	\$	-		
Installation/ Configuration	Qty		Unit	: Price	Exte	nded		
Sewer Utility will handle internally	•	1	\$	5,000	\$	5,000		
		_						
	Subtotal Con	figurat					Ş	5,000
	Total Conf	iarati		ntingency roaramm		10%		
	rotai Conj	igurati	on, P	rogramm	ing an	а зіагіир		
				Subtotal	Hardw	are Costs	\$	-
			Col	ntingency		15%	\$	-
				ı	Hardw	are Total	\$	-
						are Costs		-
			Col	ntingency		15%		-
					Softw	are Total	\$	-
		Total	Hard	ware and	Softw	are Costs	\$	-
Admin/QC						10%	\$	-
Misc Expenses								
						Total	\$	-

н	W-13						
Implement CKTP Instru	umentati	on lı	mprove	ment	s		
·			Unit				
Hardware Items	Qty		Prices	Ex	tended		
Flowmeter 4" Pipe(Magmeter)		2 :	\$ 3,50	0 \$	7,000		
Flowmeter 6" Pipe(Magmeter)		5	\$ 4,00	0 \$	20,000		
Flowmeter 8" Pipe(Magmeter)		2 :	\$ 4,50		9,000		
Thermal Dispersion Flowmeter		1 :	\$ 2,50		2,500		
Chlorine Residual Analyzer					2,500		
Turbidity Analyzer					3,000		
Lower Explosive Limit Transmitter					5,000		
Suspended Solids Probe			\$ 8,00		16,000		
Hardware Subtotal			. ,		65,000		
Software Items							
Software Subtotal				\$	-		
Totals		15 :	\$ 33,00	0 \$	65,000		
	<u> </u>						
Installation/ Configuration	Qty		Unit Pri				
Installation of instruments					65,000		
PLC Programming					10,000		
HMI Configuration			\$ 5,00	-	5,000	4	22.222
Subtotal Configu	iration, P				-		80,000
T. 1. 1. C C.			ntingen	•	10%	•	8,000
Total Configur	ration, Pr	rogra	ammıng	ana	Startup	Ş	88,000
		Subt	total Ha	rdwa	re Costs	\$	65,000
		Cor	ntingen	:y	15%	\$	9,750
			На	rdwa	re Total	\$	74,750
		Suk	ototal So	oftwa	re Costs		-
		Cor	ntingen	<i>y</i>	15%	\$	-
			Sc	ftwa	re Total	\$	-
То	tal Hardy	vare	and Sc	ftwa	re Costs	\$	74,750
Admin/QC					10%	\$	16,275
Misc Expenses						\$	5,000

Implement CKTP Automation I	mpı	rov				
Ulandurana Itana						
Handurana Itanaa			Unit			
Hardware Items Qty			Prices		tended	
PLC Panel			50,000		50,000	
Associated Odor Control Instrumentation	1	\$	25,000	\$	25,000	
Low Level Switch	1	\$	500	\$	500	
Hardware Subtotal				\$	75,500	
Software Items						
Software Subtotal				\$	-	
Totals	3	\$	75,500	\$	75,500	
Installation/ Configuration Qty		11	Init Price	Fy	tended	
PLC Programing	2		12,000			
HMI Configuration			5,000			
Subtotal Configuration,	Prog	gra	amming d	and	Startup	\$ 44,000
	C	ont	tingency		10%	\$ 4,400
Total Configuration, F	Prog	rai	mming a	nd	Startup	\$ 48,400
	Su	bto	otal Hara	'wa	re Costs	\$ 75,500
	C	ont	tingency		15%	\$ 11,325
			Hard	wa	re Total	\$ 86,825
	Sı	ubt	total Soft	wa	re Costs	\$ -
	C	ont	tingency		15%	\$ -
			Soft	wa	re Total	\$ -
Total Hard	lwa	re	and Soft	wa	re Costs	\$ 86,825
Admin/QC					10%	\$ 13,523
Misc Expenses					_0,0	\$ 5,000
					Total	\$ 154,000

	HW-15								
Implen	nent KWWTP Instrume	ntation I	mp	ro۱		;			
					Unit	_			
Hardware Items		Qty	_		Prices		tended		
Flowmeter 2" Pipe(Magmeter)							5,000		
Flowmeter 3" Pipe(Magmeter)			1				3,000		
Flowmeter 4" Pipe(Magmeter)			1				3,500		
Flowmeter 6" Pipe(Magmeter)							4,000		
Suspended Solids Probe			2	Ş	8,000		16,000		
	Hardware Subtotal					Ş	31,500		
Software Items									
	Software Subtotal					\$	-		
	Totals		7	\$	21,000	\$	31,500		
Installation/ Configuration		Qty			nit Price				
Installation of instruments							35,000		
PLC Programming							10,000		
HMI Configuration			1	\$	5,000	\$	5,000		
	Subtotal Config	ıration, P	rog	gra	mming (	and	Startup	\$	50,000
			Co	ont	ingency		10%	\$	5,000
	Total Configu	ration, Pi	rog	rar	nming d	ınd	Startup	\$	55,000
			Sul	bto	tal Hard	lwa	re Costs	\$	31,500
			Co	ont	ingency		15%	\$	4,725
					Hard	wa	re Total	\$	36,225
			Sı	ıbt	otal Sofi	-wa	re Costs	\$	_
					ingency		15%		_
							re Total	•	-
	То	tal Hardı	wai	re d	and Soft	wa	re Costs	\$	36,225
Admin/OC							400/	۲.	0.422
Admin/QC							10%		9,123
Misc Expenses								\$	5,000
							Total	_	105,000

	HW-16								
Im	olement KWWTP Autom	ation Ir	npı	ov					
					Unit				
Hardware Items		Qty			Prices		ended		
			0	\$	-	\$	-		
	Hardware Subtotal					\$	-		
Coffusion Itams									
Software Items									
	Software Subtotal					\$	_		
						,			
	Totals		0	\$	-	\$	-		
Installation/ Configuration	O	ty		IJr	nit Price	e Ext	ended		
PLC Programing	_	,	2		6,000				
HMI Configuration					5,000	-	•		
-									
	Subtotal Configure	ation F	roc	arar	mmina i	and	Startun	\$	32,000
	oubtotur conjigur.				ngency		10%		3,200
	Total Configura	tion, Pi						•	35,200
			Sul	btoi	tal Hard	dwar	e Costs	\$	_
					ngency		15%	•	_
							e Total	\$	-
			Sı	ıhta	ntal Sof	twar	e Costs	\$	_
					ngency			\$	_
							e Total		-
	Tota	l Hards	Mai	re n	and Soft	huar	e Costs	¢	_
	7010	iiiaia	vui	e u	na soji	vvui	e costs	٠,	
Admin/QC							10%	\$	3,520
Misc Expenses								-	•
							Total	ć	39,000
							iotui	Ą	39,000

	HW-17		
Implem	ent MWWTP Instrumentation Improvements		
	Unit		
Hardware Items	Qty Prices Extended		
Flowmeter 2" Pipe(Magmeter)	1 \$ 2,500 \$ 2,500		
Flowmeter 3" Pipe(Magmeter)	4 \$ 3,000 \$ 12,000		
Flowmeter 4" Pipe(Magmeter)	1 \$ 3,500 \$ 3,500		
Flowmeter 6" Pipe(Magmeter)	1 \$ 4,000 \$ 4,000		
Level Transmitter	1 \$ 3,000 \$ 3,000		
Lower Explosive Limit Transmitter	3 \$ 5,000 \$ 15,000		
Suspended Solids Probe	2 \$ 8,000 \$ 16,000		
	Hardware Subtotal \$ 56,000		
Software Items			
	Software Subtotal \$ -		
	<i>Totals</i> 13 \$ 29,000 \$ 56,000		
Installation/ Configuration	Qty Unit Price Extended		
Installation of instruments	13 \$ 5,000 \$ 65,000		
PLC Programming	1 \$ 10,000 \$ 10,000		
HMI Configuration	1 \$ 5,000 \$ 5,000		
	Subtotal Configuration, Programming and Startup Contingency 10% Total Configuration, Programming and Startum	\$	80,000 8,000
		\$	
	Contingency 10%	\$ <b>\$</b>	8,000
	Contingency 10%  Total Configuration, Programming and Startup	\$ <b>\$</b> \$	8,000 <b>88,00</b> 0
	Contingency 10%  Total Configuration, Programming and Startup  Subtotal Hardware Costs	\$ <b>\$</b> \$ \$	8,000 <b>88,00</b> 0 56,000
	Contingency 10% Total Configuration, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total	\$ <b>\$</b> \$ \$	8,000 <b>88,000</b> 56,000 8,400
	Contingency 10%  Total Configuration, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total  Subtotal Software Costs	\$ \$ \$ \$ \$	8,000 <b>88,000</b> 56,000 8,400
	Contingency 10%  Total Configuration, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total  Subtotal Software Costs	\$ \$ \$ \$ \$ \$	8,000 <b>88,000</b> 56,000 8,400
	Contingency 10%  Total Configuration, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total  Subtotal Software Costs Contingency 15%	\$ <b>\$</b> \$ \$ \$ \$ \$ \$ \$ \$ \$	8,000 <b>88,000</b> 56,000 8,400
Admin/OC	Contingency 10%  Total Configuration, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total  Subtotal Software Costs Contingency 15% Software Total  Total Hardware and Software Costs	\$ <b>\$</b> \$ \$ \$ <b>\$</b> \$ \$ <b>\$</b>	8,000 88,000 56,000 8,400 64,400 - - - -
Admin/QC Misc Expenses	Contingency 10%  Total Configuration, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total  Subtotal Software Costs Contingency 15% Software Total	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8,000 88,000 56,000 8,400 64,400 - - - - 564,400
Admin/QC Misc Expenses	Contingency 10%  Total Configuration, Programming and Startup  Subtotal Hardware Costs Contingency 15% Hardware Total  Subtotal Software Costs Contingency 15% Software Total  Total Hardware and Software Costs	\$ <b>\$</b> \$ \$ \$ <b>\$</b> \$ \$ <b>\$</b>	8,000 88,000 56,000 8,400 64,400 - - - -

	HW-	18							
Hardware Items    Audit   Audi	Implement MWWTP Auto	omation Im	pro	ven					
Software Items  Software Subtotal  Software Subtotal  Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - Totals  O \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$ - \$		٥.		_		_			
Software Items  Software Subtotal  Software Subtotal  Totals  O \$ - \$ -  Installation/ Configuration  Qty Unit Price Extended PLC Programing 4 \$ 6,000 \$ 24,000 HMI Configuration 4 \$ 5,000 \$ 20,000 Wiring a Fault Signal from Starter to IO panel  Subtotal Configuration, Programming and Startup Contingency 10% \$ 44,500 Contingency 10% \$ 4,500  Total Configuration, Programming and Startup \$ 49,000  Subtotal Hardware Costs Contingency 15% \$ -  Contingency 15% \$ -  Subtotal Software Costs Contingency 15% \$ -  Subtotal Software Costs Software Total Total Hardware and Software Costs \$ -  Contingency 15% \$ -  Software Total \$ -  Admin/QC Misc Expenses	Hardware Items	Qty					tended		
Software Items    Software Subtotal   \$ -	Hard and Charle	,	0	\$	-		-		
Software Subtotal   Software Subtotal   Software Subtotal   Software Subtotal   Software Subtotal Signal from Starter to IO panel   Subtotal Configuration, Programming and Startup   Subtotal Hardware Costs   Software Total Subtotal Software Costs   Software Total Software Total Software Total   Subtotal Hardware Costs   Software Total Software Costs   Software Total Software Costs Software Total Software Total Software Costs Software Total Software Total Software Costs Software Costs Software Costs Software Costs Software Total Software Costs Software C	Haraware Subtota	11				\$	-		
Software Subtotal   Software Subtotal   Software Subtotal   Software Subtotal   Software Subtotal Signal from Starter to IO panel   Subtotal Configuration, Programming and Startup   Subtotal Hardware Costs   Software Total Subtotal Software Costs   Software Total Software Total Software Total   Subtotal Hardware Costs   Software Total Software Costs   Software Total Software Costs Software Total Software Total Software Costs Software Total Software Total Software Costs Software Costs Software Costs Software Costs Software Total Software Costs Software C	Software Items								
Installation/ Configuration Qty Unit Price Extended PLC Programing 4 \$ 6,000 \$ 24,000 HMI Configuration Wiring a Fault Signal from Starter to IO panel  Subtotal Configuration, Programming and Startup Contingency 10% \$ 4,500  Total Configuration, Programming and Startup \$ 44,500 Contingency 10% \$ 4,500  Subtotal Hardware Costs Contingency 15% \$ -  Contingency 15% \$ -  Subtotal Software Costs \$ -  Contingency 15% \$ -  Software Total \$ -  Total Hardware and Software Costs \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses									
Installation/ Configuration PLC Programing Qty Unit Price Extended PLC Programing 4 \$ 6,000 \$ 24,000 HMI Configuration 4 \$ 5,000 \$ 20,000 Wiring a Fault Signal from Starter to IO panel  Subtotal Configuration, Programming and Startup Contingency 10% \$ 4,500  Total Configuration, Programming and Startup Subtotal Hardware Costs Contingency 15% \$ -  Hardware Total Contingency 15% \$ -  Hardware Total Subtotal Software Costs Contingency 15% \$ -  Total Hardware and Software Costs Software Total \$ -  Total Hardware and Software Costs \$ -  Software Total \$ -  Admin/QC Misc Expenses	Software Subtota	ıl				\$	-		
Installation/ Configuration PLC Programing Qty Unit Price Extended PLC Programing 4 \$ 6,000 \$ 24,000 HMI Configuration 4 \$ 5,000 \$ 20,000 Wiring a Fault Signal from Starter to IO panel  Subtotal Configuration, Programming and Startup Contingency 10% \$ 4,500  Total Configuration, Programming and Startup Subtotal Hardware Costs Contingency 15% \$ -  Hardware Total Contingency 15% \$ -  Hardware Total Subtotal Software Costs Contingency 15% \$ -  Total Hardware and Software Costs Software Total \$ -  Total Hardware and Software Costs \$ -  Software Total \$ -  Admin/QC Misc Expenses			_	_		_			
PLC Programing  HMI Configuration  Wiring a Fault Signal from Starter to IO panel  Subtotal Configuration, Programming and Startup  Contingency  Total Configuration, Programming and Startup  Subtotal Hardware Costs  Contingency  15%  Hardware Total  Subtotal Software Costs  Contingency  15%  Total Hardware and Software Costs  Admin/QC  Misc Expenses	Tota	als	0	\$	-	\$	-		
PLC Programing  HMI Configuration  Wiring a Fault Signal from Starter to IO panel  Subtotal Configuration, Programming and Startup  Contingency  Total Configuration, Programming and Startup  Subtotal Hardware Costs  Contingency  15%  Hardware Total  Subtotal Software Costs  Contingency  15%  Total Hardware and Software Costs  Admin/QC  Misc Expenses	Installation/ Configuration	Qty		Ur	nit Price	Ex	tended		
HMI Configuration 4 \$ 5,000 \$ 20,000 Wiring a Fault Signal from Starter to IO panel 1 \$ 500 \$ 500  Subtotal Configuration, Programming and Startup \$ 44,500 Contingency 10% \$ 4,500 Total Configuration, Programming and Startup \$ 49,000  Subtotal Hardware Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses	_		4	\$	6,000	\$	24,000		
Wiring a Fault Signal from Starter to IO panel  Subtotal Configuration, Programming and Startup \$ 44,500 Contingency 10% \$ 4,500 Total Configuration, Programming and Startup \$ 49,000  Subtotal Hardware Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC  Misc Expenses									
Total Configuration, Programming and Startup \$ 49,000  Subtotal Hardware Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses	Wiring a Fault Signal from Starter to IO panel		1	\$	500	\$	500		
Total Configuration, Programming and Startup \$ 49,000  Subtotal Hardware Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses	Subtatal Con	fiauration	Dro	~ ~ ~ .	annin a	~ ~ d	Ctartus	۲	44 500
Subtotal Hardware Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses	Subtotal Coll	jigurution,			_		-		
Subtotal Hardware Costs \$ - Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Total Hardware and Software Costs \$ -  Misc Expenses	Total Confi	guration, F			_			•	
Contingency 15% \$ - Hardware Total \$ -  Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Total Hardware and Software Costs \$ -  Misc Expenses									
Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Total Hardware Software Costs \$ -  Misc Expenses								•	-
Subtotal Software Costs \$ - Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses			C	onti				-	-
Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses					Hard	wa	re Total	\$	-
Contingency 15% \$ - Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses			Sı	ıbto	otal Soft	twa	re Costs	\$	_
Software Total \$ -  Total Hardware and Software Costs \$ -  Admin/QC 10% \$ 4,900  Misc Expenses					-				-
Admin/QC 10% \$ 4,900 Misc Expenses								\$	-
Admin/QC 10% \$ 4,900 Misc Expenses		Total Hard	lwa	ro o	ınd Soft	14/01	ra Costs	ć	
Misc Expenses		Total Hard	wu	ie u	iliu Soji	wui	e costs	٠	
	Admin/QC						10%	\$	4,900
Total \$ 54,000	Misc Expenses								
10tal \$ 54,000							Tatal	<u>۲</u>	F4 000
							iotal	<b>\$</b>	54,000

3,000 4,000 3,000 5,000	\$ \$ \$ \$ \$	6 6 6 4 6 3	3,000		
ices 3,000 4,000 3,000 5,000 8,000	\$ \$ \$ \$ \$	6 6 6 4 6 3	6,000 4,000 3,000		
3,000 4,000 3,000 5,000 8,000	\$ \$ \$ \$ \$	6 6 6 4 6 3	6,000 4,000 3,000		
4,000 3,000 5,000 8,000	\$ \$ \$ \$	5 2 5 3	4,000 3,000		
3,000 5,000 8,000	\$ \$ \$	5 5	3,000		
5,000 8,000	\$ \$ \$	5 5			
8,000	\$ \$				
	\$	16	5,000		
2,000			6,000		
	\$	, 4	4,000		
		38	8,000		
	\$	5	-		
5,000	\$	38	8,000		
	_				
t Price					
5,000					
0,000					
5,000	\$	5 5	5,000		
ming a	ind	d St			60,000
gency			10%		6,000
ning aı	nd	Sto	artup	\$	66,000
l Hardı	wa	are	Costs	\$	38,000
gency			15%	\$	5,700
Hardv	wa	are	Total	\$	43,700
al Softı	wa	are	Costs	\$	_
gency			15%	\$	-
Softv	wa	are	Total	\$	-
	wa	are	Costs	\$	43,700
d Softv					
d Softv			10%		10,970
d Softv				\$	5,000
d Softv				\$	126,000
	d Soft	1 Softwo	1 Software	10%	10% \$ Total \$

	HW-20							
Implement SWWTP	Automation I	mpro	ven					
Hardware Items	Q	tv.		Unit Prices	Ev	tended		
naruware items	Q	-	\$	-	\$	-		
Hardware Sul	btotal	ŭ	۲		\$	-		
Software Items								
Software Sul	btotal				\$	-		
	Totals	0	\$	-	\$	-		
Installation/ Configuration	Qty		Hr	nit Price	·Fν	tended		
PLC Programing	۷٠,	4				24,000		
HMI Configuration						10,000		
High Discharge Pressure Troubleshooting			\$			6,000		
Subtota	l Configuratior	n, Prod	grar	nming (	and	Startup	\$	40,000
	, ,			ngency		10%		4,000
Total (	Configuration	. Prog	ran	nming d	ınd	Startup	\$	44,000
		Sui	bto	tal Hard	lwa	re Costs	\$	_
		Co	onti	ngency		15%	\$	-
				Hara	lwa	re Total	\$	-
		Sı	ubto	otal Sof	twa	re Costs	\$	_
		Co	onti	ngency		15%	\$	-
				Soft	wa	re Total	\$	-
	Total Ha	rdwa	re a	nd Soft	wa	re Costs	\$	-
Admin/QC						10%	خ	4,400
Misc Expenses						10/0	ڔ	4,400
						Total	¢	48,000

Implement Don	HW-21							
implement ken	note Pump Station Instrur	nentatio	n lı	mprover	ner	nts		
•	•			Unit				
Hardware Items		Qty		Prices	Ex	tended		
Pressure Transmitter		12	\$	3,600	\$	43,200		
Level Transmitter		2	\$	3,000	\$	6,000		
Level Transducer		1	\$	1,000	\$	1,000		
Lower Explosive Limit Transmitter		2	\$	5,000	\$	10,000		
	Hardware Subtotal				\$	60,200		
Software Items								
	Software Subtotal				\$	-		
	Totals	17	\$	12,600	\$	60,200		
Installation/ Configuration	Qt	ty	U	nit Price	Ex	tended		
Installation of instruments	7	-		5,000				
PLC Programming				10,000				
HMI Configuration				5,000				
	Subtotal Configura		_	_	ınd	-		100,000
				ingency		10%	-	10,000
	Total Configurati	ion, Prog	ıraı	mming a	nd	Startup	ς	110,000
							7	
		Su	bto	tal Hard	wa	re Costs		
				tal Hard ingency	wa	re Costs 15%	\$	60,200 9,030
				ingency			\$ \$	60,200 9,030
		C	ont	ingency	wa	15% re Total	\$ \$ <b>\$</b>	60,200 9,030
		s	Cont ubt	ingency <b>Hard</b>	wa	15% re Total	\$ \$ <b>\$</b>	60,200 9,030
		s	Cont ubt	ingency Hard otal Soft ingency	wa wa	15% re Total re Costs	\$ \$ <b>\$</b> \$	60,200 9,030
	Total	s c	ont ubt	ingency Hard otal Soft ingency	wa wa wa	15% re Total re Costs 15% re Total	\$ \$ \$ \$ \$	60,200 9,030 <b>69,230</b> - - -
Admin/QC	Total	s c	ont ubt	ingency Hard otal Soft ingency Soft	wa wa wa	15% re Total re Costs 15% re Total re Costs	\$ \$ \$ \$ \$ \$	60,200 9,030 <b>69,230</b> - - - -
Admin/QC Misc Expenses	Total	s c	ont ubt	ingency Hard otal Soft ingency Soft	wa wa wa	15% re Total re Costs 15% re Total	\$ \$ \$ \$ \$ \$	60,200 9,030 69,230 - - - - 69,230 17,923 5,000

	HW-22								
Impleme	nt Remote Pump Station A	utomat	ior	ılm	proven	nent	s		
					Unit				
Hardware Items		Qty			Prices		ended		
			0	\$	-	\$	-		
	Hardware Subtotal					\$	-		
Software Items									
	Software Subtotal					\$	-		
	Totals		0	\$	_	\$	_		
						-			
Installation/ Configuration	Q	ty			nit Price				
PLC Programing					6,000				
HMI Configuration			4	\$	5,000	\$	20,000		
	Subtotal Configure	ation P	roc	arai	mmina i	and	Startun	\$	50,000
	Subtotur conjugare	1011, 1	_		ingency		10%		5,000
	Total Configura	tion, Pr			_			•	55,000
			Sul	bto	tal Hard	dwar	e Costs	\$	_
			Co	onti	ingency		15%	\$	-
					Hard	lwar	e Total	\$	-
			Sı	ıbto	otal Soft	twar	e Costs	\$	-
			Co	onti	ingency		15%	\$	-
					Soft	twar	e Total	\$	-
	Tota	l Hardı	vai	re a	ınd Soft	war	e Costs	\$	-
Admin/QC Misc Expenses							10%	\$	5,500
						Si	ubtotal	\$	61,000

	SW-23	}						
Upgrade WWTP Standalone SCADA HMI			VA S	System Platf	orm with	Manage	d InT	ouch
Applications and Stand	dardized Templ	ates B	Base	ed on HPHMI	Concept	is		
Hardware Items	Qt	-		<b>Unit Prices</b>	Exte	nded		
		0	\$	-	\$	-		
Hardware St	ubtotal				\$	-		
6.6								
Software Items		0	۲		¢			
Software Si	uhtotal	U	Ş	-	\$ \$	-		
Software St	abtotai				Ą			
	Totals	0	\$	-	\$	-		
Installation/ Configuration	Qty		Un	nit Price	Exte	nded		
				on, Programr Contingen <b>n, Programn</b>	су	10%	\$	-
				Suhtota	l Hardwa	re Costs	¢	_
				Contingen		15%	-	_
				eege	•	re Total		-
				Subtoto	al Softwa	re Costs	\$	_
				Contingen	су	15%	\$	-
					Softwa	re Total	\$	-
		Tot	al H	lardware and	d Softwa	re Costs	\$	
Admin/QC Misc Expenses						10%	\$	-
Funded and in Progress						Total	\$	-
WWTP = 1 PLC/week *150								

SW-24								
Implement an Alarm Management I	Program I	3ase			8.2			
				Unit				
Hardware Items	Qty	_		Prices		tended		
Handware Culstated		0	\$	-	\$ \$	-		
Hardware Subtotal					\$	-		
Software Items								
Software rems		0	\$	_	\$	_		
Software Subtotal			*		\$	-		
Totals	5	0	\$	-	\$	_		
Installation/ Configuration	Qty		Hr	nit Price	Fv	tended		
Workshops to Review Current Alarm Classifications	Qty	1				5,000		
HMI/Historian Configuration						40,000		
,			,	,	,	,		
Subtotal Config	guration, I	Prog	grar	nming o	and	Startup	\$	45,000
		Co	onti	ingency		10%	\$	4,500
Total Configu	uration, P	rog	ran	nming a	ınd	Startup	\$	49,500
		Sul	bto	tal Hara	lwa	re Costs	\$	_
		Co	onti	ingency		15%	\$	-
				Hard	wa	re Total	\$	-
		Sι	ıbto	otal Soft	wa	re Costs	\$	-
		Ca	onti	ingency		15%	\$	-
				Soft	wa	re Total	\$	-
Т	otal Hard	wai	re a	ınd Soft	wa	re Costs	\$	-
Admin/QC						10%	ċ	4,950
Misc Expenses						10/0	۲	4,330
						Total	¢	E4 000
						iotal	Þ	54,000

S	W-25										
Establish a Tiered Histor	ian Imp	lementat	ior	ı at	t CKTF	)					
					Unit						
Hardware Items		Qty			Prices			ten	ded		
			0	\$	-		\$		-		
Hardware Sub	ototal						\$		-		
Software Items											
Enterprise Historian License (25,000 tags)			1	ς	53,00	n	ς	53	იიი		
2 Additional Historian Web Client License					1,69				380		
Software Sub	ototal			Τ.	_,00				380		
,							•	/			
	Totals		1	\$	53,00	0	\$	56,	380		
Installation/ Configuration		Qty			nit Pri						
Workshops to determine data to go to Tier 2 Historia	an				5,00						
Historian Configuration					10,00						
Subtotal	Config	uration, P	_			_	ınd	Sta			15,000
					ingen	•			10%	•	1,500
Total C	Configu	ration, Pr	og	rar	nming	g a	nd .	Sta	rtup	\$	16,500
			Cul	hto	tal Ha	ırd	wa	ro (	`octc	خ	_
					ingen				15%	•	_
			C	,,,,	_	-			otal	-	_
										•	
			Sι	ıbt	otal S	oft	wai	re C	osts	\$	56,380
			Co	ont	ingen	су			15%	\$	8,457
					Sa	oft	wai	re T	otal	\$	64,837
	То	tal Hardy	vai	e c	and Sc	oftı	wai	re C	osts	\$	64,837
Admin/OC									100/	۲	0 134
Admin/QC									10%		8,134
Misc Expenses										\$	-
								7	otal	\$	89,000
Appual Cost for Enterprise Historian License		\$10,60	٥								
Annual Cost for Enterprise Historian License  Annual cost for 2 Historian Web Client Licenses		\$10,60									
Aimual cost for 2 mistorian web client licenses	Total	\$33 \$10,93									
	iotai	<b>Σ10,33</b>	O								

SW-26							
Broaden The Data Set Archived by the Sev	wer Utility	His	storian				
			Unit				
Hardware Items	Qty		Prices		tended		
	0	\$	-	\$	-		
Hardware Subtotal				\$	-		
Software Items							
Software items	0	\$		ć			
Software Subtotal	U	ڔ	_	\$ \$	_		
30) tware subtotui				Y			
Totals	0	\$	-	\$	-		
Installation/ Configuration C	Qty	U	nit Price	Ext	tended		
Site/PLC Program Investigation of current available signals	-		27,000				
Workshops to select parameters from findings		\$					
Historian Configuration		\$	7,500				
Subtotal Configure						\$	62,000
			ingency		10%		6,200
Total Configura	tion, Prog	ran	nming a	nd S	Startup	\$	68,200
	Su	bto	tal Hard	war	e Costs	\$	_
			ingency		15%	•	_
					re Total		-
	S	ubt	otal Soft	war	re Costs	\$	_
			ingency		15%		_
					re Total	•	-
7-4-	ul Haurdii.ee		and Cafe		o Costa	¢	
1010	al Hardwa	re c	ina soju	wui	e costs	Ą	-
Admin/QC					10%	Ś	6,820
Misc Expenses						\$	-,5-5
•						•	
					Total	\$	75,000
(1 PLC/day for 4.5 weeks (*40hrs) )*150= Cost							

	1		_					
Develop ICS Standar	ds (Hardw	are	<del>(</del> )					
				Unit				
Hardware Items	Qty			Prices		tended		
Tablets		5	\$	1,000		5,000		
Hardware Subtota					\$	5,000		
Software Items								
Software items		Λ	\$		ć	_		
Software Subtota	1	U	Ą	-	\$ \$	-		
30jtware Subtotal					ڔ	_		
Tota	ıls	5	\$	1,000	\$	5,000		
					Α			
Installation/ Configuration	Qty		U	nit Price	Ex	tended		
SCADA Control Panel Std				34,996				
SCADA Instrument and Vendor Communication Std		1	\$	28,116	\$	28,116		
SCADA Network Design and Hardware Std		1	\$	30,300	\$	30,300		
SCADA Equipment Procurement Std		1	\$	24,188	\$	24,188		
Subtotal Confi		Co	ont	ingency		10%	\$	117,600 11,800 <b>129,400</b>
		Sul	bto	tal Hara	lwa	re Costs	\$	5,000
		Co	ont	ingency		15%	\$	750
				Hard	wa	re Total	\$	5,750
		SL	ıbt	otal Soft	wa	re Costs	\$	_
				ingency		15%	, \$	-
				_	wa	re Total		-
	Total Hardı	vai	re d	and Soft	wa	re Costs	\$	5,750
A Luty 100						4001	_	40.545
Admin/QC						10%		13,515
Misc Expenses							\$	5,000

DC-27B									
Develop ICS Standards and Go	vernance I	Ooc	um						
laudurana Itawa	Otv			Unit Price		Ev	+and	~ d	
Hardware Items	Qty		ı	Price	S	EX	tend	ea	
Hardware Subtotal						\$	-	-	
Software Items									
		0	\$	-		\$	-	-	
Software Subtotal						\$	-	•	
Tota	ls	0	\$	-		\$	-	-	
						Α			
nstallation/ Configuration	Qty			nit P					
SCADA Application Programming Std for PLCs				70,9					
HMI Software and Architecture Std		1	\$	19,7	74	\$	19,7	74	
SCADA Application Programming Std for HMI		1	\$	67,6	24	\$	67,6	24	
SCADA Data Historization and Archiving Std		1	\$	30,1	40	\$	30,1	.40	
SCADA Cybersecurity and Network Monitoring Std		1	\$	35,8	68	\$	35,8	868	
SCADA Software Management and Revision Control Std		1	\$	31,0	68	\$	31,0	)68	
Staff Roles and Skills Development Std		1	\$	24,7	96	\$	24,7	'96	
Subtotal Confi	guration, F	Prog	grai	mmii	ng d	and	Star	tup	\$ 280,200
		Co	ont	ingei	псу		1	L0%	\$ 28,100
Total Config	uration, P	rog	ran	nmin	ıg a	nd	Star	tup	\$ 308,300
		Sul	bto	tal H	ard	wa	re Co	sts	\$ -
		Co	ont	ingei	псу		1	5%	\$ -
				Н	ard	wa	re To	tal	\$ -
		Sι	ıbt	otal S	Soft	wa	re Co	sts	\$ -
		Co	ont	ingei	псу		1	5%	\$ -
				5	oft	wa	re To	tal	\$ -
	Total Hard	wai	re c	and S	oft	wa	re Co	sts	\$ _
Admin/QC							1	L0%	\$ 30,830
Misc Expenses									\$ 5,000
							To	tal	\$ 344,000

DC-28								
Develop and Maintain Control S	trategy Do	ocui	ner	itation				
Hardware Items	Qty		Uı	nit Prices	Ext	ended		
		0	\$	-	\$	-		
Hardware Subtota	1				\$	-		
Software Items								
		0	\$	-	\$	-		
Software Subtota	l				\$	-		
Tota	als	0	\$	-	\$	-		
Installation/ Configuration	Qty		Ur	nit Price	Ext	ended		
Process Assessments for the WWTPs/Pumpstations		1	\$	138,000	\$	138,000		
Workshops to review findings			\$			20,000		
Finalize Control Strategies for WWTPs and Pump stations			\$	30,000		30,000		
Subtotal	Configurat							
				tingency		10%	•	13,800
Total	Configurati	on,	Pro	grammir	ng an	d Startup	Ş	151,800
						vare Costs	•	-
			Cor	tingency		15%	•	-
				Н	ardv	are Total	\$	-
				Subtotal	Softv	vare Costs	\$	-
				tingency	-	15%		-
				9	Softw	are Total	\$	-
	Total	Har	dw	are and S	oftu	are Costs	\$	-
Admin/QC Misc Expenses						10%	\$	15,180
						Total	\$	167,000
(1 PLC/week for (23PLCs) (*40hrs) )*150= Cost								

	OS-29							
Complete Hach WIMS Impleme	entation and Establish Data Ex	chan	ge	with A	VEV/	System	Pla	tform
				Unit				
Hardware Items	Qty	,		Prices	Ext	ended		
		0	\$	-	\$	-		
	Hardware Subtotal				\$	-		
Software Items		_	_					
		0	\$	-	\$	-		
	Software Subtotal				\$	-		
	Totals	0	\$	_	\$	_		
Installation/ Configuration	Qty		U	nit Pric	e Ext	ended		
Sewer Utility will handle internally		1	\$	5,000	\$	5,000		
	Subtotal Configuration,	Dro	~~~	mmina	and	Ctartun	ć	5,000
	Subtotul Configuration,			ingency		10%	Ş	3,000
	Total Configuration,							
	rotal conjiguration,	rog	ıuı	illilling (	unu .	startap		
		Su	bto	tal Har	dwar	e Costs	\$	_
		C	ont	ingency	,	15%	\$	-
				Hard	dwar	e Total	\$	-
		Sı	ıbt	otal Sof	twar	e Costs	\$	-
		C	ont	ingency		15%	-	-
				Sof	twar	e Total	\$	-
	Total Hav	d		and Caf	<b>4</b>	o Costs	Ļ	
	Total Har	JWU	re c	ina soj	twar	e costs	Ą	<del>-</del>
Admin/QC						10%	\$	_
Misc Expenses							τ	
•								
						Total	\$	-
2 weeks (40hr)*150 = Cost								

OS-30									
Complete Asset Creation and Data Entry Required for LLumin Imple Runtimes, and Develop a Plan for Automati							itic Impor	ting	र of Asset
Hardware Items	Qty		Ur	nit Price	es E	Exte	ended		
Hardware Subtotal		0	\$	-		\$ \$	-		
Software Items									
Software Subtotal						\$	-		
Totals	;	0	\$	-		\$	-		
Installation/ Configuration	Qty		Uı	nit Price	e (	Exto	ended		
Workshops to determine Data	~-,	2	\$	5,00			10,000		
Pilot Project connecting Tier 2 Historian to Llumin			•				24,000		
Add additional Data from Tier 2 historian to Llumin			\$				12,000		
Establish connection from Llumin to AVEVA System Platform			•	24,00			24,000		
Integration with Cartagraph				250,00			250,000		
Subtotal Cor	nfiguratio						-	\$	320,000
		(	Con	tingenc	y		10%	\$	32,000
Total Con	figuratio	1, PI	rog	rammii	ng d	nd	l Startup	\$	352,000
			Suk	btotal F	lard	lwc	are Costs	\$	-
		(	Con	tingend	y		15%	\$	-
				Н	ara	lwa	are Total	\$	-
			Sυ	ıbtotal	Sof	twc	are Costs	\$	-
		(	Con	tingenc	y		15%	\$	-
				2	Soft	twa	are Total	\$	-
	Total H	ardı	wai	re and S	Soft	wa	are Costs	\$	

Misc Expenses


4 weeks (40hr)\*150 = Cost

Total \$ 387,000

	1							
Begin Leveraging the Sewer Util	lity's P	ower and	l En	ergy Da	ita			
		_		Unit				
lardware Items		Qty		Prices		tended		
Hardware Subtot	al		\$	-	\$ \$	-		
nuruware Subtoti	ui				Ş	-		
Software Items								
			\$	-	\$	-		
Software Subtoto	al				\$	-		
Tot	tals	0	\$	-	\$	-		
nstallation/ Configuration	Q	ty	Uı	nit Price	Ex	tended		
Integrate existing PQMs to AVEVA System Platform	-	11				11,000		
Workshops/Develop KPI Dashboard		1	\$	6,000	\$	6,000		
Subtotal Cor	nfigura	ition, Prod	grai	nming d	and	Startup	\$	17,000
	, ,		•	ingency		10%	-	1,700
Total Conf	figurat	ion, Prog	ran	nming a	ınd	Startup	\$	18,700
		Sui	bto	tal Hard	lwa	re Costs	\$	_
		Co	onti	ingency		15%	\$	-
				Hard	wa	re Total	\$	-
		Su	ıbto	otal Soft	wa	re Costs	\$	-
		Co	ont	ingency		15%	\$	-
				Soft	wa	re Total	\$	-
	Total	l Hardwa	re a	ınd Soft	wa	re Costs	\$	-
Admin/QC						10%	\$	1,870
Misc Expenses						10/0	Y	1,070
						Total	\$	21,000

	NA	-32						
Rel	ocate Network Rack in	Solids	Proce	ess	ing Buil	din	g	
					Unit			
Hardware Items			ty		Prices		tended	
PLC Panel		\$	1	\$	50,000			
	Hardware Subtotal					Ş	50,000	
Software Items								
			0	\$	-	\$ \$	-	
	Software Subtotal					\$	-	
	Totals		1	\$	50,000	\$	50,000	
Installation/ Configuration		Qty		U	Init Price	Ex	tended	
Building Assessment and (HVAC and cabling)	Engineering a room		1	\$	50,000	\$	50,000	
	Subtotal Config	uratio	n, Prod	arc	amming (	and	Startup	\$ 50,000
	, ,				tingency		10%	5,000
	Total Configu	ration	, Prog	ra	mming a	ınd	Startup	\$ 55,000
			Sui	bto	otal Hard	lwa	re Costs	\$ 50,000
			Co	on	tingency		15%	\$ 7,500
					Hard	wa	re Total	\$ 57,500
			Sı	ubt	total Soft	twa	re Costs	\$ -
			Co	on	tingency		15%	\$ -
					Soft	wa	re Total	\$ -
	To	otal Ha	ırdwa	re	and Soft	wa	re Costs	\$ 57,500
Admin/QC Misc Expenses							10%	\$ 11,250
							Total	\$ 124,000


Appendix B – Schedule





ID	0	Task Mode	Task Name	Duration	Start	Finish	Predecessors
1			SCADA Master Plan	1745 days	Mon 1/9/23	Fri 9/14/29	
2		-	Quick Wins & Immediate Needs	1565 days	Mon 1/9/23	Fri 1/5/29	
3		*	DC-27A SCADA Standards - Hardware	4 mons	Mon 1/9/23	Fri 4/28/23	
4		*	HW-8 Prioritize PLC & OIT for EOL replacement	2 mons	Mon 5/1/23	Fri 6/23/23	3
5		*	HW-10 Develop Instrument Cal and Maint Program	3 mons	Tue 6/6/23	Mon 8/28/23	3
6		*	NA-1 Upgrade CKTP Control Room	12 mons	Mon 5/1/23	Fri 3/29/24	3
7		*	DC-28 Control Strategy Documentation	18 mons	Tue 6/6/23	Mon 10/21/24	3
8		*	SW-23 WWTP Standalone to AVEVA SP Managed Intouch Apps	0.05 mons	Mon 1/9/23	Mon 1/9/23	
9		-5	Near Term Improvement	1305 days	Mon 1/8/24	Fri 1/5/29	
10		*	DC-27B SCADA Standards - Software/Governance	6 mons	Mon 1/8/24	Fri 6/21/24	3
11		*	NA-32 Relocate Network Rack in Solids Processing Building	3 mons	Mon 6/24/24	Fri 9/13/24	3,10
12		*	NA-4 CKTP OT Network Upgrades	6 mons	Mon 9/16/24	Fri 2/28/25	10,11
13		*	NA-2 Extend OT Network to PW Annex	3 mons	Mon 8/5/24	Fri 10/25/24	
14		*	NA-5 Standardization to Managed Switches	2 mons	Mon 9/16/24	Fri 11/8/24	11
15		*	NA-6 ICS and OT Network PS Improvements	6 mons	Mon 3/3/25	Fri 8/15/25	12,10
16		*	SW-26 Broaden Data Set at CKTP Tier 1 Historian	9 mons	Mon 3/3/25	Fri 11/7/25	7,12,10
17		*	HW-13 CKTP Instrumentation Improvements	18 mons	Mon 3/3/25	Fri 7/17/26	7,12,3,10
18		*	NA-3 Remote PS and WWTP Telementry Improvements	24 mons	Mon 5/26/25	Fri 3/26/27	3,12,14,10
19		*	SW-24 Alarm Management Program Based on ISA 18.2	6 mons	Mon 6/2/25	Fri 11/14/25	3,12,6,10
20		*	NA-7 DMZ and AVEVA Intouch Access Anywhere Imp	12 mons	Mon 8/18/25	Fri 7/17/26	3,12,15,6,10
21		*	HW-12 Integrate Sampler A&M for New Samplers	6 mons	Mon 11/17/25	Fri 5/1/26	19,3,10


Task Inactive Summary External Tasks Split Manual Task External Milestone Milestone Duration-only Deadline Project: SCADA Master Plan Pro Summary Manual Summary Rollup Progress Date: Mon 5/23/22 Manual Summary Manual Progress **Project Summary** Start-only Inactive Task 3 Inactive Milestone Finish-only


D	0	Task Mode	Task Name	Duration	Start	Finish	Predecessors
22		*	HW-9 Replace CKTP MCC DeviceNet	9 mons	Mon 1/5/26	Fri 9/11/26	12,3,10
23		*	SW-25 Tiered Historian at CKTP	3 mons	Mon 7/20/26	Fri 10/9/26	3,20,13,10
24		*	HW-14 CKTP Automation Improvements	12 mons	Mon 7/20/26	Fri 6/18/27	3,12,7,17,10
25		*	HW-15 KWWTP Instrumentation Improvements	6 mons	Mon 7/20/26	Fri 1/1/27	3,12,7,10
26		*	HW-17 MWWTP Instrumentation Improvements	12 mons	Mon 8/10/26	Fri 7/9/27	3,12,7,10
27		*	HW-16 KWWTP Automation Improvments	6 mons	Mon 1/4/27	Fri 6/18/27	3,12,20,7,25,10
28		*	HW-19 SWWTP Instrumentation Improvements	12 mons	Mon 2/8/27	Fri 1/7/28	3,12,7,10
29		*	HW-21 Remote PS Intrumentation Improvements	6 mons	Mon 4/12/27	Fri 9/24/27	3,12,7,10
30		*	HW-18 MWWTP Automation Improvements	6 mons	Mon 7/12/27	Fri 12/24/27	3,12,20,7,10,26
31		*	HW-22 Remote PS Automation Improvements	12 mons	Tue 1/11/28	Mon 12/11/28	3,12,20,7,10,29
32		*	HW-20 SWWTP Automation Improvements	6 mons	Mon 1/24/28	Fri 7/7/28	3,12,20,7,10,28
33		*	HW-11 CKTP Digester Bldg PNL 6000 Replacement	12 mons	Mon 2/7/28	Fri 1/5/29	3,12,10
34		*	OS-31 Power and Energy Data Integration to SCADA	3 mons	Mon 3/20/28	Fri 6/9/28	3,12,8,10
35		-5	Long Term Improvement	180 days	Mon 1/8/29	Fri 9/14/29	2SS+60 mons
36		-5	OS-30 Llumin integration with Tier 2 Historian/System Platform	6 mons	Mon 1/8/29	Fri 6/22/29	3,12,20,23,29,10
37		-5	OS-29 Hach WIMS Implementation Data Exchange with AVEVA SP	3 mons	Mon 6/25/29	Fri 9/14/29	3,12,20,23,36,10

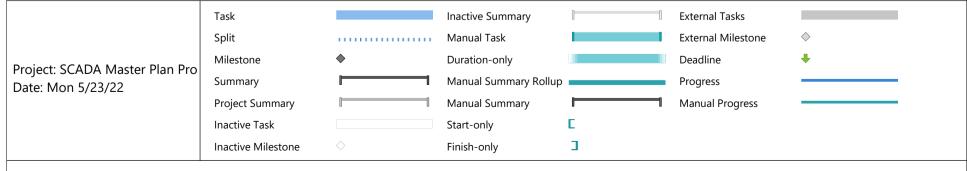


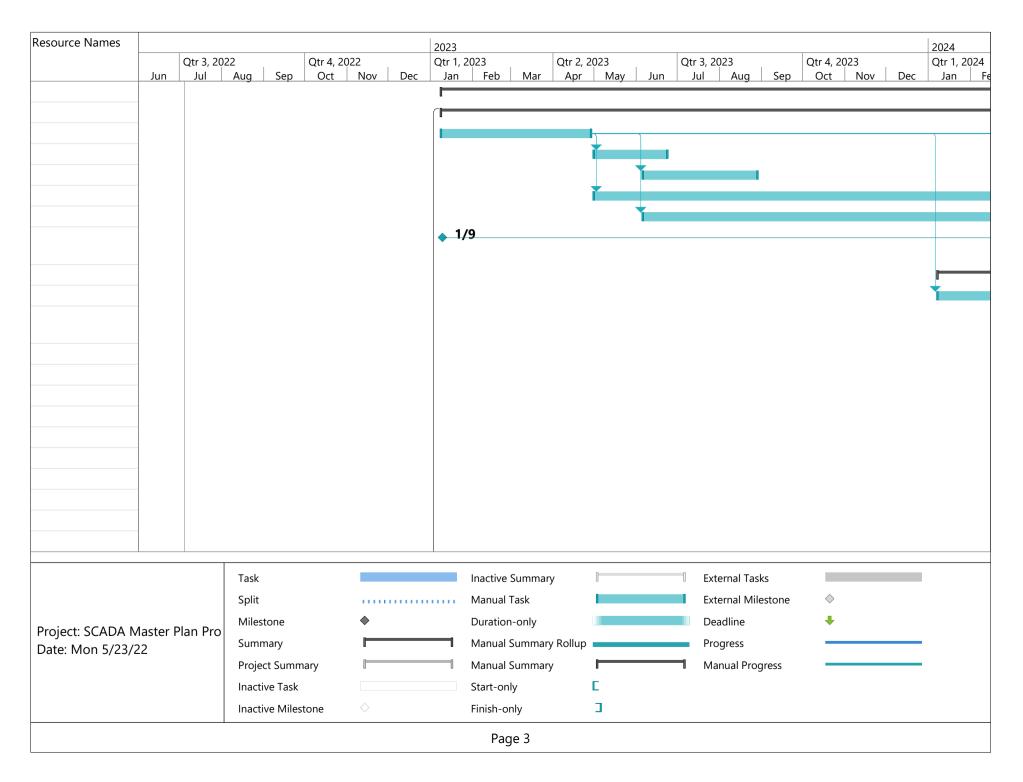


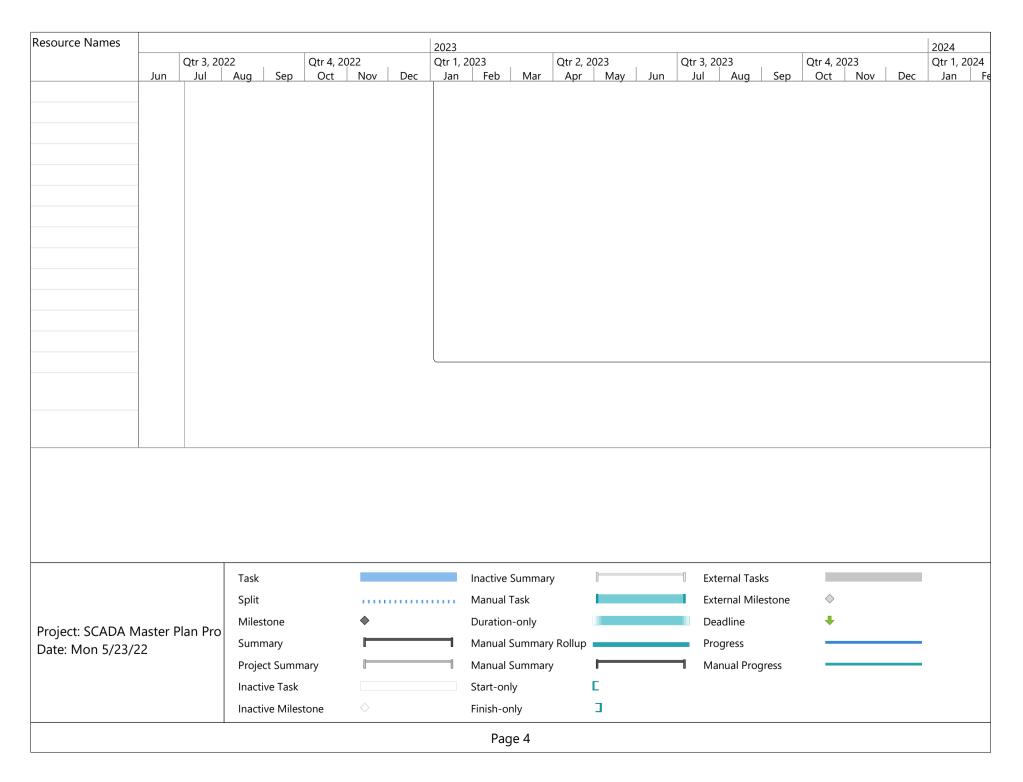


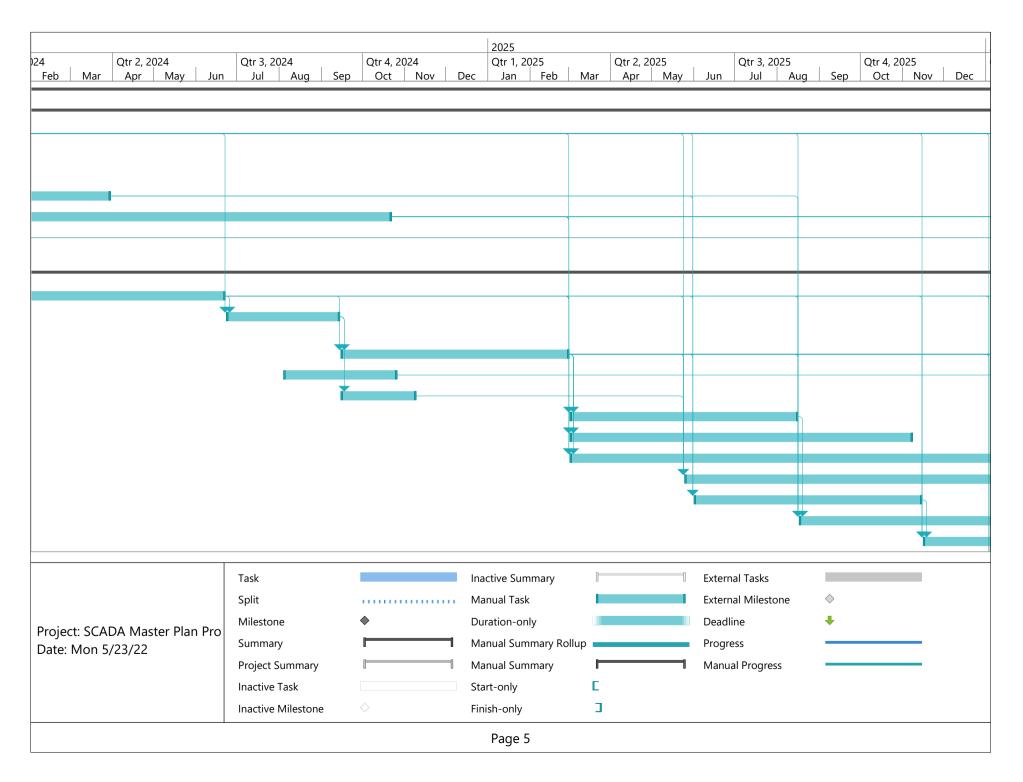


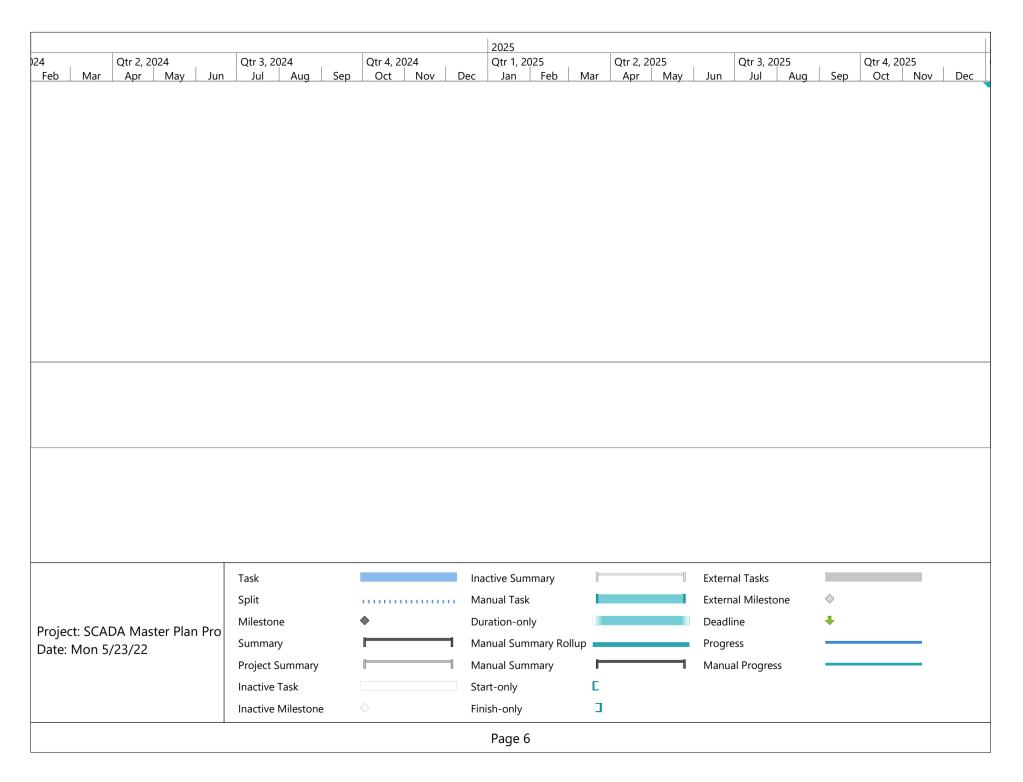

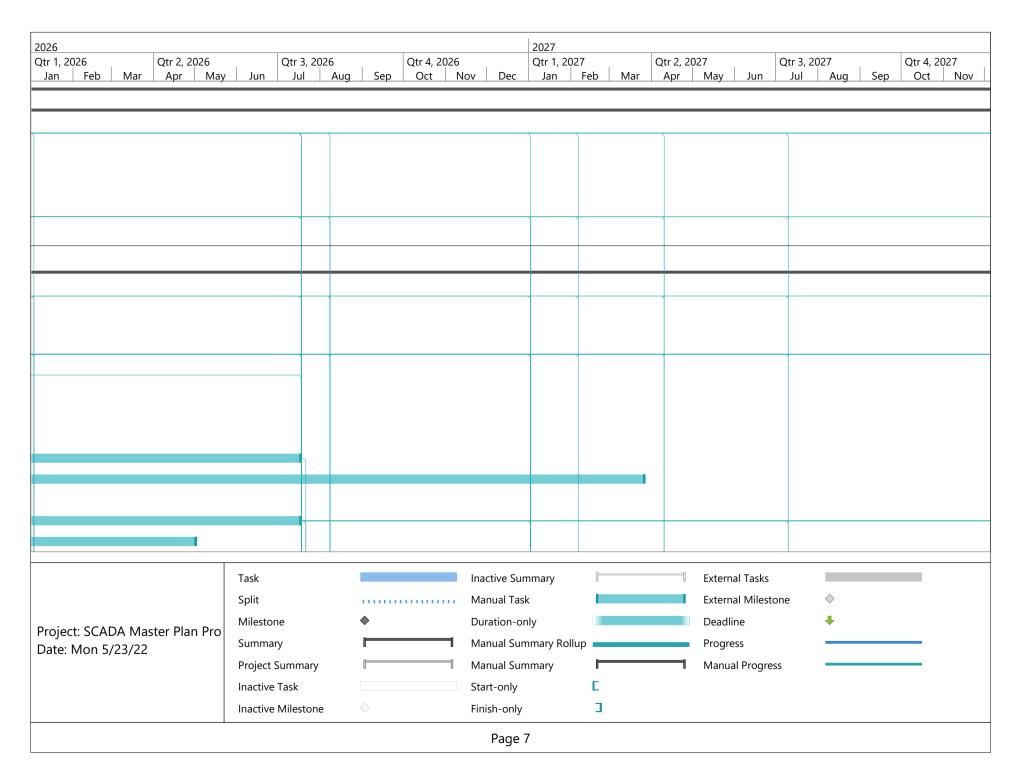

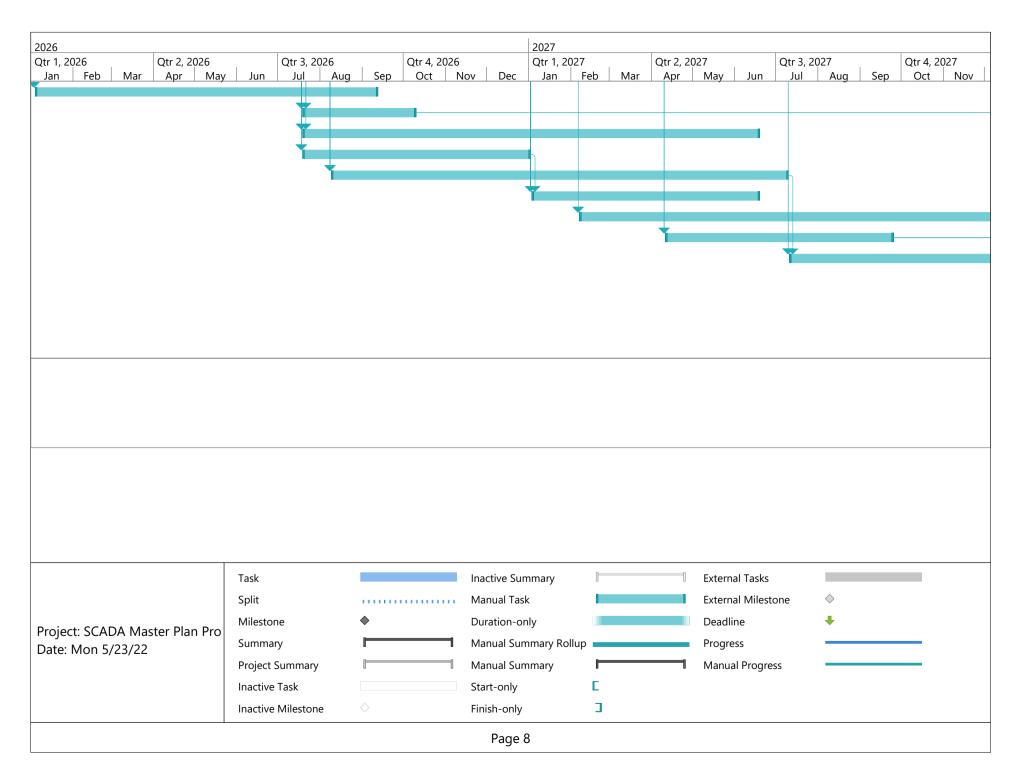

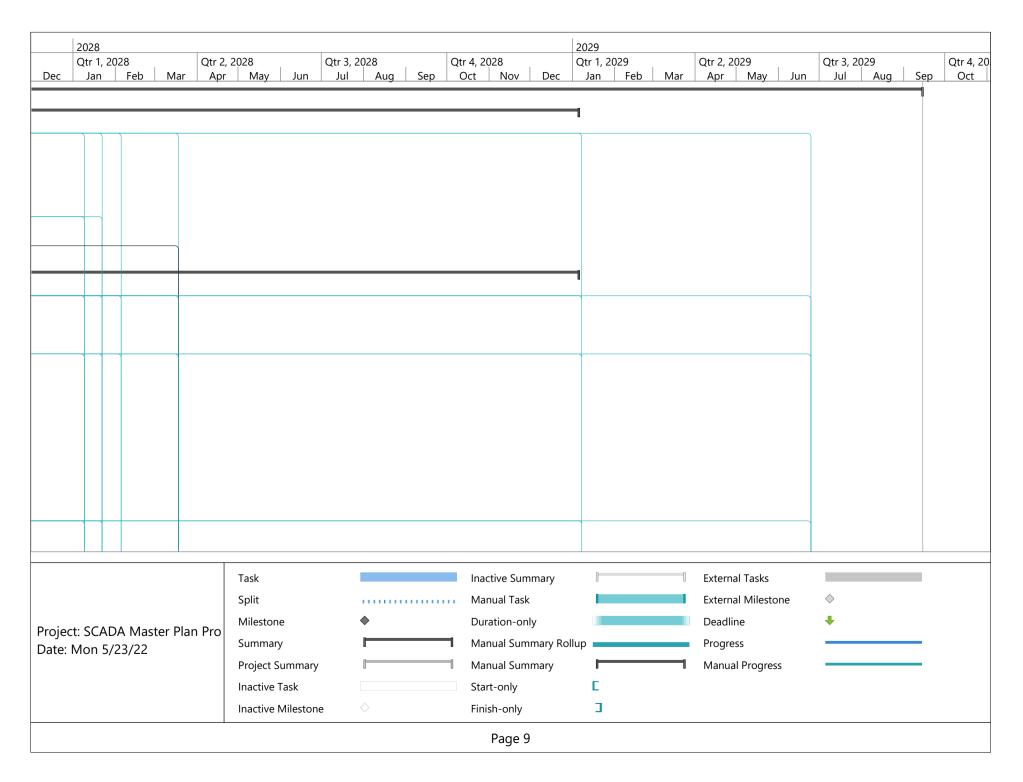

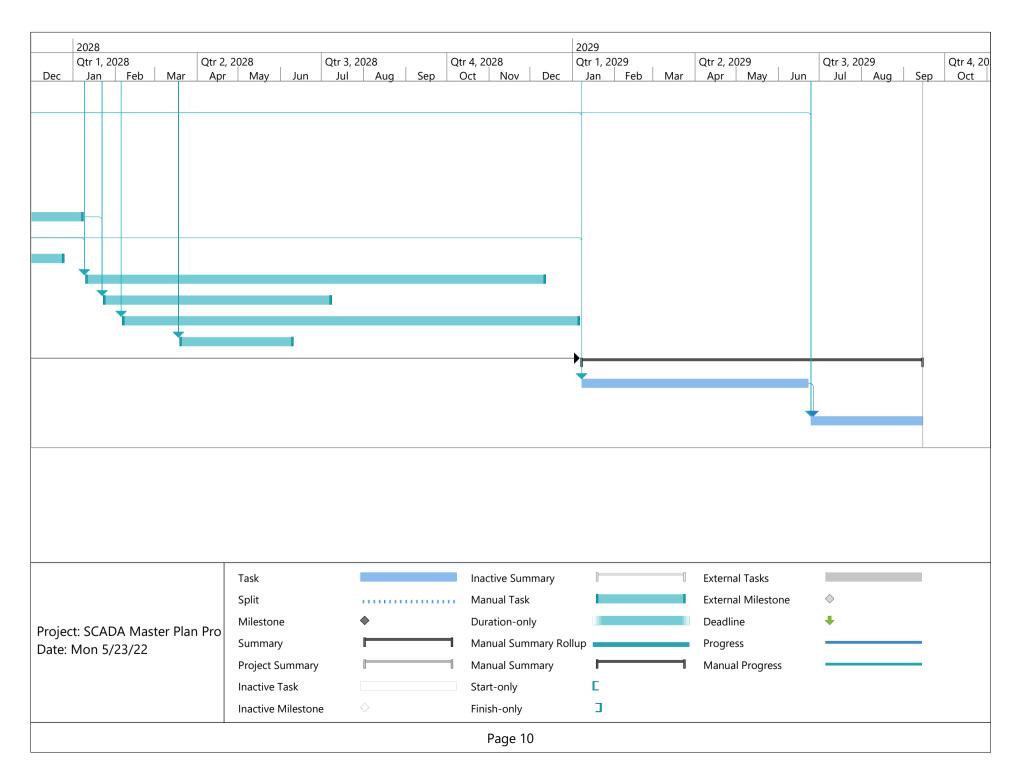





# Visual Hydraulics Summary Report - Hydraulic Analysis

Project: Kingston\_Existing.vhf

Company: Date:

### **Current flow conditions**

Forward Flow =	1.41 mgd
Return I Flow =	0.18 mgd
Return II Flow =	
Return III Flow =	

### **Section Description**

### **Water Surface Elevation**

#### **Starting water surface elevation**

131.85

131.85

Eff\_Box

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 3.33 ft

Channel width/diameter = 3.33 ft

Flow = 0.27 mgd

Downstream channel invert = 131

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $2.83 \text{ ft}^2$ 

Hydraulic radius = 0.563

Normal depth = infinite

Critical depth = 0.08 ft

Depth downstream = 0.85 ft

Bend loss = 0 ft

Depth upstream = 0.85 ft

Velocity = 0.15 ft/s

Flow profile = Horizontal

Eff\_Flume 136.34

Flume invert = 135.97

Flume throat width = 0.5 ft

Flow through flume = 0.27 mgd

Flume 'm' value = 2

Flume 'e' value = 1.58

### **Water Surface Elevation**

Head through flume = 0.37 ft

UV\_Eff\_Channel

136.34

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 7.6 ft

Channel width/diameter = 8.33 ft

Flow = 0.27 mgd

Downstream channel invert = 131

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $44.5 \text{ ft}^2$ 

Hydraulic radius = 2.34

Normal depth = infinite

Critical depth = 0.04 ft

Depth downstream = 5.34 ft

Bend loss = 0 ft

Depth upstream = 5.34 ft

Velocity = 0.01 ft/s

Flow profile = Horizontal

UV\_Eff\_Weir

137.53

Weir invert (top of weir) = 137.5

Weir length = 31 ft

Weir 'C' coefficient = 3.33

Flow over weir = 0.27 mgd

Weir submergence = unsubmerged

Head over weir = 0.03 ft

UV\_Channel

137.53

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 22 ft

Channel width/diameter = 3 ft

Flow = 0.27 mgd

Downstream channel invert = 136.08

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $4.33 \text{ ft}^2$ 

Hydraulic radius = 0.736

Normal depth = infinite

Critical depth = 0.08 ft

Depth downstream = 1.44 ft

Bend loss = 0 ft

Depth upstream = 1.45 ft

Velocity = 0.1 ft/s

# **Water Surface Elevation**

Flow profile = Horizontal

### UV\_Channel\_box

137.53

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 3.33 ft

Channel width/diameter = 3 ft

Flow = 0.27 mgd

Downstream channel invert = 131.5

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $18.08 \text{ ft}^2$ 

Hydraulic radius = 1.201

Normal depth = infinite

Critical depth = 0.08 ft

Depth downstream = 6.03 ft

Bend loss = 0 ft

Depth upstream = 6.03 ft

Velocity = 0.02 ft/s

Flow profile = Horizontal

### Clarifiers\_Common\_Eff

137.54

Pipe shape = Circular

Diameter = 14 in

Length = 120 ft

Flow = 0.27 mgd

Friction method = Manning's Equation

Friction factor = 0.013

Total fitting K value = 2.4

Pipe area =  $1.07 \text{ ft}^2$ 

Pipe hydraulic radius = 0.292

Age factor = 1

Solids factor = 1

Velocity = 0.39 ft/s

Friction loss = 0.01 ft

Fitting loss = 0.01 ft

Total loss = 0.01 ft

#### Calrifier\_Eff

### Clarifier\_1\_Pipe

137.54

Pipe shape = Circular

Diameter = 14 in

Length = 25 ft

Flow = 0.27 mgd

Friction method = Manning's Equation

Friction factor = 0.013

### **Water Surface Elevation**

Off-line

Total fitting K value = 0.89 Pipe area = 1.07 ft<sup>2</sup> Pipe hydraulic radius = 0.292 Age factor = 1 Solids factor = 1 Velocity = 0.39 ft/s Friction loss = 0 ft

Fitting loss = 0 ft Total loss = 0 ft

Clarifier\_2\_Pipe

Clarifier 2 Off-line

Clarifier 2 weir Off-line

Splitter box to Clarifier 2 Off-line

Splitter box weir to clarifier 2 Off-line

Clarifier 1 139.92

Launder invert = 139

Launder length = 54.98 ft

Launder width = 1 ft

Launder slope = 0.0136 ft/ft

Flow through launder = 0.27 mgd

Critical depth = 0.18 ft

Downstream depth = 0.18 ft

Upstream depth = 0.18 ft

Clarifier 1 weir 140.56

Invert of V notch = 140.5

Angle of V notch = 90 degrees

Number of notches = 220

Total flow over weir = 0.27 mgd

Weir submergence = unsubmerged

Head over weir = 0.06 ft

Splitter box to Clarifier 1 140.56

Pipe shape = Circular

Diameter = 14 in

Length = 42 ft

Flow = 0.27 mgd

Friction method = Manning's Equation

Friction factor = 0.013

Total fitting K value = 1.95

Pipe area =  $1.07 \text{ ft}^2$ 

Pipe hydraulic radius = 0.292

# **Section Description Water Surface Elevation** Age factor = 1Solids factor = 1Velocity = 0.39 ft/s Friction loss = 0 ft Fitting loss = 0 ft Total loss = 0.01 ft Splitter box weir to clarifier 1 141.45 Weir invert (top of weir) = 141.25Weir length = 1.5 ft Weir 'C' coefficient = 3 Flow over weir = 0.27 mgdWeir submergence = unsubmerged Head over weir = 0.2 ft Flow Splitter\_Box 141.45 User defined loss for flow split = 0 ft Total flow through flow split = 0.27 mgdFlow\_Mix\_Chnnl 141.46 Channel shape = Rectangular Manning's 'n' = 0.013Channel length = 2.5 ft Channel width/diameter = 10 ft Flow = 0.37 mgdDownstream channel invert = 125 Channel slope = 0 ft/ftChannel side slope = not applicable Area of flow = 164.55 ft<sup>2</sup> Hydraulic radius = 3.835Normal depth = infinite Critical depth = 0.05 ft Depth downstream = 16.45 ft Bend loss = 0 ft Depth upstream = 16.46 ft Velocity = 0 ft/sFlow profile = Horizontal 141.46 Ox Ditch 2 Eff Pipe shape = Circular Diameter = 14 in Length = 191 ftFlow = 0.135 mgdFriction method = Manning's Equation Friction factor = 0.013

Total fitting K value = 4.5

### **Water Surface Elevation**

Pipe area =  $1.07 \text{ ft}^2$ 

Pipe hydraulic radius = 0.292

Age factor = 1

Solids factor = 1

Velocity = 0.2 ft/s

Friction loss = 0 ft

Fitting loss = 0 ft

Total loss = 0.01 ft

#### Ox Ditch 1 Eff

141.46

Pipe shape = Circular

Diameter = 14 in

Length = 87 ft

Flow = 0.135 mgd

Friction method = Manning's Equation

Friction factor = 0.013

Total fitting K value = 2.25

Pipe area =  $1.07 \text{ ft}^2$ 

Pipe hydraulic radius = 0.292

Age factor = 1

Solids factor = 1

Velocity = 0.2 ft/s

Friction loss = 0 ft

Fitting loss = 0 ft

Total loss = 0 ft

#### Ox Ditch 1 Eff Weir

146.34

Weir invert (top of weir) = 146.31

Weir length = 14 ft

Weir 'C' coefficient = 3.33

Flow over weir = 0.185 mgd

Weir submergence = unsubmerged

Head over weir = 0.03 ft

### Ox Ditch 1

146.35

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 197 ft

Channel width/diameter = 16 ft

Flow = 0.185 mgd

Downstream channel invert = 136.1

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $163.9 \text{ ft}^2$ 

Hydraulic radius = 4.492

Normal depth = infinite

Critical depth = 0.02 ft

### **Water Surface Elevation**

Depth downstream = 10.24 ft

Bend loss = 0 ft

Depth upstream = 10.25 ft

Velocity = 0 ft/s

Flow profile = Horizontal

#### Ox Ditch 1 Weir

146.92

Weir invert (top of weir) = 146.8

Number of contracted sides = 2

Weir length = 2.5 ft

Flow over weir = 0.185 mgd

Submergence = unsubmerged

Head over weir = 0.12 ft

#### Ox Ditch 2 Eff Weir

146.34

Weir invert (top of weir) = 146.31

Weir length = 14 ft

Weir 'C' coefficient = 3.33

Flow over weir = 0.185 mgd

Weir submergence = unsubmerged

Head over weir = 0.03 ft

#### Ox Ditch 2

146.35

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 197 ft

Channel width/diameter = 16 ft

Flow = 0.185 mgd

Downstream channel invert = 136.1

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $163.9 \text{ ft}^2$ 

Hydraulic radius = 4.492

Normal depth = infinite

Critical depth = 0.02 ft

Depth downstream = 10.24 ft

Bend loss = 0 ft

Depth upstream = 10.25 ft

Velocity = 0 ft/s

Flow profile = Horizontal

#### Ox Ditch 2 Weir

146.92

Weir invert (top of weir) = 146.8

Number of contracted sides = 2

Weir length = 2.5 ft

Flow over weir = 0.185 mgd

Submergence = unsubmerged

### **Water Surface Elevation**

Head over weir = 0.12 ft

### Ox\_Ditch\_Infl\_Split

146.92

User defined loss for flow split = 0 ft Total flow through flow split = 0.37 mgd

#### ML\_Pipe

146.94

Pipe shape = Circular

Diameter = 14 in

Length = 55 ft

Flow = 0.37 mgd

Friction method = Manning's Equation

Friction factor = 0.013

Total fitting K value = 2.25

Pipe area =  $1.07 \text{ ft}^2$ 

Pipe hydraulic radius = 0.292

Age factor = 1

Solids factor = 1

Velocity = 0.54 ft/s

Friction loss = 0.01 ft

Fitting loss = 0.01 ft

Total loss = 0.02 ft

# RS\_Pipe

146.94

Pipe shape = Circular

Diameter = 14 in

Length = 25 ft

Flow = 0.27 mgd

Friction method = Manning's Equation

Friction factor = 0.013

Total fitting K value = 0.75

Pipe area =  $1.07 \text{ ft}^2$ 

Pipe hydraulic radius = 0.292

Age factor = 1

Solids factor = 1

Velocity = 0.39 ft/s

Friction loss = 0 ft

Fitting loss = 0 ft

Total loss = 0 ft

### RS\_Channel

149.87

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 5 ft

Channel width/diameter = 3.25 ft

Flow = 0.27 mgd

Downstream channel invert = 149.75

### **Water Surface Elevation**

150.23

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow = 0.32 ft<sup>2</sup>

Hydraulic radius = 0.093

Normal depth = infinite

Critical depth = 0.08 ft

Depth downstream = 0.08 ft

Bend loss = 0 ft

Depth upstream = 0.12 ft

Velocity = 1.6 ft/s

Flow profile = Horizontal

#### Parshall Flume

Flume invert = 150

Flume throat width = 1 ft

Flow through flume = 0.27 mgd

Flume 'm' value = 4

Flume 'e' value = 1.522

Head through flume = 0.23 ft

#### Flume\_Inf 150.23

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 4 ft

Channel width/diameter = 3.25 ft

Flow = 0.27 mgd

Downstream channel invert = 26.75

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $401.3 \text{ ft}^2$ 

Hydraulic radius = 1.604

Normal depth = infinite

Critical depth = 0.08 ft

Depth downstream = 123.48 ft

Bend loss = 0 ft

Depth upstream = 123.48 ft

Velocity = 0 ft/s

Flow profile = Horizontal

#### Grit Chamber 150.35

2nd degree polynomial

Flow = 0.27 mgd

Overall head loss = 0.12 ft

## Grit\_Inf 150.36

Channel shape = Rectangular

Manning's 'n' = 0.013

### **Water Surface Elevation**

Channel length = 20 ft

Channel width/diameter = 1.25 ft

Flow = 0.27 mgd

Downstream channel invert = 150

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $0.44 \text{ ft}^2$ 

Hydraulic radius = 0.226

Normal depth = infinite

Critical depth = 0.15 ft

Depth downstream = 0.35 ft

Bend loss = 0 ft

Depth upstream = 0.36 ft

Velocity = 0.96 ft/s

Flow profile = Horizontal

Screen Eff 150.36

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 5 ft

Channel width/diameter = 2 ft

Flow = 0.27 mgd

Downstream channel invert = 150

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow = 0.72 ft<sup>2</sup>

Hydraulic radius = 0.265

Normal depth = infinite

Critical depth = 0.11 ft

Depth downstream = 0.36 ft

Bend loss = 0 ft

Depth upstream = 0.36 ft

Velocity = 0.58 ft/s

Flow profile = Horizontal

#### **Screen Combine**

#### Mech\_Screen\_Eff 150.37

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 6 ft

Channel width/diameter = 2 ft

Flow = 0.27 mgd

Downstream channel invert = 28.5

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow = 243.73 ft<sup>2</sup>

### **Water Surface Elevation**

Hydraulic radius = 0.992

Normal depth = infinite

Critical depth = 0.11 ft

Depth downstream = 121.86 ft

Bend loss = 0 ft

Depth upstream = 121.87 ft

Velocity = 0 ft/s

Flow profile = Horizontal

### Manual Screen Eff

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 10 ft

Channel width/diameter = 2 ft

Flow = 0.27 mgd

Downstream channel invert = 150

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow = 0.73 ft<sup>2</sup>

Hydraulic radius = 0.268

Normal depth = infinite

Critical depth = 0.11 ft

Depth downstream = 0.36 ft

Bend loss = 0 ft

Depth upstream = 0.37 ft

Velocity = 0.57 ft/s

Flow profile = Horizontal

#### Manual\_Screen\_Eff2

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 3 ft

Channel width/diameter = 1.75 ft

Flow = 0.27 mgd

Downstream channel invert = 150

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $0.65 \text{ ft}^2$ 

Hydraulic radius = 0.26

Normal depth = infinite

Critical depth = 0.12 ft

Depth downstream = 0.37 ft

Bend loss = 0 ft

Depth upstream = 0.37 ft

Velocity = 0.65 ft/s

Flow profile = Horizontal

150.37

150.37

## **Water Surface Elevation**

Manual Screen 150.38

Theory used = Kirschmer

Rack/screen invert = 150

Rack/screen width = 1.75 ft

Flow through rack = 0.27 mgd

Bar width = 0.38 in

Bar spacing = 1.38 in

Bar shape = Rectangular

Angle of inclination = 60 degrees

Downstream depth = 0.37 ft

Approach velocity = 0.63 ft/s

Rack/screen head loss = 0.01 ft

### Manual\_Screen\_Inf

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 2 ft

Channel width/diameter = 1.75 ft

Flow = 0.27 mgd

Downstream channel invert = 150

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $0.66 \text{ ft}^2$ 

Hydraulic radius = 0.264

Normal depth = infinite

Critical depth = 0.12 ft

Depth downstream = 0.38 ft

Bend loss = 0 ft

Depth upstream = 0.38 ft

Velocity = 0.63 ft/s

Flow profile = Horizontal

#### Mech Screen 150.65

3rd degree polynomial

Flow = 0.27 mgd

Overall head loss = 0.28 ft

#### Mech Screen Inf

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 6 ft

Channel width/diameter = 1.75 ft

Flow = 0.27 mgd

Downstream channel invert = 150

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow =  $1.14 \text{ ft}^2$ 

150.38

150.65

### **Water Surface Elevation**

Hydraulic radius = 0.373

Normal depth = infinite

Critical depth = 0.12 ft

Depth downstream = 0.65 ft

Bend loss = 0 ft

Depth upstream = 0.65 ft

Velocity = 0.37 ft/s

Flow profile = Horizontal

Screen Split 150.65

User defined loss for flow split = 0 ft Total flow through flow split = 0.54 mgd

Inlet Trough 150.65

Channel shape = Rectangular

Manning's 'n' = 0.013

Channel length = 2.66 ft

Channel width/diameter = 5.25 ft

Flow = 0.27 mgd

Downstream channel invert = 150

Channel slope = 0 ft/ft

Channel side slope = not applicable

Area of flow = 3.42 ft<sup>2</sup>

Hydraulic radius = 0.522

Normal depth = infinite

Critical depth = 0.06 ft

Depth downstream = 0.65 ft


Bend loss = 0 ft

Depth upstream = 0.65 ft

Velocity = 0.12 ft/s

Flow profile = Horizontal

# Water Surface Elevations - Kingston WWTP - 1.41 MGD

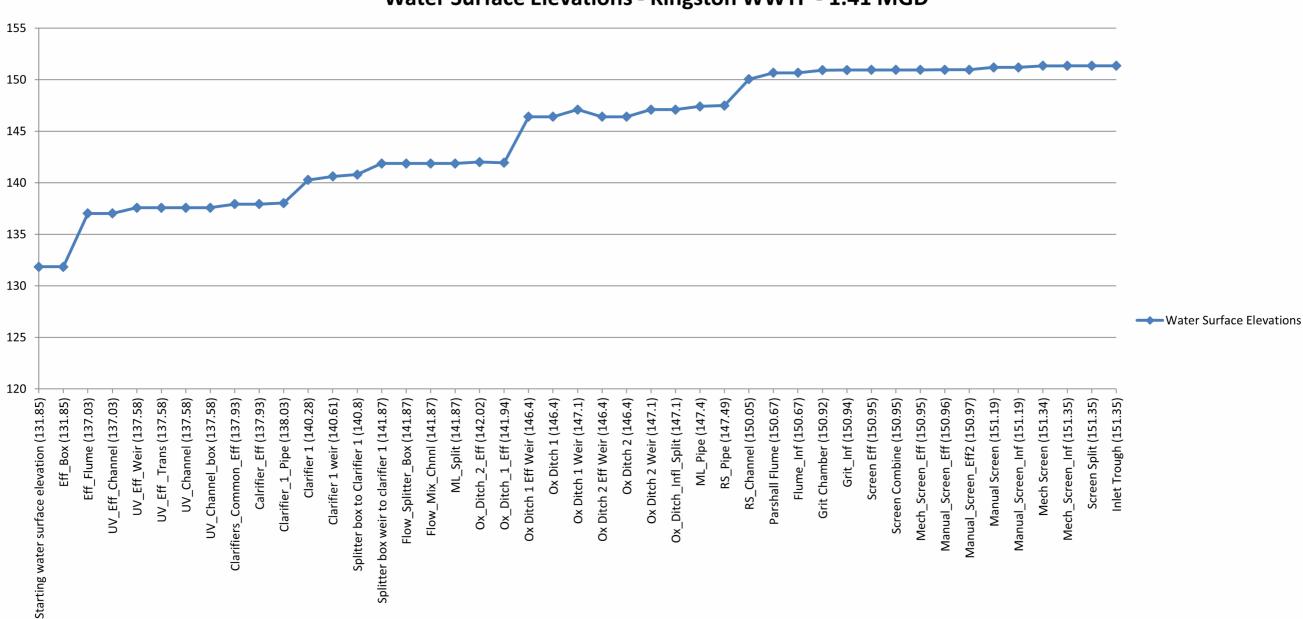

APPENDIX H
KINGSTON AND SUQUAMISH
DESIGN STORM, MODEL
LOADINGS, AND FUTURE
CONDITION PARAMETERS





# **Technical Memorandum**

Date: February 4, 2022

**Project:** Kingston and Suquamish General Sewer Plan

To: Barbara Zaroff, PE, PMP

From: Andrew Henson, PE, PMP; Ryan Jones, PE

Reviewed By: Adam Schuyler, PE, PMP

Re: Kingston and Suquamish Design Storm, Model Loadings, and Future Condition

**Parameters** 

#### Introduction

Completion of the General Sewer Plan updates for the Kitsap County (County) Kingston and Suquamish basins relies on hydraulic and hydrologic (H/H) modeling. Model scenarios representing the existing conditions and 20-year planning horizon will be used to identify capacity deficiencies and develop proposed alternatives to address system issues. Each basin is represented by a calibrated model developed in the Danish Hydraulic Institute's (DHI's) MIKE+ software. The calibrated models simulate dry and wet weather system response in the existing collection systems. A design storm will be applied to the calibrated models to identify existing system deficiencies under certain wet weather conditions.

Model scenarios representing the 20-year planning horizon will be created from the calibrated model for each basin. In these new scenarios, future dry weather flow (DWF) will be updated to reflect expected population growth. The design storm will be adjusted for climate change and will be used to determine future deficiencies. Future DWF and a climate change adjusted design storm will be used in developing proposed alternatives to address system deficiencies.

Documented in this Technical Memorandum (TM) are the selection of the design storm, the climate change adjustments, existing model flow loadings, and the future DWF loadings.

# Design Storm Generation and Usage

The collection systems for the Kingston and Suquamish basins will be analyzed using a 25-year design storm to be consistent with the analysis used in the on-going Central Kitsap Wastewater Facility Plan and Sewer Plan Update. The project team proposes using a design storm based on a

Soil Conservation Service (SCS) Type 1A 25-year 12-hour storm and a storm volume of 3.637 inches, which is the volume associated with the 25-year return period for this area (State of Washington Water Research Center, 2015).

Hydrologic parameters in the model represent how much rainfall is infiltrated into the soil versus how much is surface runoff. These parameters, in turn, determine how rainfall is routed into the sewer system in the form of inflow and infiltration (I/I). Running the model for a longer period, e.g., an entire wet season, allows for the model to account for antecedent soil moisture conditions. This is important for the model to generate a wet weather response in the separated sewer system due to infiltration. Note that the inflow portion of wet weather flow, i.e., the runoff that enters through manhole lids or connected storm lateral connections, is less sensitive to the model simulation duration but it is still accounted for in the selected hydrologic parameters. The hydrologic parameters are tuned during model calibration so that the simulation results align with available flow monitoring data.

Using a single design storm alone will not properly build antecedent soil conditions. Therefore, the developed design storm was inserted into the recorded rainfall timeseries such that the peak rainfall intensity lined up with the peak rainfall intensity of the 12/21/2020 storm, a large storm from both the observed Kingston and Suquamish rainfall. This storm placement allows for running the model using observed rainfall to develop hydrologic antecedent soil moisture conditions that will be consistent with the calibrated model. **Table 1** shows the peak rainfall intensity and total rainfall volume for these timeseries for this storm. The 12-hour duration of the SCS Type 1A design storm was selected to better match the rainfall peak intensities in the observed rainfall data. This design storm will be used to determine existing conditions deficiencies.

Table 1: Rainfall Summary of December 21, 2020 Storm Event and Design Storm

Rainfall Source	Rainfall Peak Intensity (in/hr)	Rainfall Volume (in)
Kingston Rain Gage	0.24	0.41
Suquamish Rain Gage	0.24	0.43
25-year 12-hour Design Storm	0.25	0.73

# **Design Storm Climate Change Adjustments**

The rainfall input described above will be adjusted for climate change by scaling up the overall storm volume and intensity by a percentage shown in bold in **Table 2**. The adjustment reflects the fact that a 25-year storm in the future is projected to be larger than the current 25-year storm. The University of Washington Climate Impacts group publishes expected increased in rainfall for each decade between 2030 and 2080 (Climate Impacts Group, 2021). Note that the published values include the 24-hour and 6-hour storm durations but did not include a 12-hour storm. As such the 6-hour storm was used to be more conservative. Two different climate change adjustment factors are proposed for use for different purposes. The first, representative of the 2040s to align with the 20-year planning horizon, will be used to determine future system

deficiencies. The second, representative of the 2080s, will be used to size alternatives to address identified deficiencies. The 2080s projection aligns more closely with the expected useful life of a pipe.

Table 2: Projected Change from UW Climate Impacts Group.

Decade	Projected Change*
2030s	10%
2040s	16%
2050s	22%
2060s	22%
2070s	21%
2080s	27%

<sup>\*</sup>Based on location of Kingston basin which is the more conservative projection provided by Climate Impacts Group.

# **Existing Conditions Model Loadings**

ADS Environmental placed flow meters in both the Kingston and Suquamish collection systems from 10/1/2020 through 5/1/2021. The flow monitoring data is the preferred data set to develop the loadings for application in the model as it was collected at a relatively high resolution (nine total meter sites, four in Kingston and five in Suquamish, at 5-minute intervals) and collects flow from the entire service area. As such, the models were calibrated to dry and wet weather events using this data, including developing DWF average values and patterns and determining hydrologic parameters. However, flow data collected at each Wastewater Treatment Plant (WWTP) is used as the basis for the plant loadings at the as described in the Population, Flow, and Loading sections of the General Sewer Plans. Therefore, the flow monitoring data was compared to available data at each of the Wastewater Treatment Plants (WWTP) to ensure consistency between plant and collection system loadings. Average annual flow (AAF) at the WWTPs is compared to the average DWF value determined from the flow metering data Table 3.

Table 3: Flow Data Comparisons

Basin	2020 AAF (mgd)	DWF Average Value from Flow Monitoring Data (mgd)
Kingston	0.11	0.24
Suquamish	0.23	0.26

The data sets compare favorably in the Suquamish basin given the magnitude of the flow and the varying metering approaches (i.e., daily flow recorded at the WWTP versus 5-minute data recorded in the collection system flow monitoring). Therefore, it is recommended to use the flow

monitoring data as the basis for the dry weather loading and to determine the hydrologic parameters in the Suquamish basin model.

The comparison in the Kingston basin is less favorable, however, with an over 100 percent difference in the average daily flow in the basin. The project team discussed potential reasons for the discrepancy internally, with Kitsap County staff, and with ADS Environmental, including:

- Potential for ADS flow meters to be installed in different locations than planned resulting in accidentally "double counting" flows, which could result in inflated DWF summations. The project team reviewed ADS flow meter install sheets and discussed this with ADS and determined that the meters were installed as expected.
- Low flow depths in the collection system present metering challenges for collecting accurate data, thereby influencing the flow calculations (flow is computed by multiplying measured depth and velocity readings). ADS reviewed the depth data upon request and found no apparent issue with the data collection or flow computations.
- Potential for the metering at the Kingston WWTP to be erroneous. County staff expressed confidence in this metering, noting that it has been calibrated.
- Potential that the collection system connectivity is different than represented in the geographic information system (GIS) data, which could result in flow paths being different than expected. County staff provided as-built data near the ADS flow meter install location and no differences from GIS data were discovered.
- Potential for an unknown break in a pipeline between an ADS flow meter install locations and the Kingston WWTP resulting in a loss of flow. County staff discussed that system issues would have likely been evident in pump run times or surface conditions in the vicinity given the magnitude of loss needed to explain the difference between WWTP plant data and ADS flow meter data.

Ultimately, no obvious error in either collection methodologies were determined through these discussions. To provide another data point, County operations and maintenance (O&M) staff performed pump draw down tests at Lift Station (LS) 71 and LS 41 and provided monitoring data from a meter on the force main at LS 71. The project team evaluated this data to determine if it supported the magnitude of flows at the Kingston WWTP or the ADS collection flow monitoring data. LS 41 feeds directly into LS 71, and there were three individual flow meters placed upstream of LS 41. LS 71 feeds directly into the Kingston WWTP, and there was one individual flow meter upstream of this station to record data from the system that does not flow through LS 41.

**Table 4** and **Table 5** show the comparisons of the ADS flow meter data with County data at LS 41 and LS 71, respectively. Multiple County data sources – data from the Kingston WWTP, LS 71, and LS 41 – agree while the ADS data is an outlier. It is recommended to use the average value from the County data sources for DWF loading in the Kingston model. Using the County data for DWF loading places the collection system flows more in alignment with the flows used to evaluate the Kingston WWTP for dry weather.

Table 4: Average DWF Comparison at LS 41

Location	Average DWF (mgd)
Sum of ADS Meters Upstream of LS 41	0.15
LS 41 Runtime Data (Average monthly value for December 2020 per available data)	0.05

Table 5: Average DWF Comparison at LS71 and Kingston WWTP

Location	Average DWF (mgd)
Sum of ADS Meters Upstream of LS 71	0.24
LS 71 Runtime Data (Average monthly value for October 2020 based per available data)	0.09
LS 71 Force Main Mag Meter	0.08
Kingston WWTP	0.11

The comparison of wet weather events from the various data sources in the Kingston basin is more difficult. The LS 71 runtime and Kingston WWTP data are provided in daily totals so peak flow magnitudes related to a storm event are unlikely to be reflected in the data. The ADS flow monitoring data is collected in 5-minute intervals so peak flows are more apparent in this data. The peak hour flow (PHF) peaking factor at the WWTP was estimated as 5.16, which was documented in the Kingston draft plan Section 3 (Population, Flow, and Load Projections). A similar PHF peaking factor is achieved in the model by using a DWF loading reduced to better match the Kingston WWTP AAF DWF value in conjunction with the wet weather hydrologic parameters determined by using the ADS data for wet weather calibration. For this reason, it is recommended that the Kingston model hydrologic parameters be based on the calibration to the ADS flow monitoring data while the model DWF component be based on the Kingston WWTP AAF DWF value.

# **Future Conditions DWF Loadings**

Future DWF loadings are projected to increase based on population growth in both Kingston and Suquamish for the 20-year planning horizons which align with the available population growth estimates for these areas. Future conditions DWF will be computed by increasing the existing conditions DWF based on projections of AAF at the Kingston and Suquamish WWTPs in 2042. As the 2080 climate change planning condition will be used for pipe sizing, using the same AAF as in

the 2042 planning horizon was deemed appropriate for this analysis. Current and projected AAF are summarized below in **Table 6**.

At the time of compiling this TM, the Arborwood development is being planned for the southern portion of the Kingston basin that will have 358 equivalent residential units (ERU). Flows from this area will be pumped directly to the Kingston WWTP and therefore will not impact the modeled Kingston collection system. As a result, the projected flow associated with this development is subtracted from the WWTP AAF to determine the appropriate model loadings.

Table 6: Future DWF Projected Increase in Collection System

WWTP	2020 AAF (mgd)	2042 AAF (mgd)	2042 AAF without Arborwood (mgd)	Projected Increase*
Kingston	0.11	0.27	0.23	109%
Suquamish	0.23	0.26	N/A	12%

<sup>\*</sup>Projected increase based on 2042 AAF without Arborwood.




# FINAL

# Kingston Recycled Water Facility Plan

Prepared for Kitsap County Public Works Sewer Utility Division Port Orchard, Washington March 12, 2020



Prepared for
Kitsap County Public Works, Port Orchard, Washington
March 12, 2020



Prepared By: Matthew DeBoer March 12, 2020



Reviewed By: Tadd Giesbrecht March 12, 2020



Reviewed By: Bill Persich March 12, 2020



701 Pike Street, Suite 1200 Seattle, Washington 98101 T: 206.624-0100

# **Table of Contents**

Lis	t of Fig	ures		iv
Lis	t of Tak	oles		V
Lis	t of Abl	oreviatio	ns	vii
Exe	ecutive	Summa	ry	ix
	Curre	ent Wate	r Issues	ix
		Water (	Quantity	ix
		Water (	Quality	X
	Bene	ficial Re	use Options	X
	Stake	eholder (	Coordination and Public Involvement	xi
	Recy	cled Wat	er Benefits	xii
		Conser	ve limited groundwater resources	xii
		Divert r	nutrients away from the marine environments and to where they are needed.	xii
		Restore	e and replenish streams and fish habitats	xiii
		Enhand	e marine life ecosystems	xiii
		Engage	the community about our critical water resources	xiii
		Create	a community asset	xiv
	Imple	ementati	on	xiv
1.	Introd	uction		1-1
	1.1 Project Background			
	1.2	Purpos	e and Scope	1-2
	1.3	Project	Planning Area	1-3
	1.4	Authori	ty and Management	1-3
	1.5	Stakeh	older Coordination and Public Involvement	1-4
2.	Servic	e Area C	Characteristics	2-1
	2.1	Service	Area Land Use, Zoning, and Demographics	
		2.1.1	Existing Service Area	2-2
		2.1.2	Future Service Area	2-2
	2.2 Recreation and Open-Space Alternatives		tion and Open-Space Alternatives	2-4
	2.3	Enviror	mental Setting	2-4
		2.3.1	Topography and Geology	2-4
		2.3.2	Climate and Precipitation	2-4
		2.3.3	Water Resources	2-5
		2.3.4	Sensitive Areas	2-7
		2.3.5	Wildlife Habitat	2-9
		2.3.6	Prime and Unique Farmland	2-10



		2.3.7	Archaeological and Historical Sites	2-10		
		2.3.8	Wild and Scenic Rivers	2-12		
	2.4	Air Qua	ality and Public Health	2-12		
3.	Waste	ewater C	haracteristics	3-1		
	3.1	Historio	cal Wastewater Flows and Loadings	3-1		
	3.2	Popula	tion Forecasts	3-4		
	3.3	Flow ar	nd Loading Projections	3-4		
4.	Recyc	led Wate	er Market Analysis	4-1		
	4.1	Potable	e Water Facilities	4-1		
		4.1.1	Existing Facilities	4-1		
		4.1.2	Regional Water Supply and Demand	4-2		
		4.1.3	Water Quality	4-3		
	4.2	Wastev	water Facilities Summary	4-3		
	4.3	Recycle	ed Water Uses and Demand	4-4		
		4.3.1	Potential Recycled Water Uses	4-4		
		4.3.2	Barriers to Recycled Water Use	4-4		
	4.4	Project	Need	4-5		
	4.5	Custon	ner Outreach	4-6		
5.	Existing Wastewater Facilities					
	5.1	5.1 Existing Collection System				
	5.2	5.2 Existing Treatment System		5-1		
	5.3	5-5				
		5.3.1	Preliminary Treatment	5-6		
		5.3.2	Secondary Treatment	5-6		
		5.3.3	Disinfection	5-6		
		5.3.4	Sludge Thickening	5-6		
6.	Altern		evelopment and Analysis			
	6.1	Project	Objectives and Evaluation Criteria	6-1		
	6.2	Benefic	cial Uses Alternatives Analysis	6-1		
		6.2.1	Beneficial-Use Alternative Screening	6-2		
	6.3	Recycle	ed Water Treatment Alternatives	6-4		
		6.3.1	Secondary Treatment System	6-4		
		6.3.2	Tertiary Filtration System	6-5		
		6.3.3	Disinfection			
		6.3.4	Tertiary Filtration and Disinfection Process Flow Options	6-6		
	6.4	Infiltrat	tion Investigation	6-9		
	6.5	6.5 Beneficial Use Business Case Evaluation Analysis and Results				
	6.6	5.6 Conveyance Alternatives				
7.	•		er Project Benefits			
	7.1	Curren	t Approach to Water Resource Management	7-1		



	7.2	Pressu	re on Our Water Supplies and Environment	7-2	
	7.3	Treatin	g Water as a Resource	7-2	
	7.4	Conser	ve Limited Groundwater Resources	7-3	
	7.5	Divert I	Nutrients Away from the Marine Environment and to Where They Are Need	ed7-5	
	7.6	Restore	e and Replenish Streams and Fish Habitats: Grovers Creek	7-6	
	7.7	Enhand	ce Marine Life Ecosystems	7-8	
	7.8	Engage	e the Community About Our Critical Water Resources	7-12	
	7.9	Create	a Community Asset	7-13	
	7.10	Conclu	sion	7-13	
8.	Recon	nmende	d Recycled Water Facilities	8-1	
	8.1	Recycle	ed Water Quality Design Criteria	8-1	
	8.2	Design	Overview	8-2	
		8.2.1	Facilities Layout	8-3	
		8.2.2	Redundancy	8-5	
	8.3	Facilitie	es Description	8-5	
		8.3.1	Treatment		
		8.3.2	Conveyance	8-7	
		8.3.3	Irrigation	8-7	
		8.3.4	Infiltration		
	8.4	Proces	s Control Strategy	8-9	
	8.5		nal Design Considerations		
		8.5.1	Cross-Connection Control	8-9	
		8.5.2	Contingency Planning	8-10	
	8.6	Staffing	g Requirements	8-10	
	8.7	Cost Es	stimates	8-10	
		8.7.1	Capital Costs	8-10	
		8.7.2	Operation, Maintenance, and Replacement Costs	8-12	
9.	Financ	cial Anal	ysis		
	9.1	Introdu	iction to Recycled Water Financing	9-1	
	9.2	Fundin	g Sources	9-2	
		9.2.1	County Funding		
		9.2.2	Debt Funding	9-4	
		9.2.3	Grants and Loans	9-4	
	9.3	Financ	ial Capability Assessment	9-7	
	9.4	Fundin	g Plan	9-7	
10.	1		nental Analysis and Documentation		
			ary of Potential Impacts of Recommended Facilities		
			nmental Review		
	10.3	3 Anticipated Permits10			
		Public Meetings10-			



11. Water I	Rights, Permitting, and Legal Considerations	11-1
11.1 Water	Rights Analysis	11-1
11.2 Regul	atory Requirements	11-1
11.2.3	1 Legal and Institutional Requirements	11-1
	2 Permitting Procedures	
	3 Unresolved Issues	
	4 Wastewater Discharge Requirements	
11.2.5	2 7 1	
	6 Rights to Wastewater Discharges	
	ocal Agreements	
	ch Needs	
	ionsnces	
	ston Recycled Water Project Report	
	R Requirements Crosswalk Table	
	seholder Presentation Materials	
	rogeologic Site Characterization Report	
Appendix E: Febr	ruary 2018 Wetlands Reconnaissance Memorandum	E-1
Appendix F: Com	parison of Filtration Alternatives	F-1
Appendix G: Opin	nion of Probable Construction Cost	G-1
Appendix H: Grou	undwater Modeling TM	H-1
Appendix I: SEPA	Checklist	I-1
Appendix J: Finar	ncial Capability Assessment	J-1
List of Figu	ures	
Figure 1-1. Base	line option summary	1-2
Figure 2-1. Proje	ct planning area	2-1
Figure 2-2. Coun	ty zoning designations	2-3
Figure 2-3. Collec	ction system infrastructure	2-3
Figure 2-4. Shellf	fish closure zone	2-7
Figure 2-5. Sensi	itive areas map	2-8
	ife habitat map	
	e and unique farmland map	
	neological and historical site probability map	
	ston WWTP influent flows, 2010–17	



Figure 3-2. Kingston WWTP influent CBOD $_5$ loadings, 2010–17	3-2
Figure 3-3. Kingston WWTP influent TSS loadings, 2010–17	3-3
Figure 4-1. KPUD water systems	4-2
Figure 4-2. Water balance for 2040	4-5
Figure 5-1. Kingston WWTP process flow schematic	5-3
Figure 6-1. Comparison of UV and tertiary filter process flow options	6-8
Figure 6-2. South Fork Grovers Creek at Confluence with Mainstem Grovers Creek	6-10
Figure 6-3. Mouth of Grovers Creek at Appletree Cove	6-11
Figure 6-4. Beneficial Uses BCE results	6-12
Figure 6-5. Conveyance alternatives	6-13
Figure 7-1. Water cycle showing current water management approach	7-1
Figure 7-2. Water cycle showing proposed holistic water resources management approach	7-2
Figure 7-3. Groundwater withdrawal levels after implementation of recycled water program	7-4
Figure 7-4. Golf courses are ideal examples of using recycled water for irrigation	7-5
Figure 7-5. Groundwater infiltration area will serve to replenish nearby streams	7-7
Figure 7-6. The Hawks Prairie recycled water recharge facility helped the LOTT Clean Water A avoid costly nitrogen permit limits while providing multiple benefits	
Figure 7-7. Groundwater infiltration through recharge improves stream flow and SAT provides multiple barriers for protecting surface water and groundwater	
Figure 7-8. Community outreach examples	7-13
Figure 8-1. Recycled water facilities process flow schematic	8-2
Figure 8-2. Preliminary site layout of recycled water facilities	8-4
Figure 8-3. Proposed pipeline to WHGC and infiltration area	8-8
List of Tables	
Table ES-1. Alternatives Screening Criteria	xi
Table 2-1. Monthly Climate Summary	2-5
Table 3-1. Flow Peaking Factors	3-3
Table 3-2. BOD $_5$ and TSS Loading Peaking Factors	3-4
Table 3-3. Sewered Population Forecasts	3-4
Table 3-4. Projected Wastewater Flows	3-5
Table 3-5. Projected Wastewater BOD $_{5}$ and TSS Loadings	3-6
Table 4-1. Summary of Existing Water Rights Information	4-2
Table 4-2. Water Demand Projections for Kitsap County	4-3



Table 4-3. WHGC Water Demands and Kingston WWTP Projected Flows	4-4
Table 5-1. Kingston WWTP Major Equipment Design Data	5-4
Table 5-2. Kingston WWTP Rated Capacities and NPDES Effluent Limits	5-5
Table 6-1. Benefits of Beneficial-Use Alternatives	6-3
Table 6-2. Level of Treatment for Different Discharge Options for Recycled Water	6-4
Table 6-3. Design Criteria for Tertiary Filtration and Disinfection Process Flow Options	6-6
Table 8-1. Class A Recycled Water Performance Standards	8-1
Table 8-2. Kingston WWTP Recycled Water Treatment Design Data	8-6
Table 8-3. Estimate of Probable Construction Cost	8-11
Table 8-4. Estimation of Annual O&M Costs	8-12
Table 10-1. Anticipated Permit Summary	10-2

# List of Abbreviations

°F	degree(s) Fahrenheit	DWCDE	Drinking Water State Develoing Fund	
AACE	Association for the Advancement of Cost	DWSRF	Drinking Water State Revolving Fund Washington State Department of	
	Engineering International	Ecology	Washington State Department of Ecology	
AAF	annual average flow	EDA	Economic Development Administration	
ac	acre(s)	EDC	endocrine-disrupting compound	
ADWF	average dry weather flow	EPA	U.S. Environmental Protection Agency	
Albuquerque	e Albuquerque Bernalillo County Water Utility Authority	EQ	equalization	
amsl	above mean sea level	ESSB	Engrossed Substitute Senate Bill	
AWWA	American Water Works Association	Facilities Plan Update Kingston Wastewater Facilities Plan Update Addendum		
BAT	backflow assembly tester	Eggsibility C	·	
ВМР	best management practice	-	tudy USBR Title XVI Feasibility Study	
BCE	business case evaluation	FEMA	Federal Emergency Management Agency	
BOD <sub>5</sub>	5-day biochemical oxygen demand	FPPA	Farmland Protection Policy Act	
CBOD <sub>5</sub>	5-day carbonaceous biochemical oxygen	ft	foot/feet	
	demand	ft <sup>2</sup>	square foot/feet	
CDBG	Community Development Block Grant	FTE	full-time equivalent	
CERB	Community Economic Revitalization Board	gal	gallon(s)	
CFDA		GBT	gravity belt thickener	
-	Catalog of Federal Domestic Assistance	gpcd	gallon(s) per capita per day	
CFR	Code of Federal Regulations	gpm	gallon(s) per minute	
cfs	cubic foot/feet per second	Health	Washington State Department of Healtl	
CFU	colony-forming unit(s)	hp	horsepower	
CKTP	Central Kitsap Treatment Plant	hr	hour(s)	
Cl <sub>2</sub>	chlorine	HVAC	heating, ventilation, and air conditioning	
cm <sub>2</sub>	square centimeter(s)	1&1	inflow and infiltration	
CO <sub>2</sub>	carbon dioxide	in.	inch(es)	
Commerce	Washington State Department of Commence	IRP	integrated resource planning	
County	Kitsap County	KPUD	Kitsap Public Utility District	
CWA	Clean Water Act	kW	kilowatt(s`)	
d	day(s)	lb	pound(s)	
DAHP	Department of Archaeology and Historic	LF	linear foot/feet	
2711	Preservation	LOTT	Cities of Lacey, Olympia, and Tumwater	
DBP	disinfection by-product		and Thurston County	
DCD	Kitsap County Department of	m	meter(s)	
DND	Community Development	MCL	maximum contaminant level	
DNR	Washington State Department of Natural Resources	MG	million gallons	
DNS	Determination of Non-Significance	mgd	million gallons per day	
DO	dissolved oxygen	MHI	median household income	
		mJ	millijoule(s)	



mL	milliliter(s)	SMA	Shoreline Management Act
MLLW	mean lower low water	SRF	State Revolving Fund
MMF	maximum month flow	SRT	solids retention time
MPN	most probable number	SWD	side water depth
N/A	not applicable	TMDL	total maximum daily load
NEPA	National Environmental Policy Act	TN	total nitrogen
NKHP	North Kitsap Heritage Park	Tribe	Suquamish Tribe
NOAA	National Oceanic and Atmospheric	TSS	total suspended solids
	Administration	TWAS	thickened waste activated sludge
NPDES	National Pollutant Discharge Elimination System	UE	unemployment
NPV	net present value	UGA	urban growth area
NRCS	Natural Resources Conservation Service	USBR	United States Bureau of Reclamation
NSAID	nonsteroidal anti-inflammatory drug	USC	United States Code
NTU	nephelometric turbidity unit(s)	USDA	United States Department of Agriculture
NWRI	National Water Research Institute	USG	UnStructured Grid
O&M	operations and maintenance	USGS	United States Geological Survey
OM&R	operation, maintenance, and	UV	ultraviolet
	replacement	UVI	ultraviolet intensity
Orange Book	Criteria for Sewage Works Design	WAC	Washington Administrative Code
PDF	peak day flow	WAS	waste activated sludge
PIC	Pollution Identification and Correction	WDFW	Washington State Department of Fish
Plan	Kingston Recycled Water Facility Plan	14/1100	and Wildlife
ppcd	pound(s) per capita per day	WHGC	White Horse Golf Course
PPCP	pharmaceuticals and personal care product	WIFIA	Water Infrastructure Finance and Innovation Act
Project	Kingston Recycled Water Project	wk	week(s)
PSCAA	Puget Sound Clean Air Agency	WWTP	wastewater treatment plant
PSP	Puget Sound Partnership	yr	year(s)
PSRF	Puget Sound Restoration Fund		



Purple Book Reclaimed Water Facilities Manual

Public Works Assistance Account

Revised Code of Washington

standard cubic foot/feet per minute

State Environmental Policy Act

Public Works Trust Fund

return activated sludge

Rural Utilities Service

soil aquifer treatment

polyvinyl chloride

Public Works Board

PVC

**PWAA** 

PWB

**PWTF** 

RAS

**RCW** 

RUS

SAT

scfm SEPA

**SFHA** 

# **Executive Summary**

Sustainable and resilient water supplies require "closing the water loop," essentially minimizing discharges from the overall water system and capturing that water for replenishment and recycling. This replenishment and recycling is essential in Kitsap County, especially because 80 percent of the local water supply comes from the Kitsap Peninsula aquifer.

Kingston area stakeholders are focused on achieving long-term, sustainable solutions to protecting area water resources, in terms of both water quality and quantity. Initiatives underway like the Puget Sound Partnership's (PSP's) Action Agenda and Washington State Department of Ecology's (Ecology's) Blue Ribbon Panel and Puget Sound Nutrient Reduction Project are taking steps to address the greatest threats to Puget Sound and to protect the long-term health and supply of area waters and habitat.

In the past, Kitsap County has discharged billions of gallons of treated effluent to Puget Sound. New approaches and principles defined in Kitsap County's (County's) Water as a Resource Policy promote significant reduction of discharges to Puget Sound and replenishment of the existing water supplies, both directly and indirectly.

Through discussions and outreach with the Suquamish Tribe (Tribe) and other area stakeholders, it has been determined that all stakeholders favor the concept of producing recycled water, using it beneficially, and reducing wastewater treatment plant (WWTP) discharges to Puget Sound. The Kingston area offers a unique and ideal situation to implement a recycled water program with the WWTP situated near a golf course for irrigation and prime hydrogeological conditions for infiltration.

The County is proposing to produce Class A recycled water at the existing Kingston WWTP, which would be used for summer irrigation at the White Horse Golf Course (WHGC) and winter indirect groundwater recharge to the area north of WHGC. The objective of the County and this Kingston Recycled Water Project (Project) is to "treat water as a resource rather than a waste stream" to address water quality and quantity concerns specific to Kingston, and other related water resource issues throughout the county. The proposed Project represents a unique opportunity to achieve new, far-reaching benefits for multiple stakeholders. Wastewater would be further treated, recycled, and managed as a valuable resource rather than treated and disposed of as a waste product. This water management approach represents a fundamental shift in how wastewater is managed on the Kitsap Peninsula, deriving multiple benefits while eliminating a continuous direct discharge to Puget Sound.

### **Current Water Issues**

The Kitsap Peninsula has both water quantity and water quality concerns that need to be addressed.

### **Water Quantity**

The Kitsap Peninsula is essentially an "island," surrounded by salt water with little freshwater sources other than direct rainfall to recharge local aquifers and surface water impoundments. More than 80 percent of the potable water being used in Kitsap County comes from groundwater—a percentage that will increase in the future as new surface water sources are limited. Recharge of this aquifer is limited to moderate rainfall, as intense storms result in water leaving the system as runoff to Puget Sound.



With increased aquifer mining, there is a concern of saltwater intrusion from "reverse flow" of salt water entering the aquifer system. Anticipated climate change impacts, such as longer and hotter summers (requiring additional irrigation demand) and more intense rainfall events during the winter (potential recharge lost from the system as runoff), put increasing stress on Kitsap County's water supply system.

Stream flow is also a concern and a limiting factor for salmon habitat. Stream flows in Grovers Creek have been monitored by the Washington State Department of Natural Resources (DNR) (1991–96) and the Tribe (2004–05). Summer low flows in Grovers Creek are approximately 1.5 cubic feet per second (cfs) and do not currently meet minimum flows (2.0 cfs) established in Washington Administrative Code (WAC) Chapter 173-515.

### **Water Quality**

The Kingston WWTP discharges an average of 42 million gallons (MG) per year of treated wastewater through the Appletree Cove Outfall. Since construction of the existing facility in 2005, the Kingston WWTP has been in full compliance with the requirements of its National Pollutant Discharge Elimination System (NPDES) permit. However, portions of Appletree Cove are closed to shellfish harvesting because of the presence of the Kingston Marina and Ferry Terminal. The outfall terminus is located such that treated effluent discharged to Appletree Cove does not impact commercial shellfish harvesting per Washington State Department of Health (Health) shellfish management criteria.

The mainstem of Grovers Creek consists of approximately 5.1 miles of stream channel, plus numerous small tributaries, flowing to the south and discharging to Miller Bay. Grovers Creek is classified as a Class AA stream under WAC 173-201A, with designated uses including salmon and trout spawning, core and non-core rearing, and migration; wildlife habitat; primary contact recreation, boating, and aesthetic values; domestic, industrial, and agricultural water supply and stock watering; and commerce and navigation. The Tribe operates a fall Chinook and chum hatchery near the mouth of Grovers Creek, which ultimately flows into Miller Bay. Grovers Creek is listed as impaired for fecal coliform and dissolved oxygen (DO) immediately upstream of the mouth at Miller Bay, and for fecal coliform at two additional upstream reaches. In addition, Miller Bay is currently closed for shellfish harvesting because of pollution.

# **Beneficial Reuse Options**

In 2003, the County began assessing opportunities to use recycled water that could be produced at the Kingston WWTP to address long-term County water quantity and water quality goals. In 2015, the County initiated a Kingston WWTP Recycled Water project to build on previous planning efforts and select a preferred recycled water option.

The following beneficial uses of the Project were identified based on these assessments and current understanding of area stakeholder interests:

- Irrigation: Water recycled at the Kingston WWTP would offset groundwater withdrawal by meeting summer irrigation needs at WHGC (approximately 29 MG/year) and other potential sites within North Kitsap Heritage Park (NKHP) ball fields.
- Infiltration: Investigations in the area north of WHGC indicate favorable subsurface conditions for indirect groundwater infiltration (winter only or year round). Infiltration in this area is anticipated to result in subsurface migration of Class A recycled water to Grovers Creek, potentially providing a significant benefit in the summer when stream flows are below minimum instream flow requirements. Infiltration through the soil column would also have the positive impacts of



providing additional treatment and thermal cooling of the water resulting in lower stream temperatures.

• Wetlands: Providing that water temperature and quality regulations would be achieved, directing Class A recycled water through the wetlands located to the northwest of the Kingston WWTP would provide benefits such as improved water quality (through wetland treatment), hydrologic storage, thermal cooling, and seasonal wetland hydration. The temperature of Class A recycled water may need to be lowered between June and September from 70 degrees Fahrenheit (°F) to 61°F–64°F to meet state and federal criteria for delivery to salmon-bearing streams (Golder 2010). The recycled water would ultimately be conveyed to Grovers Creek and help address low summer stream flow issues.

Table ES-1 summarizes the beneficial-use alternatives that were assessed to improve area water quality and water quantity concerns.

Table ES-1. Alternatives Screening Criteria						
Discharge A	Alternatives		Relative Benefits			
Alternative	Summer	Winter	Puget Sound (Quality)	Vashon (Deep) Advanced Aquifer (Quantity)	Shallow Aquifer and Streams (Quantity and Quality)	
1. Puget Sound wastewater discharge ("no action")	Puget Sound	Puget Sound	+	N/A	N/A	
2. Winter discharge, summer irrigation	Irrigation	Puget Sound	++	++	N/A	
3. Winter infiltration, summer irrigation	Irrigation	Infiltration	+++	++	+	
4. Irrigation and storage	Irrigation	Storage	+++	+++	N/A	
5. Infiltration	Infiltration	Infiltration	+++	+	++	
6. Wetlands	Wetlands	Wetlands	+++	N/A	+++	

The number of "+" notations represents the relative benefits for each option.

Based on discussions with major stakeholders (County and Tribe), a strong preference was expressed for alternatives that included elements of irrigation and infiltration to benefit not only Puget Sound water quality, but also the aquifer and area streams. The alternatives evaluation process also supported the selection of Alternative 3 as the preferred alternative.

## Stakeholder Coordination and Public Involvement

In 2015, when the County reinitiated the Project to build on previous planning efforts and select a preferred recycled water option, a stakeholder outreach program was developed to identify shared interests and goals. The following stakeholders were engaged throughout Project development:

- Kitsap County Public Works
- Kitsap Board of Commissioners
- Kitsap County Parks
- Suguamish Tribe
- Kitsap Public Utility District
- Puget Sound Partnership
- White Horse Golf Club



- Port of Kingston
- Washington State Department of Health
- Washington State Department of Ecology
- Washington State Department of Fish and Wildlife

Public outreach was performed in June 2018 that included presentation of the proposed Project and an overview of two local case studies. The public was provided the opportunity to visit with Project representatives and participate in a question and answer session to provide feedback on the proposed Project. In general, support was expressed for the concept of developing a recycled water program and realizing the potential benefits specifically around the preferred alternative (Alternative 3).

The County, Tribe, and other stakeholders are excited to embark on this unique opportunity. Through previous stakeholder outreach efforts, unanimous and enthusiastic support has been expressed for advancing the Project and realizing the multiple benefits that are anticipated from this Project. This Project is a microcosm of the broader goal where Tribal and State government partnerships are coming together to support these agencies' and organizations' initiatives. These actions are also in alignment with the broader goals of Ecology, Governor Jay Inslee's Shellfish Initiative, West Central Local Integrating Organization, and the Puget Sound Partnership's Strategic Initiatives to prevent pollution, protect and restore habitat, and recover shellfish beds.

# **Recycled Water Benefits**

The proposed Project is an important element of a more holistic water resources management approach in the region. The specific environmental benefits supported by the Project are described below.

### Conserve limited groundwater resources

Currently, irrigation water for WHGC is purchased from the Kitsap Public Utility District (KPUD) and is sourced from groundwater wells in the area that pump from a sea-level aquifer. Quantity of usable groundwater is limited and, eventually, as the local demand for groundwater supplies increases, this water source could decline because it is not being adequately replenished. Additionally, with increased withdrawals from the sea-level aquifer, there is a concern of saltwater intrusion and the associated impacts to groundwater quality over time.

Delivery of recycled water to WHGC would preserve 29 MG per year of potable water from KPUD's groundwater supply system and eliminate the stress to the supply system imposed by dramatic swings in potable water system demands during the irrigation season. Recycled water use will also decrease the risk of saltwater intrusion within the regional sea-level aquifer and extend the useful life of existing potable water infrastructure.

### Divert nutrients away from the marine environments and to where they are needed

The proposed Project would virtually eliminate the direct discharge of nutrients to Puget Sound. At this time, the existing Kingston WWTP outfall would be used only intermittently to "exercise" the outfall and keep it operational for emergency situations until such time that a year-round land application or storage site is identified. As a result, the potential negative impacts of excess nutrients on marine life would be avoided and instead, nutrients would be beneficially used as a fertilizer for irrigation purposes. More than 2,300 golf courses in the United States use recycled water for irrigation to take advantage of these types of benefits. Recycled water accounts for 25 percent of total golf course irrigation use in the United States



### Restore and replenish streams and fish habitats

Through the infiltration component of the Project, aquatic habitat in Grovers Creek would be improved. Grovers Creek supports Chinook, chum, and coho salmon and steelhead and cutthroat trout. The Tribe has a fall Chinook and chum hatchery near the mouth of the creek, which ultimately flows into Miller Bay. The Project would improve habitat in Grovers Creek and Miller Bay by recharging the aquifer that feeds the creek, increasing the flow of cool, clean water.

Like many streams in the Puget Sound lowlands, Grovers Creek suffers from insufficient baseflow during the dry season. Flow often falls below 2 cubic feet per second (cfs), which is the minimum instream flow for Grovers Creek established in state regulations. The proposed Project would infiltrate about 107 MG per year of highly treated recycled water into the shallow aquifer that provides baseflow to Grovers Creek and its tributaries. Assuming an average infiltration volume of 0.3 million gallons per day, the Project could increase baseflow in Grovers Creek by roughly 0.5 cfs.

### **Enhance marine life ecosystems**

By eliminating direct discharge to Puget Sound, and associated nutrient loading, the Project would provide a wide range of environmental benefits:

#### **Improved Fish Habitat**

The Project would help avoid overpopulation of phytoplankton (floating, microscopic plants) and zooplankton (small animals that eat phytoplankton). When the phytoplankton and zooplankton die, they settle to the bottom, where they are decomposed by bacteria that consume DO from the water column. This process can create areas where DO concentrations are too low to support fish and other marine life.

The Project would also help protect eelgrass, kelp, and other plant species important to Puget Sound salmon, crab, and other marine life. The 2016 *Washington State Water Quality Assessment* listed Appletree Cove as impaired by excessive growth of ulvoid algae and reduced eelgrass beds associated with human causes. The Project would reduce the nitrogen loads that can cause plankton to become so dense that it blocks sunlight and limits the growth of eelgrass and kelp.

### **Improved Shellfish Habitat and Decreased Shellfish Toxicity**

- Ocean acidification harms shellfish and other marine organisms that need calcium carbonate to form their skeletons and shells. Climate change is causing increased ocean acidification as roughly 25 percent of carbon dioxide (CO<sub>2</sub>) in the atmosphere is being adsorbed into oceans. A 2-year ocean acidification monitoring program completed by the Puget Sound Restoration Fund (PSRF) in 2010 indicates that ocean acidification is contributing to changing seawater chemistry in Puget Sound. The study also found that mechanisms driving more acidic conditions including human-driven activities, such as nutrient loading, were amplifying the effects of changing water quality conditions in Puget Sound.
- Excess nitrogen can trigger blooms of algal species that release toxic substances, such as paralytic shellfish poisoning and domoic acid. These substances can cause illness or death in people or animals eating shellfish from the affected waters. They can also be harmful to animals that are directly exposed to the toxins in the water column. The Project would help reduce the potential for shellfish toxicity associated with excessive nitrogen loading.

### Engage the community about our critical water resources

Community education, particularly at the grade school level, is critical to demonstrating the values of the region and highlighting how agencies are acting as stewards of the environment. This Project would allow the County and stakeholders to showcase the importance of preserving the area's water



supply and water quality for future generations. Without a venue or showcase project for this type of communication, the message is less tangible and meaningful to residents and children, who will be charged with being stewards of our future water resources and this special ecosystem. This Project would provide a range of opportunities to inform the public about how the Project benefits the environment, public health, and local economy.

### Create a community asset

Using water for its "highest and best use" and planning for future resilience keeps long-term costs down for water resources management and controls utility rates. Businesses (and ratepayers) are interested in controlled utility rates, so by planning ahead and investing in resilient supplies, the County will not be forced into emergency investments (and corresponding drastic utility rate spikes) in the future. Making these investments now in a thoughtful and strategic manner will result in the maximum environmental and financial benefit to the area for long-term value.

# **Implementation**

The estimated Project cost for the preferred alternative (Alternative 3) to provide opportunities for summer irrigation and winter infiltration is \$13,700,000. A Financial Capability Assessment was conducted to determine the likelihood that the County would be able to provide its share of the non-federal portion of the Project costs. Based on this assessment, it was determined that the projected debt service coverage ratio would be in the acceptable range based on a number of assumptions for funding sources.

The next step of the Project will be to develop a user agreement with the major stakeholder (e.g., the Tribe) to confirm the level of financial commitment to the Project. Additionally, all applicable sources of grant funding from state, federal, and sovereign nation sources will be explored. As agreements are developed and Project funding is secured, the design phase of the Project would be initiated as required by WAC 173-240-070. Throughout the next steps, the County intends to continue with the stakeholder outreach program to provide status updates and maintain Project support.

### Section 1

# Introduction

Section 1 provides Kingston Recycled Water Project (Project) background information and defines the purpose and scope of this *Kingston Recycled Water Facility Plan* (Plan). Furthermore, this section identifies the role of Kitsap County (County) as the Project sponsor, facilitating stakeholder involvement, with authority and responsibility for future recycled water facilities.

# 1.1 Project Background

In 2003, the County began assessing opportunities to use recycled water that could be produced at the Kingston Wastewater Treatment Plant (WWTP) to address long-term County water quantity and water quality goals. Production of recycled water at the Kingston WWTP is one of the specific actions identified in the County's Water as a Resource Policy, adopted in 2009, which aims to conserve groundwater resources, restore the natural hydrologic flow in local streams and creeks, and reduce water pollution.

The County engaged Golder Associates to evaluate numerous recycled water applications and consider financial, regulatory, stakeholder, and technical factors specific to the Kingston WWTP. Golder Associates' *Kingston Reclaimed Water Environmental Feasibility Study* (Golder 2010) outlined a recommended approach: produce Class A recycled water and apply to wetlands to augment flows in Grovers Creek.

In 2015, the County initiated the Project to build on previous planning efforts and select a preferred recycled water option. Potential beneficial uses were refined based on continuing assessment and through discussions with area stakeholders to identify shared interests and goals. Implemented alone or in combination, beneficial-use opportunities included irrigation of the White Horse Golf Course (WHGC), wetlands/stream flow augmentation, and groundwater infiltration. The *Kingston Recycled Water Project: A Preliminary Investigation of Recycled Water Opportunities in the Kingston Area* (BC 2016) report summarizes the County's efforts and findings to date and includes a "baseline" option. This baseline option was developed to demonstrate to the stakeholders what a representative Kingston recycled water project would look like and what it would cost. Appendix A provides select sections of the 2016 report, including identification and evaluation of alternatives, a summary of stakeholder goals, and conceptual analysis of Project components.

The baseline option (see Figure 1-1) was selected as the representative project because it provides several water quality and quantity benefits, flexible end-use locations, and met the goals of the major stakeholder (e.g., County and Tribe). Components of the baseline option included:

- Treatment upgrades at Kingston WWTP to produce Class A recycled water
- Pumping, conveyance, and equalization (EQ) infrastructure to deliver Class A recycled water to the area north of WHGC
- Infiltration gallery to allow winter indirect groundwater recharge to the area north of WHGC

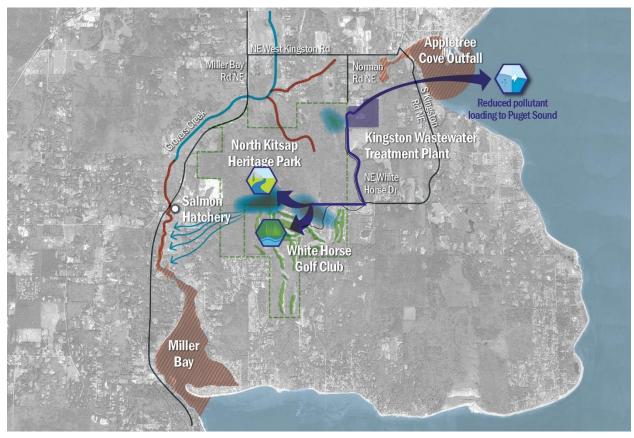


Figure 1-1. Baseline option summary

# 1.2 Purpose and Scope

The purpose of this Plan is to build on the BC 2016 report and further assess recycled water conveyance and use/disposal alternatives, focusing on irrigation, infiltration, and continued discharge to Puget Sound. The alternatives are evaluated against each other and the "no action" alternative using factors such as overall environmental benefit and cost. The preferred alternative is refined herein to a conceptual level for regulatory approval prior to design and implementation of the preferred alternative by the County.

This Plan has been prepared consistent with Washington Administrative Code (WAC) Sections 173-240-060 and 173-219-180, and the guidance documentation of the Washington State Department of Ecology (Ecology) and Department of Health (Health). Ecology provides guidance for Facility Plan development in Section G1-4.1 of the *Criteria for Sewage Works Design* (Orange Book) (Ecology 2008). Similarly, Feasibility Analysis guidance is documented in Section 5.2.4 of the *Reclaimed Water Facilities Manual* (Purple Book) (Ecology and Health 2019). Furthermore, because the development of this Plan is partially funded by the United States Bureau of Reclamation (USBR) through its Title XVI Program, the Plan includes specific components that address USBR requirements. Appendix B includes a cross-walk document that identifies Plan components and how they address USBR Title XVI requirements.

The Plan organization was developed to efficiently address Ecology, Health, and USBR requirements, and is structured as follows:

• **Section 1** provides Project background, identifies the planning area, and defines the purpose and scope of the Plan.



- **Section 2** provides information to support recycled water planning, including a service area summary and a description of the environmental setting in the vicinity of the proposed Project.
- Section 3 evaluates existing wastewater characteristics and presents wastewater flow and load projections based on population forecasts for the planning period
- Section 4 presents a recycled water market analysis that describes the Project need, identifies
  the existing potable water resources, and evaluates potential recycled water uses and barriers to
  recycled water use
- Section 5 summarizes existing Kingston wastewater facilities.
- **Section 6** presents recycled water alternatives, evaluation criteria, and the results of alternatives analyses. A recommended alternative is identified for further conceptual design.
- **Section 7** summarizes the environmental benefits of the proposed Project and how those benefits are consistent with goals established by regional stakeholders.
- **Section 8** presents the conceptual design for the preferred alternative, staffing requirements for the proposed facilities, and estimated Project costs.
- Section 9 presents a financial analysis of the proposed Project, including a funding plan.
- **Section 10** identifies the potential environmental impacts of the proposed Project as documented in a State Environmental Policy Act (SEPA) checklist.
- **Section 11** summarizes permitting requirements related to the proposed Project, evaluates potential effects to water rights, and presents initial documentation related to interlocal agreements required for the beneficial use of recycled water generated by the County.
- **Section 12** identifies the subsequent research needs and "next steps" to be performed after completion of the present planning analyses.
- Section 13 states the Project limitations as established in the contract between Kitsap County and Brown and Caldwell.
- Section 14 provides a summary of reference documentation cited throughout this Plan.

# 1.3 Project Planning Area

The Project planning area, as shown in Figure 1-1 above, includes the Kingston WWTP site, North Kitsap Heritage Park (NKHP), WHGC, and adjacent areas. Recycled water irrigation would occur at WHGC while infiltration would occur within the boundaries of NKHP. This Plan also includes analysis of potential Project benefits to Appletree Cove and Puget Sound from reduced (or eliminated) discharge of treated effluent from the current WWTP outfall, and benefits to Grovers Creek from increased stream flows.

# 1.4 Authority and Management

The County owns, operates, and maintains the existing Kingston WWTP, associated collection system, and outfall discharge to Appletree Cove as described in Section 5. Treatment and discharge at the Kingston WWTP are regulated under Ecology National Pollutant Discharge Elimination System (NPDES) Permit WA0032077. The ownership, operation and maintenance responsibility of the recycled water system elements will be determined once project funding has been established. Future permitting requirements and interlocal agreements between the County and Tribe are addressed in Section 11.



The County representative for the Project is:

Barbara Zaroff Capital Projects Engineer Kitsap County Sewer Utility 360.337.5777 bzaroff@co.kitsap.wa.us

The Tribe representatives for the Project are:

Alison O'Sullivan Suquamish Tribe Senior Biologist, Fisheries Department 360.394.8447 aosullivan@suquamish.nsn.us

Mark Fisher Suquamish Tribe Tribal Engineer 360.394.7128 mfisher@suquamish.nsn.us

### 1.5 Stakeholder Coordination and Public Involvement

In summer 2016, the County convened a group of stakeholders to provide an update on the Project and engage stakeholders in a dialogue about their objectives and concerns related to the Project. Stakeholders from the following entities were represented at the workshop:

- Kitsap County Public Works
- Kitsap Board of Commissioners
- Kitsap County Parks
- Suquamish Tribe
- Olympic Property Group
- Silverdale Water District
- Kitsap Public Utility District (KPUD)
- White Horse Golf Club
- Port of Kingston
- Climate Reality Leadership
- Washington State Department of Health
- Washington State Department of Ecology
- Washington State Department of Fish and Wildlife (WDFW)

The Project team gave an overview of area water issues, a description of the Project, and an outline of identified shared stakeholder goals. Following this presentation, the team's public outreach specialist facilitated a discussion with the group to confirm shared priorities and goals, identify any concerns or missing information, refine participation scope and roles, and explore preliminary funding strategies. Significant support for the Project was demonstrated by the stakeholders, with no direct opposition raised. There was general agreement that the Project planning efforts should move



ahead to better understand the overall Project infrastructure details, costs, benefits, and funding opportunities.

Following the initial planning effort for the present analyses, a second stakeholder and public outreach meeting was held on June 26, 2018. The meeting provided an overview of the Project and two area case studies by King County and the Cities of Lacey, Olympia, and Tumwater and Thurston County (LOTT) Clean Water Alliance. The public was provided the opportunity to listen to presentations on each of these recycled water programs and visit with Project representatives in an open-house format before and after the presentations. King County focused on golf course use of its recycled water while LOTT focused on infiltration of recycled water.

Each presentation was followed by a "question and answer" session where attendees were encouraged to ask questions and provide feedback on the proposed Project. In general, support was expressed for the concept of developing a recycled water program and realizing the potential benefits and not just "wasting" the water by discharging it to Puget Sound. Stakeholder concerns centered around the following three main themes:

- Fate and transport of recycled water and potential chemicals of concern: What are the risks of chemicals of concern and what does the science say?
- **Impacts to the environment:** Has background/baseline sampling been conducted to determine the impact that recycled water could have on the ecosystem?
- End-use options: Where else could the recycled water be used (e.g., future ball fields)?

Public outreach meeting materials, including attendee list, meeting notes, and presentation slides, are provided in Appendix C.

# **Section 2**

# **Service Area Characteristics**

This section provides information to support recycled water facilities planning, including a description of the service area zoning and population, as well as the environmental setting in the vicinity of the Project planning area. The existing Kingston WWTP and proposed treatment, conveyance, and beneficial-use improvements are located outside of the existing sewer service area. The planning area for recycled water improvements is located to the south and west of the Kingston service area/urban growth area as shown in Figure 2-1.

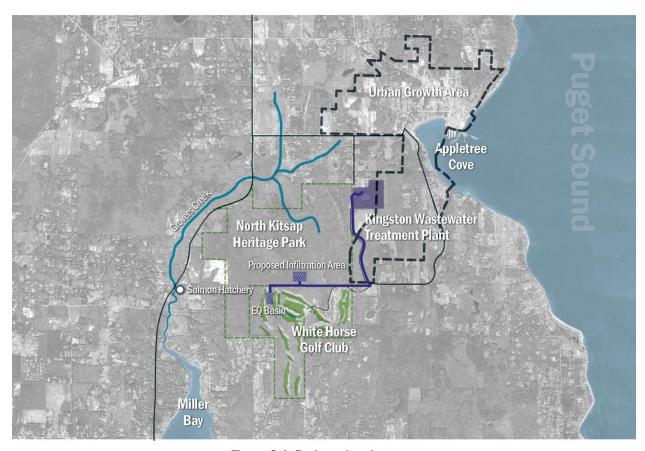


Figure 2-1. Project planning area

Information on service area boundaries and population projections used in developing this Plan was based on the *Kingston Wastewater Facilities Plan Update Addendum* (BHC 2013), updated to account for 2016 population data available at www.census.gov, and to project out to a 20-year horizon (for a design year of 2040). Population forecasts, and the associated flows and loads, are discussed in Section 3.3.

# 2.1 Service Area Land Use, Zoning, and Demographics

This section describes land use, zoning, and demographics characteristics of the service area, both existing and future.

### 2.1.1 Existing Service Area

Kingston is Kitsap County's northernmost urban growth area (UGA). The Kingston UGA was originally established in May 1998. Kitsap County most recently updated the Kingston Sub-Area Plan and the Kingston UGA as part of its 2012 Comprehensive Plan (Kitsap County 2012).

The current Kingston UGA, as shown in Figure 2-1 above, is approximately 1,400 acres in area. Wastewater facilities planning for Kingston is based on providing service to the entire UGA. Figure 2-2 shows zoning designations for the UGA. Development within the service area is primarily residential, with higher densities located north of NE West Kingston Road, which roughly divides the service area into north and south sections. Existing commercial development is located adjacent to State Route 104, in the north section of the service area.

#### 2.1.2 Future Service Area

Analysis in this Plan assumes continued development within the UGA only, consistent with the zoning designations identified in Figure 2-2. The current sewer collection system serves most of the northern portion of the UGA. It is conservatively assumed that the entire service area population will be sewered within the 20-year planning period. Figure 2-3 shows the current and projected future collection system infrastructure as discussed in the 2013 Facilities Plan Update.

Population growth forecasts are discussed in Section 3, as they relate to projected wastewater flows and loads. It is assumed that the nonresidential population (employment-based) will remain commensurate with the existing population-to-employment ratio.

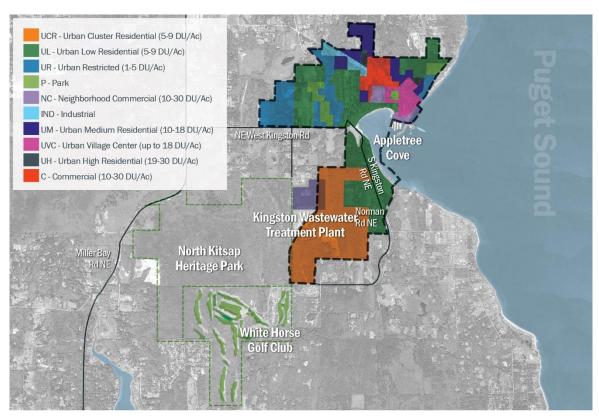


Figure 2-2. County zoning designations

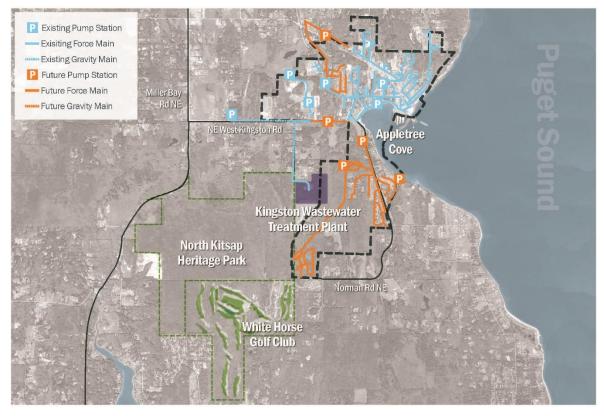


Figure 2-3. Collection system infrastructure



# 2.2 Recreation and Open-Space Alternatives

The Project area has numerous opportunities for active and passive recreation activities. NKHP is a 799-acre park located in the Project area. This park is largely undeveloped with several miles of developed trails and existing logging roads. This park provides opportunities for walking, hiking, and trail running along the trails and logging roads. WHGC, owned by the Tribe, is an 18-hole golf course with putting greens, chipping area, and clubhouse. The county also has many popular bike routes.

# 2.3 Environmental Setting

This section discusses the environmental setting for the proposed recycled water improvements at the existing Kingston WWTP and in the vicinity of conveyance and beneficial-use alternatives.

### 2.3.1 Topography and Geology

This section summarizes the *Hydrogeologic Site Characterization Report* prepared to support evaluation of potential groundwater recharge facilities (see Appendix D). Site-specific investigations for potential recharge areas were used to develop conceptual design analyses presented in Section 8.

### 2.3.1.1 Topography

Topography in the vicinity of the Project ranges from sea level to approximately 400 feet above mean sea level (amsl) and is reflective of flat-topped rolling hills and ridges originating as glacial drumlin features. In the area near Kingston, steep slopes rise from Puget Sound to more than 400 feet within 0.25 mile of the waterfront. Upland areas are predominantly recharge areas where water percolates downward until reaching a lower-permeability zone and forming discharge areas. Surface water features in the area generally coincide with the local groundwater levels in the adjacent uplands and serve as the overall drainage network for the uplands recharge.

#### 2.3.1.2 Geology

The surficial geology of Kitsap County consists primarily of glacial deposits and includes complex sequences of low-permeability tills and lacustrine sediments and higher-permeability outwash sequences that range from gravels to silty fine sand. The relatively low permeability of the glacial till units is attributed to both the finer textures and higher compaction from sub-glacial deposition. Throughout Kitsap County and most of the Puget Sound region, the Vashon Stade of the Frasier Glaciation advanced and retreated between approximately 18,000 and 14,500 years ago, overriding a thick sequence of older glacial sediments deposited over a period of more than 50,000 years. To a lesser extent, more recent alluvial deposits occur within the incised drainage systems. Throughout the Project area and surrounding regions, surficial geology generally consists of flat-topped rolling hills and elongated ridges characteristic of glacial drumlin landforms.

### 2.3.2 Climate and Precipitation

Climate within the vicinity of Kingston is characterized by mild weather conditions including short, cool, dry summers and prolonged, mild wet winters. Below-freezing temperatures occur infrequently and for short durations during the winter while summer temperatures rarely exceed 80 degrees Fahrenheit (°F).

The seasonal variation results from the position of the Pacific High, a high-pressure air mass that varies in position along the Pacific Coast. The Pacific High reaches its northernmost position during the summer months and brings with it typically clear and sunny days. During the winter months, the Pacific High recedes to the south and is replaced by a low-pressure system associated with



rainstorms that cover paths several hundred miles in width. Transitions between the wet and dry seasons occur in early fall and late spring. Approximately 70 to 80 percent of annual precipitation occurs in 6 months, between October and March.

Table 2-1 summarizes monthly temperature and precipitation data.

Table 2-1. Monthly Climate Summary				
Month	Average High Temperature (°F)	Average Low Temperature (°F)	Average Precipitation (in.)	
January	47	37	4.8	
February	50	37	3.4	
March	54	39	3.5	
April	59	43	2.8	
May	64	48	2.2	
June	70	52	1.6	
July	76	56	0.8	
August	76	57	1.0	
September	71	53	1.5	
October	60	47	3.4	
November	51	41	5.8	
December	46	36	5.4	

#### 2.3.3 Water Resources

This section provides information with respect to various surface water and potential connection to groundwater resources. A more detailed discussion of groundwater resources is provided in Appendix D.

#### 2.3.3.1 Surface Streams

Kitsap County surface water is characterized by small rivers and creeks that drain directly to Puget Sound. Many surface waters are connected hydrologically to systems of wetlands and areas of shallow groundwater. Kingston WWTP is located on the topographic divide between the Grovers Creek drainage to the west discharging to Miller Bay and Carpenter Creek to the east discharging to Appletree Cove. The proposed recycled water facilities discussed herein would be located within the Grovers Creek watershed.

The mainstem of Grovers Creek consists of approximately 5.1 miles of stream channel, plus numerous small tributaries, flowing to the south and discharging to Miller Bay. Grovers Creek is classified as a Class AA stream under WAC 173-201A, with designated uses including:

- Salmon and trout spawning, core and non-core rearing, and migration
- · Wildlife habitat and shellfish harvest
- Primary contact recreation, boating, and aesthetic values
- Domestic, industrial, and agricultural water supply, and stock watering
- Commerce and navigation

Stream flows in Grovers Creek have been monitored by the Washington State Department of Natural Resources (1991–96) and the Suquamish Tribe (2004–05). Summer low flows in Grovers Creek



(1.5 cubic feet per second [cfs]) do not meet minimum instream flows (2 cfs) established in WAC 173-515. Grovers Creek is listed as impaired for fecal coliform and dissolved oxygen (D0) immediately upstream of the mouth at Miller Bay, and for fecal coliform at two additional upstream reaches.

The Tribe operates the Grovers Creek Salmon Hatchery, a fall Chinook and chum salmon hatchery, located as shown in Figure 1-1.

#### 2.3.3.2 Marine Environments

Puget Sound is a complex estuarine system of interconnected waterways and basins. Puget Sound circulation is driven by tidal currents with surface outflow of freshwater from rivers discharging to Puget Sound and deep inflow of saltwater from the Pacific Ocean. Deep, dense saltwater enters Puget Sound through the Strait of Juan de Fuca and Admiralty Inlet, which is located to the north of the Project area.

Local flow patterns and density conditions have been studied primarily to support design of the existing Kingston WWTP outfall discharge to Appletree Cove (CH2M Hill 2000). The mean predicted tidal range for the area is approximately 7.3 feet. Currents flow alongshore and generally mirror bathymetric contours. During flood tide, net currents are to the north and west, reversing direction to the south and east during ebb tide. In general, ebb tides are stronger than flood tides. Density measurements indicate lower-density waters to a depth of 33 to 50 feet, with denser marine waters below.

Puget Sound is classified as Extraordinary water quality with respect to water quality standards for aquatic life uses identified in WAC 173-201A. Additional designated uses include shellfish harvest, primary contact recreation, wildlife habitat, navigation, boating, and aesthetic uses. Ambient concentrations of toxic parameters (primarily metals) used to evaluate compliance with water quality standards and support outfall design were very low.

Puget Sound provides habitat to numerous plant and animal species. Discussion of all of these species is beyond the scope of this Plan; however, shellfish are of particular interest with respect to the potential impact of effluent discharge from Kingston WWTP on commercial shellfish resources. A shellfish closure zone, where all shellfish are decertified for human consumption by Health, currently is in effect within Appletree Cove (see Figure 2-4). The closure zone is due to presence of the Port of Kingston marina, Washington State Ferries terminal, and associated commercial activities. With the extension of the Kingston WWTP outfall in 2005 to deeper waters outside of Appletree Cove, discharge of effluent from Kingston WWTP no longer affects shellfish within the commercially harvestable zone (depths less than 70 feet).

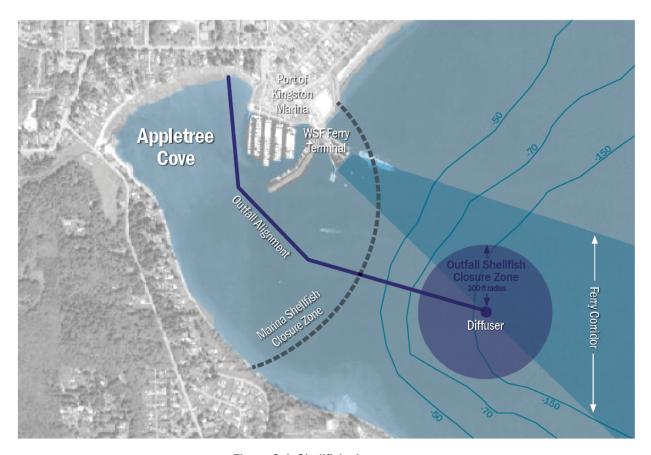


Figure 2-4. Shellfish closure zone

### 2.3.3.3 Wetlands

A wetland reconnaissance was conducted in February 2018 along the potential pipeline alignments from the WWTP to WHGC. No wetlands were delineated as part of this effort, but wetlands were identified for location. Nine wetlands and three streams were identified between the WWTP and the intersection of the Spine Line and Whitehorse trails in the vicinity of proposed conveyance alignments. The four northernmost (1–4) wetlands are believed to be headwaters of small tributaries to Grovers Creek. The northernmost wetland (1) contains segments of open water, emergent vegetation, and scrub shrub vegetation, with mature trees located near the wetland edges. The other three wetlands (2–4) are forested, scrub-shrub, and slope wetlands that are near the existing Spine Line Trail. The five southern wetlands (5–9) are forested scrub-shrub and depressional wetlands.

Locations of the wetlands and details of the reconnaissance are provided in Appendix E.

### 2.3.4 Sensitive Areas

Sensitive areas include floodplains, aquifer recharge areas, and Shorelines of the State. Floodplains, also known as Special Flood Hazard Areas (SFHAs), are defined as geographic areas that are identified by varying levels of risk and are identified using a Federal Emergency Management Agency (FEMA) Flood Insurance Rate Map. No identified SFHAs are located in the vicinity of conveyance and beneficial-use alternatives, or near Kingston WWTP.

Aquifer recharge areas are portions of the land that contain hydrogeologic conditions that facilitate aquifer recharge and/or potentially transmit contaminants to an underlying aquifer. In Kitsap County, aquifer recharge areas are sorted into two categories, including Category I critical aquifer recharge



areas, which are defined as areas where the probability that groundwater may be adversely impacted by certain land use activities is high. Kingston WWTP is located in a Category I critical aquifer recharge area, and each of the conveyance routes crosses portions of Category I areas. Category II critical aquifer recharge areas are areas that provide recharge to aquifers that are currently or potentially will become potable water sources and are vulnerable to contamination based upon the type of land use activity.

Washington's Shoreline Management Act (SMA) aims to protect the state's shorelines by providing a universal state standard in the approach to preserving water quality and enhancing recreation opportunities in the state shorelines. The SMA establishes a broad policy giving preference to uses that protect the quality of water and the natural environment, are water-dependent uses, and maintain and increase public recreation access to the shorelines and nearby areas. No Shorelines of the State are located in the Project vicinity.

Sensitive areas are shown on Figure 2-5 with reference to the Kingston WWTP, conveyance and beneficial use improvements. Analysis of potential conveyance routes is presented in Section 6.

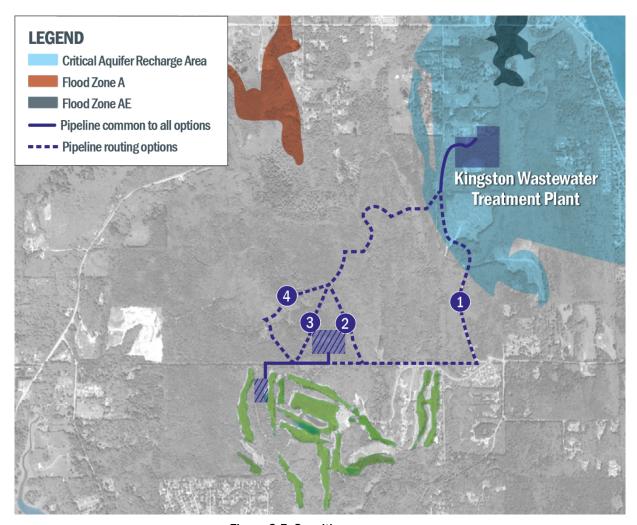


Figure 2-5. Sensitive areas map

### 2.3.5 Wildlife Habitat

Fish and wildlife habitat conservation areas are summarized in WAC 365-190-130, and Class I wildlife habitat conservation areas are defined in Kitsap County Code 19.300.310 to include the following areas:

- Habitats recognized by federal or state agencies for federal and/or state listed endangered, threatened, and sensitive species documented in maps or databases available to Kitsap County, including but not limited to the database on Priority Habitats and Species provided by WDFW
- Areas targeted for preservation by the federal, state and/or local government that provide fish
  and wildlife habitat benefits, including but not limited to important waterfowl areas identified by
  the U.S. Fish and Wildlife Service and WDFW wildlife areas
- Areas that contain habitats and species of local importance that have not been identified at this
  time, and may be identified at a later date through a public process when information
  necessitating such identification is made known

WDFW is tasked with keeping a list of priority habitats provided to WDFW by agency biologists and other sources of scientific data about species and habitat locations.

The conveyance routes for Alternatives 1, 2, and 3 cross the priority habitat for cutthroat trout (see Figure 2-6). No other state endangered, threatened, sensitive, and candidate species; animal aggregations considered vulnerable; or species of recreational, commercial, or tribal importance that are vulnerable were found in the vicinity of the conveyance and beneficial-use options. A bald eagle nesting area is located approximately one-half mile northeast of Kingston WWTP.

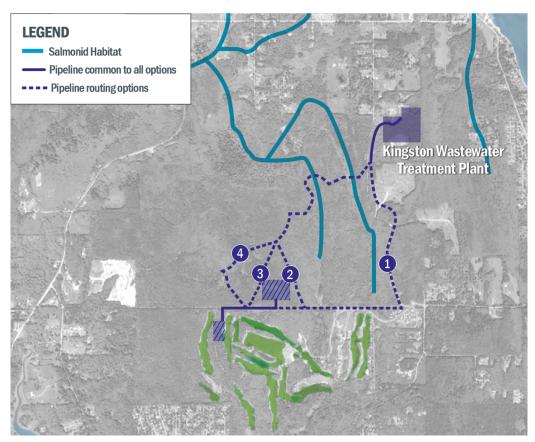


Figure 2-6. Wildlife habitat map



### 2.3.6 Prime and Unique Farmland

The Farmland Protection Policy Act (FPPA) was passed in 1981 as part of the Agriculture and Food Act (Public Law 97-98). The goal of the FPPA is to minimize the impact of federal projects on farmland caused by conversion to non-agricultural uses. Prime farmland is land that has the best combination of physical and chemical characteristics for producing food, feed, forage, fiber, oilseed, and other agricultural crops. Unique farmland is land other than prime farmland that is used for the production of specific high-value food and fiber crops. The Natural Resources Conservation Service (NRCS), the federal agency tasked with applying the FPPA, uses the criteria listed in Code of Federal Regulations (CFR) Title 7 Section 658.5 to identify the farmland and gauge impacts.

Land that does not meet the criteria for prime or unique farmland may still be considered to be "farmland of statewide importance" for the production of food, feed, fiber, forage, and oilseed crops, as determined by appropriate state or local government agency or agencies and the Secretary of Agriculture.

Prime and unique farmland, as well as farmland of statewide importance, are shown on Figure 2-7. Most of the Project area is forested and does not constitute prime or unique farmland.

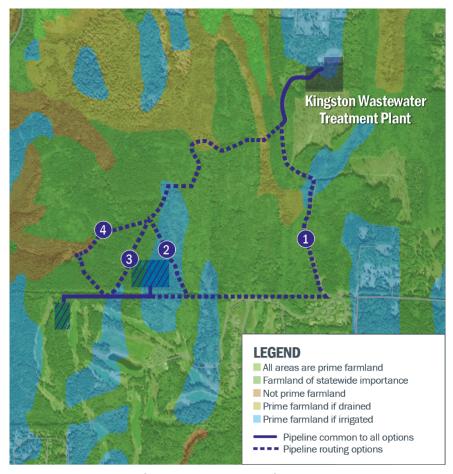


Figure 2-7. Prime and unique farmland map

### 2.3.7 Archaeological and Historical Sites

No recorded archaeological sites are located in the Project area. Figure 2-8 is a probability map showing the likelihood of encountering a buried, cultural resource in the Project area. This map is a



tool produced by the Department of Archaeology and Historic Preservation (DAHP) that is commonly used as a "first step" in cultural resources investigations. The probabilities are calculated using data such as landform and proximity to known activity areas. The model does not, however, account for modern impacts. For example, a road corridor may be considered "very high risk," but it actually would be low risk because of impacts caused by road construction and utility installation. The model is a guide and should not be used in isolation. Based upon the predictive model, all of the conveyance alternatives would be considered a moderately low to high possibility of encountering buried archaeological resources.

Once a preferred alternative has been determined, a more comprehensive examination of that area will be performed. The comprehensive examination would include a review of previously recorded archaeological sites and cultural resources surveys conducted in the area, a landform and geomorphological study, historic research, and a review of available geotechnical logs. The results of that examination guide cultural resources recommendations, which can vary from subsurface investigation, archaeological monitoring, or no additional work.

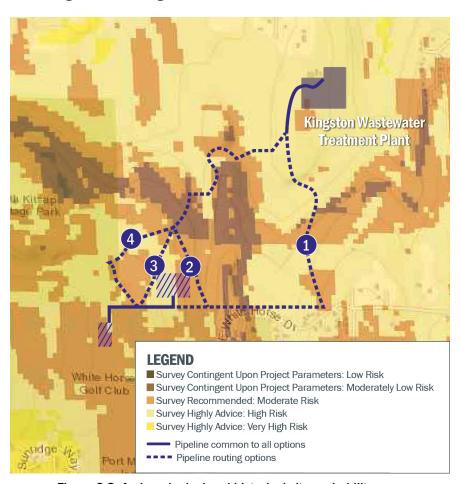


Figure 2-8. Archaeological and historical site probability map

The Suquamish Tribe was contacted in September 2018 to inquire about ethnographic and/or cultural information they may have and wish to share with regard to the project area. The statement below was provided by the Suquamish Tribe's Tribal Historic Preservation Officer (THPO), Dennis Lewarch on October 1, 2018.



"The Suquamish Tribe does not have specific ethnographic period references or place names for the potential project elements. Areas with wetland habitats may have been or may continue to be used by Suquamish people. The Suquamish Tribe's cultural resource sensitivity model incorporates soil types to estimate native vegetation that may have been used by hunter-fisher-gatherers and does not rely as heavily on distances to sources of fresh water, unlike the predictive model used by DAHP."

### 2.3.8 Wild and Scenic Rivers

The national Wild and Scenic Rivers system was created in 1968 by Congress through the Wild and Scenic Rivers Act (Public Law 90-542; United States Code [USC] Title 16 Section 1271 et seq.); this system includes special protections for rivers that have remarkable scenic, recreational, geologic, fish and wildlife, historic, or other similar characteristics. No Wild and Scenic Rivers are located in the Project area.

### 2.4 Air Quality and Public Health

The Federal Clean Air Act of 1992 requires that all federally funded projects be in compliance with state and regional air quality plans. The local air-quality authority for Kitsap County is the Puget Sound Clean Air Agency (PSCAA). PSCAA regulates construction and modification of potential air contaminant sources in King, Kitsap, Pierce and Snohomish counties. PSCCA must be notified of construction projects so that it may review whether a permit is required. However, under Article 6, Section 6.03(c) of PSCAA regulations, municipal sewer systems, including treatment plants, are exempt from new source review provided that they do not use anaerobic digesters or chlorine (Cl<sub>2</sub>) disinfection. The Kingston WWTP will not utilize anaerobic digestion or chlorine disinfection.

### **Section 3**

# **Wastewater Characteristics**

This section includes review of existing wastewater flows and loadings to Kingston WWTP, population projections, and projections of future flows and loadings through 2040. These flows and loadings are used as a basis to develop the water balance for recycled water use alternatives and treatment alternatives at Kingston WWTP to produce recycled water.

# 3.1 Historical Wastewater Flows and Loadings

Kingston WWTP data were reviewed to assess current wastewater characteristics and peaking factors for flows and loadings. Figure 3-1 shows the monthly average and peak day flows from January 2010 to September 2017. The plot indicates the typical seasonal variation, but otherwise Kingston WWTP flow has remained about the same on average over the almost 8-year period. With the exception of 2012, the maximum month flow in each year has been less than half of the current permitted maximum month flow of 0.292 million gallons per day (mgd).

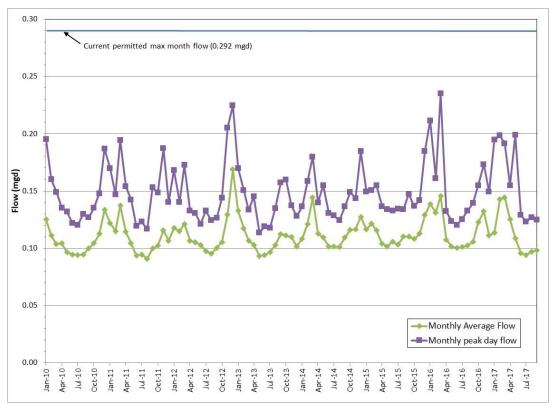


Figure 3-1. Kingston WWTP influent flows, 2010-17

Figure 3-2 and Figure 3-3 show the monthly average and daily peak 5-day carbonaceous biochemical oxygen demand (CBOD $_5$ ) and total suspended solids (TSS) loadings, respectively, from January 2010 to September 2017. CBOD $_5$  data are shown instead of 5-day biochemical oxygen demand (BOD $_5$ ) data as CBOD $_5$  is measured more frequently (typically three times a week while BOD $_5$  is measured only twice a month). The average CBOD $_5$  to BOD $_5$  ratio is approximately 0.83. Unlike Kingston WWTP flows, both CBOD $_5$  and TSS loadings have gradually increased over the 8-year period, with more notable increases in CBOD $_5$  loading. Monthly average CBOD $_5$  and TSS loadings have remained significantly below the current permitted maximum month loadings (even after accounting for the CBOD $_5$  to BOD $_5$  ratio); however, Kingston WWTP has occasionally received some very high daily TSS loadings as shown Figure 3-3.

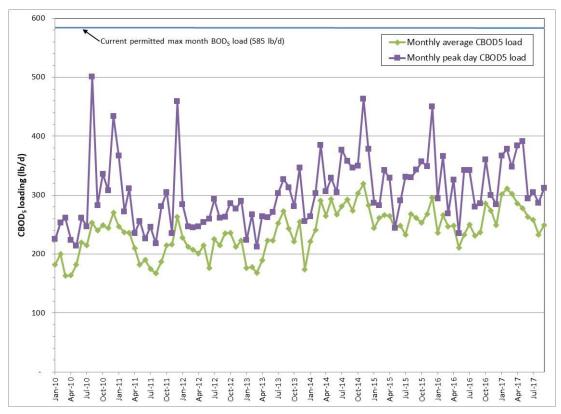


Figure 3-2. Kingston WWTP influent CBOD<sub>5</sub> loadings, 2010-17

(Note: CBOD<sub>5</sub> data plotted as CBOD are measured more frequently. Average CBOD<sub>5</sub>-to-BOD<sub>5</sub> ratio is approximately 0.83.)

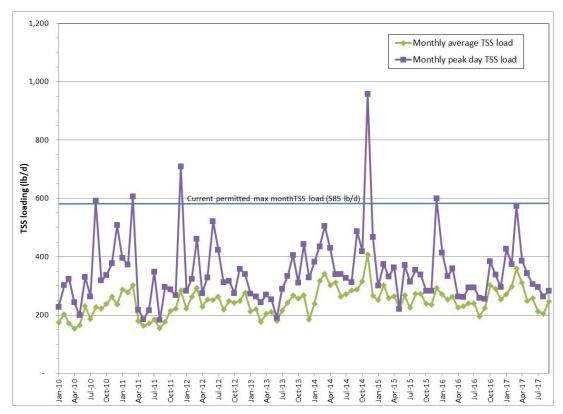


Figure 3-3. Kingston WWTP influent TSS loadings, 2010-17

Flow and load peaking factors were developed from Kingston WWTP data. These peaking factors, summarized in Table 3-1 and Table 3-2 for flows and loadings, respectively, were used to calculate future flows and loadings as described in Section 3.3.

Table 3-1. Flow Peaking Factors				
Parameter Value				
Minimum day/AAF	0.75			
Average sanitary/AAF	0.95			
ADWF/AAF	0.92			
MMF/AAF	1.30			
PDF/MMF	1.40			

Peaking factors derived from 2010–17 Kingston WWTP data, except for the average sanitary flow to AAF ratio, which is calculated from the 2010 average sanitary flow as calculated in the 2013 Facilities Plan Update and the actual 2010 annual average flow.

AAF = annual average flow (average daily flow computed for a calendar year).

Minimum day = minimum daily flow in a calendar year.

Average sanitary = average sewer base flow without I&I.

ADWF = average dry weather flow (average daily flow occurring in dry weather season, May-October).

MMF = maximum month flow (average monthly flow for the month with the highest average monthly flow in a calendar year).

PDF = peak day flow (maximum daily flow in a calendar year).



Table 3-2. BOD₅ and TSS Loading Peaking Factors					
Parameter BOD <sub>5</sub> a TSS					
Average dry weather to annual average	1.00	0.96			
Maximum month to annual average	1.20	1.30			
Peak day to maximum month	1.50	2.00			

Loading peaking factors were derived from 2010-17 Kingston WWTP data.

a.  $BOD_5$  peaking factors were developed based on  $CBOD_5$  data as  $CBOD_5$  is more frequently monitored than  $BOD_5$  (3 times per week for  $CBOD_5$ , 2 times per month for  $BOD_5$ ). It was assumed that the peaking factors for  $BOD_5$  are the same as those for  $CBOD_5$ .

### 3.2 Population Forecasts

Population forecasts for the Kingston service area are based on the same assumptions used in the Facilities Plan Update, adjusted based on data developed by the Kitsap County Department of Community Development (DCD) in 2016 and population data available on the U.S. Census Bureau website (census.gov). Baseline residential population corresponds to 1,858 for the year 2016 based on data provided on the census.gov website. Residential population in 2040 was then calculated by adding the growth capacity projected by DCD to the 2016 number. Total sewered population consists of sewered residential population, employment, and students. For the baseline year 2016, the sewered residential population was estimated by assuming that 40 percent of the residential population was sewered, the same percentage calculated from the 2010 population data given in the Facilities Plan Update. All residential population was conservatively assumed to be sewered in 2040. Table 3-3 summarizes the 2016 and projected 2040 sewered population used to develop future flows and loadings. It was assumed that the residential population and number of employees increases linearly from 2016 to 2040.

Table 3-3. Sewered Population Forecasts					
Parameter 2016 a 2040 b					
Sewered residential population	743	4,710			
Employees	632	1,317			
Students	2,034	2,034			
Total sewered population	4,904	8,541			

- a. 2016 sewered residential population based on population data from census.gov website, with the sewered population assumed to be 40% of the total population of 1,858 (same percentage for the 2010 population data given in the Facilities Plan Update). 2016 employment and students assumed to be the same as the 2010 numbers given in the Facilities Plan Update.
- b. 2040 sewered residential population and employment calculated from the 2016 numbers, plus the growth capacities projected by DCD (2,852 for residential population, 685 for employment), with all residential population sewered by 2040. Student population was assumed to remain the same through 2040 (same assumption used in the Facilities Plan Update).

# 3.3 Flow and Loading Projections

In deriving future flows from the projected sewered population, the following assumptions were used:

- 60 gallons per capita per day (gpcd) for residential sewer flow
- 30 gpcd for employee sewer flow
- 16 gpcd for student sewer flow
- 1.5 peak hour factor for sewer base flow only (no inflow and infiltration [I&I])
- 1,100 gallons per acre per day (gal/ac/d) unit flow for peak hour I&I for existing sewered area
- 560 gal/ac/d unit flow for peak hour I&I for new sewered area

With the exception of the I&I unit flow for new service area, the values of these unit flow parameters are the same as those used in the Facilities Plan Update. The per capita flows for the residential and nonresidential population were used to calculate the average sanitary flows (without I&I). In the Facilities Plan Update, the 1.5 peak hour factor and a unit flow factor for peak hour I&I were used to calculate the peak hour flow. In this analysis, it is assumed that the I&I unit flow for new sewered area will be lower than that for the existing areas. The I&I unit flow rate for the new sewered areas was adjusted to obtain a peak hour to annual average flow ratio that matches the peak hour to annual average flow ratio recommended in the Orange Book, published by Ecology in 2008, for the corresponding equivalent population. The equivalent population was calculated to include the residential population, employees, and students, where the latter two were adjusted based on sewer flow contribution. Besides the average sanitary sewer flow and peak hour flow, other wastewater flow parameters were calculated from historical peaking factors given in Table 3-1 above. The current design and projected 2020 to 2040 wastewater flows, in 10-year intervals, are summarized in Table 3-4.

Table 3-4. Projected Wastewater Flows				
Parameter	Current Design a	2020	2030	2040
Equivalent population	-	2,320	4,115	5,911
Annual average flow (mgd)	0.235	0.146	0.259	0.372
Minimum day flow (mgd)	0.424	0.110	0.194	0.279
Average dry weather flow (mgd)	-	0.134	0.238	0.342
Maximum month flow (mgd)	0.292	0.190	0.337	0.484
Peak day flow (mgd)	0.424	0.266	0.472	0.677
Peak hour flow (mgd)	1.340	0.513	0.855	1.197

Equivalent population calculated as the sum of residential population, employees, and students, while the latter two are adjusted based on sewer flow contribution. Equivalent employees = employees \*30/60; equivalent students \*30/60.

Future wastewater loadings, including those for  $BOD_5$  and TSS, were derived based on per capita loading rates and peaking factors given in Table 3-2 above. Loading projections were not provided in the 2013 Facilities Plan Update. The per capita BOD and TSS loading rates were thus derived based on assumptions used in the earlier *Final Kingston Wastewater Facilities Plan* (December 1999). In that document, a value of 0.20 pound per capita per day (ppcd) was assumed to calculate maximum month  $BOD_5$  and TSS loading rates. The same value was used for this analysis, and load peaking factors as summarized in Table 3-4 above were used to calculate other  $BOD_5$  and TSS loading



a. Design flows provided on the "Kingston Wastewater Treatment Plant and Pump Station no. 71" as-built drawings (June 2003).

parameters. The projected 2020 to 2040 wastewater  $BOD_5$  and TSS loadings, in 10-year intervals, are summarized in Table 3-5.

Table 3-5. Projected Wastewater BOD₅ and TSS Loadings							
Parameter	Parameter Current Design a 2020 2030 2040						
BOD <sub>5</sub> loading (lb/d)							
Annual average	471	387	686	985			
Average dry weather	-	387	686	985			
Maximum month	584	464	823	1,182			
Peak day	848	696	1,235	1,773			
TSS loading (lb/d)							
Annual average	471	357	633	909			
Average dry weather	-	343	608	873			
Maximum month	584	464	823	1,182			
Peak day	848	928	1,646	2,364			

a. Design flows provided on the "Kingston Wastewater Treatment Plant and Pump Station no. 71" as-built drawings (June 2003).

### **Section 4**

# **Recycled Water Market Analysis**

This section describes the existing potable water providers, existing wastewater facilities, and potential recycled water users in the region.

### 4.1 Potable Water Facilities

KPUD provides potable water to the Project area via the North Peninsula water system. KPUDs Suquamish, Miller Bay and Indianola water systems are located south of the Project area. The existing facilities, projected water supply and demands for the region, and water quality are described in this section.

### 4.1.1 Existing Facilities

Existing regional potable water facilities are described in the Water System Plan Update (KPUD 2011) and Coordinated Water System Plan (Kitsap County 2005). KPUD wholesale and retail service areas are aligned with the boundaries of Kitsap County. KPUD has 26 Group A water systems and 25 Group B water systems. The North Peninsula, Suquamish, Miller Bay, and Indianola water systems are the primary districts in the region as shown in Figure 4-1. The North Peninsula Water System, located on the northern end of the Kitsap Peninsula, serves approximately 5,400 residential and commercial customers, including WHGC. KPUD manages many other major water systems outside of this Project area. Although not currently connected, KPUD has plans for a series of interties that will connect the Vinland, North Peninsula, and Suquamish water systems.

Recycled water produced as part of the proposed Project would replace potable water use at WHGC provided through the North Peninsula Water System. The North Peninsula Water System has a source capacity of 1,880 gallons per minute (gpm) and a storage capacity of 2.6 million gallons (MG) (Kitsap County 2005). A total of 19 active wells supply the North Peninsula Water System.

The Silver Springs Estates water system is located west of the project area, just north of the northern most reach of Miller Bay. The Silver Springs Estates water system has approximately 30 connections serving approximately 80 residential customers with a single groundwater well (60 gpm capacity). The water system is owned and managed by Washington Water Service Company.



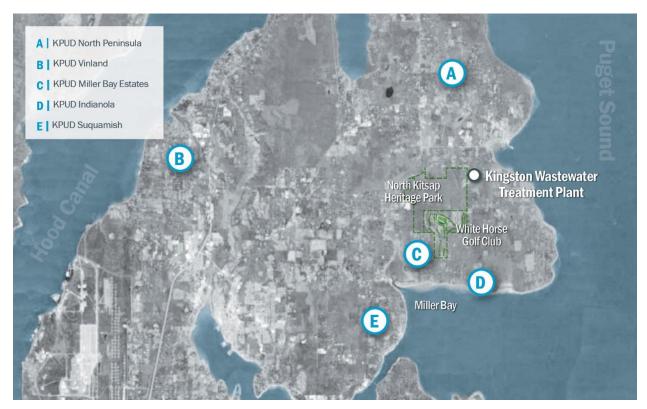


Figure 4-1. KPUD water systems

### 4.1.2 Regional Water Supply and Demand

Table 4-1 inventories the annual quantity  $(Q_a)$  and instantaneous quantity  $(Q_i)$  of water rights from the 2012 Kitsap County Capital Facilities Plan. The water rights are inclusive of all water rights, permits, and certificates within Kitsap County including municipal, commercial/industrial, domestic, irrigation, and rights for all other purposes of use.

Table 4-1. Summary of Existing Water Rights Information						
Type of Water Right	Type of Water Right North Kitsap Bainbridge Island Central Kitsap South Kitsap					
		Groundwate	r Rights			
Qa (mgd)         9.78         9.17         23.77         15.2         57.93						
Q <sub>i</sub> (mgd)	18.52	16.73	38.05	33.77	107.08	
	_	Surface Wate	er Rights			
Q <sub>a</sub> (mgd)	0.68	0.09	0.64	0.56	1.97	
Q <sub>i</sub> (mgd)	0.04	0	0.05	0.06	0.16	
Total						
Q <sub>a</sub> (mgd)	10.46	9.26	24.41	15.76	59.9	
Q <sub>i</sub> (mgd)	18.57	16.73	38.1	33.83	107.24	



Table 4-2 shows the projected water demands for Kitsap County developed by the Kitsap County Water Utility Coordinating Committee in 2005. Based on previous analyses, existing water sources are sufficient to meet demand through 2030. However, climate change and the potential for saltwater intrusion into groundwater sources (see Section 4.4) have the potential to affect previous supply and demand assumptions. The proposed Project would reduce demand, extending available water supply, and minimize the impact of large peak day demand swings to the local Suquamish Water System.

Table 4-2. Water Demand Projections for Kitsap County				
Year Average Day Demand (mgd) Maximum Da Demand (mgd)				
2010	30.03	69.67		
2020	37.57	87.16		
2030	42.89	99.5		

Source: Kitsap County 2005.

### 4.1.3 Water Quality

KPUD has a wellhead protection program in accordance with WAC 246-290-135 that includes susceptibility assessments, wellhead delineations, and an inventory of potential sources of contamination on file for all KPUD-owned wells. KPUD staff maintains the file database at the KPUD office.

KPUD chlorinates 19 of the Group A systems with sodium hypochlorite for disinfection and maintains a trace residual throughout the distribution system. Coliform sampling and chlorine residual tests are measured on a weekly basis and reported to Health on a quarterly basis. None of KPUD's water systems have a history of chronic Total Coliform Rule violations and none are under disinfection orders by Health. The North Peninsula system has no active compliance actions at the time of this Plan (Health 2018a).

Kitsap County groundwater frequently contains iron and/or manganese in levels exceeding the secondary maximum contaminant level (MCL). To comply with the secondary MCL requirements for iron and manganese, KPUD installed treatment plants on the following sources (as of 2011):

Keyport: S02

North Bainbridge: S05 and S07

Vinland: S08

North Peninsula: S09 and S10

# 4.2 Wastewater Facilities Summary

The existing Kingston WWTP is an extended aeration type activated sludge plant that discharges to Appletree Cove in Puget Sound. Kingston WWTP has a design capacity of 0.292 mgd on a maximum month basis. Treatment processes include preliminary treatment through a rotary screen and aerated grit chamber, biological treatment in an oxidation ditch followed by solids settling in two secondary clarifiers, and disinfection with an ultraviolet (UV) light disinfection system. Solids removed from the secondary clarifiers are thickened by a gravity belt thickener (GBT) and then transported to Central Kitsap Treatment Plant (CKTP) for further treatment and disposal. There are currently no tertiary processes for recycled water production. The current discharge permit limits apply to effluent pH, fecal coliform, CBOD<sub>5</sub>, and TSS. While there are no nutrient limits, the current operating conditions of the oxidation ditch provide partial nitrogen removal. More detailed



descriptions of Kingston WWTP, including its existing treatment capacity, are included in Section 5. Treatment alternatives for recycled water production are described in Section 6.

# 4.3 Recycled Water Uses and Demand

This section describes potential recycled water uses and demands.

### 4.3.1 Potential Recycled Water Uses

This section focuses on the largest potable water user in the region and expected recycled water user, WHGC. The County has developed a partnership with the Tribe, which owns and operates WHGC. Table 4-3 compares estimated WHGC irrigation demands to Kitsap recycled water projections for the years 2020, 2030, and 2040 on a seasonal basis. Historically, WHGC irrigates the golf course during the months of May through September.

Table 4-3. WHGC Water Demands and Kingston WWTP Projected Flows				
Month	WHGC Average Water	Kingston WWTP Projected Flows (mg		
WOILUI	Demands <sup>a</sup> (mgd)	2020	2030	2040
January	-	0.162	0.287	0.412
February	-	0.156	0.277	0.399
March	-	0.164	0.291	0.418
April	-	0.141	0.251	0.360
May	0.112	0.134	0.237	0.341
June	0.178	0.130	0.231	0.332
July	0.313	0.129	0.229	0.330
August	0.230	0.131	0.232	0.334
September	0.077	0.139	0.246	0.353
October	-	0.145	0.256	0.368
November	-	0.156	0.276	0.397
December	-	0.165	0.293	0.420

Data based on water use information provided by WHGC for 2013 and 2014.

The region near the Kingston WWTP is primarily commercial and residential. There are few industrial users in the region. Additional potential recycled water users include NKHP and nearby schools, such as Kingston Middle School and Kingston High.

### 4.3.2 Barriers to Recycled Water Use

By comparing the wastewater projections to WHGC irrigation demands, there is a limitation (see Table 4-3). During the dry season when the golf course irrigates most, the wastewater projections are at their lowest. In 2020, WHGC will require more irrigation demand than what Kingston WWTP can provide. Therefore, potable water will be used to offset the difference between recycled water supply and irrigation demands. Proper cross-connection and backflow prevention will be utilized to eliminate the risk of contamination of the potable water supply (more details are provided in Section 8.5.1).

Moving forward into the planning horizon, the wastewater projections can meet all WHGC projected irrigation demands. Figure 4-2 presents the water balance for the year 2040. When outside of the irrigation season or summer months, recycled water can be infiltrated to recharge nearby streams.

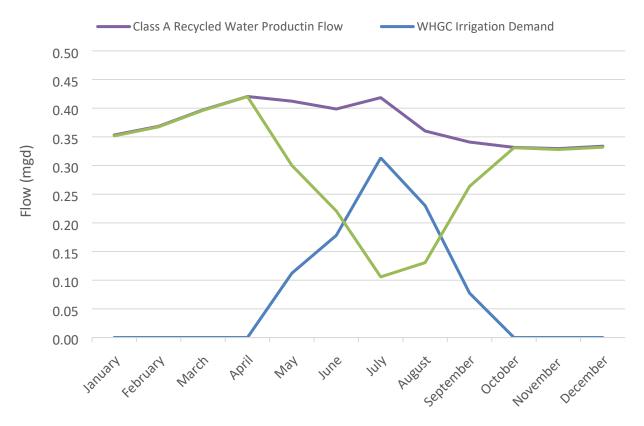


Figure 4-2. Water balance for 2040

# 4.4 Project Need

This Project would help improve the following issues:

- Water supply scarcity/reliability
- Environmental issues
- Water quality concerns
- · Future economic viability

WHGC, owned by the Tribe, currently uses potable water from KPUD to irrigate the golf course. KPUD sources this water from groundwater wells that draw from the sea-level aquifer. The sea-level aquifer is widely used and mostly confined (USGS 2014). Therefore, the quantity of usable groundwater is limited and, eventually, as the local demand for groundwater supplies increases, this water source could decline because it is not being adequately replenished. Additionally, with increased withdrawals from the sea-level aquifer, there is a concern of saltwater intrusion and the associated impacts to groundwater quality over time. There is no evidence of extensive seawater intrusion in the county, but localized seawater intrusion is found in a few areas such as Jefferson Beach in the Kingston sub-area (Ecology 1997). Climate change impacts further compound these issues. Rainfall



is projected to be increasingly intense and to result in a greater portion of the precipitation leaving the system directly into Puget Sound as runoff. Additionally, longer and hotter summers from climate change impacts will result in a greater water demand over time, putting even greater stress on the finite potable water supply. This water usage averages approximately 29 MG annually.

Ecology's 2016 Washington State Water Quality Assessment (Ecology 2016) placed Grovers Creek in the following categories:

- Category 5 (polluted water that requires a total maximum daily load [TMDL]) because of low DO concentrations.
- Category 4-B (polluted, but has a pollution control that is expected to solve the problem) because of elevated fecal coliform concentrations. Kitsap County's Pollution Identification and Correction (PIC) program is expected to reduce fecal bacteria concentrations in the creek.
- Category 2 ("water of concern") because of elevated temperature and turbidity.

Like many streams in the Puget Sound lowlands, Grovers Creek suffers from insufficient baseflow during the dry season. Flow often falls below 2 cfs, which is the minimum instream flow for Grovers Creek established in state regulations (WAC 173-515-030) (Washington State Legislature 2003). Golder (2010) reported summer flows as low as 1 cfs in August 2005.

Low DO concentrations have caused fish kills in areas with limited water circulation like Hood Canal. The *Washington State Water Quality Assessment* identified Appletree Cove as a "water of concern" because of low DO (Ecology 2016).

There are many benefits from reducing the discharge to Puget Sound and beneficially using recycled water to irrigate WHGC and infiltrate recycled water:

- Conserve limited groundwater resources by minimizing groundwater withdrawals to preserve stream flows and prevent saltwater intrusion
- Divert nutrients away from the marine environments to where they are needed by reducing the Kingston WWTP outfall to Appletree Cove
- Restore and replenish streams and fish habitats by restoring Grovers Creek through infiltration
- Enhance marine life ecosystems and salmonid habitat
- Create a community asset that also addresses future concerns related to growth and climate change

A detailed benefit analysis is described in Section 7.

### 4.5 Customer Outreach

The County and Tribe held stakeholder coordination and public involvement meetings (see Section 1.5) as part of the development of this Plan. Public outreach meeting materials, including attendee list, meeting notes, and presentation slides, are provided in Appendix C. The County and Tribe would continue to work with their planning partners and involve and inform the public in the planning process through continuing future stages of the Project.

### **Section 5**

# **Existing Wastewater Facilities**

This section describes the existing collection system and treatment facility, as well as assessment of the existing capacity and condition.

# 5.1 Existing Collection System

The existing collection system services the northern portion of the Kingston UGA. The southern portion of the UGA is currently unsewered. The system consists of more than 12 miles of gravity sewer and force main pipe of which 60 percent is 8-inch-diameter gravity sewer. Approximately 95 percent of the existing collection system was constructed in 1974, including primarily asbestoscement pipe and shorter lengths of 10- and 12-inch-diameter cast-iron pipe. The remaining 5 percent of the system, built between 1978 and 1984, was constructed using 6- and 8-inch-diameter polyvinyl chloride (PVC) pipe. There are six pump stations, the largest of which (LS-71) is located at the old Kingston WWTP site and discharges to a force main that transfers wastewater from the old Kingston WWTP site to the current Kingston WWTP.

Conveyance system improvements were evaluated in the 2013 Facilities Plan Update. The improvements were developed to provide sewer service to the entire UGA by 2025, including part of the northern UGA that did not have sewer service and the southern UGA. Recommended improvements include pump station upgrades (for LS-41 and LS-71), new manholes along existing gravity sewers, and five new pump stations and associated force mains. The upgraded LS-71 will have a capacity of 630 gpm, while the capacities of the new pump stations range from 10 to 510 gpm. Figure 2-3 above shows the current and projected future collection system infrastructure as discussed in the 2013 Facilities Plan Update.

# 5.2 Existing Treatment System

The original Kingston WWTP was constructed in 1974 in downtown Kingston. The current facility, located on South Kingston Road, was constructed in 2005. Raw influent enters the headworks, which includes a rotary screen with 1/4-inch openings and a vortex grit chamber. Screenings are washed and grit is separated and dewatered in a grit classifier, with the combined dewatered grit and screenings collected in a dumpster and subsequently disposed of in a local landfill. The screened and degritted wastewater is sent to the oxidation ditch for secondary treatment. The oxidation ditch provides extended aeration biological treatment, typically operated at long solids retention times (SRTs). There are two oxidation ditches but only one of them is currently equipped with two mechanical brush rotors for aeration. The other ditch is not currently in service and can be placed into service in the future when aerators are installed. Mixed liquor from the oxidation ditch is routed to two secondary clarifiers for solids separation. Secondary effluent is disinfected in a UV system consisting of two UV banks of low-pressure lamps. Final effluent is discharged to Appletree Cove via an 18-inch-diameter outfall pipe that extends 5,350 feet into Appletree Cove to a depth of 169 feet below mean lower low water (MLLW).

Waste activated sludge (WAS) from the secondary system is sent to one of two WAS storage tanks. Scum removed from the secondary clarifiers is also sent to the WAS storage tanks. WAS and secondary scum are thickened in a GBT. The thickened sludge is sent to a thickened waste activated



sludge (TWAS) storage tank. The GBT is operated approximately once per week and TWAS is hauled to the County's CKTP for further treatment and disposal.

Figure 5-1 shows a process flow schematic of Kingston WWTP. Design data for the major unit processes are given in Table 5-1.

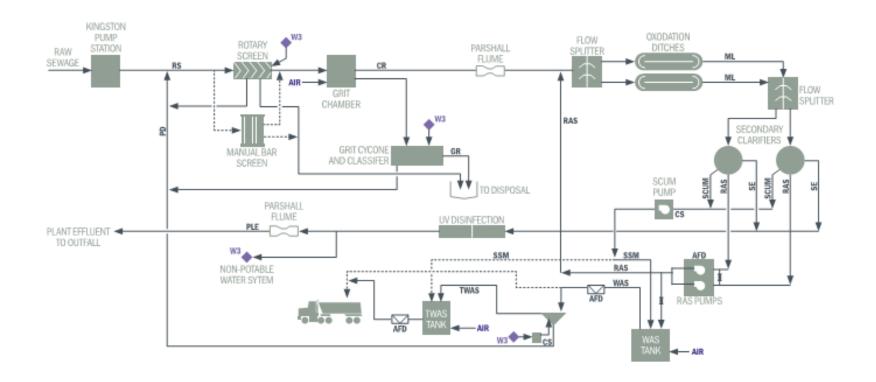


Figure 5-1. Kingston WWTP process flow schematic

Process Element	Design Value
Mechanical screens	
Туре	Rotary
Number of units	1
Opening size, in.	1/4
Grit chamber	
Туре	Vortex
Number of units	1
Capacity, mgd	2.26
Oxidation ditches	
Number of basins	2
Dimensions, ft	121 x 35 x 13 (SWD)
Volume, each, gal	262,000
Aeration system (in oxidation ditch only)	202,000
Type	Mechanical brush rotors
Number of units	2
Oxygen transfer efficiency, percent	12
Airflow capacity, scfm	250
Power, each, hp	40
Return activated sludge (RAS) pumps	Contributed herizontal
Type Number of units	Centrifugal, horizontal
Capacity, each, gpm	275
Power, each, hp	5
	3
Secondary clarifiers	
Type	Circular with spiral-shaped sludge scrape
Number of units	2
Dimensions, ft	35 (dia), 13 (SWD)
Surface area, each, ft <sup>2</sup>	1,924
UV disinfection	
Lamp type	Low-pressure mercury
Capacity, mgd	1.6
Design UV dose, mJ/cm <sup>2</sup>	37
Number of channels	1
Number of banks	2
Number of lamps per bank	56
NAS storage tank	
Number of tanks	2
Capacity, each, gal	25,000
Mixing system	Coarse-bubble diffusers
Airflow rate, total, scfm	215
Gravity belt thickener	
Number of units	1



Table 5-1. Kingston WWTP Major Equipment Design Data			
Belt size, m	1		
Hydraulic capacity, gpm	200		
TWAS storage tank			
Capacity, gal	1		
Number of tanks	16,000		
Mixing system	Coarse-bubble diffusers		
Airflow rate, scfm	200		

a. Design data provided on the "Kingston Wastewater Treatment Plant and Pump Station no. 71" as-built drawings (June 2003).

Kingston WWTP is currently rated for a maximum month flow of 0.292 mgd and maximum month loadings of 585 pounds per day (lbs/d) for both  $BOD_5$  and TSS. Table 5-2 summarizes the rated capacities and effluent limits in the current NPDES permit.

Table 5-2. Kingston WWTP Rated Capacities and NPDES Effluent Limits				
Design Criteria		Value		
Max month flow	0.292 mgd	0.292 mgd		
Max month BOD <sub>5</sub> loading <sup>a</sup>	585 lbs/d			
Max month TSS loading <sup>a</sup>	585 lbs/d			
	Effluent Limits			
Parameter	Average Monthly	Average Weekly		
CBOD <sub>5</sub> <sup>a</sup>	25 mg/L	40		
CBOD <sub>5</sub> -	61 lbs/d	98 lbs/d		
TSS <sup>b</sup>	30 mg/L	45 mg/L		
155 -	73 lbs/d	110 lbs/d		
рН	6.0 (minimum)	9.0 (maximum)		
Fecal coliform °	200/100 mL	400/100 mL		

Based on NPDES permit effective 12/1/2015.

- a. Design max month loading values as shown in the permit are slightly different from those shown on the 2003 as-built drawings (which are shown in Table 3-5).
- b. The average monthly effluent concentrations for CBOD₅ and TSS shall not exceed 25 and 30 mg/L, respectively, or 15% of the respective influent concentration taken over the same calendar month, whichever is more stringent.
- c. Limits for fecal coliform are monthly and weekly geometric means, with units defined as colony-forming units (CFU) per 100 mL.

# **5.3 Treatment Capacity Assessment**

This section summarizes the capacity assessment of the major unit processes at Kingston WWTP. The assessment was performed based on the original design criteria and modeling of the secondary treatment system. As the biological process model was not calibrated with detailed sampling data, default parameter values were assumed, and a safety factor is included to provide conservative results. The results provide a framework for determining existing capacity and upgrade requirements to facilitate development of alternatives described in Section 6. More detailed evaluation will be performed during the design phase to fine-tune the requirements.

### **5.3.1** Preliminary Treatment

Preliminary treatment consists of screening and grit removal. The headworks include a rotary screen with 1/4-inch openings and a manual bar screen in a bypass channel. Grit removal is achieved in a vortex-type grit chamber. The screens and grit removal system were sized for the original peak design flow of 2.26 mgd. As the 2040 design peak hour flow is 1.2 (refer to Table 3-4) mgd based on the most recent projections, the preliminary treatment processes have considerable excess capacity.

### **5.3.2 Secondary Treatment**

Secondary treatment consists of an oxidation ditch and two secondary clarifiers. As mentioned above, there is a second ditch, but it is not equipped with aerators and is not in use. Process modeling indicates that the secondary system currently has excess capacity based on the current permitted effluent requirement. The two secondary clarifiers are predicted to become overloaded with respect to solids loading rates around 2030 to 2035. Aeration limitations in the existing oxidation ditch may occur sooner. To increase the aeration capacity, the second ditch could be placed into service after installing aerators in that ditch, or the aeration system in the existing ditch could be converted from mechanical aeration to fine-pore aeration. Additional analysis would be needed to evaluate any aeration system capacity upgrade. In addition to increasing aeration capacity, placing the second ditch in service will reduce solids loading to the clarifiers and thus avoid overloading the clarifiers through the planning period (through 2040).

#### 5.3.3 Disinfection

The existing low-pressure UV system was originally designed for a peak hour flow capacity of 1.6 mgd with two UV banks in service. The system was designed to accommodate additional lamps in the future (from 56 to 96 lamps per bank) to treat a peak hour flow of up to 2.54 mgd. These design flow rates are based on a UV dose of 37 millijoules per square centimeter (mJ/cm²) to meet the current disinfection requirements. As the 2040 design peak hour flow is 1.2 mgd based on the most recent projections, the UV system has considerable excess capacity.

### 5.3.4 Sludge Thickening

The GBT receives WAS and secondary scum from the WAS storage tanks. The GBT was sized for a maximum hydraulic loading rate of 200 gpm. Preliminary solids mass balance calculations show a hydraulic loading rate of less than 200 gpm through 2040, assuming an operational schedule of 4 days per week and 6 hours per day. Therefore, the existing GBT is expected to have significant excess capacity. There is, however, currently no redundancy in the thickening system as there is only one GBT. When the GBT needs to be taken out of service for maintenance, the waste sludge can be hauled to CKTP for processing.

### **Section 6**

# **Alternatives Development and Analysis**

Several alternatives were considered for this Project, including to maintain the status quo ("no action" alternative) and various end uses for the recycled water that vary seasonally. Alternatives that evaluated the beneficial uses for recycled water are discussed in detail in Sections 6.2 and 6.4. Treatment alternatives to meet recycled water quantity and quality objectives were also considered as described in Section 6.3. Several pipeline alignments were evaluated and are presented in Section 6.5.

# 6.1 Project Objectives and Evaluation Criteria

The objective of the County and this Project is to "treat water as a resource rather than a waste stream" to address water quality and quantity concerns specific to Kingston, and other related water resource issues throughout the county. Based on several years of stakeholder engagement with the community and Kitsap County's key partners, such as the Suquamish Tribe, the following objectives were developed:

- Enhanced water quality in Puget Sound
- Improved sustainability of the deep sea-level aquifer
- Enhanced local stream habitat

Evaluation criteria for the Project primarily centered on triple bottom line considerations of environmental, social, and financial attributes of the Project. Although the County and Suquamish Tribe did not develop a formal "weighting" criteria, through Project discussions it became apparent that the priority was on environmental and social considerations. The following key factors were considered as part of each criteria and the decision-making process:

- Environmental: the extent to which an alternative met the Project objectives of preserving
  groundwater resources for potable uses, enhancing marine life ecosystems, and restoring
  stream flows and fish habitat
- **Social:** the extent to which an alternative was supported by the major Project stakeholders (e.g., the County and the Tribe)
- **Financial:** the extent to which an alternative minimized capital and operational costs; see Section 6.2.2 for a description of this "business case evaluation" (BCE) process

# **6.2** Beneficial Uses Alternatives Analysis

In 2003, the County began assessing opportunities to use recycled water that could be produced at the Kingston WWTP to address long-term County water quantity and water quality goals. Beneficial uses of the Kingston recycled water project were identified based on these assessments and current understanding of area stakeholder interests. Implemented alone or in combination, these beneficial uses include:



- Irrigation. Water recycled at the Kingston WWTP would offset groundwater withdrawal by meeting summer irrigation needs at the WHGC (approximately 29 MG/year) and other potential sites, such as NHKP ball fields. During the winter, flows could be stored for irrigation use the following summer.
- Infiltration. Preliminary investigations in the area north of WHGC indicate favorable subsurface conditions for indirect groundwater infiltration (winter only or year-round). Infiltration in this area is anticipated to result in subsurface migration of Class A recycled water to Grovers Creek, potentially providing a significant benefit in the summer when stream flows are below minimum instream flow requirements. Infiltration through the soil column would also provide additional treatment and thermal cooling of the water.
- Wetlands. Providing that water temperature and quality regulations would be achieved, directing Class A recycled water through the wetlands located to the northwest of the Kingston WWTP would provide benefits such as improved water quality (through wetland treatment), hydrologic storage, thermal cooling, and seasonal wetland hydration.

Several alternatives were considered that evaluated these various beneficial end uses for the recycled water. The evaluation also included the "no action" alternative (Alternative 1) where the Kingston WWTP effluent would be continued to be discharged to Puget Sound. This alternatives evaluation builds on a 2016 study included in Appendix A, which investigated recycled water opportunities for the Kingston WWTP (BC 2016). The following six alternatives were considered for this Project:

- Alternative 1 Continued discharge of wastewater to Puget Sound ("no action")
- Alternative 2 Winter discharge to Puget Sound and summer irrigation at WHGC
- Alternative 3 Winter infiltration and summer irrigation at WHGC
- Alternative 4 Winter storage of produced recycled water and summer irrigation at WHGC
- Alternative 5 Infiltration year round
- Alternative 6 Discharge to wetlands year round

### 6.2.1 Beneficial-Use Alternative Screening

The six alternatives for various uses of the recycled water were further evaluated through a screening process for feasibility. Each of the alternatives was screened against the evaluation criteria discussed in Section 6.1 and the relative benefits qualitative assessment provided in Table 6-1.

Table 6-1. Benefits of Beneficial-Use Alternatives						
Discharge Alternatives				Relative Bene	fits	
Alternative	Summer	Winter	Puget Sound (Quality)  Vashon (Deep) Advanced Aquifer (Quantity)  Shallow Aquife Streams (Quantity)  Quality)			
1. Puget Sound wastewater discharge ("no action")	Puget Sound	Puget Sound	+	N/A	N/A	
2. Winter discharge, summer irrigation	Irrigation	Puget Sound	++	++	N/A	
3. Winter infiltration, summer irrigation	Irrigation	Infiltration	+++	++	+	
4. Irrigation and storage	Irrigation	Storage	+++	+++	N/A	
5. Infiltration	Infiltration	Infiltration	+++	+	++	
6. Wetlands	Wetlands	Wetlands	+++	N/A	+++	

The number of "+" notations represents the relative benefits for each option.

Based on discussions with major stakeholders (County and Tribe), a strong preference was expressed for alternatives that included elements of irrigation and infiltration to benefit not only Puget Sound water quality, but also the aquifer and area streams. Therefore, there was significant support for Alternative 3 based on this initial screening exercise. Alternative 3 was the "baseline option" presented to stakeholders in 2016 that also received unanimous support.

To streamline the evaluation and focus on alternatives that met the primary stakeholder objectives, Alternatives 4, 5, and 6 were removed from further evaluation based on the following limitations:

- Alternative 4: irrigation and storage. This option would irrigate WHGC in the summer and then, during other times of the year, store recycled water at WHGC for irrigation during the following summer. Based on the water balance analysis presented in Table 4-3, the WHGC potable water irrigation demands are less than the yearly wastewater produced at Kingston WWTP. Therefore, there is not enough irrigation need for the entire wastewater production flow and another beneficial use would need to be identified to take advantage of a storage option. Additionally, storage volume would need to be quite large (greater than 75 MG to store flow outside of the summer season in 2040). Given this significant storage requirement and associated cost and siting issues) and because this alternative does not benefit area streams, this alternative was eliminated from further consideration.
- Alternative 5: infiltration year round. Although infiltration would benefit local stream flow, this
  alternative would not reduce pumping from the aquifer. This alternative would infiltrate recycled
  water at NKHP year round. Additionally, it has less benefit to the deep aquifer, which is mostly
  confined. Infiltrated water is expected to replenish the shallow aquifer, which is not used as a
  drinking water source in the area. Therefore, this option was screened out for further
  consideration.

Alternative 6: wetlands. Providing that water temperature and quality regulations would be achieved, directing Class A recycled water through the wetlands located to the northwest of Kingston WWTP would provide benefits, such as improved water quality (through wetland treatment), hydrologic storage, thermal cooling, and seasonal wetland hydration. The recycled water would ultimately be conveyed to Grovers Creek and help address low summer stream flow issues. Although this is a benefit from a water quantity standpoint, there is remaining concern regarding the water quality impacts to the stream that would require additional testing and monitoring. In addition, there is concern that the temperature of Class A recycled water would



need to be lowered between June and September from 70°F to 61°F–64°F to meet state and federal criteria for delivery to salmon-bearing streams (Golder 2010). Technologies to cool the recycled water effluent flow from 70°F include mechanical cooling with refrigeration technology and evaporative cooling using cooling towers. These options are energy-intensive (not helpful for climate change resilience/mitigation) and would add cost to the Project. For these reasons, along with the concern that this alternative would not reduce pumping from the aquifer, this alternative was eliminated from further consideration.

The following sections outline the treatment options for producing Class A recycled water (Alternatives 2 and 3). Based on the treatment evaluation, life-cycle costs were produced for each alternative, which are presented in Section 6.5.

# 6.3 Recycled Water Treatment Alternatives

The level of additional treatment needed to produce recycled water depends on the anticipated uses of the recycled water and how it will be discharged. Table 6-2 summarizes the treatment required for the potential discharge options. Although endocrine-disrupting compounds (EDCs) and other emerging contaminants of concern are not addressed by current regulations, the Project would include provision for future installation of EDC removal treatment beyond what soil aquifer treatment (SAT) will provide via infiltration (see Section 7.7 for a discussion on SAT). At this time, the Project would include provision only for future installation of EDC removal processes.

Table 6-2. Level of Treatment for Different Discharge Options for Recycled Water				
Discharge Option <sup>a</sup>	Nitrogen Removal	Filtration	Disinfection Method Options	
Discharge to Puget Sound through outfall	Not required currently	Not required	UV	
Irrigation	Not required	Yes	UV, Cl <sub>2</sub> , or both	
Infiltration	≤ 10 mg/LTN monthly average	Yes	UV, Cl <sub>2</sub> , or both	

Treatment level for irrigation and infiltration in accordance with Reclaimed Water Rule, WAC 173-219 (effective 2/23/2018).

To produce recycled water at Kingston WWTP, upgrades to the existing secondary treatment and disinfection systems will be required and a new tertiary filtration will need to be added. These upgrades are described in the following sections.

### 6.3.1 Secondary Treatment System

Currently, limited nitrogen removal is provided in the oxidation ditch by air on/off cycling. To meet the total nitrogen (TN) limit required for indirect infiltration (Alternative 3), modifications of the existing treatment system would be required. As Table 6-2 shows, nitrogen removal is not currently required for discharge to Puget Sound or irrigation uses.

The following modifications are recommended to upgrade the secondary treatment system to allow for nitrogen removal:

- Adjust aeration air on/off cycles
- Add aerators in the second ditch to allow operation of both ditches
- Add mixers to the oxidation ditch to provide more effective anoxic cycles



 $Cl_2$  = chlorine (chlorination).

TN = total nitrogen.

Preliminary process modeling indicates that sufficient TN removal may be achieved with a second ditch in operation and optimization of the air on/off periods without supplemental carbon addition. A supplemental carbon system is not included in the site layout and cost estimates for the recycled water facilities. If supplemental carbon is needed, it is recommended that a system feeding non-hazardous, proprietary chemicals (e.g., MicroC products) be added.

### 6.3.2 Tertiary Filtration System

A new tertiary filtration system is needed to produce Class A recycled water. Different types of filters are available, including sand filters, cloth media filters, membrane filters, and compressible media filters. A comparison of the different types of filters is provided in Appendix F. An upflow sand filter (with continuous or intermittent backwash) is the preferred alternative, mainly because the same type of filters have been installed at CKTP to produce recycled water. Having the same type of filters at the two facilities is beneficial to the County in terms of operational consistency and equipment maintenance.

Sizing of the filtration system is based on the anticipated hydraulic loading at Kingston WWTP. The filters could be sized to treat the design peak hour flow or a flow rate less than the design peak hour flow. In the latter case, an EQ tank would be included to equalize any flow that exceeds the filter maximum hydraulic capacity. In both cases, the system is sized with one filter cell out of service to meet redundancy requirements. An EQ tank or redundant filter cell would not be needed if any flow exceeding the filter capacity is discharged through the outfall. However, in developing the treatment options, it was assumed that all flows will be filtered and thus be reclaimed to limit flow discharged to Puget Sound. Flow discharged to Puget Sound would be for exercising the outfall only. To optimize the required filtration capacity, flow equalization is thus included in the treatment options discussed below.

As discussed below concerning disinfection, the existing UV system can be retrofitted to provide a higher UV dose required for reuse up to a certain flow rate. The new filtration system can thus also be sized to match the UV system capacity.

The filtration system will include the filter cells installed in concrete basins, air compressors, chemical feed system, and filter feed pump station.

### 6.3.3 Disinfection

The existing UV system at Kingston WWTP has a design dose of 37 mJ/cm² at a design capacity of 1.6 mgd. To meet Class A recycled water requirements, a higher dose (at least 100 mJ/cm² to achieve 4 log virus removal) would be required when media (non-membrane) filtration is used as part of the treatment process stream upstream of disinfection (NWRI 2012). According to the UV equipment manufacturer (Trojan), the existing UV system can be modified to provide the required dose (for up to 0.5 mgd) by adding eight UV modules to the system. Disinfection can also be achieved by means of chlorination. Therefore, there are three general disinfection options to achieve Class A recycled water requirements:

- Add a new UV system designed to meet the requirements for recycled water production.
   Chlorination will also be required to address biofilm control in the pipeline.
- Modify the existing UV system to provide the higher level of disinfection for a portion of the flow (0.5 mgd). Flows in excess of 0.5 mgd would be equalized in a new EQ tank. The EQ tank can be sized to accommodate the design peak hour flow or a flow rate lower than the design peak hour flow, such as the design peak day flow. In the latter case, when Kingston WWTP flow exceeds the design peak day flow, all flows would be sent directly to the UV system without filtration and the



effluent would be discharged to the outfall. Similar to the previous option, chlorine would be added to provide a residual in the distribution pipeline to prevent re-growth.

Provide disinfection of all recycled water by adding chlorine only.

For chlorine addition, the existing sodium hypochlorite tank and metering pumps currently not in use at Kingston WWTP may be used for any of these options, so that a new chemical addition system will likely not be needed for disinfection.

The existing chlorination system can also be used to maintain a chlorine residual in the reclaimed water distribution system. The new Reclaimed Water Rule requires a free chlorine residual of 0.2 mg/L or a total chlorine residual of 0.5 mg/L in the distribution system, or a waiver can be granted. A waiver may be able to be granted for this reclaimed water system. However, operation and maintenance implications would need to be considered if no chlorine residual was provided, such as the ability to periodically apply a chlorine residual for pipe cleaning/maintenance to minimize biofilm growth and corrosion. In the state, there are a few facilities that practice groundwater recharge and the chlorine residual requirement is not required for this intended use (i.e., LOTT Martin Way's Groundwater Recharge Facility).

### 6.3.4 Tertiary Filtration and Disinfection Process Flow Options

Three tertiary treatment schemes related to filtration and disinfection systems were evaluated. Oxidation ditch improvements are common to all three options. Table 6-3 summarizes the design criteria for each option. Figure 6-1 illustrates the options and summarizes the advantages and disadvantages of each option.

Table 6-3. Design Criteria for Tertiary Filtration and Disinfection Process Flow Options				
Parameter	Option 1: Add Parallel Filters and UV Disinfection	Option 2: Add Filters and Upgrade Existing UV System	Option 3: Add Filters and Chlorinate for Disinfection	
Existing UV system	(used only as backup)		(used only as backup)	
Maximum flow (mgd)	1.6	0.5	1.6	
Design UV dose (mJ/cm²)	37	100	37	
EQ tank Maximum volume (gal)	93,000	359,000 (equalize all flows above 0.5 mgd) 38,000 (equalize flows between 0.5 and 0.7 mgd)	93,000	
Tertiary filters				
Maximum flow (mgd)	0.7	0.5 or 0.7	0.7	
New UV system  Maximum flow (mgd)  Design UV dose (mJ/cm²)	0.7 100	None	None	

For treatment options 1 and 3, an EQ tank volume of approximately 93,000 gallons was estimated if the filters (and new UV system) are sized to treat up to a flow of approximately 0.7 mgd (2040 peak day flow). Flow equalization would not be needed until around 2026 based on Kingston WWTP flow projections. For option 2, if all flows beyond 0.5 mgd are equalized, an EQ tank volume of approximately 359,000 gallons was estimated. If only flow up to 0.7 mgd is equalized, then the EQ



tank volume can be reduced substantially to approximately 38,000 gallons. However, in that case, when flow exceeds 0.7 mgd, all flow would be sent directly to the UV system and subsequently to the outfall (no flow to reuse), as the UV system must then be used to disinfect all flows for discharge to the outfall.

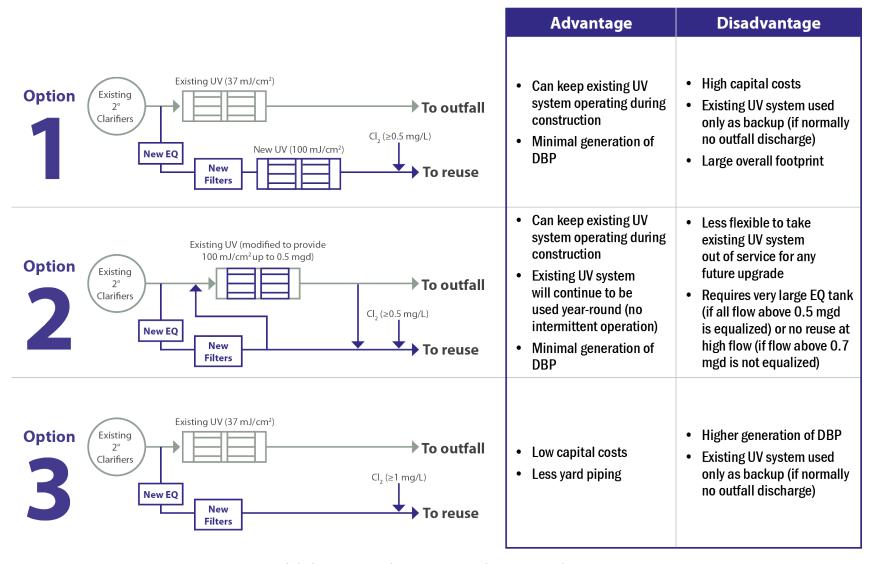


Figure 6-1. Comparison of UV and tertiary filter process flow options



Comparing the three options, option 1, with a new UV system, would have the highest capital cost, while option 3, using chlorination only for disinfection of the recycled water, would have the lowest capital cost. For options 1 and 3, the existing UV system would serve only as a backup and would be used only when the filtration system or new UV system (for option 1) is taken out of service or when the outfall is "exercised" intermittently to maintain its functionality. The potential for generating disinfection by-products (DBPs) is the highest for option 3 with the highest expected chlorine (as hypochlorite) dose requirements, although DBPs are currently not regulated for reclaimed water and their generation is expected to be relatively insignificant for all three options with filtration of the secondary effluent. Option 2 would allow continued use of the existing UV system but would generate only up to 0.5 mgd of recycled water. Future expansion would require replacement of the UV system. Based on preliminary evaluation, option 1 was selected as it would provide the most flexibility in terms of meeting future DBP limitations in reclaimed water and a conservative cost estimate for facility planning purposes.

# 6.4 Infiltration Investigation

To assess the feasibility of groundwater recharge and stream flow augmentation, site-specific testing including shallow test pits and infiltration testing, and test drilling and installation of a groundwater monitoring system were conducted. This site-specific testing provided hydrogeologic data to support the feasibility assessment and groundwater modeling.

The data collected during hydrogeologic site characterization activities were also used to update the United States Geological Survey (USGS) 2016 Kitsap Peninsula groundwater flow model. To simulate Project-specific conditions and increased model resolution within the Project area, a finer-scale MODFLOW UnStructured Grid (USG) was incorporated into the original model. Following this process, regional features and overall model calibration were maintained while building a high-resolution grid within the Project area. Within the USG zone, model updates included refinement to surface elevations and hydrostratigraphic units, incorporation of smaller unnamed tributaries within the Grovers Creek watershed, adjustments to the model recharge to simulate Project scenarios, and adjustments to the hydraulic properties for the clay layer beneath the targeted unconfined aquifer within the Project area. Original model properties, including hydraulic conductivity of the aquifer units and leakance of the lower confining units, remained consistent with the USGS model outside of the USG zone. The updated model was used to process simulations for (1) existing background conditions, (2) year-round groundwater recharge at 0.5 mgd, and (3) seasonal recharge (irrigation/recharge) at a rate of 0.5 mgd.

The model was used to assess groundwater mounding and transport of the recharged water within the shallow unconfined aquifer system beneath the Project area to tributaries within the Grovers Creek watershed. Results indicate that both year-round and seasonal groundwater recharge alternatives result in net increases in stream flow within Grovers Creek. Both the continuous recharge and seasonal recharge scenarios produce the greatest increased stream flow over base conditions in December, with the magnitude of the benefit decreasing during the spring season. Based on preliminary feedback from Ecology, a supplemental analysis of particle tracking and transport to surface water is included in Appendix H. Transport within the groundwater system was estimated with conservative particle tracing that indicates a range of transport paths to approximately 1.93 miles of tributary length receiving benefits from additional baseflow within the watershed. Time of travel within the aquifer, based on the cumulative volumes contributing to baseflow with time, indicates that approximately 40 percent of the induced recharge becomes baseflow after approximately 55 days, reaching a peak contribution to baseflow of approximately 90% of the recharge after approximately 200 days. Contribution to baseflow appears to follow a



slightly bimodal pattern, based on the different tributary reaches receiving benefit. Based on the range of aquifer travel times, the recharge benefit to baseflow occurs year-round, as shown in Figure 6-2 and Figure 6-3. Under both the continuous and seasonal recharge scenarios, the greatest dry season benefit occurs in August, while other summer season benefits remain relatively consistent from month to month between April and November. The earliest travel time of the recharge within the groundwater system was estimated at approximately 6 to 12 months based on the average hydraulic gradients and aquifer properties, and 1 to 3 months based on the modeling results. The transport of recharge within the groundwater system is dependent on seasonal and year-to-year changes in aquifer hydraulic gradients. Based on the modeling results, all reclaimed water recharging the aquifer system eventually becomes 1) base flow to the Grovers Creek system, 2) discharge to Appletree Cove, or 3) after a period of approximately 30 years of mixing and transport in the groundwater system, captured by one pumping well (KPUD Well 6). Based on the modeling results, the proposed recharge alternatives have little potential for transport to drinking water sources or other sensitive receptors.

The Hydrogeologic Site Characterization Report is included in Appendix D. The groundwater modeling methodology and results are provided in Appendix H, including the supplemental analysis of aquifer travel time. Results of the hydrogeologic characterization demonstrate that groundwater recharge and stream flow augmentation is feasible, and the proposed recharge alternative is outside of the influence of other groundwater wells, including shallow domestic-use wells in the area.

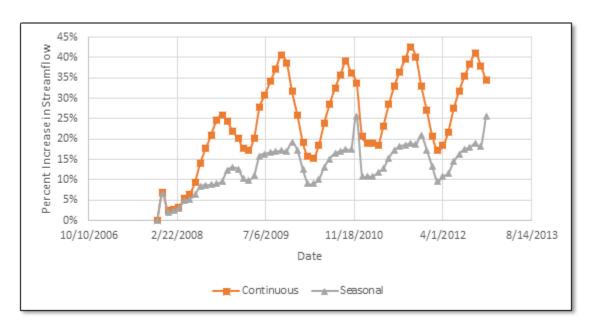


Figure 6-2. South Fork Grovers Creek at Confluence with Mainstem Grovers Creek

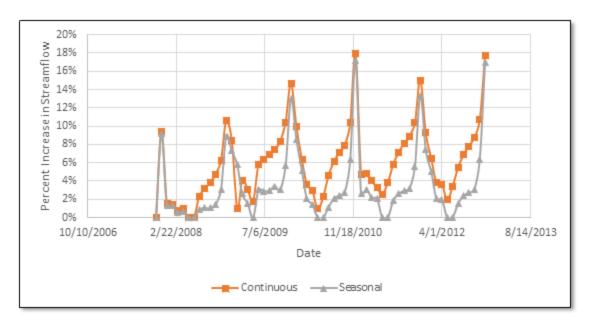


Figure 6-3. Mouth of Grovers Creek at Appletree Cove

# 6.5 Beneficial Use Business Case Evaluation Analysis and Results

A BCE was used to further analyze beneficial-use Alternatives 1, 2, and 3 resulting from the screening analysis discussed in Section 6.2.1, incorporating the treatment option selected in Section 6.3 for each alternative. The capital cost and life-cycle cost presented as a net present value (NPV) are presented in Figure 6-4. The capital cost is based on construction during 2021 and 2022. Life-cycle costs assume the reclaimed water system is operating through 2040.

As shown in Table 6-2, Alternative 3 requires nitrogen removal when the recycled water is being infiltrated (see Section 6.3.1). For Alternatives 1 and 2, it was also assumed that nitrogen removal would be required in 2030 because of new permit requirements based on concerns about DO concentrations in the Puget Sound. Therefore, all three alternatives require nutrient removal, but the timing of implementation effects the NPV. The capital cost difference between Alternatives 2 and 3 is a result of the estimated cost for the infiltration basins and additional pipeline (1,650 feet) to extend to the infiltration galleries.

There are several considerations for the operations and maintenance (O&M) costs. Alternative 1 includes costs for purchasing potable water by the WHGC. Alternative 1 also assumes that KPUD (which provides potable water to WHGC) increases potable water costs at an annual rate of 2 percent per year. Alternative 2 has additional treatment and monitoring and compliance costs for 150 days (the summer period) when reclaimed water is produced for irrigation at WHGC. Alternative 3 assumes year-round treatment with increased nitrogen removal outside of the summer season when reclaimed water is used for infiltration.

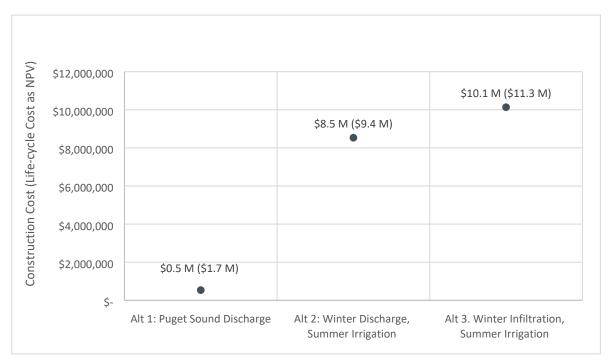


Figure 6-4. Beneficial Uses BCE results

As indicated earlier, significant support was expressed for Alternative 3 based on the multifaceted benefits that this alternative provides to area streams, the aquifer, and Puget Sound. The BCE results reinforced this preference by major stakeholders because the additional cost for infiltration was considered relatively nominal for the benefits that are described in Section 7. Therefore, the preferred alternative for implementation is Alternative 3.

# 6.6 Conveyance Alternatives

This section outlines the conveyance alternatives to route reclaimed water to WHGC (applicable to both Alternatives 2 and 3). Three conveyance route alternatives were identified and determined to be viable in the *Kingston Recycled Water Project* Report (BC 2016). All three alternatives (Alternatives 2, 3, and 4 in **Error! Reference source not found.**) use the existing Spine Line Trail for the first 60 to 70 percent of the conveyance route starting at the Kingston WWTP. The route then diverges along separate trails (Alternatives 2 and 3) or cuts through forested area (Alternative 4). At the time of development of the BC 2016 report, Alternative 2 was selected as the baseline option for further analyses because it maximized construction along trails that will be widened and paved in the future as part of the Kitsap County Parks Department's efforts to extend its trail network.

The present planning analysis added a fourth alternative that maximizes use of power line right-of-way (Alternative 1 in Figure 6-5). The present planning analysis reviewed all four conveyance alternatives with respect to environmental impacts (see Section 2.3) and timing with Parks Department trail revitalization efforts. The environmental review did not identify a significant difference in impact among the four alternatives. Furthermore, the Parks Department plans for the trail network are not yet at a level where conveyance improvements can be scheduled to maximize the benefit of planned paving activities.

Further analysis of the conveyance alternatives will be performed in subsequent design analyses, including coordination with the Parks Department. For the present analysis, Conveyance Alternative



1 was selected as the basis for cost estimates because it utilizes more power line right-of-way should trail improvement coordination prove infeasible and provides a conservatively higher cost because of its length.

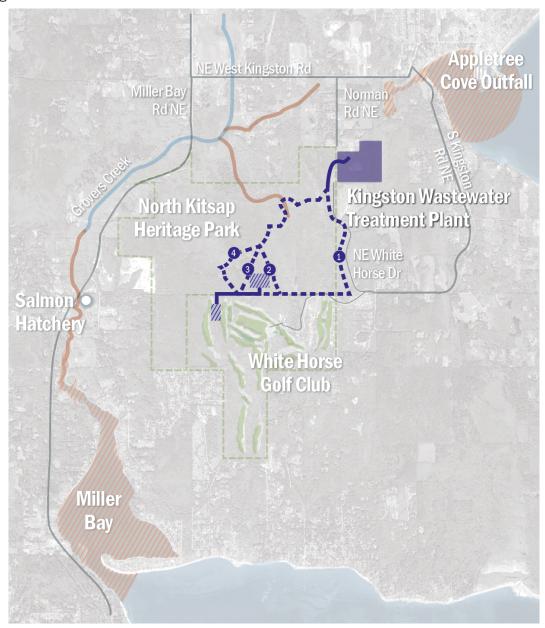


Figure 6-5. Conveyance alternatives

## **Section 7**

# **Recycled Water Project Benefits**

The proposed Project represents a unique opportunity to achieve new, far-reaching benefits for multiple stakeholders. Wastewater would be further treated, recycled, and managed as a valuable resource rather than treated and disposed of as a waste product. This water management approach represents a fundamental shift in how wastewater is managed on the Kitsap Peninsula, deriving multiple benefits while eliminating a direct discharge to Puget Sound.

Seldom do the technical and stakeholder elements of a project all align for a "win-win" situation. This section describes the exceptional geographic and stakeholder setting that makes this Project a distinctive and rare opportunity with immediate and long-term benefits for the region.

# 7.1 Current Approach to Water Resource Management

As Figure 7-1 shows, water on the Kitsap Peninsula is pumped from a limited groundwater source and used for potable and non-potable uses, such as landscape and lawn irrigation. Under this current water management approach, the portion of pumped water that ultimately gets treated at Kingston WWTP as wastewater is "lost" from the watershed once it is discharged to Puget Sound. This discharge to Puget Sound occurs year round and includes nutrient and pollutant loadings, even though Kingston WWTP successfully meets or exceeds permit requirements. Over time, this current practice will impact Puget Sound water quality and the availability of the limited potable water supply, because freshwater resources are being exported out of the watershed. This practice does nothing to address the low stream flows in the area. Furthermore, nutrients will continue to be discharged into Puget Sound, not on lawns where they can be beneficially used.

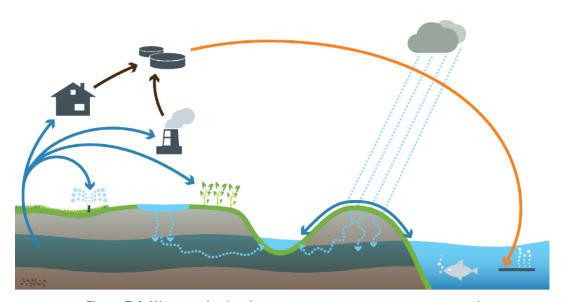


Figure 7-1. Water cycle showing current water management approach

All water resource usages are taken from groundwater and then, after treatment, a significant portion is "lost" into Puget Sound.



# 7.2 Pressure on Our Water Supplies and Environment

The long-term impacts of this current water management practice on water supply and water quality are a concern, especially when considering factors such as population growth, effects of climate change, pollutant accumulations, and the possibility of saltwater intrusion into the aquifer. A shift to a sustainable water management approach is needed to consider the multifaceted nature and value of water, and to preserve a resilient/reliable water supply and environmental quality as fundamental community assets.

There is a better way of doing things—where we treat all water as a resource.

# 7.3 Treating Water as a Resource

The proposed Project is an important element of a more holistic water resources management approach in the region (Figure 7-2). This Project is also a direct outgrowth of Kitsap County's Water as a Resource Policy (Kitsap County Resolution 109-2009) (Kitsap County 2009). Irrigation of WHGC during the summer and groundwater infiltration north of WHGC during other times of the year is the beneficial use considered for the Project.

This option provides significant and tangible benefits relative to the current water management approach—serving as an example of sustainable 21st century water resources management.

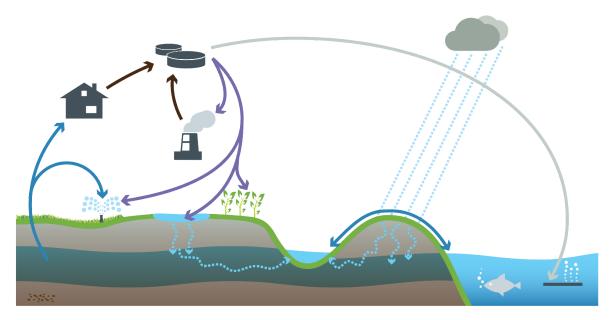


Figure 7-2. Water cycle showing proposed holistic water resources management approach

Freshwater resources are largely recycled in the watershed and water is treated as a resource.

Moreover, one unique aspect of this Project is the strong partnership between Kitsap County and the Suquamish Tribe. Beginning at the initial planning stages, these two entities have collaborated to assess the feasibility and benefits from this Project. They also have a history of successfully partnering to improve the community including:

- Augusta Avenue stormwater replacement project
- Totten Road pedestrian path
- Suquamish Way and Division Street intersections and traffic lights



Trail paving within WHGC of pedestrian path between Kingston and Indianola.

Beyond the strong stakeholder partnerships, the Kingston geography from a logistics and hydrogeology viewpoint is highly conducive to implementing a recycled water program. The relatively short distance from Kingston WWTP to WHGC, of less than 2 miles, minimizes the conveyance needed to distribute recycled water for irrigation. Furthermore, the ideal locations for infiltration are in the general WHGC area, so conveyance infrastructure needed for irrigation can also be used to accomplish winter infiltration. Often a significant "purple pipe" system is needed to distribute recycled water to willing users but, in this case, a single conveyance pipe from Kingston WWTP to WHGC addresses most of the infrastructure needed to serve the identified beneficial end uses. The proximity of a significant recycled water user at WHGC coupled with the Tribe's strong advocacy and commitment for recycled water use make this an ideal situation for efficiently and effectively implementing a recycled water Project.

The proposed Project supports many goals of the community including:

- Conserve limited groundwater resources
- Divert nutrients away from the marine environments and to where they are needed
- Restore and replenish streams and fish habitats: Grovers Creek
- Enhance marine life ecosystems
- Engage the community about our critical water resources
- Create a community asset and maintain a healthy economy

### 7.4 Conserve Limited Groundwater Resources

Using the right water for the right use would reduce withdrawals of potable water used for landscape irrigation from the confined groundwater aquifer. The Kitsap Peninsula is essentially an "island," surrounded by salt water with little freshwater sources other than direct rainfall to recharge local aquifers and surface water impoundments. More than 80 percent of the potable water being used in Kitsap County comes from groundwater—a percentage that will increase in the future as new surface water sources are limited.

Currently, irrigation water for WHGC is purchased from KPUD and is sourced from groundwater wells in the area that pump from the sea-level aquifer. The sea-level aquifer is widely used and mostly confined (USGS 2014). Therefore, the quantity of usable groundwater is limited and, eventually, as the local demand for groundwater supplies increases, this water source could decline because it is not being adequately replenished.

Additionally, with increased withdrawals from the sea-level aquifer, there is a concern of saltwater intrusion and the associated impacts to groundwater quality over time. There is no evidence of extensive seawater intrusion in the county, but localized seawater intrusion is found in a few areas such as Jefferson Beach in the Kingston sub-area (Ecology 1997). Climate change impacts further compound these issues. Rainfall is projected to be increasingly intense and to result in a greater portion of the precipitation leaving the system directly into Puget Sound as runoff. Additionally, longer and hotter summers from climate change impacts will result in a greater water demand over time, putting even greater stress on the finite potable water supply.

WHGC is located close to Kingston WWTP and the Tribe is strongly advocating for recycled water irrigation. WHGC currently uses approximately 29 MG of water to irrigate the golf course annually (based on historical irrigation data from 2015 to 2017). This annual water usage equates to the volume of filling 44 Olympic-sized swimming pools; with this same water volume, one could fill a skyscraper that is 100 feet long, 100 feet wide, and 360 feet tall. As climate change increases



temperatures and evapotranspiration in the region, the kind of drought that was observed in 2015 is likely to occur more frequently and water demand for irrigation is expected to increase.

During the irrigation season, peak day water demands approach 0.5 MG. During peak irrigation periods, daily demand can exceed KPUD's delivery capacity and the system must rely on existing storage to buffer the peak irrigation flow. Delivery of recycled water to WHGC would preserve 29 MG per year of potable water from KPUD's groundwater supply system and eliminate the stress to the supply system imposed by dramatic swings in potable water system demands during the irrigation season.

Following this recycled water approach, each source of supply would be allocated to its highest and best use, enhancing regional sustainability and providing good stewardship of our precious resources with the following outcomes:

- Decrease the irrigation demands from the regional aquifer system and thereby preserve groundwater supply for future potable uses
- Decrease the risk of saltwater intrusion within the regional sea-level aquifer
- Extend the useful life of existing potable water infrastructure

An example of a utility that transitioned from relying solely on groundwater to using more renewable water resources is the Albuquerque Bernalillo County Water Utility Authority (Albuquerque). Prior to implementation of the Water Resource Management Strategy, groundwater in the Middle Rio Grande was declining an average of 1 to 3 feet per year. To diversify water supply, Albuquerque developed two reuse and reclamation projects, providing non-potable water for most of the large irrigated turf. Albuquerque has one operating infiltration project and is designing a large-scale injection project. Since 2008, groundwater levels in the aquifer have continued to rebound and have increased by as much as 10 feet throughout the region. Figure 7-3 highlights how groundwater withdrawals have decreased with population growth. Creating and maintaining a groundwater drought reserve using diversifying water supplies has led to a complete reversal in the groundwater aquifer (Albuquerque 2013).

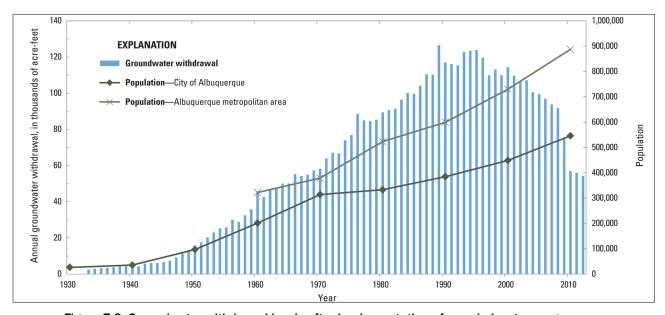


Figure 7-3. Groundwater withdrawal levels after implementation of recycled water program

Source: Albuquerque 2013.

# 7.5 Divert Nutrients Away from the Marine Environment and to Where They Are Needed

Nitrogen and phosphorus are essential to plant growth. Fertilizer (often produced using petroleum) is commonly applied to golf courses, gardens, farms, and landscaped areas to maintain healthy plant communities. However, too much nitrogen and phosphorus in our water bodies causes excessive aquatic plant growth, which ultimately reduces DO concentrations. Excessive aquatic plant growth can lead to a wide range of ecological problems and reduce or preclude human uses such as swimming, fishing, shellfish harvesting, and water supply.

The proposed Project would virtually eliminate the direct discharge of nutrients to Puget Sound (the existing Kingston WWTP outfall would be used only intermittently to "exercise" the outfall and keep it operational for emergency situations until such time that a year-round land application or storage site is identified). As a result, the potential negative impacts of excess nutrients on marine life would be avoided and instead, nutrients would be beneficially used as a fertilizer for irrigation purposes during the summer or irrigation season.

Phosphorus is a finite material. In the United States, domestic phosphorus reserves will likely be depleted within 25 years, which will drive up fertilizer costs (Stewart et al. 2005; Jasinski 2010).

Under the irrigation alternative, during the WHGC irrigation season, Kingston WWTP would "turn off" the nutrient removal treatment processes so more of the nutrients would pass through Kingston WWTP and serve as fertilizer in the recycled water for WHGC. The irrigation option could not only reduce operating costs for Kingston WWTP (to avoid nutrient removal treatment), but it would also reduce fertilizer use and costs for WHGC.

More than 2,300 golf courses in the United States use recycled water for irrigation to take advantage of these types of benefits. Recycled water accounts for 25 percent of total golf course irrigation use in the United States (GCSAA 2015), including world-class golf courses such as Pebble Beach in California. Recycled water is also used to irrigate landscapes at Disney theme parks.



Figure 7-4. Golf courses are ideal examples of using recycled water for irrigation

Source: Willows Run Golf Course 2018

Puget Sound area recycled water irrigation examples include the Tumwater Valley Municipal Golf Course, which is irrigated with recycled water provided by the LOTT Clean Water Alliance. Starfire

Sports (the Seattle Sounders' practice center), Willows Run Golf Course (the largest user of recycled water in the Pacific Northwest), and TPC Snoqualmie Ridge Golf Course are all irrigated with recycled water provided by King County. When the Willows Run Golf Course switched to recycled water (see Figure 7-4), it reduced its fertilizer application by 50 percent (*Redmond Reporter* 2015). King County estimated that by reducing application of fertilizer, the Willows Run Golf Course took the equivalent of seven cars off the road (King County 2018a). The Willows Run Golf Course became Salmon-Safe certified after switching to recycled water (salmonsafe.org 2018). The certification inspires a new level of environmental innovation in golf course management with respect to protection of urban water quality and preservation of imperiled West Coast salmon through controls of fertilizer and chemical use and preservation of salmon habitat. Washington State has three Salmon-Safe certified golf courses: Willows Run, Salish Cliffs, and Druids Glen.

# 7.6 Restore and Replenish Streams and Fish Habitats: Grovers Creek

Through the infiltration component of the Project, aquatic habitat in Grovers Creek would be improved. Grovers Creek supports Chinook, chum, and coho salmon and steelhead, and cutthroat trout. The Tribe has a fall Chinook and chum hatchery near the mouth of the creek, which ultimately flows into Miller Bay. The Project would improve habitat in Grovers Creek and Miller Bay by recharging the aquifer that feeds the creek, increasing the flow of cool, clean water.

Ecology's 2016 Washington State Water Quality Assessment (Ecology 2016) placed Grovers Creek in the following categories:

- Category 5 (polluted water that requires a TMDL because of low D0 concentrations.
- Category 4-B (polluted, but has a pollution control that is expected to solve the problem) because of elevated fecal coliform concentrations. Kitsap County's Pollution Identification and Correction (PIC) program is expected to reduce fecal bacteria concentrations in the creek.
- Category 2 ("water of concern") because of elevated temperature and turbidity.

Like many streams in the Puget Sound lowlands, Grovers Creek suffers from insufficient baseflow during the dry season. Flow often falls below 2 cubic feet per second (cfs), which is the minimum instream flow for Grovers Creek established in state regulations (WAC 173-515-030) (Washington State Legislature 2003). Golder (2010) reported summer flows as low as 1 cfs in August 2005.

The hydrogeologic conditions near WHGC, NKHP, and the surrounding Grovers Creek watershed are ideal" for infiltration. Appendix D describes the hydrogeologic conditions of the area.

The proposed irrigation and infiltration alternative assumes summer season irrigation at WHGC and infiltration the remainder of the year. Based on the 2013–17 period of record for WHGC, irrigation demands occur from May through September. During this period all recycled water produced at Kingston WWTP will be used for irrigation.

The proposed Project would infiltrate about 107 MG per year of highly treated recycled water into the shallow aquifer that provides baseflow to Grovers Creek and its tributaries (Figure 7-5). Assuming an average infiltration volume of 0.3 mgd (107 MG per year divided by 365 days), the Project could increase baseflow in Grovers Creek by roughly 0.5 cfs. The location of the infiltration facility would determine the specific creek reaches that receive the additional baseflow. Ongoing field investigations and groundwater modeling should enable a more accurate estimation of baseflow benefits from infiltration of recycled water.

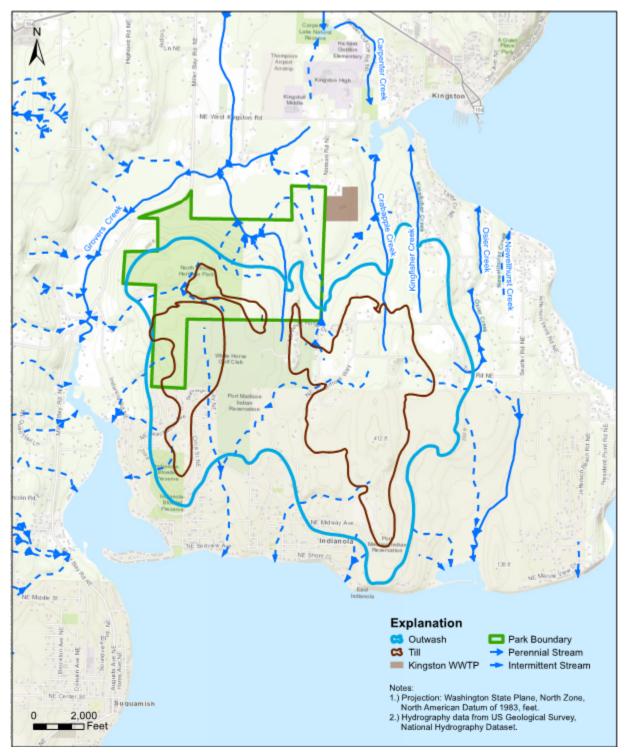


Figure 7-5. Groundwater infiltration area will serve to replenish nearby streams

In general, increasing baseflow in Grovers Creek through infiltration would provide multiple benefits:

- More baseflow would increase the amount of physical habitat available for fish, insects, and
  other aquatic life. Increasing the depth of pools and the width of the stream would provide more
  habitat for salmonid rearing and more wetted area for growth of aquatic prey for juvenile
  salmonids. Increased baseflow may also aid adult salmon returning to the stream in the fall and
  winter months.
- As the recharged water travels through the soil, it will undergo natural cooling and additional
  vadose zone adsorption and biological treatment before emerging as baseflow in Grovers Creek.
  The increased discharge of cool groundwater would reduce water temperatures in Grovers
  Creek, which the Washington State Water Quality Assessment identified as a "water of concern"
  because of elevated temperature (Ecology 2016). The Grovers Creek hatchery relies on the
  stream to supply water for holding adult salmon to maturity, when water temperature is critical
  prior to spawning.
- Reducing creek water temperatures would help increase D0 concentrations because cool water
  can hold more D0 than warm water. The Washington State Water Quality Assessment listed
  Grovers Creek and Miller Bay as "polluted" because of low D0 (Ecology 2016); therefore,
  measures that increase D0 would be very beneficial.
- Increased baseflow would help to reduce fecal coliform and toxic pollutant concentrations in Grovers Creek and Miller Bay. Grovers Creek has been listed as "polluted" because of high fecal coliform concentrations (Ecology 2016). The baseflow would have very low concentrations of fecal coliform bacteria because the recycled water would be disinfected before entering the recharge basin and it would receive additional natural treatment as it moves through the soil. Consequently, the increased baseflow would help to dilute the fecal coliform concentrations in Grovers Creek. The groundwater discharge would also help to dilute toxic pollutants from road runoff, which has been identified as a likely cause of pre-spawn mortality for coho salmon.

A successful regional example of improving stream flow through infiltration is LOTT's Martin Way Reclaimed Water Plant. Class A recycled water is infiltrated near the headwaters of Woodland Creek in the city of Lacey, with the purpose of recharging groundwater that provides base flows to Woodland Creek. Infiltrating 1.3 mgd during dry months (summer) and 0.3 mgd during wet months (winter) was predicted to increase Woodland Creek flow by 66 percent of the summer infiltration rate and 85 percent of the winter infiltration rate (City of Lacey 2010). Woodland Creek provides critical habitat for Chinook salmon, as well as coho, chum, winter steelhead, and sockeye salmon. The Woodland Creek Groundwater Recharge Facility received the 2014 Excellence in Engineering Award from the American Water Works Association's Pacific Northwest Section (City of Lacey 2014).

# 7.7 Enhance Marine Life Ecosystems

As described above, the Project would virtually eliminate the direct discharge of treated effluent to Appletree Cove and Puget Sound and effectively reduce nitrogen loads by an estimated 3,300 lbs/yr in 2018 and 6,800 lbs/yr in 2040. This is aligned with the State's initiative to clean up and restore Puget Sound. By eliminating direct discharge to Puget Sound, the Project would provide a wide range of environmental benefits:

• Improved fish habitat: The proposed Project would help increase DO concentrations in Appletree Cove and Miller Bay. Low DO concentrations have caused fish kills in areas with limited water circulation like Hood Canal. The Washington State Water Quality Assessment identified Appletree Cove as a "water of concern" because of low DO (Ecology 2016).



By reducing the nitrogen load to Puget Sound, the Project would help avoid overpopulation of phytoplankton (floating, microscopic plants) and zooplankton (small animals that eat phytoplankton). When the phytoplankton and zooplankton die, they settle to the bottom, where they are decomposed by bacteria that consume DO from the water column (Dunagan 2018b). This process can create areas where DO concentrations are too low to support fish and other marine life.

The Project would also help protect eelgrass, kelp, and other plant species important to Puget Sound salmon, crab, and other marine life. The 2016 Washington State Water Quality Assessment listed Appletree Cove as impaired by excessive growth of ulvoid algae and reduced eelgrass beds associated with human causes (Ecology 2016). The Project would reduce the nitrogen loads that can cause plankton to become so dense that it blocks sunlight and limits the growth of eelgrass and kelp.

Reducing the nitrogen load would also help to avoid shifting the plankton composition to favor species that herring and other forage fish do not eat (Dunagan 2018a). Therefore, the Project would help protect the food supply for salmon, birds, and other species.

- Improved shellfish habitat: By reducing nitrogen loads, the proposed Project could also help to reduce ocean acidification, which harms shellfish and other marine organisms that need calcium carbonate to form their skeletons and shells. Decomposing algae release carbon dioxide (CO<sub>2</sub>), which dissolves to form carbonic acid, which in turn reduces carbonate ion concentrations in the seawater. This makes it harder for oysters and other shellfish to form shells. Climate change is causing increased ocean acidification as roughly 25 percent of CO<sub>2</sub> in the atmosphere is being adsorbed into oceans (Peabody 2018). A 2-year ocean acidification monitoring program completed by the Puget Sound Restoration Fund (PSRF) (in partnership with the National Oceanic and Atmospheric Administration [NOAA], University of Washington, Taylor Shellfish, Baywater, Inc., Pacific Shellfish Institute, and Pacific Coast Shellfish Growers Association) in 2010 indicates that ocean acidification is contributing to changing seawater chemistry in Puget Sound (PSRF 2011). The study also found that mechanisms driving more acidic conditions including human-driven activities, such as nutrient loading, were amplifying the effects of changing water quality conditions in Puget Sound (PSRF 2011).
- Decreased shellfish toxicity: Excess nitrogen can trigger blooms of algal species that release toxic substances, such as domoic acid. These substances can cause illness or death in people or animals eating shellfish from the affected waters. They can also be harmful to animals that are directly exposed to the toxins in the water column. The Project would help reduce the potential for shellfish toxicity associated with excessive nitrogen loading.

The Project could also contribute to reducing shellfish harvesting restrictions triggered by elevated fecal coliform bacteria concentrations in Miller Bay. Miller Bay has been closed for shellfish harvesting because of fecal pollution and marine biotoxins (Health 2018b). The Project would provide higher wastewater treatment, which would further reduce fecal coliform concentrations in the produced wastewater. The Project would also increase the discharge of clean groundwater discharge into Grovers Creek, diluting fecal coliform present in the creek. The increased stream flow would also help to improve flushing of Miller Bay. As an example of the benefit to water quality, after removal of a WWTP discharge into Hood Canal by KPUD, 90 acres of shellfish harvesting were opened (*Kitsap Sun* 2017). Although it is not expected that increasing Grovers Creek stream flow would open the bay for shellfish harvesting, it could be an important component of a broader strategy to improve water quality in Miller Bay. Friends of Miller Bay has indicated support for the concept of increasing flows in Grovers Creek.



Proactive regulatory compliance: Reducing the nitrogen load from WWTPs is a high priority for Ecology because wastewater effluent is the largest local human source of dissolved inorganic nitrogen to Puget Sound (Ecology 2018). Future discharge permits for Kingston WWTP will likely include stringent nutrient limits that would require costly Kingston WWTP upgrades. Failure to meet permit limits can trigger fines and increase the risk of third-party lawsuits. These costly nutrient removal upgrades would reduce the nutrient discharge only; they would not address any water supply concerns through a full recycled water project. The Project provides a unique opportunity to avoid prescriptive future permit requirements and protect local water resources in ways that provide additional benefits and align with the values and priorities of the local community. The LOTT Clean Water Alliance's Hawks Prairie recycled water recharge facility has provided similar benefits (Figure 7-6).

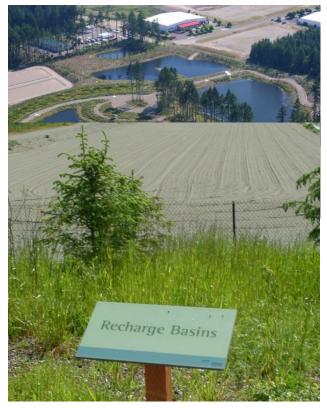


Figure 7-6. The Hawks Prairie recycled water recharge facility helped the LOTT Clean Water Alliance avoid costly nitrogen permit limits while providing multiple benefits

Reduce loads of other constituents: In addition to eliminating the direct discharge of nitrogen and BOD, the Project would eliminate the direct discharge of other constituents, such as pharmaceuticals and personal care products (PPCPs), that could affect human and ecological receptors. Recently mussels in Puget Sound tested positive for prescription opioid oxycodone, along with containing synthetic surfactants, antibiotics, and antidepressants (CNN 2018). However, concentrations were quite low; for example, a person would need to eat 150 pounds of mussels to get even a small dose (CNN 2018). Research is ongoing to understand the impact to mussels and other aquatic life. According to Jennifer Lanksbury, a WDFW biologist, a significant source of these pharmaceuticals is from people flushing their drugs down the toilet. A benefit of the Project is that the enhanced treatment required to produce recycled water can also remove 30 to greater than 80 percent of EDCs and PPCPs (Wang et al. 2005; Lubliner et al. 2010) that would otherwise enter sensitive marine environments.

The Project would include aquifer recharge through an infiltration basin, which would provide additional treatment (as shown in the schematic in Figure 7-7). After seeping through the bottom of the basin, the highly treated (Class A) water would undergo SAT, which provides multiple barriers for protecting surface water and drinking water. The infiltration interface provides the first barrier. In this first zone, recycled water is filtered by the recharge basin bedding materials. In addition to providing additional filtration, the surfaces of the soil particles provide binding sites for multiple constituents. Phosphorus, for example, is readily adsorbed by the common iron-based minerals in soil. Next, the downward migration of recharge water through the unsaturated, or vadose zone that provides a percolation barrier. The percolation barrier provides constituent reduction and removal through aerobic degradation, and additional sorption. After moving through the unsaturated zone, the recharge water interfaces with the regional groundwater flow system. The groundwater system provides a mixing and transport barrier. Within the zone of mixing and transport, anaerobic degradation occurs, as well as additional sorption. Other aqueous geochemical reactions may occur in the mixing and transport zone as the recharge water equilibrates with the regional flow system.

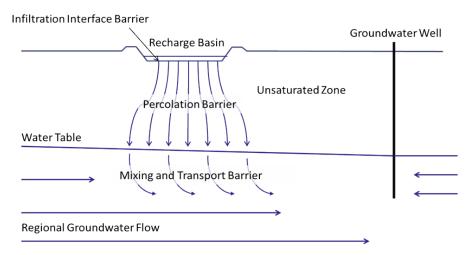


Figure 7-7. Groundwater infiltration through recharge improves stream flow and SAT provides multiple barriers for protecting surface water and groundwater

The efficacy of SAT for the removal of common constituents of concern as well as trace compounds such as PPCPs and other EDCs has been studied at several sites where managed aquifer recharge projects have been established. Many of these facilities have been in operation for more than 50 years, with the focus of providing managed aquifer recharge using recycled water as a vital mechanism for sustaining drinking water supplies (e.g., Orange County's Groundwater Replenishment System). These long-established facilities have been the subject of much research in the industry. Within the last 5 to 10 years, studies have shown that SAT is a reliable method for removing a broad range of constituents, including those classified as "emerging contaminants." Many studies report removal efficiencies ranging from 50 to 80 percent for constituents like antidepressants, beta blockers, insect repellant, tranquilizers, antibiotics, anti-epileptics, nonsteroidal anti-inflammatory drugs (NSAIDs), lipid regulators, and flame retardants (Dickenson et al. 2008; WERF 2006).

A study on Oahu investigated the use of recycled water instead of groundwater for landscape irrigation. Concerns over aquifer protection, resulting from historical use of agricultural pesticides that have caused groundwater contamination, was the motivation for the study that evaluated water quality differences between irrigating with recycled water and groundwater. Concentrations of microconstituents in potable water aquifers under recycled water irrigated lands did not change drastically, even where irrigated recycled water had higher concentrations of organic compounds



than the well water (Crites et al. 2006). This study represents the potential worst-case scenario conditions for transmission of soluble constituents downward. It was found that nearly all attenuation of microconstituents occurs in the top layers of soil where biological activity in the aerobic zone leads to decomposition (Crites et al. 2006), and the authors found that irrigation posed no water quality risk to groundwater.

# 7.8 Engage the Community About Our Critical Water Resources

The Project would represent a transformative shift from the traditional "waste treated and discharged to Sound" approach to a "resource recovery" approach. With this Project, the community is not just reacting to regulatory requirements, but is taking the initiative to produce recycled water and use it as an integral part of the near- and long-term water supply management plan for the area (i.e., use it as a valuable resource). Kitsap County established a Water as a Resource Policy in 2009 to further this cause (Kitsap County 2009).

Community education, particularly at the grade school level, is critical to demonstrating the values of the region and highlighting how agencies are acting as stewards of the environment. This Project would allow the County and stakeholders to showcase the importance of preserving the area's water supply and water quality for future generations. Without a venue or showcase project for this type of communication, the message is less tangible and meaningful to residents and children, who will be charged with being stewards of our future water resources and this special ecosystem. This Project would provide a range of opportunities to inform the public about how the Project benefits the environment, public health, and local economy. For example:

- Signs at WHGC would inform golfers about the recycled water irrigation system and its benefits (e.g., reduced demand on the limited potable water supply, reduced fertilizer use, no direct discharge to Appletree Cove).
- Signage and/or kiosks at NKHP and the Tribe's Grovers Creek fish hatchery and Cowling Creek Center facilities could inform visitors about the Project and its environmental benefits. The park and tribal facilities could be places to take school-age kids and educate them about our environment. The LOTT Clean Water Alliance has created a similar educational program, as shown in Figure 7-8.
- A public engagement component at Kingston WWTP could inform and encourage tour groups. As
  an example, King County's Brightwater WWTP includes an Education and Community Center to
  "educate and motivate the public to environmental stewardship and build community," as shown
  in (King County 2018b).
- The Kitsap County and stakeholder websites could provide a wide range of information about the Project, its uses in the region, and its benefits.



Figure 7-8. Community outreach examples

Left: Public education is an important component of the LOTT Clean Water Alliance's recycled water program.

Right: King County's Education and Community Center is a resource for the community

# 7.9 Create a Community Asset

Water is life and a critical aspect of a vibrant region and healthy economy. Having a long-term and sustainable plan to supply water to the community is important to:

- Maintain economic prosperity
- Keep long-term costs down for water resource management
- Retain and attract new business to the region

Using water for its "highest and best use" and planning for future resilience keeps long-term costs down for water resources management and controls utility rates. Businesses (and ratepayers) are interested in controlled utility rates, so by planning ahead and investing in resilient supplies, the County will not be forced into emergency investments (and corresponding drastic utility rate spikes) in the future. Making these investments now in a thoughtful and strategic manner will result in the maximum environmental and financial benefit to the area for long-term value.

The City of Nampa, Idaho, recently studied the potential economic benefits of generating Class A recycled water for reuse. The study concluded that the availability of Class A recycled water could help attract new businesses and retain existing businesses, providing substantial economic benefits from more jobs, labor income, and property tax revenue (ECONorthwest 2016).

#### 7.10 Conclusion

The County, Tribe, and other stakeholders are excited to embark on this unique opportunity. Through previous stakeholder outreach efforts, unanimous and enthusiastic support has been expressed for advancing the Project and realizing the multiple benefits that are anticipated from this Project. This Project is a microcosm of the broader goal where Tribal and State government partnerships are coming together to support these agencies' and organizations' initiatives. These actions are also in alignment with the broader goals of Ecology, Governor Jay Inslee's Shellfish Initiative, West Central Local Integrating Organization, and the Puget Sound Partnership's Strategic Initiatives to:

- Prevent pollution from stormwater
- Protect and restore habitat
- Recover shellfish beds

A transformative shift in the area's approach to water management from "waste treated and discharged to the Puget Sound" to "treating water as a resource" is feasible given the unique



geographic and stakeholder characteristics of the Project. And with this shift would come a community asset that would offer immediate and long-term benefits for the Kingston area.



## **Section 8**

# Recommended Recycled Water Facilities

This section summarizes the key features of the recommended recycled water facilities.

# 8.1 Recycled Water Quality Design Criteria

Recycled water quality design criteria are based on the Reclaimed Water Rule adopted by Ecology on January 23, 2018 and given in WAC 173-219. This rule applies to all existing and proposed facilities that are or will be designed, constructed, operated, and maintained in the state of Washington to generate, distribute, and/or use recycled water. Two different classes of recycled water are defined: Class A and Class B. For landscape irrigation with direct or indirect public access (such as in a golf course), Class A recycled water is required, while for indirect groundwater recharge (through surface or subsurface percolation or vadose wells), either Class A or B recycled water is required. Recycled water production at Kingston WWTP will meet the Class A requirements for all anticipated uses.

Treatment methods for Class A recycled water include biological oxidation, followed by coagulation, filtration, and disinfection, demonstrating a 4-log virus removal or inactivation. In lieu of coagulation and filtration, membrane filtration could be employed. At Kingston WWTP, biological oxidation will be achieved in the current oxidation ditch extended aeration system. The performance standards for Class A recycled water are given in Table 8-1.

$\begin{array}{c c} & & & & & \\ \hline Parameter & & & & \\ BOD_5 & & & & \\ CBOD_5 & & & & \\ TSS & & & & \\ \hline \end{array}$	Weekly Average 45 mg/L 40 mg/L 45 mg/L	
BOD <sub>5</sub> 30 mg/L CBOD <sub>5</sub> 25 mg/L	45 mg/L 40 mg/L 45 mg/L	
CBOD <sub>5</sub> 25 mg/L	40 mg/L 45 mg/L	
<u> </u>	45 mg/L	
TSS 30 mg/L		
	0 ()	
pH 6 (min)	9 (max)	
Coagulation/Filtration (applic	cable for sand filtration)	
Parameter Monthly Average	Sample Maximum	
Turbidity 2 NTU	5 NTU	
Disinfecti	on	
Parameter 7-day Median	Sample Maximum	
Total coliform 2.2 MPN/100 mL or CFU/	100 mL 23 MPN/100 mL or CFU/100 m	
Virus removal	4-log removal or inactivation	
Denitrificat	ion <sup>a</sup>	
Parameter Monthly Average	e Weekly Average	
Total nitrogen 10 mg/L	15 mg/L	

a. Applicable only for release to wetlands, surface water augmentation, and groundwater recharge.



The disinfection requirements can be achieved by chlorination, UV light treatment, or other processes demonstrated to be equivalent to or better than chlorination or UV light treatment. For UV disinfection, the treatment process is to meet the criteria given in *Ultraviolet Disinfection Guidelines* for *Drinking Water and Water Reuse* published by the National Water Research Institute (NWRI), which includes the UV dose of 100 mJ/cm² described in Section 6.3.3.

# 8.2 Design Overview

The recycled water system is designed for a capacity of 0.7 mgd (representing the predictions for 2040 peak day flow). The recycled water system consists of the following components:

- Modifications to the existing oxidation ditch
- E0 tank
- Filter feed pumps station
- Tertiary filtration
- UV disinfection followed by sodium hypochlorite addition for recycled water distribution system residual
- Recycled water pump station
- Recycled water pipeline

A process flow schematic for the proposed recycled water system is shown in Figure 8-1. Recycled water would be produced year-round with the goal to have limited discharge to Puget Sound.

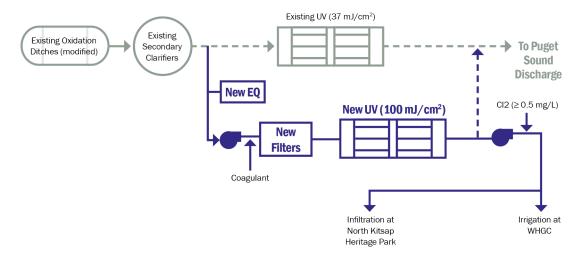


Figure 8-1. Recycled water facilities process flow schematic

## 8.2.1 Facilities Layout

Figure 8-2 shows the preliminary layout of the recycled water facilities within Kingston WWTP. The layout shows in blue new or retrofitted facilities as well as new major yard piping on the Kingston WWTP site. The new filters, UV channel, and equipment building would be located on the west side of the site, next to the secondary clarifiers. A new final effluent pipe would carry effluent from the recycled water pump station to the outfall when needed. The layout provides space for any future advanced processes to meet more stringent requirements, mainly related to removal of organic chemicals that are not readily removed in secondary treatment and sand filtration. It is assumed that the future processes would include ultrafiltration (UF), reverse osmosis (RO) and advanced oxidation process (AOP).

Section 8 Kingston Recycled Water Facility Plan

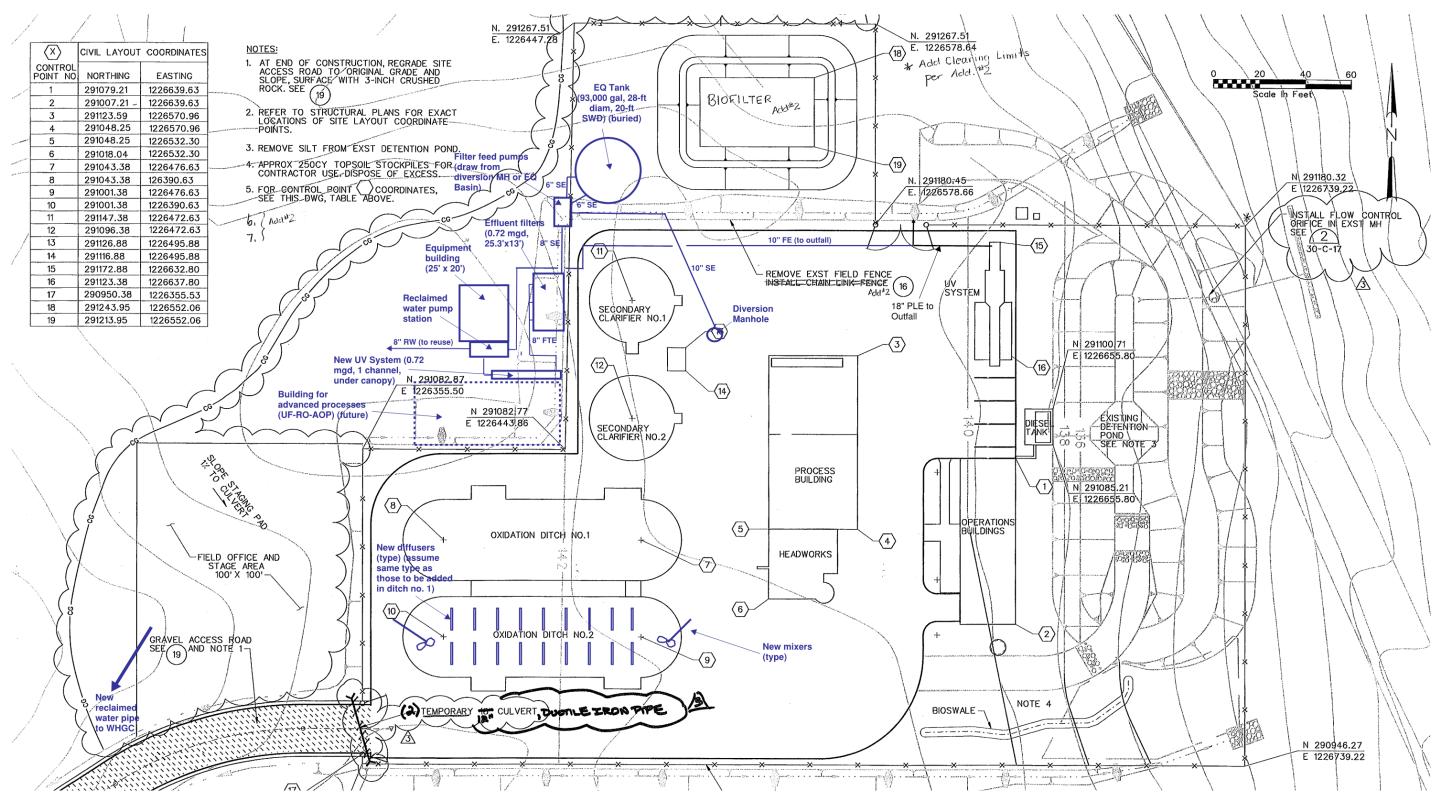


Figure 8-2. Preliminary site layout of recycled water facilities



#### 8.2.2 Redundancy

Per the Reclaimed Water Rule (WAC 173-219), bypass of inadequately treated wastewater from the recycled water facility to the distribution system is prohibited. To maintain adequate treatment, redundancy would thus be provided for the tertiary processes. The level of redundancy can be reduced or removed if the County preserves the option to discharge secondary effluent to Puget Sound. For this facility planning effort, it was assumed that all flows would be reclaimed. The outfall would be used for exercising purposes only. The treatment systems could be downsized if redundancy is provided by allowing outfall discharge.

The tertiary filters are sized to treat the peak design flow (0.7 mgd for option 1 as selected in Section 6.3.4), with one cell out of service. The filter feed pumps would similarly be sized such that with one pump out of service, the remaining pumps would accommodate the peak design flow.

For the disinfection system, the new UV system is sized for the peak design flow of 0.7 mgd, with two UV banks in a single channel. It was assumed that when a UV bank is taken out of service for maintenance, disinfection would be provided by chlorination using existing equipment as discussed in Sections 6.3.3 and 6.3.4. The UV disinfection system will be validated using the water quality requirements outlined in Table 8-1 for total coliform and viruses. The chlorination system will be validated based on chlorine residual in the distribution system.

Recycled water pumps would be sized such that with one pump out of service, the remaining pumps would accommodate the design peak day flow.

Additionally, the outfall would be maintained so that treated wastewater can still be discharged to the Puget Sound if operational issues arise. The existing Kingston WWTP outfall would be used intermittently to "exercise" the outfall and keep it operational for emergency situations until such time that a year-round land application or storage site is identified.

# 8.3 Facilities Description

The following section provides a description of the proposed recycled water treatment processes and conveyance facilities.

#### 8.3.1 Treatment

The existing secondary system would be upgraded to provide the necessary nitrogen removal. This includes replacement of the brush aerators in a currently operating oxidation ditch with fine-pore diffusers, addition of diffusers in the second oxidation ditch, and addition of mixers in both ditches. Preliminary analysis indicated that sufficient nitrogen removal could be achieved without supplemental carbon addition. Therefore, a supplemental carbon system is not included in the site layout and cost estimates for the recycled water facilities.

Secondary effluent would flow from the secondary clarifiers to a new diversion manhole. From there, the secondary effluent can be directed to either the filter feed pump station or the existing UV system for subsequent disposal at the outfall. When Kingston WWTP is producing recycled water, the secondary effluent is pumped to the upflow filters up to the design flow of 0.7 mgd. When flow exceeds 0.7 mgd, the excess flow is sent to the EQ tank. The filtered effluent flows to the UV system. The existing chlorination system can be used to dose chlorine for chlorine residual in the reclaimed water distribution system. After disinfection, the recycled water is pumped to the distribution system.

Table 8-2 summarizes the preliminary design data for the recycled water facilities.

Process Element	cled Water Treatment Design Data
	Design Value
Oxidation ditches	
Number of basins	2 (existing)
Type of new aeration system	Fine-pore aeration
Number of mixers	2 per basin
EQ tank	
Maximum liquid volume, gal	93,000
Diameter, ft	28
SWD, ft	20
Discharge/mixing pumps	
Number of pumps	2
Motor, hp	7.5
Filter feed pumps	
Number of pumps	3
Capacity, each, gpm	250
Motor hp	10
Pump speed	Variable
	14.14.15
Fertiary filters Type	Upflow sand, intermittent backwash
Number of filter cells	3
Peak hydraulic loading rate, gpm/ft <sup>2</sup>	5.0
Maximum capacity with one cell out of service, mgd	0.72
JV disinfection	
Lamp type	Low-pressure amalgam
Capacity, mgd	0.72
Design secondary effluent transmittance, percent,	65
minimum	100
Design UV dose, mJ/cm <sup>2</sup>	1
Number of channels	2
Number of banks	20
Number of lamps per bank	10
Maximum power draw, kW	-
Chlorination system	
Number of storage tanks	1
Tank capacity, gal	2,500
Number of metering pumps	2
Target chlorine dosage range, mg/L Cl <sub>2</sub>	2 - 6
Design average day demand, gpd	7.4 (as 12.5 percent sodium hypochlorite solution)
Design 2040 peak day demand, gpd	29 (as 12.5 percent sodium hypochlorite solution)
Reclaimed water pumps	
Number of pumps	3
Capacity, each, gpm	250
Motor, hp	20
Pump speed	Variable
. ump opoou	

Only the major equipment is listed. Auxiliary equipment, including coagulant chemical storage and feed system and hypochlorite feed system as well as air compressors for the tertiary filtration system, is not included in this table.



#### 8.3.2 Conveyance

The reclaimed water can be conveyed to the following locations:

- WHGC for irrigation during the summer months
- North Heritage Kitsap Park for infiltration

Additional reclaimed water users could also be added in the future. Secondary effluent or reclaimed water can also be discharged to Puget Sound if there is an operational upset or for means of exercising the outfall.

The Class A recycled water would be pumped south from the southwest corner of the WWTP site to the WHGC and proposed infiltration area through an 8-inch pipeline. The new recycled water pump station would be located immediately downstream of the new UV system at the WWTP site. The currently proposed conveyance route would use power line right-of-way, but the benefits of additional conveyance alternatives utilizing existing paths through NKHP will be evaluated during subsequent design analyses. As discussed in Section 6.6, conveyance routing will be coordinated with the Kitsap County Parks Department's efforts to extend and improve its trail network within NKHP. Figure 8-3 shows the proposed pipeline alignment to WHGC and the infiltration area.

Conveyance components will be designed, inspected, and tested in compliance with the requirements of the Uniform Plumbing Code (Chapter 15), Health's *Water System Design Manual* (Health 2019) and WAC 173-219-360. Conveyance piping will be labeled as "recycled water" and will utilize appropriate cross connection control. Proposed cross connection control procedures are further described in Section 8.5.1.

#### 8.3.3 Irrigation

At WHGC, the project includes a 700,000 gallon lined equalization (EQ) basin for irrigation. The EQ basin will allow WHGC to irrigate out of the existing large storage pond that serves as an aesthetic feature on the golf course without the level in the storage pond changing based on irrigation demands. The project also includes the following features for irrigation at WHGC:

- A new irrigation pump station, 1,500 gpm capacity with remote monitoring capabilities
- A new pond fountain pump and three subsurface pumps to promote circulation in the pond and increased dissolved oxygen
- Two chemical injection systems including chemical feed tanks, pumps, and controls
- Level control in the storage pond and EQ basin, flowmeters, and control valves for controlling operation of the irrigation system

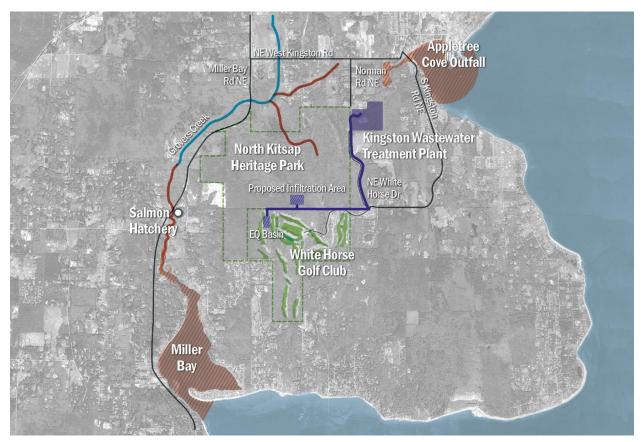


Figure 8-3. Proposed pipeline to WHGC and infiltration area

#### 8.3.4 Infiltration

Recharge would infiltrate into the shallow unconfined aquifer system and would become available for baseflow to the Grovers Creek watershed. The unconfined aquifer identified during site characterization activities has a limited areal extent within the central and southern portions of NKHP and the northern portion of WHGC. A review of well log records revealed that no wells pump from the unconfined aquifer, with the nearest water wells pumping from the underlying confined sealevel aquifer. The recommended design of the proposed groundwater recharge facility has a footprint of approximately 2 acres and is located in the general vicinity of the boundary between NKHP and WHGC. Figure 8-3 depicts the proposed infiltration location.

The basis of design for the proposed groundwater recharge alternative, in terms of recharge basin size and geometry, is a function of the shallow stratified near-surface sand deposits. However, groundwater mounding and transport is based on the hydraulic properties of the shallow aquifer system. Based on the Project results, the recommended basin configuration consists of a primary recharge basin, with dimensions of approximately 100 by 400 feet and divided into two equal cells. Additionally, a secondary recharge basin, with dimensions of approximately 100 by 400 feet, is recommended as backup during maintenance of the primary basin, and handling of extreme flows during peak discharge and rainfall events. Each basin is designed with an engineered sand media at the surface followed by a gravel layer over the native soils. The surficial sand unit facilitates basin maintenance and vegetation control via seasonal tilling or disking of the sand. The underlying gravel unit facilitates the spread of recharge over the basin surface area. Discharge to each basin will occur at the surface via perforated pipes resting on the top of the sand layer.

# 8.4 Process Control Strategy

Control of the recycled water facilities would be based on the quality and quantity of water available (secondary effluent) and the recycled water demand and application. As the tertiary filters and new UV system are sized for approximately the projected 2040 peak day flow (0.72 mgd), when the secondary effluent flow is less than 0.72 mgd, all flows are sent to the tertiary system and subsequently to either the golf course or the infiltration basin. When the secondary effluent flow exceeds 0.72 mgd, the excess flow is directed to the EQ tank. This may be achieved by controlling the level in the filter feed pump wetwell. The pumps would be operated to maintain a constant wetwell level. When the operating level exceeds the set point level while the pumps are operating at the maximum flow rate, the excess flow is diverted to the EQ tank. When the operating level drops below the set point level while the pumps are operating at maximum flow rate and the EQ tank level is above a minimum set point level, equalized flow from the tank is returned to the wetwell to combine with the secondary effluent.

For the tertiary filters, flow rate to the filters is controlled by the filter feed pumps. Each filter cell is brought on or off line by manually operating or closing the associated valve. Backwash of the filters is performed intermittently and automatically by the filter control system. Typically, the operator can select the backwash initiation mode (timer or differential pressure) and the associated set points (backwash frequency, backwash duration, filter differential pressure).

The UV disinfection is typically also controlled automatically with the UV lamp output adjusted to maintain the required dose of 100 mJ/cm². An ultraviolet intensity (UVI) sensor would continually measure the lamp output, and the UV dose is calculated as UVI multiplied by retention time. A chemical/mechanical cleaning system is set to automatically clean the wiper sleeves. A motorized effluent weir gate is used to maintain the water level over the lamps.

The recycled water pump station receives flow from the UV system and pumps the disinfected effluent to the distribution system. The pumps would be equipped with variable-speed drives. The pump speed can be controlled to maintain a constant level in the wetwell. A bypass pipe and associated valve would be included to allow diversion of the disinfected effluent to the outfall when needed.

During the dry season, the extent of nitrogen removal could be reduced to increase the nitrogen content in the recycled water used for irrigation. This could be achieved by reducing the operating solids retention time (SRT) of the oxidation ditch secondary system, adjusting the aeration on-off cycle, and/or taking one of the oxidation ditches offline (if both ditches are on-line to provide nitrogen removal). If supplemental carbon is added to provide nitrogen removal, it will be stopped during irrigation season.

# 8.5 Additional Design Considerations

This section describes cross-connection control considerations and contingency planning.

#### 8.5.1 Cross-Connection Control

Cross-connection control for recycled water systems is described in Washington's new Reclaimed Water Rule (WAC 2018). The potable water provider in the region is responsible for cross-connection between recycled water with potable water supplies (WAC 173-219-310(2)). The Reclaimed Water Rule (WAC 173-219-310(3)) also dictates that recycled water generators are responsible for protecting recycled water and partially treated recycled water from contamination via cross-connection with lower-quality supplies and preventing water under their control from contaminating potable water, starting in the generation facility, including all treatment stages, storage, and

distribution facilities, and ending at the point of delivery to the user's recycled water meter at the property line of the use area.

The generator must notify its potable water purveyor of the proposed and ongoing recycled water treatment activity and facility location and comply with the purveyor's cross-connection control requirements under WAC 246-290-490 and any locally adopted regulations.

A cross-connection control specialist must be involved in the development of a written cross-connection control program and the recycled water system must be inspected annually to be submitted with the annual summary reports and backflow incident reports (WAC 173-290-310). Backflow prevention devices must also be tested annually by a backflow assembly tester (BAT) (WAC 246-290-490).

The proposed recycled water facilities would include proper cross-connection at Kingston WWTP. At WHGC, an air gap would be installed at the outlet of the recycled water distribution pipe. No other connections to the recycled water distribution system are proposed at this time. The existing KPUD potable water connections at the WHGC are equipped with a reduced pressure backflow preventers (RFBP).

#### 8.5.2 Contingency Planning

The recycled water treatment system is being designed with redundancy as described in Section 8.2.2 so that the tertiary filtration system can operate with a feed pump out of service or a cell of the filtration system out of service.

Additionally, Kingston WWTP would maintain its current outfall to Puget Sound that can be used if recycled water performance objectives are not being met.

# 8.6 Staffing Requirements

Additional labor would be required to support operation and maintenance of the recycled water system. With the addition of the new filtration system, new distribution system, and infiltration gallery, the annual labor required would be 4 hours per week for compliance and monitoring, 8 hours per week for treatment operations, and 2 hours per week for maintenance, with a total staffing requirement of 728 hours per year or 0.35 full-time equivalents (FTEs).

#### 8.7 Cost Estimates

A detailed cost estimate was developed for the recycled water facility including distribution and infiltration. In accordance with Association for the Advancement of Cost Engineering International (AACE) criteria, this is a Class 4 estimate, which is defined as a planning-level or design technical feasibility estimate. Expected accuracy for Class 4 estimates typically ranges from -30 to +50 percent, depending on the technological complexity of the project, appropriate reference information, and inclusion of an appropriate contingency determination.

#### 8.7.1 Capital Costs

The primary capital costs for the recycled water treatment system include modifications to the existing secondary system, and addition of a tertiary filtration system and a new UV disinfection. Costs for the secondary system modifications include the costs for new aeration diffusers and mixers. The new EQ tank, sized for 28 feet diameter and 22 feet deep, is assumed to be buried with spray nozzle equipment and two 7.5-horsepower (hp) pumps to send equalized flow to the filter feed pump station and mixing of the EQ tank. Cost for the new tertiary filtration system includes the costs for the filter media, concrete basins, backwash system, air compressors, and chemical feed system



(for the coagulant). The new UV system comprises one channel with two UV banks. The cost for the new UV system includes costs for the UV banks, concrete channels, grating, and gates. The coagulant feed system, air compressors, and electrical equipment would be housed in a new 450-square-foot (ft²) prefabricated building. The cost estimate for the WWTP upgrade also includes costs for the filter feed pump station and reclaimed water pump station.

A new 12,600-linear-foot (LF), 8-inch-diameter force main would be constructed from the existing Kingston WWTP south to a new EQ basin to be used for irrigation. A 700,000-gallon lined equalization (EQ) basin including level control, flowmeters, and control valves allow for equalizing reclaimed water for irrigation to the existing storage pond at the WHGC. Upgrades to the existing irrigation system include a new irrigation pump station (1,500 gpm capacity), a new pond fountain pump and three subsurface pumps, and two chemical injection systems including chemical feed tanks, pumps, and controls.

The pipeline extends through an existing park owned by the County and follows an existing pathway to minimize the clearing required. An additional 1,650 LF of 8-inch-diameter pipeline routes recycled water from WHGC to NKHP. The recharge basin cost estimate includes site clearing, cut and fill, a gravel access road, sand filter media, and monitoring wells. An 800 LF discharge line of perforated pipe would discharge water within the recharge basin.

An estimate of probable construction costs, probable project cost, and probable unit cost are provided in Table 8-3.

Table 8-3. Estimate of Probable Construction Cost				
Description	Costa			
Class A Recycled Water Treatment				
Oxidation ditch 2 modifications	\$534,000			
New Secondary Effluent EQ tank	\$479,000			
New filter feed pump station	\$264,000			
New filtration system	\$863,000			
New recycled water building	\$172,000			
New disinfection system (UV)	\$818,000			
New reclaimed water pump station	1,464,000			
Miscellaneous improvements	\$653,000			
C	Conveyance			
New pipeline	\$1,757,000			
EQ basin and irrigation at WHGC	\$1,565,000			
Infiltration basins and associated piping	\$1,567,000			
Constructi	on and Project Costs			
Total construction cost (accuracy range) <sup>b</sup>	\$10,136,000 (\$7,095,000-\$15,200,000)			
Total Project cost c	\$13,648,000			
Annualized Costs <sup>d</sup>	\$630,000			
Estimated unit cost (\$/MG)e	\$6,700			



- a. Includes labor (15%), material (10%), subcontractor (10%), construction equipment markups (10%), contractor markups (15%), contingency (30%), escalation (12.5%), and other markups detailed in Appendix G, Cost Estimate.
- b. Class 4 cost estimate, accuracy range of -30% to +50%.
- Total Project cost includes predesign, engineering, construction services, legal, and administrative costs totaling 35%.
- d. Based on NPV including capital and O&M costs and a 20-year life cycle.
- e. Per USBR requirements, unit cost range based annualized costs and expected average annual yield over the life cycle.

#### 8.7.2 Operation, Maintenance, and Replacement Costs

0&M costs for winter infiltration and summer irrigation include labor costs, chemical costs, and energy costs. Table 8-4 tabulates the individual cost items in each category. The operational period is from 2023 to 2040. 0&M costs are based on average annual flow. Flows are projected to increase from 0.18 mgd in 2023 to 0.37 mgd in 2040.

Table 8-4. Estimation of Annual O&M Costs				
Description	Cost (\$/year) a			
Labor Cost				
Compliance/monitoring	4 hr/wk			
Treatment operations	8 hr/wk			
Maintenance	2 hr/wk			
Total annual labor cost <sup>d</sup>	\$37,000/yr			
Chemical Cost				
Coagulant, polyaluminum chloride <sup>b</sup>	\$7,000/yr			
Sodium hypochlorite <sup>c</sup>	\$5,000/yr			
Total annual chemical cost	\$12,000/yr			
	Energy Cost			
UV upgrade	\$5,000/yr			
Pumping, HVAC, and lighting	\$68,000/yr			
Total annual energy costs	\$73,000/yr			
Equipment Replacement Cost				
Equipment replacement	\$29,000			
Total O&M Cost				
Total annual O&M cost	\$151,000			

- Annual 0&M costs represent an average value over the operating period (2023–40) based on escalating 2018 dollars using an escalation rate of 4% and a discount rate of 5%.
- b. An average dose of 10 mg/L of polyaluminum chloride is assumed.
- c. An average dose of 4 mg/L of sodium hypochlorite is assumed.
- d. Annual salary of \$60,000 was assumed.



## **Section 9**

# **Financial Analysis**

This section presents the financial analysis for the proposed Project, including potential funding sources, a funding capability analysis, and a preliminary funding plan.

# 9.1 Introduction to Recycled Water Financing

The U.S. Environmental Protection Agency (EPA) has established guidelines for funding recycled water systems that are summarized along with USBR Title XVI Feasibility Study (Feasibility Study) project and Washington State specific information provided below.

Historically, wastewater utilities have entered into long-term agreements with agricultural and golf course customers to deliver recycled water at little or no cost to the customer because giving treated effluent away was viewed as mutually beneficial.

However, as water supplies are becoming scarce and more valuable, there is a growing opportunity to develop reasonable rates and charges for the alternative sustainable water supply created by recycled water. Recycled water is now widely recognized as a viable component of integrated water resources planning and providing adequate funding for recycled water systems is similar to other water services. EPA suggests the following guidelines for financing and operating a sustainable water system:

- Revenues from rates and charges should be sufficient to provide annual operating maintenance and repair expenses, capital improvements costs, adequate working capital, and required reserves.
- Accounting practices should separate recycled water funds from other governmental or entity
  operations for transparency and to prevent diversion of funds to uses for unrelated services; this
  concept is typically reflected by use of an enterprise fund, which may be standalone for the
  recycled water system or be combined with the County's wastewater system.
- Accounting practices should adhere to generally accepted accounting principles and comply with applicable regulatory requirements.
- Rates and fees should equitably distribute the cost of water service based on cost-of-service
  principles, compliance with legal requirements, and transparency of communication regarding
  non-quantifiable benefits to ratepayers.
- Budgeting should be adequate to support asset management, including planned and preventive maintenance, as well as infrastructure reinvestment.

Utilities often set recycled water rates lower than potable water rates to promote recycled water use. In general, recycled water is priced from 50 percent to 100 percent of potable water with the median rate 80 percent of potable water rates. This discount enables users to pay for retrofit costs, plus it serves as an incentive to use recycled water. However, the remaining costs of providing recycled water are typically borne by the wastewater system that benefits from treating its effluent to recycled water standards and/or reducing disposal costs or the water systems that benefits from an alternative water supply or groundwater/aquifer recharge. There are some jurisdictions where recycled water is priced the same as potable water, especially where recycled water is not subject to the potable water use restrictions during drought or available to offset peak use periods. Some



utilities have large water users that may be willing to pay a large amount of the cost of providing recycled water to secure a stable long-term supply. Large customers that pay the bulk of a recycled water system costs, through a user agreement or direct capital contributions, may desire a latecomer agreement with the County to recoup some of their initial investment, or reduce their rates, as new customers connect to the system in the future.

Various funding sources are available to pay for implementation and operation of a recycled water system.

# 9.2 Funding Sources

While there are several sources for funding recycled water systems, County internal funding, debt funding, and grants/loans are the most common.

#### 9.2.1 County Funding

County funding is based on revenue generated from customers, economic development funds, and reserves. The customers can be individual large-volume users or a wide network of users/beneficiaries within the water recycled area. Large-volume customers, if available, can finance a significant portion of a project and may have well-defined water quality objectives that would impact the nature and character of the treatment and distribution system or resource needs. Typically, these customers are industrial users, large-scale agricultural operations, or golf courses. The concern for the utility is the risk of losing the large-volume customer or the revenue from the service agreement once the project is underway. A "take or pay" clause (see more below) may need to be incorporated into any service agreements that is used to repay debt or other long-term fixed costs of the system. Internal funding is typically received annually or monthly, through an agreement with a large customer, from rates over the life of the project.

#### 9.2.1.1 User Rates and Fees

Two methods are typically used for developing recycled water rates. The rate either fully covers the cost of recycled water production, distribution, administration, and operation, or rates are lowered by subsidizing the cost from other sources. Full cost recovery rates include the appropriate portion of capital and annual costs to plan, design, construct, administer, and operate a recycled water program. Capital costs include treatment, distribution, and possibly onsite facilities. The allocation of treatment facilities between recycled water and wastewater rates can be challenging, but it is generally accepted that facilities necessary for meeting NPDES discharge requirement levels are attributed to wastewater rates. Anything in addition to costs necessary to produce recycled water of a higher quality is attributed to recycled water rates. Costs saved from effluent disposal may be considered a credit. Indirect costs include a percentage of administration, management, and overhead. Another cost is replacement reserve, i.e., the reserve fund to pay for system replacement in the future. In many instances, monies generated to meet debt service coverage requirements are deposited into replacement reserves.

Several types of rate and fee structures have been used for the recovery of recycled costs, including a fixed monthly fee, volumetric rates, and connection fees. These are described below:

• Fixed monthly fee: Fixed monthly fees are used for a variety of purposes. In some cases, actual use is not metered, and the operation, maintenance, and replacement (OM&R) costs and/or capital costs are collected from this fee. Several methods are used to establish these fees, such as a cost per acre, cost per acre-foot, cost per pervious square foot, cost per equivalent residential connection, cost per meter size, or cost per customer. A combination of a fixed

monthly fee and a volumetric rate can be charged with the fixed fee recovering fixed costs and the variable component reflecting cost that vary with usage.

- Volumetric rates: Volumetric rates may be the primary fee, with either OM&R and/or capital
  costs recovered. These rates may be charged per thousand gallons or per hundred cubic feet.
  The actual volumetric rates may differ per phase of connection. Initial recycled systems may
  offer incentives for early connections. This is specifically true when recycled water is the primary
  means of effluent disposal. Bulk users, such as agriculture, golf courses, and industrial
  applications, have benefited from these early connection rates. These large-volume users may
  also need rates that are competitive with the costs of groundwater use rather than potable
  water.
- Potable water driven rates: The dollar value of recycled water rates is typically based on the value of recycled water to those who have non-potable water demands, such as for irrigation or industrial applications. In some cases, water conservation pricing is used to further encourage efficient recycled water use. Recycled water rates are at their lowest values when the availability of fresh water and/or potable water is significantly greater than demand. As fresh and potable water supplies tighten relative to demand (for water systems) or regulatory and disposal costs increase for wastewater systems, there is pressure on the utility to use recycled water to meet demands. In areas with sufficient freshwater supply but limited wastewater effluent disposal options, recycled water is produced and applied to constructed wetlands, pastures, and irrigated areas to reduce effluent discharges to surface waters or nearshore coastal areas. The recycled water rates in these areas can be much lower than potable water rates and recycled water costs (if subsidized by wastewater customers) or closer to cost depending on the relative benefit customers receive.

In some cases, recycled water is provided at no charge or at a nominal charge that does not recover its full costs. As a result, the full costs are recovered through wastewater customers, water customers, or state or federal subsidies. For many utilities, recycled water use provides significant benefits to other customers by providing an environmentally safe alternative to wastewater effluent disposal, by reducing groundwater and surface water pumping and/or by delaying the need for additional water supply wellfields and water treatment plant facility capacity.

Nationally, recycled water rates as a percent of potable water rates range from 0 to at least 100 percent. According to a survey by the American Water Works Association (AWWA), the median recycled water rate charged by sampled utilities in 2000 and 2007 was 80 percent of the potable water rate.

Many non-potable water users are not fully aware of the benefits that recycled water provides. User benefits of recycled water may include the following:

- Having a guaranteed and reliable water supply
- Ability to conserve fresh water for other uses
- Ability to irrigate more frequently than if a traditional water source was used
- Ability to reduce fertilizer applications
- Ability to apply more water to the crop or landscape than with a traditional water source
- Typically costs less than potable water

As non-potable water users begin to understand the benefits of recycled water to their household or business, the amount of money they are willing to pay for recycled water will increase along with recycled water demand.



#### 9.2.1.2 Service Agreements Based on Take or Pay Charges

Service agreements and cost recovery for utilities is a large part of the socioeconomic balance that is required by utilities to properly value a recycled water product. The high cost of treating wastewater is one of the reasons that utilities have historically not wanted to pass the entire cost of a system onto their recycled water customers. This situation is also prevalent in the costs of potable water systems and is a water industry-wide concern for the future.

Service agreements can be relatively simple with a single rate, but normally they are complex and multi-tiered, depending on water quality, supply and demand, specialized recycled districts, and peaking factors. Service agreements that include full cost recovery for recycled water should be promoted because recycled water is a recycled and delivered product that inherently includes all the costs from point of water withdrawal to point of use. A schedule of rates for each service agreement should include terms and conditions, covenants and restrictions, water quality parameters, allocations by intended use or service sector, and a dispute resolution clause.

#### 9.2.1.3 Connection Fees for Wastewater Treatment Versus Distribution

Typically, connection fees for recycled systems are limited to recovering the costs of transmission and distribution. Treatment costs are generally the responsibility of the wastewater utility that provides recycled water; the wastewater utility and its customers assume financial responsibility for treating the wastewater to applicable standards, whether for discharge or recycled.

There are examples of utilities including the cost of recycled water treatment in their fees or splitting such costs with the wastewater utility. The recycled utility may be a separate agency that simply takes wastewater treated to discharge standards and provides the necessary extra level of treatment to produce recycled water. In that circumstance, connection fees would properly include treatment costs. Each situation is unique, and various costs must be identified to be sure a nexus exists between the cost and the ultimate service being provided to end users.

#### 9.2.2 Debt Funding

There are several forms of debt funding, including revenue bonds and low-interest loans. The benefits of these funding instruments are that they are typically repaid over the long term with the funding received up front. Revenue bonds are supported by net operating income from utility rates and charges. Rates and funding resources must be in place prior to issuing debt. For the County, the requirement for issuing debt requires that the operation, maintenance, and debt repayment costs are covered by recurring user rates and charges, with a minimum 25 percent debt service coverage allowance over costs.

#### 9.2.3 Grants and Loans

Grant programs are a good source of partially funding recycled water projects, but they require that the proposed system meets grant eligibility requirements. Grants reduce the total capital cost to be recovered from recycled water users and project beneficiaries and improve the affordability and viability of the project. Fortunately, many funding agencies are receiving a clear legislative and executive mandate to encourage water recycling in support of water conservation.

To be financially successful over time, a recycled water program must be able to "pay for itself." While grant funds may be available to fund portions of the capital improvements for a recycled water project, they are not allowed to fund annual operating costs. Once the project is underway, the water recycling program is encouraged to achieve self-sufficiency as quickly as possible, to fund OM&R costs and debt service requirements, by generating a dedicated source of ongoing revenues.



#### 9.2.3.1 Federal Funding Sources

The Clean Water Act (CWA) of 1977, as amended, has supported water recycled projects through the following provisions:

- Section 201 of PL 92-500 was amended to ensure that municipalities are eligible for "201" funding only if they have "fully studied and evaluated" techniques for "reclaiming and reuse of water." A facility plan must be completed to qualify for state revolving loan funds.
- Section 214 stipulates that the EPA administrator "shall develop and operate a continuing program of public information and education on water reclamation and reuse of wastewater...."
- Section 313, which describes pollution control activities at federal facilities, was amended to ensure that wastewater treatment facilities will utilize "reuse techniques: if estimated life-cycle costs for such techniques are within 15 percent of the most cost-effective alternative."

Various federal sources could be used to fund water recycling projects as described below. The Tribe may be eligible for additional funding that the County does not have access to. If the Tribe becomes a major consumer of recycled water, it may be beneficial for the County to work with it to secure joint funding for the Project. While there are many funding sources, only certain types of applicants or projects are eligible for assistance under each program, with annual funding dependent on congressional authorizations.

- Economic Development Administration (EDA): EDA supports projects that foster regional economic development strategies designed to create jobs, leverage private capital, and encourage economic development. The maximum grant amount is \$3 million with a 50 percent match for a total project cost of \$6 million. EDA will now also accept project proposals before requiring full applications. The short proposal form describes the project to determine if the project warrants EDA's competitive consideration. Applications are accepted year round on an ongoing basis.
- EPA: The Water Infrastructure Finance and Innovation Act (WIFIA) program supports wastewater projects that are eligible for the State Revolving Fund (SRF). Industrial projects are not currently eligible for SRF funds. Eligible applicants include corporations; partnerships; joint ventures; trusts; federal, state, or local government entities; agencies; tribal governments or a consortium of tribal governments; or state infrastructure financing authorities, as defined by the CWA and the Safe Drinking Water Act. EPA can provide federal loans or loan guarantees for eligible water/wastewater infrastructure projects with a 51 percent match. The program is better for very large projects because of the fees associated with the loan (over \$350,000 in application and processing fees) and an interest rate equal to or greater than bond rates. The benefit of this program is that it can fund projects for a 35-year repayment term and the County can defer payments up to 5 years after the project is complete. The deferred payment can be ideal for communities needing upfront capital but that will take time to build a paying customer base. Priority is given to repairing, rehabilitating, and replacing aging infrastructure and conveyance systems.
- USBR: USBR offers some grants for water recycling projects that cover 50 percent of eligible project costs with a 50 percent local match. The County is currently completing a USBR Feasibility Study (this Study) for its potential recycled water project. The Feasibility Study results will help the County to be eligible to apply for USBR Title XVI (Title XVI) construction grants that are available to fund approved design and construction projects that reclaim or reuse wastewater and groundwater in 17 western states, including Washington. Title XVI offers grants up to \$20 million as a 25 percent match. The County would be responsible for covering 75 percent of the cost through customer contributions, reserves, rates, non-federal grants and loans, or other sources. Title XVI projects no longer require official congressional approval. All



that is required is that a project have: (1) an approved USBR Feasibility Study (this study) and (2) that study has been transmitted to Congress and has been added to the 4009(a) and/or 4009(c) list. Construction costs must have been incurred after the application date to count toward the match. It is important to start planning to apply for this program early in the process to maximize the amount of funding the County can receive.

• United States Department of Agriculture (USDA) Rural Development: USDA has several programs that may provide financial assistance for water recycled projects in rural areas. Rural Utilities Service (RUS) offers funds through the Water and Waste Program in the form of loans, grants, and loan guarantees. The largest is the Water and Waste Loan and Grant Program, with approximately \$1.5 billion available nationwide per year. Washington State gets approximately \$25 million annually. This program offers financial assistance to public bodies, eligible not-for-profits, and recognized tribal entities for development (including construction and non-construction costs) of water and wastewater infrastructure. Unincorporated areas are typically eligible, as are communities with less than 10,000 people. Grants may be available to communities meeting income limits to bring user rates down to a level that is reasonable for the serviced population. The Kingston service area and its WWTP may be eligible even if the county population is too large. Interest rates for loans depend on income levels in the served areas (currently 2.38 to 3.88 percent). Grants are available in some cases (typical split is 70 percent loan:30 percent grant). Repayment term is up to 40 years. USDA does not fund industrial only projects.

Information about specific funding sources can be found in the Catalog of Federal Domestic Assistance (CFDA), prepared by the Federal Office of Management and Budget and available in federal depository libraries (CFDA, n.d.). It is the most comprehensive compilation of the types and sources of funding available.

#### 9.2.3.2 State, Regional, and Local Grant and Loan Support

There are also state sources for grant and loan funding for recycled projects. A summary of state, regional, and local sources of grants and loans is provided below:

- Public Works Assistance Account (PWAA), formerly known as the Public Works Trust Fund (PWTF), to help fund wastewater and recycling projects for counties, cities, special-purpose districts, and quasi-municipal organizations but not port districts or tribes. The Public Works Board (PWB) is updating its funding cycles, programs, and processes authorized by the passage of Engrossed Substitute Senate Bill (ESSB) 1677 and future funding under this program is unknown. The PWAA is currently funding pre-construction projects (engineering, design, environmental, etc..) and offering \$1 million loans with a 5-year repayment term and variable interest rates. Pre-construction applications are accepted every 2 months until funds are exhausted. Loan repayments begin within 1 year of funds being dispersed. Commerce also administers the Community Economic Revitalization Board (CERB) grants that are available if the project creates jobs and the Community Development Block Grant (CDBG) if the project serves low to moderate income customers.
- Washington State Department of Ecology State Revolving Fund: The SRF provides loans to construct water pollution control facilities and to implement nonpoint source, groundwater, and estuary management activities, as well as recycled water and potable water facilities. Interest rates are below current market rates and may be as low as 0 percent (currently 0.7–2.0 percent). The amount of such loans may be up to 100 percent of the cost of eligible facilities. Loan repayments begin within 1 year of completion of the facility construction and are generally completely amortized in 20 years. Water conservation and recycled projects eligible under the



Drinking Water State Revolving Fund (DWSRF) include installation of meters, installation or retrofit of water-efficient devices such as plumbing fixtures and appliances, implementation of incentive programs to conserve water (e.g., rebates, tax breaks, vouchers, conservation rate structures), and installation of dual-pipe distribution systems as a means of lowering costs of treating water to potable standards. In addition to providing loans to water systems for water conservation and recycling, states can use their DWSRF set-aside funds to promote water efficiency through activities such as development of water conservation plans, technical assistance to systems on how to conserve water (e.g., water audits, leak detection, rate structure consultation), development and implementation of ordinances or regulations to conserve water, drought monitoring, and development and implementation of incentive programs or public education programs on conservation.

• State budget appropriations: Some communities are able to secure grants directly through the state annual budgeting process. Grant funds are available after the state budget is passed and do not require matching funds. The process for requesting funds is simple and typically involves a two-page letter to legislators representing the project area. However, getting funds is highly subjective and political, so many communities seeking this funding hire lobbyists and meet directly with legislators to promote their project and its benefits to the state (economic development, water quality, etc.).

# 9.3 Financial Capability Assessment

A Financial Capability Assessment, performed consistent with USBR standards, is included in Appendix J. USBR identifies a two-step approach to determine if the County is financially capable of funding the non-federal share of a project's construction and OM&R costs. The primary analysis is used to establish what type of secondary analysis must be performed. The primary analysis evaluates the County's bond rating or issuer credit rating and the debt service coverage ratio.

Financial statements of the County verify that the **credit rating and the debt service coverage ratio is in the acceptable high range.** Given that these two factors are acceptable, it is assumed that a cursory secondary analysis of the socioeconomic indicators in the Project area is sufficient. Both unemployment (UE) and median household income (MHI) indicators are good (see Appendix J). Should a more rigorous secondary analysis be required, the County will evaluate water service affordability, local water service rates, and the potential for rate shock.

# 9.4 Funding Plan

As described in the Financial Capability Assessment, several mechanisms are available for funding recycled water projects. The analysis shown for funding project costs in the Financial Capability Assessment Tables 1 and 3 is based on bond financing for the engineering and construction costs. Two funding scenarios are identified in Table 1: (1) total bond financing and (2) 75 percent bond financing and a 25 percent grant from the USBR Title XVI grant program. The funding plan shown on Table 3 of the Financial Capability Assessment shows that if the County can secure customers willing to pay the annual debt and 0&M for the Project, with at least 25 percent grant funding, the financial indicators are considered good for the Project. The final combination of funding resources could vary depending on the amount of grants received, County or recycled water customer contributions, and the total cost of the capital Project. Additional financial analysis should be completed throughout the Project as those factors are determined.

To determine the viability of a recycled water program and establish reasonable rates for recycled water service, the County would benefit from an understanding of the technical, economic, and anticipated customer usage of the proposed system. Integrated resource planning (IRP) is often used



as a means of developing this information going forward. IRP would allow the County to clearly communicate its funding strategy with potential customers and develop the costs and benefits of the recycled water program. Proper planning can also provide a framework to address uncertainty (e.g., economic volatility, climate change) and provide a sustainable funding strategy based on a combination of capital, OM&R considerations, and sources of revenue that provide the greatest value for the system and its customers.

It is important to identify and obtain commitments from future recycled water customers before undertaking the costs of design and construction. Those commitments will be critical to determining design capacity, facility sizing, and other decisions about future distribution branches. Securing these commitments often begins by conducting an initial survey in a service area, followed by a formal written agreement. These agreements may include a memorandum of understanding, particularly for customers with significant capacity requirements, such as golf courses, large industrial customers, or agricultural operations. These commitments ensure the long-term viability and financially sustainability of the Project. A recycled water purveyor can also employ participation incentives to help motivate users to convert to recycled water.

The County would benefit from seeking grants and direct customer contributions where possible to reduce the amount of the Project that would need to be funded via debt and customer rates. In particular, the County is encouraged to take the following steps:

- 1. Continue to engage the Tribe in discussions on its willingness to use and fund recycled water at WHGC
- 2. Position itself to be eligible to apply for USBR Title XVI grants, prior to design and construction, to maximize the amount of the Project that can be funded by grants over the life of the Project
- 3. Seek other grants and low-cost financing (via the County and/or Tribe)
- 4. Evaluate the benefit of the Project for the wastewater system, related to future capital, OM&R, and regulatory compliance costs to determine cost sharing advantages



# **Environmental Analysis and Documentation**

This section summarizes the environmental review process completed for the Project.

#### **10.1** Summary of Potential Impacts of Recommended Facilities

Construction of the Project would result in typical temporary construction-related impacts including noise, dust, potential erosion, and sedimentation. Construction best management practices (BMPs) would be employed to minimize impacts and potential sediment leaving construction areas. Some vegetation clearing would occur; however, disturbed areas would be replanted and restored to existing conditions following construction. Construction of the conveyance pipeline, EQ basin and infiltration basins may occur within 200 feet of wetlands areas. Any stream or wetland buffer areas impacted as a result of construction activities would be restored to existing conditions with native vegetation, in accordance with County requirements.

Completion of the Project would ultimately result in greater use of recycled water for irrigation and groundwater recharge instead of discharging to Puget Sound. The Project would improve marine water quality by reducing the nitrogen load to Puget Sound, which would help to increase the DO concentrations in Appletree Cove. Implementation of the Project would result in beneficial impacts to stream baseflows, particularly Grovers Creek and its tributaries. Infiltration of the reclaimed water through the soil column would result in a natural cooling of the water before discharge into Grovers Creek and its associated tributaries. The increased discharge of cool water would help to reduce the temperatures in Grovers Creek.

The use of recycled water for irrigation would reduce the demands on potable groundwater for irrigation purposes.

The Project is compatible with existing land uses and would comply with all applicable state and local permitting requirements.

#### 10.2 Environmental Review

The Project has undergone environmental review in accordance with WAC 197-11. A SEPA Environmental Checklist was prepared and the Kitsap County Public Works Department, the lead agency for review of the SEPA Checklist, issued a Determination of Non-Significance (DNS) on September 27, 2019 based upon review of this Plan and the SEPA Checklist. A copy of the SEPA Checklist and the DNS are included in Appendix I.

Environmental review was performed in accordance with USBR Title XVI Water Reclamation and Reuse Program Feasibility Study Review Process guidelines for a feasibility study report. The SEPA review included review of compliance with the Endangered Species Act and CWA; discussion of significant impacts on public health or safety, natural resources, regulated water of the United States, and cultural resources and historic properties; discussion of potential to affect water supply and water quality; and a discussion of public involvement throughout the feasibility study. The review of a Title XVI feasibility study report does not require National Environmental Policy Act (NEPA)



compliance. However, additional environmental review consistent with a proposed action (construction) would be performed during subsequent design stages of the proposed Project and may include additional components consistent with NEPA requirements.

#### **10.3 Anticipated Permits**

Table 10-1 summarizes the anticipated permits that are likely to be required for the Kingston Recycled Water Project and their associated trigger activities. The actual permit requirements will be determined during the design phase of the Project. The Project will comply with all federal, state, and local environmental permitting requirements and conditions.

		Table 10-1. Anticipate	d Permit Summary
Lead Agency	Permits/Approvals/ Reviews	Application/ Documentation	Trigger Activity
WA Departments of Health and Ecology	Reclaimed Water Permit	Reclaimed Water Permit application	Storage and application of reclaimed water.
WDFW	Hydraulic Project Approval	JARPA	Required for stream crossings.
WA Department of Ecology	National Pollution Discharge Elimination System (NPDES) General Construction Permit  Notice of Intent		Needed for disturbance of 1 acre or more.
	State Environmental Protection Act	Environmental Checklist	Environmental documentation to be coordinated with the Suquamish Tribe.
	Critical Areas Review	Critical Areas Report	Work near critical areas (i.e., wetlands and streams)
Local Permits and approvals Kitsap County	Shoreline Substantial Development Permit	JARPA with Shoreline Supplement	Work within 200 feet of a designated shoreline.
	Site Development Activity	Site Development Activity form	Grading, right of way use
	Right of Way permit	Right of Way Permit application	Work within a right of way.

#### **10.4 Public Meetings**

As described in Section 1.5, stakeholder outreach and public involvement has been conducted for the Project since 2016. Public outreach meeting materials, including attendee list, meeting notes, and presentation slides, are provided in Appendix C.

In addition, public comment was solicited as part of the SEPA process. SEPA public comments provided by the Suquamish Tribe, North Kitsap Heritage Park Stewardship Group, and interested citizens are included in Appendix I.

# Water Rights, Permitting, and Legal Considerations

This section summarizes water rights, permitting, and other legal considerations related to the proposed Project.

#### 11.1 Water Rights Analysis

The water rights implications and analysis for this proposed Project are governed by Revised Code of Washington (RCW) Chapter 90.46 and by WAC 173-219-090 dealing with water rights protection. WAC indicates that the Project must demonstrate compliance with RCW 90.46.130, which states:

Except as provided in subsection (2) of this section, facilities that reclaim water under this chapter shall not impair any existing water right downstream from any freshwater discharge points of such facilities unless compensation or mitigation for such impairment is agreed to by the holder of the affected water right.

Existing Kingston WWTP effluent is entirely and directly discharged to marine water in Puget Sound (not fresh water). Because there are no holders of any affected water right for this existing municipal wastewater effluent discharge nor are there any known water rights for Grovers Creek or any of the tributaries receiving baseflow benefit from the proposed infiltration system, there can be no impairment per RCW 90.46.130 and an impairment analysis required in WAC 173-219-090(4) is not required. Localized springs and seeps exist in the area, and there are approximately 10 to 15 water rights for irrigation, domestic, and fish propagation in the vicinity of the project, but are outside of the area influenced by the infiltration system. Therefore, it can be demonstrated that this Project would not infringe on existing water rights protection per the requirements of WAC 173-219-090.

#### 11.2 Regulatory Requirements

Regulatory and institutional requirements for the proposed recycled water facilities and recycled water uses are governed by RCW 90.46 and WAC 173-219. WAC stipulates all requirements from Project inception, design, treatment standards, usage, operations, and recycled water permitting.

#### 11.2.1 Legal and Institutional Requirements

Legal and institutional requirements associated with recycled water projects have been made law via RCW 90.46 as a result of legislation that has been passed by the state legislature and signed by the governor. WAC 173-219 is the administrative code or rule that is adopted by agencies to enact the requirements of RCW 90.46 legislation pertinent to executing recycled water requirements. WAC 173-219 defines all terms; establishes the purpose and scope of recycled water rules; and stipulates all rules for the administration, design, water quality standards, facilities operations, monitoring and reporting, and permits associated with recycled water use. Required permitting procedures are discussed in Section 11.2.2.

#### 11.2.2 Permitting Procedures

Recycled water permits are required per WAC 173-219-070 with the lead agency issuing the permit defined in WAC 173-219-050. Per this latter reference, it is likely that Ecology would be the lead agency in this instance. Procedures for applying for a recycled water permit are described in WAC 173-219-080 and general terms and conditions for this permit are described in WAC 173-219-270.

Procedures for a new recycled water permit are summarized as follows:

- Prior to submittal of a recycled water permit application, the permit applicant must receive lead agency approval of a feasibility analysis per WAC 173-219-180
- Prior to, or in conjunction with, submitting a permit application, the applicant must submit an Engineering Report/Facility Plan per WAC 173-219-210 to the lead agency for approval
- Prior to, or in conjunction with, submitting a permit application, the applicant must submit a copy of the new use agreements per WAC 173-219-290
- Applications must be submitted to the lead agency no later than 180 calendar days before planned recycled water distribution
- The lead agency must assess the application for completeness within 90 calendar days after receipt of the application
- Fees charged by the appropriate review agencies are described in WAC 173-219-080(3)

Upon approval of the recycled water permit and the Engineering Report/Facility Plan, plans and specifications for construction of facilities must be submitted and approved by the lead agency prior to construction per WAC 173-219-220. Following construction, a Declaration of Construction is to be submitted per WAC-173-219-230.

#### 11.2.3 Unresolved Issues

There are no specific unresolved issues with the proposed Project, other than the need to complete the permit application process and develop a Use Agreement as described in Section 11.3.

#### 11.2.4 Wastewater Discharge Requirements

The proposed Project is to generate recycled water from the existing Kingston WWTP, which is currently governed by an NPDES discharge permit for treated effluent discharge into Puget Sound. Additionally, all current sludge streams are conveyed by truck to another municipal wastewater treatment plant (CKTP), owned by the County, for further treatment. Any liquid stream treated at Kingston WWTP that is not processed in the proposed recycled water facility would continue to be discharged to the existing Puget Sound outfall per the current NPDES discharge permit. Likewise, any waste streams from the proposed recycled water treatment process would be recycled to the head end of Kingston WWTP for further processing. All sludge streams (those from the wastewater treatment processes and any concentrated solids from the recycled water process) would continue to he hauled to CKTP for further processing.

#### 11.2.5 Reclaimed Water Quality Requirements

The Class A reclaimed water quality criteria applicable to this Project are discussed in Section 8.1. The requirements for Class A reclaimed water are described in WAC 173-219-320, with performance standards and specific use-based requirements described in WAC 173-219-330 and WAC 173-219-390, respectively. Note that for the two primary Class A applications for this Project, golf course irrigation during the summer and indirect groundwater recharge, only the use for indirect groundwater recharge requires the TN control limits cited in WAC-173-219-330.



#### 11.2.6 Rights to Wastewater Discharges

The County maintains the rights to wastewater discharges per the requirements of RCW 90.46.120(1):

The owner of a wastewater treatment facility that is reclaiming water with a permit issued under this chapter has the exclusive right to any recycled water generated by the wastewater treatment facility.

#### 11.3 Interlocal Agreements

This Project would require an interagency use agreement between the County and the Tribe in accordance with WAC 173-219-290. The recycled water would be generated by the County and the primary user of the water would be the Tribe. The Tribe plans to use the water during the summer months to irrigate its local golf course (WHGC). Any recycled water not used for golf course irrigation (including recycled water generated during non-irrigation seasons) would be recharged to the local aquifer to the extent possible. This agreement must be approved by the lead agency (identified in WAC 173-219-050). This use agreement between the County serving as the generator and distributor and the Tribe acting as the end user would identify sufficient detail to ensure compliance with RCW 90.46 and WAC 173-219 at the point of use. The agreement would at a minimum identify cross-connection control measures, monitoring points, parameters and sample times, identification of a site's inclusion in a wellhead protection area or critical aquifer recharge area, the County's notice to the potable water suppliers in the area, BMPs to ensure permit compliance, and general use-based requirements per WAC 173-219-380. It is also anticipated that the user agreement would stipulate a cost sharing or appropriate rate structure to support the long-term financial obligations of the involved parties.

Prior to submitting the use agreement to the lead agency for permit approval, the County and the Tribe would enter into negotiations governing salient features of this agreement including water quantities, the date and times of delivery, water quality, and any applicable rate structure commensurate with the financial contributions made to construct and operate these facilities.

## **Research Needs**

Following the adoption and approval of this Plan, the next steps to continue with this Project are as generally described above in Section 11.2.2. The use-based agreements are to be developed and information contained in this Plan will be used for further development of design plans and specifications, augmented by more detailed site-specific geotechnical and hydrogeological investigations, surveying, and right-of-way development. Additional investigations will be made to quantify specific irrigation demands for the design of all conveyance facilities and interties to backup potable water supplies (suitably protected by cross-connection prevention devices).

# **Limitations**

This document was prepared solely for Kitsap County and the Suquamish Tribe in accordance with professional standards at the time the services were performed and in accordance with the contract between Kitsap County and Brown and Caldwell dated October 23, 2017. This document is governed by the specific scope of work authorized by Kitsap County; it is not intended to be relied upon by any other party except for regulatory authorities contemplated by the scope of work. We have relied on information or instructions provided by Kitsap County and other parties and, unless otherwise expressly indicated, have made no independent investigation as to the validity, completeness, or accuracy of such information.

# References

- Albuquerque (Albuquerque Bernalillo County Water Utility Authority). 2013. Water Resources Management Strategy Implementation. http://www.abcwua.org/uploads/files/2024\_Water\_Conservation\_Plan\_Update.pdf
- BC (Brown and Caldwell). 2016. Kingston Recycled Water Project: A Preliminary Investigation of Recycled Water Opportunities in the Kingston Area. Prepared for Kitsap County by Brown and Caldwell. Seattle, Washington. February.
- BHC. 2013. Kingston Wastewater Facilities Plan Update Addendum. Prepared for Kitsap County by BHC. Seattle, WA. May 2013.
- CH2M Hill. 2000. Kingston Replacement Outfall Engineering Report. Prepared by CH2M Hill for the Kitsap County Department of Public Works. January.
- City of Lacey. 2010. Comprehensive Water Rights Mitigation Plan. December 3. http://www.ci.lacey.wa.us/Portals/0/docs/Public\_Works/water\_resources/lacey\_mitigation\_plan\_updated\_dec\_2010.pdf
- City of Lacey. 2014. Woodland Creek Groundwater Enhancement Facility Receives Excellence in Engineering Award. City of Lacey website. June 27. http://www.ci.lacey.wa.us/news-events/press-releases/newsid2198/499
- CNN. 2018. Mussels from Puget Sound Test Positive for Opioids, Other Drugs. May 25. https://www.msn.com/en-us/health/medical/mussels-from-puget-sound-test-positive-for-opioids-other-drugs/ar-AAxOxsJ
- Crites, R., Kawata, E., and W. Muirhead. 2006. Recycling in the Tropics—A Study Looks at the Feasibility of Applying Recycled Water to Land Above Potable Water Aquifers in Hawaii. WE&T. Vol. 18, No. 5.
- Dickenson, E., Drewes, J.E. and S. Snyder 2008. The Use of Surrogates and Indicators to Assess the Performance of Soil Aquifer Treatment Systems Treating Recycled Water. WateReuse Symposium, Dallas, Texas.
- Dunagan, Christopher. 2018a. Does Puget Sound need a diet? Concerns grow over nutrients. March 6. https://www.eopugetsound.org/magazine/is/nutrients
- Dunagan, Christopher. 2018b. *Puget Sound circulation triggers low-oxygen conditions at different times and in different places*. February 28. https://www.eopugetsound.org/magazine/is/nutrients-circulation
- Ecology (Washington State Department of Ecology). 1997. *Kitsap County Initial Basin Assessment*. https://fortress.wa.gov/ecy/publications/publications/oftr974.pdf
- Ecology. 2008. Criteria for Sewage Works Design. Water Quality Program. Publication No. 98-37. August.
- Ecology. 2016. Washington State Water Quality Assessment 305(b) Report and 303(d) List of Impaired Waters. https://fortress.wa.gov/ecy/approvedwga/ApprovedSearch.aspx
- Ecology. 2018. Nitrogen in Puget Sound: Nitrogen Sources and Pathways. https://waecy.maps.arcgis.com/apps/MapSeries/index.html?appid=907dd54271f44aa0b1f08efd7efc4e30
- Ecology and Health (Washington State Department of Health). 2019. *Reclaimed Water Facilities Manual.* Water Quality Program. Publication No. 15–10–024. February.
- ECONorthwest. 2016. City of Nampa ID WWTP Infiltration Study: Preliminary Economic Development Impact Analysis. Prepared for City of Nampa.



- GCSAA (Golf Course Superintendents Association of America). 2015. Golf Course Environmental Profile Water Use and Conservation Practices on U.S. Golf Courses. Phase II, Volume I. Funded by USGA (United States Golf Association).
- Golder Associates. 2010. Kingston Reclaimed Water Feasibility Study. Prepared for Kitsap County Waste Water Division.
- Health. 2018a. Sentry Database SUQUAMISH Water System Id 864005. Accessed September 18.
- Health (Washington State Department of Health). 2018b. Shellfish Safety Information. https://fortress.wa.gov/doh/eh/maps/biotoxin/biotoxin.html
- Health. 2009. Water System Design Manual. Office of Drinking Water. Publication No. 331-123. Revised December 2019.
- Jasinski, S. M. 2010. *Phosphate rock: Mineral commodity summaries*. U.S. Geological Survey. November 8. http://minerals.usgs.gov/minerals/pubs/commodity/phosphate\_rock
- King County. 2018a. Recycled Water the right water for irrigation in King County. Brochure. https://kingcounty.gov/recycledwater
- King County. 2018b. *Brightwater Center*. King County website. Accessed June 4. https://www.kingcounty.gov/services/environment/brightwater-center.aspx
- Kitsap County. 2005. Coordinated Water System Plan. Prepared by HDR and Economic and Engineering Services, Inc. (EES). May 9, 2005.
- Kitsap County. 2009. Kitsap County Resolution 109.
- Kitsap County. 2011. Water System Plan Update. September 2011.
- Kitsap County. 2012. Final Capital Facilities Plan Update. Prepared by BERK and Parametrix. August 2012.
- Water System Plan Update (KPUD 2011)
- Kitsap Sun. 2017. New Sewage Plant Helps Bring Port Gamble 'Back to Life'. September 25. https://www.kitsapsun.com/story/news/2017/09/25/new-sewage-plant-helps-bring-port-gamble-back-life/701595001/
- KPUD (Kitsap Public Utility District). 2011. Water System Plan Update. https://www.kpud.org/downloads/CWSP\_2004\_Esized\_hsd\_250dpi.pdf
- Lubliner, B., M. Redding, and D. Ragsdale. 2010. *Pharmaceuticals and Personal Care Products in Municipal Wastewater and Their Removal by Nutrient Treatment Technologies*. Olympia, Washington. Publication 10-03-004. www.ecy.wa.gov/biblio/1003004.html
- NWRI (National Water Research Institute). 2012. *Ultraviolet Disinfection Guidelines for Drinking Water and Water Reuse*. Published in collaboration with the Water Research Foundation. Publication NWRI-2012-04. August.
- Peabody, Betsy. 2018. Seaweed Farming and its Surprising Benefits. 60 Minutes. April 29. https://www.cbsnews.com/news/seaweed-farming-and-its-surprising-benefits/
- PSRF (Puget Sound Restoration Fund). 2011. Restoration News Ocean Acidification Monitoring Project. Spring. https://www.restorationfund.org/sites/default/files/Newsletter\_Spring2011.pdf
- Redmond Reporter. 2015. Constantine honors Willows Run Golf Course with Green Globe Award. April 20. http://www.redmond-reporter.com/news/constantine-honors-willows-run-golf-course-with-green-globe-award/
- Salmon-Safe. 2018. Get Certified. Salmon-Safe Website. Accessed June 2. http://salmonsafe.org/getcertified
- Stewart, W., Hammond, L., Kauwenbergh, SJV. 2005. *Phosphorus as a Natural Resource*. Phosphorus: Agriculture and the Environment. Agronomy Monographs No. 46. American Society of Agronomy.



- USGS (United States Geological Survey). 2014. Hydrogeologic Framework, Groundwater Movement, and Water Budget of the Kitsap Peninsula, West-Central Washington. Scientific Investigations Report 2014-5106.
- WAC (Washington Administrative Code). 2018. 173-219 Reclaimed Water. Washington State. January 23.
- Wang, Y., Hu, W., Cao, Z., Fu, X., T. Zhu. 2005. Occurrence of Endocrine-disrupting Compounds in Reclaimed Water from Tianjin, China. Analytical and Bioanalytical Chemistry. Volume 383, Issue 5, pp 857–863.
- Washington State Legislature. 2003. WAC 173-515-030: Establishment of instream flows. http://apps.leg.wa.gov/WAC/default.aspx?cite=173-515-030
- WERF (Water Environment Research Foundation). 2006. Advances in Soil Aquifer Treatment for Sustainable Water Reuse.
- Willows Run Golf Course. 2018. A Brief History of Willows Run. Website. Accessed June 7. http://willowsrun.com/about/





Kingston Basin



#### **Replace PS-41 and Forcemain**

#### **Project Summary**

- Replace the pump station to increase firm capacity to 630 gpm
- Construct new wet well
- Construct new valve vault
- Construct new electrical, instrumentation, and controls equipment under a new canopy
- Construct new diesel generator set with Level 2 sound attenuating enclosure

• Replace 1,400 LF forcemain with 8-inch diameter pipe. Station upgrade will trigger forcemain replacement.

Item	Description	Quantity	Unit	 Unit Cost	Total
1	Mob/Demob	1	LS	\$ 100,000	\$ 100,000
2	Traffic Control	1	LS	\$ 20,000	\$ 20,000
3	TESC	1	LS	\$ 9,700	\$ 9,700
4	Dewatering	1	LS	\$ 63,000	\$ 63,000
5	Sheeting, Shoring, and Bracing	1	LS	\$ 7,000	\$ 7,000
6	Removal and Backfill of Existing Wetwell	1	LS	\$ 27,000	\$ 27,000
7	48" Manhole Type 1	1	EA	\$ 9,000	\$ 9,000
8	10-foot Diameter Wet Well	1	LS	\$ 169,000	\$ 169,000
9	Valve & Meter Vaults	1	LS	\$ 62,000	\$ 62,000
10	Pumps	1	LS	\$ 79,000	\$ 79,000
11	Valves and Piping - Wetwell & Valve Vault	1	LS	\$ 70,000	\$ 70,000
12	Yard Piping	1	LS	\$ 17,000	\$ 17,000
13	Generator w/ Level 2 Sound Attenuating Enclosure	1	LS	\$ 75,000	\$ 75,000
14	Electrical, Instrumentation, and Controls	1	LS	\$ 300,000	\$ 300,000
15	Canopy	1	LS	\$ 15,000	\$ 15,000
16	Fencing	160	LF	\$ 40	\$ 6,400
17	Clearing and Grubbing	1	LS	\$ 4,000	\$ 4,000
18	Temporary Bypass Pumping	1	LS	\$ 50,000	\$ 50,000
19	Site Restoration	1	LS	\$ 20,000	\$ 20,000
20	8" Force Main Sewer Upgrade	1400	LF	\$ 260	\$ 364,000
	SUBTOTAL				\$ 1,467,100
	Contingency (50%)				\$ 734,000
	Sales Tax (9.2%)				\$ 202,501
	CONSTRUCTION SUBTOTAL				\$ 2,404,000
	Design Services Engineering and Allied Costs (25%)				\$ 601,000
	Construction Services and Allied Costs (25%, assumes full CM	1)			\$ 601,000
	TOTAL PROJECT COST (ROUNDED)				\$ 3,700,000

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- $\bullet \ \, \text{Method of implementation} \ \bullet \ \, \text{Schedule (time to completion, time of commencement, speed of excecution, and} \ \bullet \ \, \text{Other variables}$



Kingston Basin



#### **Upgrade PS-71 and Replace Forcemain**

#### **Project Summary**

- Upgrade pump station to increase pump capacity of LS-71 to 790 gpm
- Replace pumps
- Replace electrical, instrumentation, and control equipment
- Replace 9,500 LF forcemain with 8-inch diameter pipe. Station upgrade will trigger forcemain replacement

Item	Description	Quantity	Unit	U	Init Cost	Total
1	Mob/Demob	1	LS	\$	49,000	\$ 49,000
2	Valve and piping improvements	1	LS	\$	62,000	\$ 62,000
3	Pumps	1	LS	\$	79,000	\$ 79,000
4	Electrical, Instrumentation, and Controls	1	LS	\$	300,000	\$ 300,000
5	Temporary Bypass Pumping	1	LS	\$	50,000	\$ 50,000
6	8" Force Main Sewer Upgrade	9500	LF	\$	260	\$ 2,470,000
	SUBTOTAL					\$ 3,010,000
	Contingency (50%)					\$ 1,505,000
	Sales Tax (9.2%)					\$ 415,380
	CONSTRUCTION SUBTOTAL					\$ 4,931,000
	Design Services Engineering and Allied Costs (25%)				·	\$ 1,232,750
	Construction Services and Allied Costs (25%, assumes full CM	)				\$ 1,232,750
	TOTAL PROJECT COST (ROUNDED)					\$ 7,400,000

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



#### **Arness Pump Station and Conveyance**

#### **Project Summary**

- Construct 1,850 LF of new 8-inch diameter gravity sewer.
- Construct new 20 gpm PS and 2,200 LF associated 4-inch diameter forcemain.
- Project would discharge to the infrastructure being planned as part of the Arborwood development (portions currently under construction).
- Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit	J	Init Cost		Total
1	Mob/Demob	1	LS	\$	65,000	\$	65,000
2	Traffic Control	1	LS	\$	13,000	\$	13,000
3	TESC	1	LS	\$	6,000	\$	6,000
4	Dewatering	1	LS	\$	20,000	\$	20,000
5	Sheeting, Shoring, and Bracing	1	LS	\$	20,000	\$	20,000
6	Removal and Backfill of Existing Wetwell	1	LS	\$	8,000	\$	8,000
7	8-foot Diameter Wet Well	1	LS	\$	116,000	\$	116,000
8	Valve Vault	1	LS	\$	10,000	\$	10,000
9	Pumps	2	EA	\$	75,000	\$	150,000
10	Valves and Piping - Wetwell & Valve Vault	1	LS	\$	25,000	\$	25,000
11	Yard Piping	1	LS	\$	7,000	\$	7,000
12	Generator w/ Level 2 Sound Attenuating Enclosure	1	LS	\$	40,000	\$	40,000
13	Electrical, Instrumentation, and Controls	1	LS	\$	198,000	\$	198,000
14	Canopy	1	LS	\$	21,000	\$	21,000
15	Fencing	80	LF	\$	40	\$	3,200
16	Clearing and Grubbing	1	LS	\$	1,000	\$	1,000
17	Temporary Bypass Pumping	1	LS	\$	2,000	\$	2,000
18	Site Restoration	1	LS	\$	13,000	\$	13,000
19	4" Force Main Sewer	2200	LF	\$	140	\$	308,000
	SUBTOTAL					\$	1,026,200
	Contingency (50%)					\$	514,000
	Sales Tax (9.2%)					\$	141,698
	CONSTRUCTION SUBTOTAL					\$	1,682,000
	Design Services Engineering and Allied Costs (25%)						
	Construction Services and Allied Costs (25%, assumes full CM	)				\$	420,500
	TOTAL PROJECT COST (ROUNDED)*					\$	2,600,000

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



#### **Kitsap County General Sewer Plans** Kingston Basin



#### **Sewer to Arness PS**

#### **Project Summary**

• Constr	• Construct 1,850 LF of new 8-inch diameter gravity sewer.						
Item	Description	Quantity	Unit	J	Unit Cost		Total
1	Mobilization / Demobilization	1	LS	\$	90,000	\$	90,000
2	Traffic Control	1	LS	\$	60,000	\$	60,000
3	Dewatering	1	LS	\$	22,000	\$	22,000
4	SWPPP & BMPs	1	LS	\$	4,000	\$	4,000
5	Sewer Bypass	1	LS	\$	19,000	\$	19,000
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	1,842	LF	\$	150	\$	276,300
7	6-inch Side Sewer Replacement	1,000	LF	\$	180	\$	180,000
8	Shoring and Trench Safety	1	LS	\$	8,000	\$	8,000
9	Imported Trench Backfill	1,500	TON	\$	25	\$	37,500
10	Manhole 48-inch diameter	7	EA	\$	15,000	\$	105,000
11	HMA for Trench Patch (CSBC and CSTC Incidental)	600	TON	\$	200	\$	120,000
12	Grind and Overlay, Channelization*	1	EST	\$	300,000	\$	300,000
13	Cleanup & Site Restoration	1	LS	\$	30,000	\$	30,000
	SUBTOTAL					\$	1,251,800
	Contingency (50%)					\$	626,000
	Sales Tax (9.2%)					\$	172,758
	CONSTRUCTION SUBTOTAL						2,051,000
	Design Services Engineering and Allied Costs (25%)					\$	513,000
	Construction Services and Allied Costs (25%, assumes full CM	)				\$	513,000
	TOTAL PROJECT COST (ROUNDED)*					\$	3,100,000

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



#### **Highway 104 Pump Station and Conveyance**

#### **Project Summary**

- Construct new 61 gpm PS and 2,800 LF associated 4-inch diameter forcemain.
- Project would expand the area served by LS-41
- Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit	l	Init Cost	Total
1	Mob/Demob	1	LS	\$	65,000	\$ 65,000
2	Traffic Control	1	LS	\$	13,000	\$ 13,000
3	TESC	1	LS	\$	6,000	\$ 6,000
4	Dewatering	1	LS	\$	20,000	\$ 20,000
5	Sheeting, Shoring, and Bracing	1	LS	\$	20,000	\$ 20,000
6	Removal and Backfill of Existing Wetwell	1	LS	\$	8,000	\$ 8,000
7	8-foot Diameter Wet Well	1	LS	\$	116,000	\$ 116,000
8	Valve Vault	1	LS	\$	10,000	\$ 10,000
9	Pumps	2	EA	\$	75,000	\$ 150,000
10	Valves and Piping - Wetwell & Valve Vault	1	LS	\$	25,000	\$ 25,000
11	Yard Piping	1	LS	\$	7,000	\$ 7,000
12	Generator w/ Level 2 Sound Attenuating Enclosure	1	LS	\$	40,000	\$ 40,000
13	Electrical, Instrumentation, and Controls	1	LS	\$	198,000	\$ 198,000
14	Canopy	1	LS	\$	21,000	\$ 21,000
15	Fencing	80	LF	\$	40	\$ 3,200
16	Clearing and Grubbing	1	LS	\$	1,000	\$ 1,000
17	Temporary Bypass Pumping	1	LS	\$	2,000	\$ 2,000
18	Site Restoration	1	LS	\$	13,000	\$ 13,000
19	4" Force Main Sewer	2800	LF	\$	140	\$ 392,000
	SUBTOTAL					\$ 1,110,200
	Contingency (50%)					\$ 556,000
	Sales Tax (9.2%)					\$ 153,290
	CONSTRUCTION SUBTOTAL					\$ 1,820,000
	Design Services Engineering and Allied Costs (25%)					\$ 455,000
	Construction Services and Allied Costs (25%, assumes full CM	)				\$ 455,000
	TOTAL PROJECT COST (ROUNDED)*					\$ 2,800,000

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



# Kitsap County General Sewer Plans Kingston Basin



#### **Gravity Sewers to Highway 104 PS**

#### **Project Summary**

• Construct 1,300 LF of new 8-inch diameter gravity sewer.

CONSCI	uct 1,500 Li of new 6-inch diameter gravity sewer.						
Item	Description	Quantity	Unit	U	Init Cost		Total
1	Mobilization / Demobilization	1	LS	\$	70,000	\$	70,000
2	Traffic Control	1	LS	\$	40,000	\$	40,000
3	Dewatering	1	LS	\$	16,000	\$	16,000
4	SWPPP & BMPs	1	LS	\$	3,000	\$	3,000
5	Sewer Bypass	1	LS	\$	14,000	\$	14,000
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	1,307	LF	\$	150	\$	196,050
7	6-inch Side Sewer Replacement	700	LF	\$	180	\$	126,000
8	Shoring and Trench Safety	1	LS	\$	6,000	\$	6,000
9	Imported Trench Backfill	1,000	TON	\$	25	\$	25,000
10	Manhole 48-inch diameter	4	EA	\$	15,000	\$	60,000
11	HMA for Trench Patch (CSBC and CSTC Incidental)	500	TON	\$	200	\$	100,000
12	Grind and Overlay, Channelization*	1	EST	\$	200,000	\$	200,000
13	Cleanup & Site Restoration	1	LS	\$	20,000	\$	20,000
	SUBTOTAL					\$	876,050
	Contingency (50%)					\$	439,000
	Sales Tax (9.2%)						
	CONSTRUCTION SUBTOTAL						1,437,000
	Design Services Engineering and Allied Costs (25%)					\$	360,000
	Construction Services and Allied Costs (25%, assumes full CM	)				\$	360,000
	TOTAL PROJECT COST (ROUNDED)*					\$	2,200,000

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- $\bullet \ \, \text{Method of implementation} \, \bullet \, \text{Schedule (time to completion, time of commencement, speed of excecution, and} \, \bullet \, \text{Other variables} \,$



Kingston Basin



#### **Taree Pump Station and Conveyance**

#### **Project Summary**

- Construct new 26 gpm PS and 1,300 LF associated 4-inch diameter forcemain.
- Project would discharge to the infrastructure being planned as part of the Arborwood development (portions currently under construction).
- Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit		Unit Cost		Total		
1	Mobilization / Demobilization	1	LS	\$	90,000	\$	90,000		
2	Traffic Control	1	LS	\$	60,000	\$	60,000		
3	Dewatering	1	LS	\$	23,000	\$	23,000		
4	SWPPP & BMPs	1	LS	\$	4,000	\$	4,000		
5	Sewer Bypass	1	LS	\$	19,000	\$	19,000		
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	1,828	LF	\$	150	\$	274,200		
7	6-inch Side Sewer Replacement	1,000	LF	\$	180	\$	180,000		
8	Shoring and Trench Safety	1	LS	\$	8,000	\$	8,000		
9	Imported Trench Backfill	1,400	TON	\$	25	\$	35,000		
10	Manhole 48-inch diameter	9	EA	\$	15,000	\$	135,000		
11	HMA for Trench Patch (CSBC and CSTC Incidental)	600	TON	\$	200	\$	120,000		
12	Grind and Overlay, Channelization*	1	EST	\$	300,000	\$	300,000		
13	Cleanup & Site Restoration	1	LS	\$	30,000	\$	30,000		
	SUBTOTAL					\$	1,278,200		
	Contingency (50%)					\$	640,000		
	Sales Tax (9.2%)					\$	176,474		
	CONSTRUCTION SUBTOTAL								
	Design Services Engineering and Allied Costs (25%)			_		\$	524,000		
	Construction Services and Allied Costs (25%, assumes full CM	)				\$	524,000		
	TOTAL PROJECT COST (ROUNDED)*					\$	3,200,000		

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



600,000

#### **Sewers to Taree LS Improvement 2 Project Summary** Construct 1,830 LF of new 8-inch diameter gravity sewer Item **Description** Quantity Unit **Unit Cost Total** Mobilization / Demobilization 20,000 \$ 1 LS 20,000 1 2 Traffic Control LS \$ 10,000 \$ 10,000 Dewatering LS \$ 4,000 4,000 3 1 \$ 4 SWPPP & BMPs 1 LS \$ 1,000 1,000 5 Sewer Bypass 1 LS \$ 1,000 \$ 1,000 6 Open Trench New 8-inch Pipe (SDR 35 PS46) 56 LF \$ 150 \$ 8,400 7 6-inch Side Sewer Replacement 100 LF \$ 180 \$ 18,000 8 Shoring and Trench Safety LS \$ 1,000 \$ 1,000 \$ 9 Imported Trench Backfill 200 TON \$ 5,000 25 10 Manhole 48-inch diameter \$ 15,000 \$ 15,000 EΑ HMA for Trench Patch (CSBC and CSTC Incidental) 100 TON \$ 200 \$ 20,000 11 \$ \$ 12 Grind and Overlay, Channelization\* **EST** 100,000 100,000 10,000 \$ 13 Cleanup & Site Restoration LS 10,000 **SUBTOTAL** \$ 213,400 Contingency (50%) 107,000 Sales Tax (9.2%) \$ 29,477 **CONSTRUCTION SUBTOTAL** \$ 350,000 Design Services Engineering and Allied Costs (25%) \$ 88,000 Construction Services and Allied Costs (25%, assumes full CM) \$ 88,000

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables

TOTAL PROJECT COST (ROUNDED)\*

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.



# Kitsap County General Sewer Plans Kingston Basin

**M** consor

#### Taree Lift Station (26 GPM): New Lift Station and Force Main

#### **Project Summary**

- Construct new 26 gpm LS and 1,300 LF associated 4-inch diameter forcemain.
- Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit		Unit Cost		Total	
1	Mob/Demob	1	LS	\$	65,000	\$	65,000	
2	Traffic Control	1	LS	\$	13,000	\$	13,000	
3	TESC	1	LS	\$	6,000	\$	6,000	
4	Dewatering	1	LS	\$	20,000	\$	20,000	
5	Sheeting, Shoring, and Bracing	1	LS	\$	20,000	\$	20,000	
6	Removal and Backfill of Existing Wetwell	1	LS	\$	8,000	\$	8,000	
7	8-foot Diameter Wet Well	1	LS	\$	116,000	\$	116,000	
8	Valve Vault	1	LS	\$	10,000	\$	10,000	
9	Pumps	2	EA	\$	75,000	\$	150,000	
10	Valves and Piping - Wetwell & Valve Vault	1	LS	\$	25,000	\$	25,000	
11	Yard Piping	1	LS	\$	7,000	\$	7,000	
12	Generator w/ Level 2 Sound Attenuating Enclosure	1	LS	\$	40,000	\$	40,000	
13	Electrical, Instrumentation, and Controls	1	LS	\$	198,000	\$	198,000	
14	Canopy	1	LS	\$	21,000	\$	21,000	
15	Fencing	80	LF	\$	40	\$	3,200	
16	Clearing and Grubbing	1	LS	\$	1,000	\$	1,000	
17	Temporary Bypass Pumping	1	LS	\$	2,000	\$	2,000	
18	Site Restoration	1	LS	\$	13,000	\$	13,000	
19	4" Force Main Sewer	1300	LF	\$	140	\$	182,000	
	SUBTOTAL					\$	900,200	
	Contingency (50%)							
	Sales Tax (9.2%)							
	CONSTRUCTION SUBTOTAL							
	Design Services Engineering and Allied Costs (25%)							
	Construction Services and Allied Costs (25%, assumes full CM)							
	TOTAL PROJECT COST (ROUNDED)*					\$	2,300,000	

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



**Kingston Basin** 



#### **Extend Gravity Sewers Flowing to PS-41**

#### **Project Summary**

- Construct 2,540 LF of new 8-inch diameter gravity sewers to expand the area served by PS-41
- Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit	Į	Jnit Cost		Total
1	Mobilization / Demobilization	1	LS	\$	110,000	\$	110,000
2	Traffic Control	1	LS	\$	70,000	\$	70,000
3	Dewatering	1	LS	\$	27,000	\$	27,000
4	SWPPP & BMPs	1	LS	\$	6,000	\$	6,000
5	Sewer Bypass	1	LS	\$	26,000	\$	26,000
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	2,541	LF	\$	150	\$	381,150
7	6-inch Side Sewer Replacement	1,300	LF	\$	180	\$	234,000
8	Shoring and Trench Safety	1	LS	\$	11,000	\$	11,000
9	Imported Trench Backfill	2,000	TON	\$	25	\$	50,000
10	Manhole 48-inch diameter	9	EA	\$	15,000	\$	135,000
11	HMA for Trench Patch (CSBC and CSTC Incidental)	800	TON	\$	200	\$	160,000
12	Grind and Overlay, Channelization*	1	EST	\$	300,000	\$	300,000
13	Cleanup & Site Restoration	1	LS	\$	30,000	\$	30,000
	SUBTOTAL					\$	1,540,150
	Contingency (50%)					\$	771,000
	Sales Tax (9.2%)					\$	212,626
	CONSTRUCTION SUBTOTAL						
	Design Services Engineering and Allied Costs (25%)						
	Construction Services and Allied Costs (25%, assumes full CM)						
	TOTAL PROJECT COST (ROUNDED)*					\$	3,800,000

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



**Kingston Basin** 



#### **Extend Gravity Sewers Flowing to PS-43**

#### **Project Summary**

- Construct 2,500 LF of new 8-inch diameter gravity sewers to expand the area served by PS-43
- Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit		Unit Cost		Total
1	Mobilization / Demobilization	1	LS	\$	70,000	\$	70,000
2	Traffic Control	1	LS	\$	50,000	\$	50,000
3	Dewatering	1	LS	\$	18,000	\$	18,000
4	SWPPP & BMPs	1	LS	\$	4,000	\$	4,000
5	Sewer Bypass	1	LS	\$	16,000	\$	16,000
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	1,540	LF	\$	150	\$	231,000
7	6-inch Side Sewer Replacement	800	LF	\$	180	\$	144,000
8	Shoring and Trench Safety	1	LS	\$	7,000	\$	7,000
9	Imported Trench Backfill	1,200	TON	\$	25	\$	30,000
10	Manhole 48-inch diameter	7	EA	\$	15,000	\$	105,000
11	HMA for Trench Patch (CSBC and CSTC Incidental)	500	TON	\$	200	\$	100,000
12	Grind and Overlay, Channelization*	1	EST	\$	200,000	\$	200,000
13	Cleanup & Site Restoration	1	LS	\$	20,000	\$	20,000
	SUBTOTAL					\$	995,000
	Contingency (50%)					\$	498,000
	Sales Tax (9.2%)					\$	137,356
	CONSTRUCTION SUBTOTAL						
	Design Services Engineering and Allied Costs (25%)						
	Construction Services and Allied Costs (25%, assumes full CM)						408,000
	TOTAL PROJECT COST (ROUNDED)*					\$	2,500,000

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



#### **Gravity Sewers to PS 43 Improvement 2**

#### **Project Summary**

- Construct 2,500 LF of new 8-inch diameter gravity sewers to expand the area served by PS-43
- Project expected to be paid for be developers.

Item	Description	Quantity	Unit		Unit Cost		Total	
1	Mobilization / Demobilization	1	LS	\$	60,000	\$	60,000	
2	Traffic Control	1	LS	\$	40,000	\$	40,000	
3	Dewatering	1	LS	\$	14,000	\$	14,000	
4	SWPPP & BMPs	1	LS	\$	2,000	\$	2,000	
5	Sewer Bypass	1	LS	\$	10,000	\$	10,000	
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	964	LF	\$	150	\$	144,600	
7	6-inch Side Sewer Replacement	500	LF	\$	180	\$	90,000	
8	Shoring and Trench Safety	1	LS	\$	4,000	\$	4,000	
9	Imported Trench Backfill	1,700	TON	\$	25	\$	42,500	
10	Manhole 48-inch diameter	4	EA	\$	15,000	\$	60,000	
11	HMA for Trench Patch (CSBC and CSTC Incidental)	400	TON	\$	200	\$	80,000	
12	Grind and Overlay, Channelization*	1	EST	\$	200,000	\$	200,000	
13	Cleanup & Site Restoration	1	LS	\$	20,000	\$	20,000	
	SUBTOTAL					\$	767,100	
	Contingency (50%)					\$	384,000	
	Sales Tax (9.2%)							
	CONSTRUCTION SUBTOTAL							
	Design Services Engineering and Allied Costs (25%)							
	Construction Services and Allied Costs (25%, assumes full CM)							
	TOTAL PROJECT COST (ROUNDED)*					\$	1,900,000	

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



#### **Extend Gravity Sewers Flowing to Arborwood**

#### **Project Summary**

- Construct 10,140 LF of new 8-inch diameter gravity sewers.
- Project would discharge to the infrastructure being planned as part of the Arborwood development (portions currently under construction).

• Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit	J	Init Cost		Total
1	Mobilization / Demobilization	1	LS	\$	290,000	\$	290,000
2	Traffic Control	1	LS	\$	190,000	\$	190,000
3	Dewatering	1	LS	\$	73,000	\$	73,000
4	SWPPP & BMPs	1	LS	\$	14,000	\$	14,000
5	Sewer Bypass	1	LS	\$	66,000	\$	66,000
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	6,567	LF	\$	150	\$	985,050
7	6-inch Side Sewer Replacement	3,300	LF	\$	180	\$	594,000
8	Shoring and Trench Safety	1	LS	\$	27,000	\$	27,000
9	Imported Trench Backfill	5,000	TON	\$	25	\$	125,000
10	Manhole 48-inch diameter	33	EA	\$	15,000	\$	495,000
11	HMA for Trench Patch (CSBC and CSTC Incidental)	2,100	TON	\$	200	\$	420,000
12	Grind and Overlay, Channelization*	1	EST	\$	800,000	\$	800,000
13	Cleanup & Site Restoration	1	LS	\$	80,000	\$	80,000
	SUBTOTAL					\$	4,159,050
	Contingency (50%)					\$	2,080,000
	Sales Tax (9.2%)						573,993
	CONSTRUCTION SUBTOTAL					\$	6,814,000
	Design Services Engineering and Allied Costs (25%)						1,704,000
	Construction Services and Allied Costs (25%, assumes full CM)						1,704,000
	TOTAL PROJECT COST (ROUNDED)*					\$	10,300,000

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



#### **Gravity Sewers Connecting to Arborwood Improvement 2**

#### **Project Summary**

- Construct 10,140 LF of new 8-inch diameter gravity sewers.
- Project would discharge to the infrastructure being planned as part of the Arborwood development (portions currently under construction).
- Project expected to be paid for be developers. Costs are developed in an attempt to show valuation of assets.

Item	Description	Quantity	Unit	ι	Unit Cost		Total	
1	Mobilization / Demobilization	1	LS	\$	160,000	\$	160,000	
2	Traffic Control	1	LS	\$	100,000	\$	100,000	
3	Dewatering	1	LS	\$	40,000	\$	40,000	
4	SWPPP & BMPs	1	LS	\$	8,000	\$	8,000	
5	Sewer Bypass	1	LS	\$	36,000	\$	36,000	
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	3,572	LF	\$	150	\$	535,800	
7	6-inch Side Sewer Replacement	1,800	LF	\$	180	\$	324,000	
8	Shoring and Trench Safety	1	LS	\$	15,000	\$	15,000	
9	Imported Trench Backfill	6,000	TON	\$	25	\$	150,000	
10	Manhole 48-inch diameter	7	EA	\$	15,000	\$	105,000	
11	HMA for Trench Patch (CSBC and CSTC Incidental)	1,200	TON	\$	200	\$	240,000	
12	Grind and Overlay, Channelization*	1	EST	\$	500,000	\$	500,000	
13	Cleanup & Site Restoration	1	LS	\$	50,000	\$	50,000	
	SUBTOTAL					\$	2,263,800	
	Contingency (50%)					\$	1,132,000	
	Sales Tax (9.2%)						312,414	
	CONSTRUCTION SUBTOTAL						3,709,000	
	Design Services Engineering and Allied Costs (25%)						928,000	
	Construction Services and Allied Costs (25%, assumes full CM)						928,000	
	TOTAL PROJECT COST (ROUNDED)*					\$	5,600,000	

<sup>\*</sup>Project cost for developer funded projects is provided to show an estimated valuation of assets only. The County is not expected to fund the project, therefore, Developer funded projects are not included in the CIP.

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- $\bullet \ \, \text{Method of implementation} \, \bullet \, \text{Schedule (time to completion, time of commencement, speed of excecution, and} \, \bullet \, \text{Other variables}$



# Kitsap County General Sewer Plans Kingston Basin

**\*** Consor

#### **Annual Pipe Replacement**

#### **Project Summary**

- Replace deteriorated and aging pipe.
- Project costs assume \$1,000,000 per year totaled over 14 years
- Replacement assumes 0.5 percent of total system (450 LF) is replaced per year

Item	Description	Quantity	Unit		Unit Cost	Total
1	Mobilization / Demobilization	1	LS	\$	30,000	\$ 30,000
2	Traffic Control	1	LS	\$	20,000	\$ 20,000
3	Dewatering	1	LS	\$	7,000	\$ 7,000
4	SWPPP & BMPs	1	LS	\$	1,000	\$ 1,000
5	Sewer Bypass	1	LS	\$	5,000	\$ 5,000
6	Open Trench New 8-inch Pipe (SDR 35 PS46)	450	LF	\$	150	\$ 67,500
7	6-inch Side Sewer Replacement	225	LF	\$	180	\$ 40,500
8	Shoring and Trench Safety	1	LS	\$	2,000	\$ 2,000
9	Imported Trench Backfill	400	TON	\$	25	\$ 10,000
10	Manhole 48-inch diameter	2	EA	\$	15,000	\$ 30,000
11	HMA for Trench Patch (CSBC and CSTC Incidental)	300	TON	\$	200	\$ 60,000
12	Grind and Overlay, Channelization*	1	EST	\$	100,000	\$ 100,000
13	Cleanup & Site Restoration	1	LS	\$	10,000	\$ 10,000
	SUBTOTAL					\$ 383,000
	Contingency (Approximately 50%)					\$ 192,000
	Sales Tax (9.2%)					\$ 52,900
	CONSTRUCTION SUBTOTAL					\$ 628,000
	Design Services Engineering and Allied Costs (25%)					\$ 157,000
	Construction Services and Allied Costs (25%, assume	es full CM)				\$ 157,000
	TOTAL PROJECT COST (ROUNDED)					\$ 1,000,000
				1	l4 Year Total:	\$ 14,000,000

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



ИЛОП	PASHING TO:							
	Replace UV System							
	Project Summary							
• Replac	e obsolete UV system with new, more advanced model to reduce o	perating co	st and O	&М	requireme	nts		
Item	Description	Quantity	Unit	Į	Jnit Cost		Total	
1	Stainless steel channel reduction baffle	1	LS	\$	7,800	\$	7,800	
2	Existing UV3000B Demolition	1	LS	\$	3,000	\$	3,000	
3	New UV3000+ System	1	LS	\$	229,320	\$	229,320	
4	UV Transmittance Probe	1	LS	\$	36,660	\$	36,660	
5	EI&C Allowance	1	LS	\$	80,694	\$	80,694	
	SUBTOTAL					\$	357,474	
	Contingency (50%)					\$	179,000	
	Sales Tax (9.2%)					\$	49,356	
	CONSTRUCTION SUBTOTAL					\$	586,000	
Design Services Engineering and Allied Costs (25%)						\$	146,500	
Construction Services and Allied Costs (25%, assumes full CM)						\$	146,500	
	TOTAL PROJECT COST (ROUNDED)					\$	880,000	

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



#### **Nitrogen Optimization Improvements**

#### **Project Summary**

- Project will improve TIN monitoring and control to ensure effluent TIN can be consistently reduced to below 10 mg/L
- Install additional dissolved oxygen probe
- Install ammonia and nitrate probes in each basin

Item	Description	Quantity	Unit	Unit C	ost	Total
1	On-line DO and Ammonia/Nitrate Probes	3	EA	\$ 13,	260	\$ 39,780
	SUBTOTAL					\$ 39,780
	Contingency (50%)					\$ 20,000
	Sales Tax (9.2%)					\$ 5,500
	CONSTRUCTION SUBTOTAL					\$ 66,000
	Design Services Engineering and Allied Costs (25%)					\$ 16,500
	Construction Services and Allied Costs (25%, assumes full CM	)				\$ 16,500
	TOTAL PROJECT COST (ROUNDED)					\$ 99,000

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



Kingston Basin



#### **Class A Reclaimed Water Improvements**

#### **Project Summary**

- Use reclaimed water for irrigation at White Horse Golf Course and indirect groundwater recharge at North Kitsap Heritage Park
- Construct secondary effluent equalization tank
- Construct filter feed station and tertiary filtration
- Add additional UV disinfection
- · Construct recycled water pump station and pipeline
- Implement CIP-K-WWTP-CAP-3 if not already completed

Item	Description	Quantity	Unit	Unit Cost	Total
1	Reclaimed Water Improvements	1	LS		
	SUBTOTAL				
	Contingency (50%)				
	Sales Tax (9.2%)				
	CONSTRUCTION SUBTOTAL				
	Design Services Engineering and Allied Costs (25%)				
	Construction Services and Allied Costs (25%, assumes full CM	)			
	TOTAL PROJECT COST (ROUNDED)				\$ 13,661,000

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables



# Kitsap County General Sewer Plans Kingston Basin



480,000

#### **Replace Clarifier Drives Project Summary** • Replace secondary clarifier drives, collection mechanism, walkway, platform, and weirs Description Quantity Unit **Unit Cost** Total Replace Clarifier Drives LS 150,000 195,000 **SUBTOTAL** \$ 195,000 Contingency (50%) \$ 98,000 \$ 26,956 Sales Tax (9.2%) **CONSTRUCTION SUBTOTAL** 320,000 Design Services Engineering and Allied Costs (25%) \$ 80,000 \$ Construction Services and Allied Costs (25%, assumes full CM) 80,000

Consor's construction cost ("estimate") is in dollars valued as of the date of this estimate. This estimate is an opinion of probable cost based on information available at the time of its development in June 2023. Final costs will depend on

- Actual field conditions Actual material and labor costs Market conditions for construction Regulatory factors Final project scope
- Method of implementation Schedule (time to completion, time of commencement, speed of excecution, and Other variables

TOTAL PROJECT COST (ROUNDED)

APPENDIX K
SUMMARY OF STATE OF
WASHINGTON GRANT AND
LOAN PROGRAMS FOR DRINKING
WATER AND WASTEWATER
CAPITAL PROJECTS



# Funding Programs for Drinking Water and Wastewater Projects Updated 9-17-2024

Type of Program	Pages
Planning/ Pre-Construction	2 - 6
Pre-Construction Only	7 - 8
Construction	9 - 16
Emergency	17 - 19

You can find the latest version of this document at <a href="http://www.infrafunding.wa.gov/resources.html">http://www.infrafunding.wa.gov/resources.html</a>

Please contact Amie Smith at <a href="mailto:amie.smith@commerce.wa.gov">amie.smith@commerce.wa.gov</a> if you would like to update your program information

PLANNING Programs	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
DWSRF	Preparation of planning	Group A (private and publicly-	Loan:	On-line applications accepted year-round until
Drinking Water State	documents, engineering	owned) community and not-	\$500,000 maximum per	funding exhausted. Approximately \$3 million
Revolving Fund	reports, construction documents, permits,	for-profit non-community water systems, but not federal	jurisdiction	available to award each year.
Planning and Engineering Loans	cultural reports, environmental reports.	or state-owned systems. Small systems serving fewer than	0% annual interest rate	Contact: Jocelyne Gray 564-669-4893
	Detential for great subsidu	10,000 people.	2% loan service fee	Jocelyne.gray@doh.wa.gov
Department of Health	Potential for grant subsidy for disadvantaged communities or those with		2-year time of performance	For information and forms visit: http://www.doh.wa.gov/DWSRF
	high affordability rates.		10-year repayment period	
DWSRF	Development of a	Group A not-for-profit	Grant:	Online applications accepted year round until
Drinking Water State Revolving Fund	feasibility study, engineering evaluation,	community water system, county, city, public utility	Up to \$50,000 per project	funding exhausted.
	design of a infrastructure	district, or water district in	Minimum of \$10,000	Contact: Jocelyne Gray
Consolidation Grant	project to consolidated one or more Group A water	Washington State	2-year time of performance	564-669-4893  Jocelyne.gray@doh.wa.gov
Department of Health	systems	Tribal systems are eligible provided the project is not	2 year time or parrormance	For information and forms visit:
		receiving other national set- aside funding for the project.		http://www.doh.wa.gov/DWSRF
DWSRF	Develop lead service line	Group A (private and publicly-	Loan:	Online applications available and accepted
Drinking Water State Revolving Fund	inventory. Can include creating or updating a	owned) community and not- for-profit non-community	Minimum \$25,000	October 1 through November 30, 2024.
_	planning document.	water systems, but not federal	No maximum	Contact: Jocelyne Gray
Lead Service Line Inventory Loan	There is principal	or state-owned systems.	0% annual interest rate	564-669-4893  Jocelyne.gray@doh.wa.gov
inventory Loan	forgiveness for		070 annual interest rate	Jocelyne.gray@don.wa.gov
Department of Health	disadvantaged communities.		2% loan service fee	For information and forms visit: http://www.doh.wa.gov/DWSRF
			2-year time of performance	
			10-year repayment period	
			First come, first served based on application submittal date.	

PLANNING	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs				
DWSRF Drinking Water State Revolving Fund  Drinking Water System Rehabilitation and Consolidation Grant  Department of Health	Rehabilitation Planning and design of infrastructure to bring system into compliance.  Restructuring, Consolidation, Receivership Planning  Preconstruction to bring the water system into compliance.  Purchase cost of the water system to be acquired.	Rehabilitation Group A water systems serving less than 10,000 people under a DOH compliance order.  Restructuring, Consolidation, Receivership Group A publicly owned water system (city, town, county, public utility district, or water/sewer district), an approved Satellite Management Agency, or approved receiver.	Grant: Maximum \$1.25 million  4-year time of performance	By invite only.  Contact: Jocelyne Gray 564-669-4893 Jocelyne.gray@doh.wa.gov  For information and forms visit: http://www.doh.wa.gov/DWSRF
SOURCE WATER PROTECTION GRANT PROGRAM Department of Health	Establishment of a water program for any receiving city, town, or county.  Source water protection studies (watershed, hydrogeologic, feasibility studies).	Non-profit Group A water systems.  Local governments proposing a regional project.	Grants: Funding is dependent upon project needs, but typically does not exceed \$30,000.	Applications accepted anytime; grants awarded on a funds available basis.  Contact: Deborah Johnson 253-433-4054
Department of freatti	Eligible activities can lead to reducing the risk of contamination of a system's drinking water sources(s), or they can evaluate or build resiliency for a public water supply. They must contribute to better protecting one or more public water supply sources.	Project must be reasonably expected to provide long-term benefit to drinking water quality or quantity.		Deborah.Johnson@doh.wa.gov  http://www.doh.wa.gov/ CommunityandEnvironment/DrinkingWater/ SourceWater/SourceWaterProtection.aspx  Grant guidelines https://www.doh.wa.gov/Portals/1/Documents/ Pubs/331-552.pdf

PLANNING Programs	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
ECOLOGY: WATER QUALITY COMBINED FUNDING PROGRAM State Water Pollution Control Revolving Fund (SRF)  Centennial Clean Water Fund Stormwater Financial Assistance Program (SFAP)  Department of Ecology	Planning projects associated with publicly- owned wastewater and stormwater facilities.  The integrated program also funds planning and implementation of nonpoint source pollution control activities.	Counties, cities, towns, conservation districts, or other political subdivision, municipal or quasi-municipal corporations, and federally recognized tribes	Loan: \$10,000,000 reserved for preconstruction statewide  Interest rates (SFY 2025)  • 6-20 year loans: 1.2%  • 1-5 year loans: 0.6%  Preconstruction set-aside (Distressed Communities) 50% forgivable principal loan and 50% loan	Applications due October 15, 2024.  Contact: Eliza Keeley 360-628-1976 Eliza.keeley@ecy.wa.gov  https://ecology.wa.gov/About-us/How-we- operate/Grants-loans/Find-a-grant-or- loan/Water-Quality-grants-and-loans
RD PRE-DEVELOPMENT PLANNING GRANTS (PPG) U.S. Dept. of Agriculture Rural Development – Rural Utilities Service – Water and Waste Disposal Direct Loans and Grants	Water and/or sewer planning; environmental work; and other work to assist in developing an application for infrastructure improvements.	Low-income, small communities and systems serving areas under 10,000 population.  Population determined by U.S. Census 2020.  Income determined by the American Community Survey 2017-2021 (5-year).	Planning grant to assist in paying costs associated with developing a complete application for RD funding for a proposed project.  Maximum \$60,000 grant.  Requires minimum 25% match.	Applications accepted year-round, on a fund-available basis.  Contact: Koni Reynolds 360-704-7737 koni.reynolds@usda.gov  http://www.rd.usda.gov/wa
RD 'SEARCH' GRANTS: SPECIAL EVALUATION ASSISTANCE FOR RURAL COMMUNITIES U.S. Dept. of Agriculture Rural Development – Rural Utilities Service – Water and Waste Disposal Direct Loans and Grants	Water and/or sewer planning; environmental work; and other work to assist in developing an application for infrastructure improvements.	Low-income, small communities and systems serving areas under 2,500 population.  Population determined by U.S. Census 2020.  Income determined by the American Community Survey 2017-2021 (5-year).	Maximum \$30,000 grant. No match required.	Applications accepted year-round, on a fund-available basis.  Contact: : Koni Reynolds 360-704-7737 koni.reynolds@usda.gov  http://www.rd.usda.gov/wa

PLANNING	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs  CERB PLANNING AND FEASIBILITY GRANTS Community Economic Revitalization Board — Project-Specific Planning Program	Project-specific feasibility and pre-development studies that advance community economic development goals for industrial sector business development.	Eligible statewide Counties, cities, towns, port districts, special districts.  Federally recognized tribes  Municipal corporations, quasi- municipal corporations w/ economic development purposes.	Grant: Up to \$100,000 per project.  Requires 20% (of total project cost) matching funds  CERB is authority for funding approvals.	Applications accepted year-round. The Board meets six times a year.  Contact: Janea Stark 360-252-0812 janea.stark@commerce.wa.gov
RCAC Rural Community Assistance Corporation Feasibility and Pre-Development Loans	Water, wastewater, stormwater, and solid waste planning; environmental work; and other work to assist in developing an application for infrastructure improvements.	Non-profit organizations, public agencies, tribes, and low-income rural communities with a 50,000 population or less, or 10,000 or less if proposed permanent financing is through USDA Rural Development.	Typically up to \$50,000 for feasibility loan.  Typically up to \$350,000 for predevelopment loan.  Typically up to a 1-year term.  5.5% interest rate.  1% loan fee.	Applications accepted anytime.  Contact: Jessica Scott 719-458-5460 jscott@rcac.org  Applications available online at http://www.rcac.org/lending/environmental-loans/
Economic Development Administration (EDA) United States Department of Commerce  EDA Public Works & Economic Adjustment Assistance Program: Planning, Feasibility Studies, Preliminary Engineering Reports, Environmental Consultation for distressed and disaster communities.	Drinking water infrastructure; including pre-distribution conveyance, withdrawal/harvest (i.e. well extraction), storage facilities, treatment and distribution.  Waste water infrastructure; including conveyance, treatment facilities, discharge infrastructure and water recycling.	Indian Tribes; state, county, city, or other political subdivisions of a state; institutions of higher education; public or private non-profit organizations or associations acting in cooperation with officials of a political subdivision of a State	Grants: EDA investment share up to \$500,000  Cost sharing required from applicant  Standard grant rate of 50% of total project cost and up to 80%.  O Up to 100% for Tribal Nations	Submit application through EDA Grants Management Experience "EDGE" Home (eda.gov)  Contact:  J. Wesley Cochran Economic Development Representative (206) 561-6646 jcochran@eda.gov

PLANNING	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs				
Public Works Board	Capital facilities planning	Counties, cities, special	Pre-construction awarded	Contact: Sheila Richardson
WA Department of	(including small water	purpose districts, and quasi-	quarterly until funds are	564-999-1927
Commerce	system management plans,	municipal organizations that	exhausted. Up \$1,000,000 per	Sheila.richardson@commerce.wa.gov
	wastewater facility plans,	meet certain requirements.	project.	
Pre-construction	transportation elements,			Check the Public Works Board website
program	etc.)	Ineligible applicants: school	FY25 interest rate: 0.86%. 5 year	periodically at <a href="http://www.pwb.wa.gov">http://www.pwb.wa.gov</a> to
		districts, port districts, and	loan term.	obtain the latest information on program
	Roads, streets and	tribes, per statute.		details or to contact Public Works Board
	bridges, domestic water,		Maximum award per jurisdiction	staff.
	sanitary sewer,		per biennium across all PWB	
	stormwater, and solid		funding programs: \$10 million	
	waste/recycling/organics			
	facilities.		Awards are typically 100% loans,	
			but partial grant funding may be	
			awarded to communities	
			meeting Distressed or Severely	
			Distressed criteria.	

PRECONSTRUCTION ONLY Programs	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
ECOLOGY: WATER QUALITY COMBINED FUNDING PROGRAM State Water Pollution Control Revolving Fund (SRF) Centennial Clean Water Fund Stormwater Financial Assistance Program (SFAP)	Design projects associated with publicly-owned wastewater and stormwater facilities.  The integrated program also funds planning and implementation of nonpoint source pollution control activities.	Counties, cities, towns, conservation districts, or other political subdivision, municipal or quasi-municipal corporations, and federally recognized tribes.  Stormwater Financial Assistance Program (SFAP) is limited to cities, counties, and public ports.	Loan: \$10,000,000 reserved for preconstruction statewide  Interest rates (SFY 2025)  • 6-20 year loans: 1.2%  • 1-5 year loans: 0.6%  Preconstruction set-aside (Distressed Communities) 50% forgivable principal loan and 50% loan	Applications due October 15, 2024.  A cost effectiveness analysis must be complete at the time of application.  Contact: Eliza Keeley 360-628-1976  Eliza.keeley@ecy.wa.gov  https://ecology.wa.gov/About-us/How-we-operate/Grants-loans/Find-a-grant-or-loan/Water-Quality-grants-and-loans
Public Works Board PWB PRE-CON WA Department of Commerce Pre-Construction Program	Pre-construction activities to bring projects to a higher degree of readiness that prepare a specific project for construction.  Roads, streets and bridges, domestic water, sanitary sewer, stormwater, and solid waste/recycling/organics facilities.	Counties, cities, special purpose districts, and quasi-municipal organizations that meet certain requirements.  Ineligible applicants: school districts, port districts, and tribes, per statute.	Pre-construction awarded quarterly until funds are exhausted. Up \$1,000,000 per project.  FY25 interest rate: 0.86%. 5 year loan term.  Maximum award per jurisdiction per biennium across all PWB funding programs: \$10 million  Awards are typically 100% loans, but partial grant funding may be awarded to communities meeting Distressed or Severely Distressed criteria.	Contact: Sheila Richardson 564-999-1927 Sheila.richardson@commerce.wa.gov  Check the Public Works Board website periodically at <a href="http://www.pwb.wa.gov">http://www.pwb.wa.gov</a> to obtain the latest information on program details or to contact Public Works Board staff.

PRECONSTRUCTION ONLY	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs				
RCAC Rural Community	Water, wastewater, stormwater, or solid waste	Non-profit organizations, public agencies, tribes, and	Typically up to \$50,000 for feasibility loan.	Applications accepted anytime.
Assistance Corporation	planning; environmental	low-income rural		Contact: Jessica Scott
	work; and other work to	communities with a 50,000	Typically up to \$350,000 for	719-458-5460
Feasibility and Pre-Development Loans	assist in developing an application for	population or less, or 10,000 or less if proposed	pre-development loan.	jscott@rcac.org
The Bevelopment Louis	infrastructure	permanent financing is	Typically a 1-year term.	Applications available online at
	improvements.	through USDA Rural		http://www.rcac.org/lending/environmental-
		Development.	5.5% interest rate.	loans/
			1% loan fee.	
<b>Economic Development</b>	Drinking water	Indian Tribes; state, county,	Grants:	Submit application through EDA Grants
Administration (EDA)	infrastructure; including	city, or other political		Management Experience "EDGE"
United States	pre-distribution	subdivisions of a state;	EDA investment share up to	Home (eda.gov)
Department of	conveyance,	institutions of higher	\$500,000	
Commerce	withdrawal/harvest (i.e.	education; public or private		Contact:
	well extraction), storage	non-profit organizations or	Cost sharing required from	J. Wesley Cochran
EDA Public Works &	facilities, treatment and	associations acting in	applicant	Economic Development Representative
Economic Adjustment	distribution.	cooperation with officials of		(206) 561-6646
Assistance Program:		a political subdivision of a	Standard grant rate is 50% of total	jcochran@eda.gov
Design and/or	Waste water	State.	project cost, and up to 80%.	
Construction for	infrastructure; including		o Up to 100% for Tribal	
distressed and disaster	conveyance, treatment		Nations	
communities.	facilities, discharge			
	infrastructure and water			
	recycling.			

CONSTRUCTION AND DESIGN/CONSTRUCTION	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs				
DWSRF Drinking Water State Revolving Fund	Drinking water system infrastructure projects aimed at increasing public health protection.	Group A (private and publicly- owned) community and not-for- profit non-community water systems, but not federal or state-	Loan: Maximum \$15 million per jurisdiction.	Online applications available and accepted year-round. Applications due November 30, 2024.
Construction Loan Program	There is principal forgiveness for disadvantaged communities.	owned systems.  Tribal systems are eligible	2.25% annual interest rate (Final rate is set September 1, 2024).	Contact: Jocelyne Gray 564-669-4893 Jocelyne.gray@doh.wa.gov
Department of Health		provided the project is not receiving other national set-aside funding for the project.	1.0% loan service fee (water systems receiving subsidy are not subject to loan fees).	For information and forms visit: http://www.doh.wa.gov/DWSRF
			4-year time of performance, encouraged 2-year time of performance	
			Loan repayment period: 20 years or life of the project, whichever is less.	
			No local match required.	
<b>DWSRF</b> Drinking Water State Revolving Fund	Lead service line replacement. Galvanized service lines to be replaced per Lead and Copper Rule. Service water meters older than	Group A (private and publicly- owned) community and not-for- profit non-community water systems, but not federal or state-	Loan: Minimum \$25,000  No maximum	Online applications available and accepted October 1 year-round. Applications due November 30, 2024.
Lead Service Line (LSL) Replacement Loan	1986 lead ban, as part of LSL replacement.	owned systems.  Tribal systems are eligible	2.25% annual interest rate (Final rate is set September 1, 2024).	Contact: Jocelyne Gray 564-669-4893
Department of Health	There is principal forgiveness for disadvantaged communities.	provided the project is not receiving other national set-aside funding for the project.	1% loan service fee (water systems receiving subsidy are not subject to loan fees)	Jocelyne.gray@doh.wa.gov  For information and forms visit: <a href="http://www.doh.wa.gov/DWSRF">http://www.doh.wa.gov/DWSRF</a>
			4-year time of performance, encouraged 2-year time of performance 20-year repayment period	

CONSTRUCTION AND	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
DESIGN/CONSTRUCTION Programs				
DWSRF Drinking Water State Revolving Fund  Drinking Water System Rehabilitation and Consolidation Grant  Department of Health	Rehabilitation Construction of infrastructure to bring water system into compliance.  Restructuring, Consolidation, Receivership Planning  Construction of infrastructure to bring water system into compliance.	Rehabilitation Group A water systems serving less than 10,000 people under a DOH compliance order.  Restructuring, Consolidation, Receivership Group A publicly owned water system (city, town, county, public utility district, or water/sewer district), an approved Satellite Management Agency, or approved receiver.	Grant: Maximum \$1.25 million  4-year time of performance	By invite only.  Contact: Jocelyne Gray 564-669-4893  Jocelyne.gray@doh.wa.gov  For information and forms visit: http://www.doh.wa.gov/DWSRF
ECOLOGY: Water Quality Combined Funding Program State Water Pollution Control Revolving Fund (SRF)  Centennial Clean Water Fund  Stormwater Financial Assistance Program (SFAP)	Construction projects associated with publicly-owned wastewater and stormwater facilities.  The integrated program also funds planning and implementation of nonpoint source pollution control activities.	Counties, cities, towns, conservation districts, or other political subdivision, municipal or quasi-municipal corporations, and federally recognized tribes.  Stormwater Financial Assistance Program (SFAP) is limited to cities, counties, and public ports.  Hardship Assistance Jurisdictions listed above with a service area population of 25,000 or less.	Loan: \$200,000,000 available statewide.  Interest rates (SFY 2025) • 21-30 year loans: 1.6% • 6-20 year loans: 1.2% • 1-5 year loans: 0.6%  Hardship assistance for the construction of wastewater treatment facilities may be available in the form of a reduced interest rate, and up to \$5,000,000 grant or loan forgiveness.  SFAP grant maximum award per jurisdiction: \$10,000,000, with a required 15% match, with match reduced to 5% for hardship.	Applications due October 15, 2024.  A cost effectiveness analysis must be complete at the time of application.  Contact: Eliza Keeley 360-628-1976 Eliza.keeley@ecy.wa.gov  https://ecology.wa.gov/About-us/How-we-operate/Grants-loans/Find-a-grant-or-loan/Water-Quality-grants-and-loans

Program  stormwater, and solid waste/recycling/organics.  districts, port districts, and tribes, per statute.  Maximum award per jurisdiction per biennium across all PWB funding programs: \$10 million  Maximum project award:  Maximum project award:  Maximum project award:  \$10 million per jurisdiction per biennium. Awards are typically details or to contact Public Works  100% loans, but partial grant  Board staff.	CONSTRUCTION AND DESIGN/CONSTRUCTION Programs	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
communities meeting Distressed criteria.  Construction is a competitive program with two cycles per biennium.	PWB Public Works Board Construction	replacement, and repair of existing infrastructure for roads, streets and bridges, domestic water, sanitary sewer, stormwater, and solid	districts, and quasi-municipal organizations.  Ineligible applicants: school districts, port districts, and	FY25 interest rate: 1.71%. Loan term 20 years.  Maximum award per jurisdiction per biennium across all PWB funding programs: \$10 million  Maximum project award: \$10 million per biennium. Awards are typically 100% loans, but partial grant funding may be awarded to communities meeting Distressed criteria.  Construction is a competitive program with two cycles per	Contact: Sheila Richardson 564-999-1927 Sheila.richardson@commerce.wa.g ov  Check the Public Works Board website periodically at http://www.pwb.wa.gov to obtain the latest information on program details or to contact Public Works

CONSTRUCTION AND DESIGN/CONSTRUCTION Programs	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
RD U.S. Dept. of Agriculture Rural Development - Rural Utilities Service  Water and Waste Disposal Direct Loans and Grants	Pre-construction and construction associated with building, repairing, or improving drinking water, wastewater, solid waste, and stormwater facilities.	Cities, towns, and other public bodies, tribes and private non-profit corporations serving rural areas with populations under 10,000.  Population determined by U.S. Census 2020.  Income determined by the American Community Survey 2017-2021 (5-year).	Loans; Grants in some cases Interest rates change quarterly; contact staff for latest interest rates.  Up to 40-year loan term.  No pre-payment penalty.	Applications accepted year-round on a fund-available basis.  Contact: : Koni Reynolds 360-704-7737 koni.reynolds@usda.gov  http://www.rd.usda.gov/wa
CERB Community Economic Revitalization Board Construction Program	Public facility projects required by private sector expansion and job creation.  Projects must support significant job creation or significant private investment in the state.  Bridges, roads and railroad spurs, domestic and industrial water, sanitary and storm sewers.  Electricity, natural gas and telecommunications  General purpose industrial buildings, port facilities.  Acquisition, construction, repair, reconstruction, replacement, rehabilitation	Counties, cities, towns, port districts, special districts  Federally-recognized tribes  Municipal and quasi-municipal corporations with economic development purposes.	Maximum grant amounts: \$2,000,000 for construction projects.  \$500,000 for housing rehabilitation programs.  \$250,000 for microenterprise assistance programs.	Applications accepted year-round. The Board meets six times a year.  Contact: Janea Stark 360-252-0812 janea.stark@commerce.wa.gov

CONSTRUCTION AND DESIGN/CONSTRUCTION	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
CDBG-GP Community Development Block Grant General Purpose Grants	Design and construction of community facility, wastewater, drinking water, stormwater and street/sidewalk projects.  Infrastructure in support of affordable housing.	Projects must principally benefit low- to moderate-income people in non-entitlement cities and counties.  List and map of local governments served by state  CDBG program	\$2,000,000 for construction projects. \$500,000 for housing rehabilitation programs. \$250,000 for microenterprise assistance programs.	Applications accepted year-round on a fund-available basis.  Contact: Jon Galow 509-847-5021 Jon.galow@commerce.wa.gov  Visit www.commerce.wa.gov/cdbg for more information.
RCAC Rural Community Assistance Corporation Intermediate Term Loan	Water, wastewater, solid waste and stormwater facilities that primarily serve low-income rural communities.	Non-profit organizations, public agencies, tribes, and low-income rural communities with a 50,000 population or less.	Typically up to \$3 million with commitment letter for permanent financing  Security in permanent loan letter of conditions  Term matches construction period.  5.5% interest rate  1.125% loan fee	Applications accepted anytime.  Contact: Jessica Scott 719-458-5460 jscott@rcac.org  Applications available online at http://www.rcac.org/lending/envir onmental-loans/
RCAC Rural Community Assistance Corporation Construction Loans	Water, wastewater, solid waste and stormwater facilities that primarily serve low-income rural communities. Can include predevelopment costs.	Non-profit organizations, public agencies, tribes, and low-income rural communities with a 50,000 population or less, or 10,000 populations or less if using USDA Rural Development financing as the takeout.	2023-2025 solicitation closed 9/25/2024  Longstanding program will likely be offered in the 2025-2027 biennium.  Minimum match requirements will apply.  Other State funds cannot be used as match.	Applications accepted anytime.  Contact: Jessica Scott 719-458-5460 jscott@rcac.org  Applications available online at http://www.rcac.org/lending/envir onmental-loans/

CONSTRUCTION AND DESIGN/CONSTRUCTION Programs	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Energy Retrofits for Public Buildings Program: Energy Efficiency Grant Washington State Department of Commerce	Retrofit projects that reduce energy consumption (electricity, gas, water, etc.) and operational costs on existing facilities and related projects owned by an eligible applicant. Projects must utilize devices that do not require fossil fuels whenever possible.	Washington State public entities, such as cities, towns, local agencies, public higher education institutions, school districts, federally recognized tribal governments, and state agencies.  Some percentage of funds are reserved for projects in small towns or cities with populations of 5,000 or fewer.  Priority given to applicants who have not received funding previously, certain priority communities.	2023-25 solicitation closed 09/25/2024.  Longstanding program will likely be offered in the 2025-27 biennium.  Minimum match requirements will apply.  Other State funds cannot be used as match.	Contact: Kristen Kalbrener 360-515-8112 energyretrofits@commerce.wa.g ov  For more information: https://www.commerce.wa.gov/gr owing-the- economy/energy/energy-efficiency- and-solar-grants/
Energy Efficiency and Conservation Block Grant Washington State Department of Commerce	Energy audits and energy conservation planning projects including financing, infrastructure, public education	Local governments (cities, counties, federally-recognized tribes)  Priority for disadvantaged communities	Funding for the current biennium is depleted.  Visit our website to sign up for updates. Future funding anticipated in Late Spring 2025.	Contact: Kristen Kalbrener 360-515-8112 energyretrofits@commerce.wa.g ov
Energy Retrofits for Public Buildings: Solar Grants  Washington State Department of Commerce	Purchase and installation of grid-tied solar photovoltaic (electric) arrays net metered with existing facilities owned by public entities.  Additional points for 'Made in Washington' components.	Washington State public entities, such as cities, towns, local agencies, public higher education institutions, school districts, federally recognized tribal governments, and state agencies. See above.	Funding for the current biennium is depleted.  Visit our website to sign up for updates. Future funding anticipated in Late Spring 2025.	Contact: EPICgrants@commerce.wa.gov  Visit: https://www.commerce.wa.gov/ growing-the- economy/energy/epic/clean- energy-grant-programs/ for more information.

CONSTRUCTION AND	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
DESIGN/CONSTRUCTION	· ,			,
Programs				
Solar plus Storage for	The Solar plus Storage	Local governments, State	Funding for the current biennium is	Contact:
Resilient Communities	program funds solar and	governments, Tribal governments	depleted.	EPICgrants@commerce.wa.gov
	battery back-up power so	and their affiliates, Non-profit		
	community buildings can	organizations and Retail electric	Visit our website to sign up for	Visit:
	provide essential services	utilities.	updates. Future funding anticipated	https://www.commerce.wa.gov
Washington State	when the power goes out,		in Late Spring 2025.	/growing-the-
Department of Commerce	including both planning and			economy/energy/epic/clean-
	installation grants.			energy-grant-programs
Dual Use Solar	Constructions or planning	Local governments, State	Grants:	Contact:
	projects that will lead to the	governments, Tribal governments	EDA investment share up to	EPICgrants@commerce.wa.gov
Washington State	creation of mixed use solar	and their affiliates, Non-profit	\$5,000,000.	
Department of	installation. Projects should	organizations, for-profit		Visit:
Commerce	including, but are not limited	organizations, and Retail electric	Cost sharing required from	https://www.commerce.wa.gov
	to, combining solar with:	utilities.	applicant	/growing-the-
	animal grazing, beekeeping,			economy/energy/epic/clean-
	pollinator habitat, or other		Standard grant rate is 50% of total	energy-grant-programs/
	colocation uses.		project cost, and up to 80%.	
			Up to 100% for Tribal Nations	

CONSTRUCTION AND DESIGN/CONSTRUCTION	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs				
Economic Development Administration (EDA) United States Department of Commerce  EDA Public Works & Economic Adjustment Assistance Program: Design and/or Construction for distressed and disaster communities.	Drinking water infrastructure; including pre-distribution conveyance, withdrawal/ harvest (i.e. well extraction), storage facilities, treatment and distribution.  Waste water infrastructure; including conveyance, treatment facilities, discharge infrastructure, water recycling.	Indian Tribes; state, county, city, or other political subdivisions of a state; institutions of higher education; public or private nonprofit organizations or associations acting in cooperation with officials of a political subdivision of a State.	Loans may not exceed \$200,000 or 75% of the total project cost, whichever is less. Applicants given credit for documented project costs prior to receiving the loan.  Interest rates at the lower of the poverty or market interest rate as published by USDA RD RUS, with a minimum of 3% at time of closing.  Maximum repayment period is 10 years. Additional ranking points for a shorter repayment period. The repayment period cannot exceed the useful life of the facilities.	Submit application through EDA Grants Management Experience "EDGE" Home (eda.gov)  Contact: J. Wesley Cochran Economic Development Representative (206) 561-6646 jcochran@eda.gov
RURAL WATER REVOLVING LOAN FUND	Short-term costs incurred for replacement equipment, small scale extension of services, or other small capital projects that are not a part of regular operations and maintenance for drinking water and wastewater projects.	Public entities, including municipalities, counties, special purpose districts, Native American Tribes, and corporations not operated for profit, including cooperatives, with up to 10,000 population and rural areas with no population limits.	\$55.5 million in total funds available in 2023-2025 biennium.  \$19.4 million specifically reserved for jurisdictions with a population of less than 150,000.  \$2,000,000 maximum award.  Funds available as both grants and deferred loans.	Applications accepted anytime.  Contact: Tracey Hunter Evergreen Rural Water of WA 360-462-9287 thunter@erwow.org  Download application online: http://nrwa.org/initiatives/revolv ing-loan-fund/
Connecting Housing to Infrastructure Program (CHIP)  Washington State Department of Commerce	Housing projects with at least 25% of units affordable for at least 25 years. Funding goes toward water, sewer, and stormwater infrastructure improvements for eligible projects, as well as toward system development charges and impact fees, which are waived to encourage affordable housing.	Cities, counties, and utility districts located in a jurisdiction which has a dedicated sales tax for affordable housing. The local jurisdiction will sponsor/ partner with a housing developer on the project.	\$55.5 million in total funds available in 2023-2025 biennium.  \$19.4 million specifically reserved for jurisdictions with a population of less than 150,000.  \$2,000,000 maximum award.  Funds available as both grants and deferred loans.	Contact: Mischa Venables 360-725-3088 Mischa.venables@commerce.wa. gov Visit www.commerce.wa.gov/CHIP

EMERGENCY	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs				
ECOLOGY Water Quality Emergency Clean Water State Revolving Funding Program	Projects that may result from a natural disaster or an immediate and emergent threat to public health due to water quality issues resulting from unforeseen or unavoidable circumstances.  Water quality-related projects considered to be an environmental emergency that meets the WAC 173-98-030(27)5 definition and has received a Declaration of Emergency from the local Government.	Only available to public bodies serving a population of 10,000 or less.  Counties, cities, and towns, federally recognized tribes, water and sewer districts, irrigation districts, conservation districts, local health jurisdictions, port districts, quasi-municipal corporations, Washington State institutions of higher education	Loan: \$5,000,000 maximum  Interest rates (SFY25): 10-year loan, 0.0-1.6%	Available year round.  Contact: Eliza Keeley 360-628-1976 Eliza.keeley@ecy.wa.gov  https://ecology.wa.gov/About- us/How-we-operate/Grants- loans/Find-a-grant-or-loan/Water- Quality-grants-and-loans

EMERGENCY	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
Programs			J. Company	,
RD – ECWAG	Domestic water projects needing emergency repairs due to an	Public bodies, tribes and private non-profit corporations serving	Grant; pending availability of funds.	Applications accepted year-round on a fund-available basis.
U.S. Dept. of Agriculture	incident such as:	rural areas with populations under 10,000.	Water transmission line grants up to \$150,000 to construct water line	
Rural Development	a drought; earthquake; flood; chemical spill; fire; etc. A significant decline in quantity or	Population determined by U.S. Census 2020.	extensions, repair breaks or leaks in existing water distribution lines, and address related maintenance	Contact: Koni Reynolds
Emergency Community	quality of potable water supply that was caused by an	Income determined by the	to replenish the water supply.	360-704-7737
Water Assistance Grants	emergency.	American Community Survey 2017-2021 (5-year).	Water source grants up to \$1,000,000 for the construction of	koni.reynolds@usda.gov
			new wells, reservoirs, transmission lines, treatment plants, and/or other sources of water (water source up to and including the	http://www.rd.usda.gov/wa
			treatment plant).	
DWSRF	Will financially assist eligible	Publicly or privately owned (not-for-	Loan:	To be considered for an emergency
Department of Health – Drinking Water State	communities experiencing the loss of critical drinking water	profit) Group A community water systems with a population of fewer	Interest rate: 0%, no subsidy	loan, an applicant must submit a completed emergency application
Revolving Fund	services or facilities due to an emergency.	than 10,000.	available	package to the department.
Emergency Loan Program		Transient or non-transient non- community public water systems	Loan fee: 1.5%	Contact: Jocelyne Gray 564-669-4893
Danaston and af Haalth		owned by a non-profit organization.	Loan term: 10 years	Jocelyne.gray@doh.wa.gov
Department of Health		Non-profit non-community water systems must submit tax-exempt documentation.	\$500,000 maximum award per jurisdiction.	For information and forms visit: http://www.doh.wa.gov/DWSRF
			Time of performance: 2 years from	
		Tribal systems are eligible provided the project is not receiving other	contract execution to project completion date.	
		national set-aside funding for the project.	Repayment commencing first October after contract execution.	

EMERGENCY Programs	Eligible Projects	Eligible Applicants	Funding Available	How To Apply
RURAL WATER REVOLVING LOAN FUND Disaster area emergency loans	Contact staff for more information on emergency loans.	Public entities, including municipalities, counties, special purpose districts, Native American Tribes, and corporations not operated for profit, including cooperatives, with up to 10,000 population and rural areas with no population limits.	90-day, no interest, disaster area emergency loans with immediate turn-around.  Download application online: <a href="http://nrwa.org/initiatives/revolving-loan-fund/">http://nrwa.org/initiatives/revolving-loan-fund/</a>	Applications accepted anytime.  Contact: Tracey Hunter Evergreen Rural Water of WA 360-462-9287 thunter@erwow.org
HAZARD MITIGATION GRANT PROGRAM FEMA/WA Emergency Management Division	Disaster risk-reduction projects and planning after a disaster declaration in the state.	Any state, tribe, county, or local jurisdiction (incl., special purpose districts) that has a current FEMA-approved hazard mitigation plan.	Varies depending on the level of disaster, but projects only need to compete at the state level.  Local jurisdiction cost-share: 12.5%	Applications will be opened after a disaster declaration.  Contact: Tim Cook State Hazard Mitigation Officer 253-512-7072 Tim.cook@mil.wa.gov
PUBLIC ASSISTANCE PROGRAM FEMA/WA Emergency Management Division	Construction, repair to, and restoration of publicly owned facilities damaged during a disaster.  Debris-removal, life-saving measures, and restoration of public infrastructure.	State, tribes, counties, and local jurisdictions directly affected by the disaster.	Varies depending on the level of disaster and total damage caused.	Applications are opened after disaster declaration.  Contact: Gary Urbas Public Assistance Project Manager 253-512-7402 Gary.urbas@mil.wa.gov
WASHINGTON STATE DEPARTMENT OF COMMERCE  ERR - Emergency Rapid Response	Projects that provide continuity of essential community services/ lifelines that become diminished during an emergency and recovery assistance after an emergency event.  Projects that restore service for a limited duration or through a temporary measure. These funds are not designated for long term recovery costs associated with the full re-establishment of lifeline services.	Tribes and local governments	Grant; pending availability of funds \$5,000,000- \$6,000,000  Period of performance state fiscal year July-June	Applications accepted year-round until funding exhausted. \$5.5 to 6 million available to award each year.  Contact: Nicole Patrick 206-713-6997  Nicole.patrick@commerce.wa.gov  For information and application visit: EmergencyRapidResponse or https://deptofcommerce.box.com/s/skmab4hq3l4z55jazzc7qlsmbrsgermv